


SIENA EDGE[®]

FLEXIBLE POST AND BEAM TRAFFIC GUARD

REF: Detail_Siena Edge_Post and Beam Traffic Barrier on Top of Grid Wall

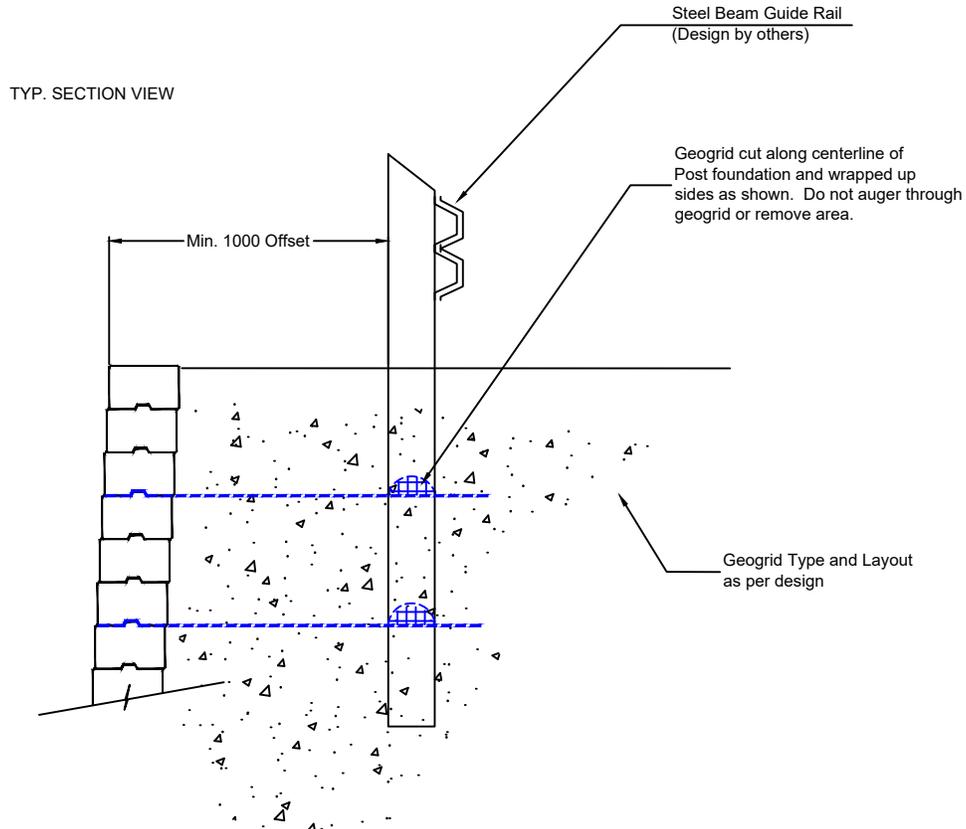

Notes:

1. Guiderail post depth to be min. 1.5m (5.0ft) below grade.
2. Guiderail posts must be placed as wall is constructed (not augured through geogrid following construction).
3. Contractor must ensure required compaction around posts, including between back of wall and back of post.
4. Civil Engineer to review required offsets to ensure they are compatible with site layout.



Engineering design by RisiStone Inc.

UNILOCK.COM | 1-800-UNILOCK

UNILOCK[®]
PAVERS & WALLS