UNILOCK°

2025 Product Data

ഗ

ELEVATE YOUR CRAFT WITH **UVISION 3D** LANDSCAPE CREATOR.



UVISION ALLOWS YOU TO VISUALLY COMMUNICATE YOUR DESIGN IDEAS TO YOUR CLIENT IN BOTH 2D PLAN VIEW AND 3D PERSPECTIVE VIEW

Whether you're coming from the hand-drawn world, or a 2D AutoCAD background, the biggest impact you'll see from adopting this new 3D design software is in how well the client will understand the project you are selling. **Uvision 3D Landscape Creator is an easy-to-use software that helps bring your designs ideas to life.**





Scan the QR code for more information or to download a free 30-day trial.



TABLE OF CONTENTS

PAVERS

	~
ADA Paver	. 04
Arcana [™]	
Artline [™]	
Beacon Hill™ Flagstone	
Beacon Hill [™] Smooth	
Bristol Valley®	
Brussels Block®	. 13
Camelot®	. 14
Copthorne®	. 16
Courtstone®	. 17
Eco-Hex™	. 18
Eco-Line [®]	. 19
Eco-Optiloc™	. 20
Eco-Priora [™] Premier	. 21
Eco-Promenade [®] Ecoterra	. 22
Eco-Promenade®	. 23
Eco-Stone [™]	. 24
Granito™	. 25
Hex™	. 26
Holland Premier [™]	. 27
Hollandstone™	. 28
ll Campo"	. 29
Mattoni™	. 30
Natural Stone	. 31
Nordic Cobble™	. 40
Optiloc™	. 41
Porcelain	. 42
Promenade [™]	. 43
Revela [™] Slab	. 45
Richcliff	. 46
Series™	. 47
Skyline™	. 48
Soreno [™]	
Thornbury [™] Smooth	
Town Hall*	
lowinnan	

Transition™	52
Treo [°]	53
Tribeca Cobble [™]	55
Turfstone™	56
Umbriano [®]	57
Urban™	63
Westport [™]	65

RETAINING WALLS

Brussels Dimensional Stone™	66
Concord Wall™	67
DuraHold®	68
DuraHold 2°	70
Estate Wall™	71
Lineo [™] Dimensional Stone	72
Pisa [™] XL Smooth	73
Pisa [™] Edge	74
Quarry [™] Smooth	75
Rivercrest®	76
SienaEdge™	78
SienaStone™	79
U-Cara®	80
Universal Base	87

COPING, STEPS, PILLAR CAPS

Architectural	88
Beacon Hill™ Coping	89
Fullnose [™]	90
Ledgestone [™]	91
Umbriano [®] Coping	93
Urban [™] Coping	94

FIRE FEATURES

Lineo [™] Dimensional Fire Pit	95
RomanStack [™] Firepit	96
Sunset Firepit	97

ACCESSORIES

Skyview™	98
Cleaners, Sealers	99
Paver Edging, Adhesive	100
Permeable Chips, Sands	100
Sealer Best Practices	102
Polysand Best Practices	102
Edge Restraints	103
Unilock Drivegrid System	103
Paver Spacers	103
Landscape Fabric	104
Fireplace Insert	104
Large Equipment	105
Important Notes	106

DESCRIPTION OF EDGE DETAILS









Zero-Edge

Chamfered Edge

Rounded Bevel

Micro Bevel

ADA Paver

ENDURACOLOR



APPLICATIONS Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm

DRIVE FRIENDLY

Can handle vehicular loads

TECHNICAL INFORMATION

Conforms to ASTM C936 Eligible for LEED v4.1 credits

		STANDARD
	Bundle Type	SINGLE
	Plant Produced	UXBRIDGE
	Thickness (mm)	70 mm
	Bundle	96.00
	Layer	12.00
SQFT PER	Sections	-
	Stone	1.00
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	1.00
	Sections	-
SOLDIER LNFT PER	Layer	12.00
	Bundle	96.00
	SqFt	1.00
	Sections	-
SAILOR LNFT PER	Layer	12.00
	Bundle	96.00
	SqFt	1.00
UNITS PER	Sections	-
	Bundle	96.00
	Layer	415
LBS PER	Sections	-
	Bundle	3,100
Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	1




DARK CHARCOAL

SR .40 SRI 44

Red

RED

1





Notes: SOLD IN FULL BUNDLES ONLY. All measurements are nominal. Contact Unilock for more information.

Arcana™



APPLICATIONS Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 0 mm

TECHNICAL INFORMATION


Conforms to ASTM C 1782 Eligible for LEED v4.1 credits

// Perfect for roof decks and other raised floor applications.

Ask us about our Skyview[™] pedestal system. See page 98 for more information.



SINGLE UNITS



3	Corvara Modena	
У	Vivanto	
Random C		VORI

2 Sq.Ft./Stone

		190		and the second
		AVORIO	CORVARA	MODENA
ndom A	Random C			
	12 x 24	18 x 24	F.0	
	301 x 606 x 50mm 11% x 23% x 2"	453 x 606 x 1 17% x 23% x		
	18 units/Bundle	18 units/Bur		

24 x 24	
606 x 606 x 50mm	
23% x 23% x 2"	
18 units/Bundle	
4 Sq.Ft./Stone	

VIVANTO

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. Product is not intended for vehicular
applications. All measurements are nominal. Unilock recommends to install Arcana using T and X Slab spacers. Please contact your Territory Manager for more information.

ing and availability. Product is not intended f	or vehicular

1

1

1

1

1

1

		12 x 24	18 x 24	24 x 24
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	50 mm	50 mm	50 mm
	Bundle	36.00	54.00	72.00
SQFT PER	Layer	2.00	3.00	4.00
	Sections	-	-	-
	Stone	2.00	3.00	4.00
PER BUNDLE	Layers	18.00	18.00	18.00
PER BUNDLE	Sections	-	-	-
	SqFt	0.99	0.99	0.99
SOLDIER LNFT PER	Sections	-	-	-
SOLDIER LINFT PER	Layer	1.98	2.97	3.98
	Bundle	35.55	53.50	71.57
	SqFt	1.99	1.33	0.99
	Sections	-	-	-
SAILOR LNFT PER	Layer	3.98	3.98	3.98
	Bundle	71.57	71.57	71.57
	SqFt	0.50	0.33	0.25
UNITS PER	Sections	-	-	-
	Bundle	18.00	18.00	18.00
	Layer	48	72	96
LBS PER	Sections	-	-	-
	Bundle	864	1,296	1,728
Colors	Reflectance	Stock	Stock	Stock
Avorio	SR .56 SRI 66	1	1	1

1

1

1

SR .32 SRI 34

SR .46 SRI 53

SR .18 SRI 16

3 Sq.Ft./Stone

Artline[™] Smooth Finish

ENDURACOLOR

Bundle Type

Plant Produced Thickness (mm)

Bundle

Layer

Stone

Layers

SqFt

Laver

Bundle

SqFt

Layer

Bundle

SqFt

Sections

Bundle

Laver

Sections

Bundle

Reflectance

SR .22 SRI 21

SR .30 SRI 32

Sections

Sections

Sections

Sections

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

Colors

Fossil

Granite Fusion (Steel Mountain)

MULTIPLE SIZES

RANDOM NEW YORK

70 mm

93.25

11.66

0.49

8.00

-

-

-

-

-

-

-

_

-

-

2.06

192.00

388

3,100

Stock

GRANITE FUSION

(Steel Mountain)

1

1

_




APPLICATIONS Pedestrian, Light Vehicular


APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 3 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits





Artline Random A



UNIT A 125 x 169 x 70mm 4 1 × 6 × 2 × 34" 32 units/Bundle .23 Sq.Ft./Stone

UNIT E 187.5 x 225 x 70mm 7³/₈ x 8⁷/₈ x 2³/₄" 32 units/Bundle .45 Sq.Ft./Stone

UNIT B 125 x 262.5 x 4 1 x 10 3 x 2 32 units/Bun .35 Sq.Ft./St

UNIT F 187.5 x 337.5 x 70mm 7 ³/₈ x 13 ³/₈ x 2 ³/₄" 16 units/Bundle .58 Sq.Ft./Stone

UNIT C

UNIT G 187.5 x 450 x 70mm 7 ³/₈ x 17 ¹/₄ x 2 ³/₄" 16 units/Bundle .91Sq.Ft./Stone

UNIT D 4 1/8 x 17 3/4 x 2 3/4"

FOSSIL

70mm	125 x 337.5 x 70mm	1
2 3/4"	4 1/8 x 13 1/4 x 2 3/4"	L
ndle	32 units/Bundle	3
tone	.45 Sq.Ft./Stone	

125 x 450 x 70mm 32 units/Bundle .61Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Artline[™] Umbriano[®] Finish

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

Colors

French Grey

Midnight Sky

Winter Marvel

Bundle Type Plant Produced

Thickness (mm)

Bundle

Layer

Stone

Layers

Sections

Sections

SqFt

Laver

Bundle

SqFt

Layer

Bundle

SqFt

Sections

Bundle

Laver

Sections

Bundle

Reflectance

SR .35 SRI 38

SR .35 SRI 38

SR .18 SRI 17

Sections

Sections



MULTIPLE SIZES RANDOM

NEW YORK

70 mm

93.25

11.66

0.49

8.00

-

-

_

-

-

-

-

--

2.06

192.00

414

3,310

Stock

1

1

1

WINTER MARVEL

.

-




APPLICATIONS Pedestrian, Light Vehicular

APPEARANCE


Edge Detail - Micro Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936 Eligible for LEED v4.1 credits







Artline Random A



UNIT A 125 x 169 x 70mm 4 1/8 x 6 1/8 x 2 3/4" 32 units/Bundle .23 Sq.Ft./Stone

UNIT E 187.5 x 225 x 70mm 7³/₈ x 8⁷/₈ x 2³/₄" 32 units/Bundle .45 Sq.Ft./Stone

UNIT B 125 x 262.5 x 70mm 4 1/8 x 10 3/8 x 2 3/4" 32 units/Bundle .35 Sq.Ft./Stone

UNIT F 187.5 x 337.5 x 70mm 7³/₈ x 13³/₈ x 2³/₄" 16 units/Bundle .58 Sq.Ft./Stone

UNIT C 125 x 337.5 x 70mm 4 1/8 x 13 1/4 x 2 3/4" 32 units/Bundle .45 Sq.Ft./Stone

FRENCH GREY

UNIT G 187.5 x 450 x 70mm 7³/₈ x 17¹/₄ x 2³/₄" 16 units/Bundle .91Sq.Ft./Stone

UNIT D

MIDNIGHT SKY

125 x 450 x 70mm 4 1/8 x 17 3/4 x 2 3/4" 32 units/Bundle .61Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

UNILOCK 07

Beacon Hill[™] Flagstone 60mm

ENDURACOLOR[®]

RANDOM




APPLICATIONS Pedestrian

APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits







LARGE RECTANGLE
380 x 570 x 60mm
15 x 22 ½ x 2 ¾"
20 Units/Bundle

2.33 SqFt/Stone SQUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.55 Sq.Ft./Stone

SMALL RECTANGLE 380 x 190 x 60mm 15 x 7¹/₂ x 2³/₈" 30 units/Bundle .78 Sq.Ft./Stone

	Ballale Type	Tu tu bottu
	Plant Produced	NEW YORK / UXBRIDGE
	Thickness (mm)	60 mm
	Bundle	116.57
	Layer	11.66
SQFT PER	Sections	-
	Stone	1.46
	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	-
	Sections	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	0.80
	Sections	-
SAILOR LNFT PER	Layer	9.35
	Bundle	93.50
	SqFt	0.69
UNITS PER	Sections	-
	Bundle	80.00
	Layer	328
LBS PER	Sections	-
	Bundle	3,279
Colors	Reflectance	Stock
Almond Grove	SR .25 SRI 25	1
Fossil	SR .22 SRI 21	1
Granite Fusion (Steel Mountain)	SR .30 SRI 32	1
Sierra	SR n/a SRI n/a	1
Tuscany	SR .39 SRI 44	1

Bundle Type







ALMOND GROVE

FOSSIL

GRANITE FUSION (Steel Mountain)





TUSCANY

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Beacon Hill[™] Flagstone 80mm

ENDURACOLOR[®]

RANDOM

UXBRIDGE

Bundle Type

Plant Produced




APPLICATIONS Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 4 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits





3 UNIT RANDOM BUNDLE



LARGE RECTANGLE 380 x 570 x 80mm 15 ½ x 22 ½ x 3 ½" 14 Units/Bundle 2.33 SqFt/Stone

SQUARE 380 x 380 x 80mm 15 x 15 x 3 1/8" 21 units/Bundle 1.55 Sq.Ft./Stone

15 x 7¹/₂ x 3 ¹/₈" 21 units/Bundle .78 Sq.Ft./Stone

SMALL RECTANGLE 380 x 190 x 80mm

	Thickness (mm)	80 mm
	Bundle	81.59
	Layer	11.65
SQFT PER	Sections	-
	Stone	1.46
PER BUNDLE	Layers	7.00
PER BUNDLE	Sections	-
	SqFt	-
SOLDIER LNFT PER	Sections	-
SOLDIER LINFT PER	Layer	-
	Bundle	-
	SqFt	0.80
SAILOR LNFT PER	Sections	-
SAILOR LINFT PER	Layer	9.35
	Bundle	65.45
	SqFt	0.69
UNITS PER	Sections	-
	Bundle	56.00
	Layer	427
LBS PER	Sections	-
	Bundle	2,988
Colors	Reflectance	Stock
Fossil	SR .22 SRI 21	1
Granite Fusion (Steel Mountain)	SR .30 SRI 32	1





FOSSIL

GRANITE FUSION (Steel Mountain)

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Beacon Hill[™] Smooth 60mm




APPLICATIONS Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Rounded; Surface Texture Smooth; Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits







BH Fixed Random A

BH Fixed Random B

SOLD SEPARATELY

RANDOM BUNDLE

UNIT

M



LUNIT	
50 x 570 x 60mm	

LARGE RECTANGLE

380 x 570 x 60mm

15 x 22 ¹/₂ x 2 ³/₈"

20 Units/Bundle

2.33 SqFt/Stone


SQUARE

15 x 15 x 2 3/8"

380 x 380 x 60mm

30 units/Bundle

1.55 Sq.Ft./Stone

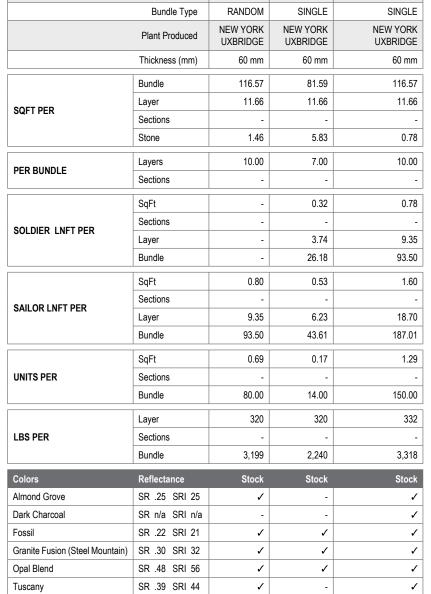

SMALL RECTANGLE 380 x 190 x 60mm $15 \times 7\frac{1}{2} \times 2\frac{3}{8}$ 150 units/Bundle .78 Sq.Ft./Stone

SMALL RECTANGLE

380 x 190 x 60mm

30 units/Bundle

.78 Sq.Ft./Stone

15 x 7¹/₂ x 2³/₈





ALMOND GROVE

DARK CHARCOAL (Small Rec Only)

OPAL BLEND

FOSSIL



GRANITE FUSION

(Steel Mountain)



TUSCANY

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

ENDURACOLOR

XL

SMALL RECTANGLE

Beacon Hill[™] Smooth with EasyClean

ENDURACOLOR[®]






APPLICATIONS Pedestrian, Roof Deck


APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits





BH Fixed Random A

LAYING PATTERNS

BH Fixed Random B


RANDOM SMALL RECTANGLE Bundle Type UXBRIDGE Plant Produced UXBRIDGE Thickness (mm) 60 mm 60 mm Bundle 116.57 116.57 11.66 11.66 Layer SQFT PER Sections -Stone 0.78 0.78 Layers 10.00 10.00 PER BUNDLE Sections --0.80 0.78 SqFt Sections SOLDIER LNFT PER Layer 9.35 9.35 Bundle 93.50 93.50 SqFt 1.60 1.60 Sections --SAILOR LNFT PER 18.70 18.70 Layer 187.01 Bundle 187.01 SqFt 1.29 1.29 UNITS PER Sections --80.00 150.00 Bundle 332 332 Layer LBS PER Sections _ . Bundle 3,318 3,318 Colors Reflectance Stock Stock Dark Charcoal SR n/a SRI n/a 1 -Granite Fusion (Steel Mountain) SR .30 SRI 32 1 1 SR .49 SRI 57 Oat Beige 1 1



DARK CHARCOAL (Small Rectangle Only) **GRANITE FUSION** (Steel Mountain)

SR .32 SRI 34

OAT BEIGE



OPAL BLEND



Opal Blend

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information

> **UNILOCK** 11

Bristol Valley®

ENDURACOLOR[®] | 🔁 EasyClean[®]



APPLICATIONS Pedestrian

APPEARANCE

LAYER CONFIGURATION

LAYING PATTERNS

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	SOLDIER LNFT PER	
~ ~ ~		_
ON	SAILOR LNFT PER	
	UNITS PER	
	LBS PER	
	Colors	
	Fossil	

	Bundle Type	RANDOM
	Plant Produced	UXBRIDGE
	Thickness (mm)	60 mm
	Bundle	116.57
	Layer	11.66
SQFT PER	Sections	-
	Stone	-
	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	_
	Sections	
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	0.80
SAILOR LNFT PER	Sections	-
	Layer	9.35
	Bundle	93.50
	SqFt	-
UNITS PER	Sections	-
	Bundle	80.00
	Layer	296
LBS PER	Sections	
	Bundle	2,957
Colors	Reflectance	Stock
Colors		Glock

Colors	Reflectance	Stock
Fossil	SR .22 SRI 21	1
Steel Mountain	SR .30 SRI 32	1
Walnut	SR n/a SRI n/a	1







FOSSIL

STEEL MOUNTAIN

WALNUT

RANDOM BUNDLE LARGE RECTANGLE SQUARE SMALL RECTANGLE 380 x 570 x 60mm 380 x 380 x 60mm 380 x 190 x 60mm 3 UNIT 15 x 22 ½ x 2 ¾" 15 x 15 x 2 3/8" 15 x 7 ½ x 2 ¾" 20 Units/Bundle 30 units/Bundle 30 units/Bundle 1.55 Sq.Ft./Stone 2.33 SqFt/Stone .78 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

BV Fixed Random B

BV Fixed Random A

Brussels Block°



APPLICATIONS

Pedestrian, Light Vehicular, Border and Accents

APPEARANCE

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 2 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		HALF	STANDARD	XL
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE
	Thickness (mm)	70 mm	70 mm	70 mm
	Bundle	88.70	88.60	76.56
	Layer	11.08	11.08	9.5
SQFT PER	Sections	12.67	12.66	25.5
	Stone	0.20	0.40	0.8
	Layers	8.00	8.00	8.0
PER BUNDLE	Sections	7	7	
	SqFt	1.72	1.44	0.8
	Sections	21.84	18.27	21.8
SOLDIER LNFT PER	Layer	-	-	
	Bundle	152.86	127.87	65.5
	SqFt	2.87	1.73	1.4
	Sections	36.33	21.84	36.5
SAILOR LNFT PER	Layer	-	-	
	Bundle	254.28	152.86	109.6
	SqFt	5.05	2.53	1.2
UNITS PER	Sections	64.00	32.00	32.0
	Bundle	448.00	224.00	96.0
	Layer	349	398	31
LBS PER	Sections	398	455	84
	Bundle	2,789	3,187	2,52
Colors	Reflectance	Stock	Stock	Stoc
Charcoal	SR n/a SRI n/a	-	1	
Limestone	SR n/a SRI n/a	1	1	·
Sandstone	SR .28 SRI 29	1	1	
0	00 / 00 /			



			1
			i
			-
_			

LAYING PATTERNS

Random AD



Brussels Multi-Unit Random AE



Brussels Multi-Unit Random AC





XL 208 x 348 x 70mm 8 ¼ x 13 ¾ x 2 ¾" 96 units/Bundle .80 Sq.Ft./Stone

Sierra



1

SR n/a SRI n/a



1

1

CHARCOAL (Standard Only) SANDSTONE





LIMESTONE

SIERRA

Camelot[®]



APPLICATIONS Pedestrian, Light Vehicular, Border and Accents

APPEARANCE

Edge Detail - Rounded Bevel Surface Texture - Smooth Joint Spacing - 3 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936 Eligible for LEED v4.1 credits



LAYER CONFIGURATION

Camelot Random Camelot Multi-Unit

Random



RECTANGLE 160 x 240 x 60mm 6 ³/₈ x 9 ¹/₂ x 2 ³/₈" 270 Units/Bundle .41SqFt/Stone

M. Kolog		Plant Produced	UXBRIDGE	UXBRIDGE
		Thickness (mm)	60 mm	60 mm
		Bundle	115.50	111.33
Sec.		Layer	11.55	12.37
Tor I	SQFT PER PER BUNDLE SOLDIER LNFT PER SAILOR LNFT PER	Section	-	-
		Stone	0.28	0.41
		Layers	10.00	9.00
	PER BUNDLE	Sections	-	-
		SqFt	1.79	0.49
		Section	-	-
	SOLDIER LNFT PER	Layer	20.67	14.76
		Bundle	206.69	132.87
		SqFt	1.79	0.74
		Section	-	-
	SAILOR LNFT PER	Layer	20.67	22.15
		Bundle	206.69	199.31
		SqFt	3.64	2.43
		Section	5.04	
	UNITS PER		-	-
		Bundle	420.00	270.00
		Layer	325	350
	LBS PER	Section	-	-
		Bundle	3,247	3,150
	Colors	Reflectance	Stock	Stock

Colors	Reflectance	Stock	Stock
Almond Grove	SR n/a SRI n/a	SO	SO
Granite	SR .26 SRI 27	SO	SO
Charcoal	SR n/a SRI n/a	SO	SO







ALMOND GROVE

GRANITE

SQUARE

SINGLE

Bundle Type

RECTANGLE SINGLE

CHARCOAL Small Rectangle Only

Notes: Made-to-Order, Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Camelot[®] Premier

ENDURACOLOR



APPLICATIONS Pedestrian, Light Vehicular, Border and Accents


APPEARANCE


Edge Detail - Rounded Bevel Surface Texture - Smooth Joint Spacing - 3 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

z							
ATIO							
IGUR							
CONFIGURATION							
LAYER							







SINGLE UNIT

QUARE
60 x 160 x 60mm
³ / ₈ x 6 ³ / ₈ x 2 ³ / ₈ "
20 Units/Bundle
28 SaFt/Stone

RECTANGLE 160 x 240 x 60mm 6 ³/₈ x 9 ¹/₂ x 2 ³/₈" 270 Units/Bundle .41 SqFt/Stone

Granite Fusion (Steel Mountain)

Dark Charcoal

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal.
Contact Unilock for more information.

		SQUARE	RECTANGLE
	Bundle Type	SINGLE	SINGLE
	Plant Produced	UXBRIDGE	UXBRIDGE
	Thickness (mm)	60 mm	60 mm
	Bundle	115.50	111.33
	Layer	11.55	12.37
SQFT PER	Section	-	-
	Stone	0.28	0.41
	Layers	10.00	9.00
PER BUNDLE	Sections	-	-
	SqFt	1.79	0.49
	Section	-	-
SOLDIER LNFT PER	Layer	20.67	14.76
	Bundle	206.69	132.87
	SqFt	1.79	0.74
	Section	-	-
Soldier LNFT Per	Layer	20.67	22.15
	Bundle	206.69	199.31
	SqFt	3.64	2.43
UNITS PER	Section	-	-
	Bundle	420.00	270.00
	Layer	325	346
LBS PER	Section	-	-
	Bundle	3,247	3,118
Colors	Reflectance	Stock	Stock
Almond Grove	SR n/a SRI n/a	1	1



SR .26 SRI 27

SR n/a SRI n/a





1

1

1

_

ALMOND GROVE

GRANITE FUSION (Steel Mountain)

DARK CHARCOAL Small Rectangle Only

Copthorne®







APPLICATIONS Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	Bundle Type	SINGLE
	Plant Produced	AYR
	Thickness (mm)	60 mm
	Bundle	89.20
	Layer	11.15
SQFT PER	Sections	-
	Stone	0.15
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	1.43
	Sections	-
SOLDIER LNFT PER	Layer	15.99
	Bundle	127.95
	SqFt	4.41
	Sections	-
SAILOR LNFT PER	Layer	49.21
	Bundle	393.70
	SqFt	6.73
UNITS PER	Sections	-
	Bundle	600.00
	Layer	294
LBS PER	Sections	-
	Bundle	2,349
Colors	Reflectance	Stock
Basalt	SR n/a SRI n/a	1
Burgundy Red	SR .35 SRI 38	1
Burnt Clay	SR .36 SRI 40	1
Old Oak	SR .37 SRI 41	1
Arctic Grey	SR .49 SRI 57	1



Steel Blue





SR n/a SRI n/a





1

3 COLOR BLEND Blended on Site



3 COLOR GREY BLEND Blended on Site





OLD OAK

BURGUNDY RED

ARCTIC GREY

BURNT CLAY

STEEL BLUE



Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 102. Contact Unilock for more information.

Copthorne BW

STANDARD 65 x 200 x 60mm $2\frac{5}{8} \times 7\frac{7}{8} \times 2\frac{3}{8}$ " 600 Units/Bundle

.15 SqFt/Stone

Copthorne RB

LAYING PATTERNS

SINGLE UNIT

Courtstone®





APPLICATIONS Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 15 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	Bundle Type	RANDOM
	Plant Produced	AYR
	Thickness (mm)	60 mm
	Bundle	98.30
SQFT PER	Layer	12.29
SQFIPER	Sections	-
	Stone	-
PER BUNDLE	Layers	8.00
PERBUNDLE	Sections	
	SqFt	
	Sections	
SOLDIER LNFT PER	Layer	
	Bundle	
	SqFt	2.25
	Sections	
SAILOR LNFT PER	Layer	27.69
	Bundle	221.52
	SqFt	3.9
UNITS PER	Sections	
	Bundle	384.00
	Layer	29
LBS PER	Sections	
	Bundle	2,326
Colors	Reflectance	Stock
Basalt	SR n/a SRI n/a	
		1



LAYING PATTERNS

Courtstone Fixed

Random



BELGIAN BLUE



BASALT

Belgian Blue

Pebble Taupe

Dawn Mist



SR n/a SRI n/a

SR n/a SRI n/a

SR n/a SRI n/a



PEBBLE TAUPE



1

1 1

DAWN MIST PEBBLE TAUPE Blended on Site

UNIT RANDOM BUNDLE

പ



BASALT

SQUARE 130 x 130 x 60mm 51/8 x 51/8 x 23/8" 64 Units/Bundle .18 SqFt/Stone

DAWN MIST

SMALL RECTANGLE 145 x 130 x 60mm 5¾ x 5½ x 2¾" 64 Units/Bundle .20 SqFt/Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 102. Contact Unilock for more information.

Eco-Hex[™]



8 x 8



APPLICATIONS Pedestrian, Light Vehicular, Permeable

APPEARANCE

Edge Detail Umbriano - Rounded Joint Spacing - 2 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1

		0.00
	Bundle Type	SINGLE
	Plant Produced	MARENGO
	Thickness (mm)	60 mm
	Bundle	108.31
	Layer	10.83
SQFT PER	Sections	-
	Stone	0.45
	Layers	10.00
PER BUNDLE		-
	SqFt	-
	Sections	-
LNFT PER	Layer	-
	Bundle	-
	SqFt	-
SAILOR	Sections	-
SAILOR .NFT PER	Layer	-
	Bundle	-
	SqFt	2.22
UNITS PER	Layer	24.00
	Bundle	240.00
	Layer	276
LBS PER	Sections	-
	Bundle	2,762
Colors	Reflectance	Stock
French Grey	SR .18 SRI 17	V
Midnight Sky	SR .17 SRI 15	J
Winter Marvel	SR .35 SRI 38	1






MIDNIGHT SKY





FRENCH GREY

WINTER MARVEL

LAYER CONFIGURATION







Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Eco-Line[®]

ENDURACOLOR | 🔁 EasyClean | ⊘ PERMEABLE



MULTIPLE SIZES



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty, Permeable

APPEARANCE

Edge Detail - Micro Surface Texture - Smooth / Exposed / Brushed / Umbriano Mottled Joint Spacing - 6.25 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

PATTERNS	
LAYING I	

LAYER CONFIGURATION

Ecoline Fixed Random



UNIT A 357 x 84 x 100mm 14 x 3 ⁵/16 x 3 ⁷/8" 24 Units/Bundle .32 SqFt/Stone

UNIT E

317 x 84 x 100mm 12½ x 35/16 x 37/8" 24 Units/Bundle .29 SqFt/Stone

UNIT B

UNIT F 357 x 114 x 100mm 317 x 114 x 100mm 14 x 4½ x 3%" 12½ x 4½ x 3%" 24 Units/Bundle 24 Units/Bundle .44 SqFt/Stone .39 SqFt/Stone

12 x 3 ⁵/16 x 3 ⁷/8" 24 Units/Bundle .25 SqFt/Stone UNIT G

UNIT C

277 x 84 x 100mm 11 x 4 ½ x 3 %" 24 Units/Bundle .34 SqFt/Stone

277 x 84 x 100mm

UNIT D 237 x 84 x 100mm 9 ³/₈ x 3 ⁵/₁₆ x 3 ⁷/₈" 24 Units/Bundle .21SqFt/Stone

UNIT H 237 x 114 x 100mm 9 ³/₈ x 4 ¹/₂ x 3 ⁷/₈" 48 Units/Bundle .29 SqFt/Stone

Notes: Made-to-Order. Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured
surfaces. All measurements are nominal. Contact Unilock for more information.

Bundle Type		RANDOM
	Plant Produced	
	Thickness (mm)	
	Bundle	66.20
	Layer	11.03
SQFT PER	Sections	-
	Stone	0.34
PER BUNDLE	Layers	6.00
PER BUNDLE	Sections	-
	SqFt	-
SOLDIER	Sections	-
LNFT PER	Layer	-
	Bundle	-
	SqFt	-
SAILOR	Sections	-
LNFT PER	Layer	-
	Bundle	-
	SqFt	2.90
UNITS PER	Sections	-
	Bundle	216.00
	Layer	504
LBS PER	Sections	-
	Bundle	3,027
Colors	Reflectance	Stock
Multiple Colors and Finishes	SR n/a SRI n/a	SO

Eco-Optiloc[™]

ENDURACOLOR[®] / PERMEABLE





APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty, Permeable

APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 12 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

CONFIGURATION	
LAYER CONF	

AYING PATTERNS	
V	EcoOptiloc Cluster

SINGLE UNITS

STANDARD 250 x 250 x 80mm 97⁄8 x 9 7⁄8 x 3 1⁄8" 126 Units/Bundle .50 SqFt/Stone

Notes: Made-to-Order. Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when
compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

		OTANDADD
		STANDARD
	Bundle Type	SINGLE
	Plant Produced	NEW YORK / UXBRIDGE
	Thickness (mm)	80 mm
	Bundle	63.56
	Layer	9.08
SQFT PER	Sections	-
	Stone	0.50
	Layers	7.00
PER BUNDLE	Sections	
	SqFt	
	Sections	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	
	Sections	-
SAILOR LNFT PER	Layer	-
	Bundle	-
	SqFt	1.98
UNITS PER	Sections	-
	Bundle	126.00
	Layer	292
LBS PER	Sections	-
	Bundle	2,047
Colors	Reflectance	Stock
Multiple Colors and Finishes	SR n/a SRI n/a	SO

Eco-Priora[™] Premier





APPLICATIONS


Pedestrian, Light Vehicular, Roadway Street, Heavy-duty , Permeable

APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits






LAYER CONFIGURATION

LAYING PATTERNS





EcoPriora 5x10 RB

EcoPriora 5x10 HB



Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

		5 x 10
	Bundle Type	SINGLE
	Plant Produced	NEW YORK
	Thickness (mm)	80 mm
	Bundle	75.95
	Layer	10.85
SQFT PER	Sections	-
	Stone	0.31
	Layers	7.00
PER BUNDLE	Sections	-
	SqFt	1.27
	Sections	
SOLDIER LNFT PER	Layer	13.78
	Bundle	96.46
	SqFt	2.54
	Sections	
SAILOR LNFT PER	Layer	27.56
	Bundle	192.91
	SqFt	3.23
UNITS PER	Layer	35
	Bundle	245.00
	Layer	388
LBS PER	Sections	
	Bundle	2,717
Colors	Reflectance	Stock

Colors	Reflectance	Stock
Granite Fusion (Steel Mountain)	SR n/a SRI n/a	1
Steel Grey	SR n/a SRI n/a	1
Opal Blend	SR n/a SRI n/a	1







GRANITE FUSION (Steel Mountain) STEEL GREY

OPAL BLEND

Eco-Promenade[®] EcoTerra

ENDURACOLOR / PERMEABLE





APPLICATIONS Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded Surface Texture - Shot Blasted Joint Spacing - n/a

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


		4 x 12
Bundle Type		SINGLE
Plant Produced		ONTARIO
	Thickness (mm)	80 mm
	Bundle	81.37
SQFT PER	Layer	11.63
JULIPER	Section	-
	Stone	0.32
PER BUNDLE	Layers	7.00
PER BUNDLE	Sections	-
	SqFt	3.00
	Section	-
SOLDIER LNFT PER	Layer	11.81
	Bundle	82.67
	SqFt	0.32
SAILOR LNFT PER	Section	-
SAILOR LNFT PER	Layer	35.43
	Bundle	248.03
	SqFt	3.09
UNITS PER	Layer	36
	Bundle	252
	Layer	360
LBS PER	Section	-
	Bundle	2,516
Colors	Reflectance	Stock





LIGHT OPAL BLEND

LIGHT STEEL GRAY





Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Eco-Promenade[®]

ENDURACOLOR | 🔁 EasyClean | 🖉 PERMEABLE





APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty, Permeable

APPEARANCE

Edge Detail - Micro Surface Texture - Smooth, Series Exposed, Umbriano, Revela Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		3 x 12	4 x 16
	Bundle Type	SINGLE	SINGLE
	Plant Produced	NEW YORK	NEW YORK
	Thickness (mm)	100 mm	100 mm
	Bundle	63.94	62.00
	Layer	10.66	10.33
SQFT PER	Sections	-	-
	Stone	0.24	0.43
	Layers	6.00	6.00
PER BUNDLE	Sections	-	
	SqFt	1.02	0.76
SOLDIER LNFT PER	Sections	-	
	Layer	10.83	7.87
	Bundle	64.96	47.24
	SqFt	4.06	3.05
	Sections	-	
SAILOR LNFT PER	Layer	43.31	31.50
	Bundle	259.84	188.98
	SqFt	4.13	2.32
UNITS PER	Layer	44.00	24.00
	Bundle	264.00	144.00
	Layer	488	455
LBS PER	Sections	-	
		2,927	2,730
	Bundle	2,521	2,700

SR n/a SRI n/a


Multiple Colors and Finishes

Multiple finishes available by Special Order. Please contact your Territory Manager for more details.

ž
0
~
Ē
Æ

FIGURATION

LAYING PATTERNS



3x12 RB



EcoPromenade 3x12 HB

EcoPromenade 3x12 DHB

4 x 16

100 x 400 x 100mm

3 1/8 x 15 3/4 x 3 7/8"

144 units/Bundle

.43 Sq.Ft./Stone



Notes: Made-to-Order. Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

S0

S0

Eco-Stone[™]

ENDURACOLOR[®]





APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty , Permeable

APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 6 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		STANDARD
	Bundle Type	SINGLE
	Plant Produced	NEW YORK
	Thickness (mm)	80 mm
	Bundle	67.00
	Layer	9.57
SQFT PER	Sections	-
	Stone	0.27
	Layers	7.00
PER BUNDLE	Sections	-
	SqFt	
	Sections	
SOLDIER LNFT PER	Layer	
	Bundle	
	SqFt	
	Sections	
SAILOR LNFT PER	Layer	
	Bundle	
	SqFt	3.66
UNITS PER	Sections	
	Bundle	245.00
	Layer	349
LBS PER	Sections	
	Bundle	2,445
Colors	Reflectance	Stock
	SR n/a SRI n/a	
Multiple Colors and Finishes	SR II/a SRI II/a	SC

ST. 115 45 249 249 .27

STANDARD 115 x 230 x 80mm 4 % x 9 x 3 1/8" 245 Units/Bundle .27 SqFt/Stone

Notes: Made-to-Order. Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Granito[™]

ENDURACOLOR[®] EasyClean[®]

Bundle Type



RANDOM

HEX

SINGLE



APPLICATIONS Pedestrian


APPEARANCE


Edge Detail - Rounded Surface Texture - Granito/Granito Textured (Random) Joint Spacing - 7 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


JRATION	
AYER CONFIGURATION	







Granito Fixed Random A Gran




inito H	lex		

SMALL RECTANGLE 180 x 360 x 60mm 7 x 14 1/4 x 2 3/8" 27 units/Bundle .79 Sq.Ft./Stone

SQUARE 360 x 360 x 60mm 14 1/4 x 14 1/4 x 2 3/8" 27 units/Bundle 1.40 Sq.Ft./Stone

LARGE RECTANGLE 360 x 540 x 60mm 14¹⁄₄ x 21¹⁄₄ x 2³⁄₈" 18 units/Bundle 2.09 Sq.Ft./Stone



Notes: Special Order, Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

	Plant Produced	ONTARIO	ONTARIO
	Thickness (mm)	70 mm	60 mm
	Bundle	73.92	94.14
	Layer	9.24	10.46
SQFT PER	Sections	-	
	Stone	0.39	1.31
	Layers	8.00	9.00
PER BUNDLE	Sections	-	
	SqFt	-	
	Sections		
SOLDIER LNFT PER	Layer		
	Bundle	-	
	SqFt	-	0.85
	Sections	-	
SAILOR LNFT PER	Layer	-	8.86
	Bundle	-	79.72
	SqFt	2.60	0.76
UNITS PER	Layer	24.00	8.00
	Bundle	192.00	72.00
	Layer	306	287
LBS PER	Sections	-	· · ·
	Bundle	2,450	2,583
Colors	Reflectance	Stock	Stock

Colors	Reflectance	Stock	Stock
Notte	SR n/a SRI n/a	SO	SO
Sabia	SR n/a SRI n/a	SO	SO
Scuro	SR n/a SRI n/a	SO	SO



NOTTE

SINGLE UNIT

Hex[™]




APPLICATIONS Pedestrian, Light Vehicular, Roadway Street


APPEARANCE

Edge Detail - Micro Surface Texture - Smooth/Exposed Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1







x 8	
)0 x 200 x 70mm	
% x 7 ⅔ x 2 ¾"	
2 Units/Bundle	
9 SqFt/Stone	

HEX PERMEABLE 200 x 200 x 80mm 7⁷/₈ x 7⁷/₈ x 3¹/₈" 140 Units/Bundle .39 SqFt/Stone

Multiple Colors & Finishes

Notes: Hex Permeable only Made-to-Order. Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing
when compacting. All measurements are nominal. Contact Unilock for more information.

	Bundle Type	SINGLE	SINGLE
	Plant Produced	NEW YORK	NEW YORK
	Thickness (mm)	70 mm	80 mm
	Bundle	73.92	53.89
SQFT PER	Layer	9.24	7.70
JUFIPER	Sections	-	-
	Stone	0.39	0.39
	Layers	8.00	7.00
PER BUNDLE	Sections	-	-
	SqFt	-	-
SOLDIER	Sections	-	-
LNFT PER	Layer	-	-
	Bundle	-	-
	SqFt	-	-
SAILOR	Sections	-	-
LNFT PER	Layer	-	-
	Bundle	-	-
	SqFt	2.60	2.60
UNITS PER	Layer	24	20
	Bundle	192.00	140.00
	Layer	306	310
LBS PER	Sections	-	-
	Bundle	2,450	2,167
Colors	Reflectance	Stock	Stock
Granite Fusion (Steel Mountain)	SR .30 SRI 32	1	-
Steel Grey	SR .12 SRI 9	1	-
Opal Blend	SR .48 SRI 56	1	-



SR .n/a SRI n/a





SO

GRANITE FUSION (Steel Mountain)

STEEL GREY OPAL BLEND

S0

ENDURACOLOR

8 x 8 HEX PERMEABLE

SINGLE UNIT

Holland Premier[™]

ENDURACOLOR[®]




APPLICATIONS Pedestrian, Light Vehicular, Borders and accents

APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits




LAYER CONFIGURATION

LAYING PATTERNS



HollandPremier

4x8 RB



4x8 HB



HollandPremier							



HollandPremier 4x8 BW

		4 x 8
	Bundle Type	SINGLE
	Plant Produced	NEW YORK / UXBRIDGE
	Thickness (mm)	60 mm
	Bundle	118.00
	Layer	11.80
SQFT PER	Sections	-
	Stone	0.22
	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	1.50
	Sections	-
SOLDIER LNFT PER	Layer	17.72
	Bundle	177.17
	SqFt	3.00
	Sections	-
SAILOR LNFT PER	Layer	35.43
	Bundle	354.33
	SqFt	4.58
UNITS PER	Layer	54.00
	Bundle	540.00
	Layer	331
LBS PER	Sections	-
	Bundle	3,305
Colors	Bundle	3,305 Stock
Colors Almond Grove		
	Reflectance	Stock
Almond Grove	Reflectance SR n/a SRI n/a	Stock



Rustic Red





1

ALMOND GROVE

SR .35 SRI 36

DARK CHARCOAL







FOSSIL

GRANITE FUSION (Steel Mountain)

RUSTIC RED

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Hollandstone[™]



APPLICATIONS Pedestrian, Light Vehicular,

APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		SMOOTH
	Bundle Type	SINGLE
	UXBRIDGE	
	Thickness (mm)	60 mm
	Bundle	106.20
	Layer	11.80
SQFT PER	Section	
	Stone	0.22
		9.00
PER BUNDLE	Layers Sections	9.00
	Sections	-
	SqFt	1.50
SOLDIER LNFT PER	Section	-
SOLDIER LINFT PER	Layer	17.72
	Bundle	159.45
	SqFt	3.00
	Section	-
SAILOR LNFT PER	Layer	35.43
	Bundle	318.90
	SqFt	4.58
UNITS PER	Section	-
	Bundle	486.00
	Layer	319
LBS PER	Section	
LBOTER	Bundle	2,868
Colors	Reflectance	- Cán ale
Almond Grove	SR n/a SRI n/a	Stock
Charcoal	SR .12 SRI 9	
Granite	SR .26 SRI 27	SO
	0.1.20 011 21	30





ALMOND GROVE

CHARCOAL

GRANITE



LAYER CONFIGURATION






Hollandstone 4x8 HB Hollandstone 4x8 RB



Hollandstone 4x8 BW



Notes: Made-to-Order. Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

II Campo[®]

ENDURACOLOR[®]



APPLICATIONS Pedestrian, Light Vehicular, Roadway Street, Border/Accents

APPEARANCE


Edge Detail - Rounded Surface Texture - II Campo Brushed Joint Spacing - 3 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		4 x 8	8 x 16
	Bundle Type	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO
	Thickness (mm)	70 mm	70 mn
	Bundle	94.40	82.6
	Layer	11.80	10.3
SQFT PER	Sections	-	
	Stone	0.22	0.8
PER BUNDLE	Layers	8.00	8.0
PER BUNDLE	Sections	-	
	SqFt	1.50	0.7
SOLDIER	Sections	-	
LNFT PER	Layer	17.72	7.8
	Bundle	141.73	62.9
	SqFt	3.00	1.5
SAILOR	Sections	-	
LNFT PER	Layer	35.43	15.7
	Bundle	283.46	125.9
	SqFt	4.58	1.1
UNITS PER	Sections	-	
	Bundle	432.00	96.0
	Layer	377	34
LBS PER	Sections	-	
	Bundle	3,019	2,74
Colors	Reflectance	Stock	Stoc
Dark Charcoal	SR n/a SRI n/a	SO	S
Granite	SR n/a SRI n/a	-	SC
Light Croy			

Colors	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	SO	SO
Granite	SR n/a SRI n/a	-	SO
Light Grey	SR .22 SRI 22	-	SO
Sandstone	SR n/a SRI n/a	-	SO









8 x 16 200 x 400 x 70mm 7 1/8 x 15 3/4 x 2 3/4" 96 Units/Bundle .86 SqFt/Stone

IICampo 4x8 SB



LIGHT GREY







DARK CHARCOAL

GRANITE

Notes: Special Order. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

ENDURACOLOR

Mattoni™



APPLICATIONS Pedestrian, Light Vehicular, Border/Accents

APPEARANCE


Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 4 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		STANDARD SMOOTH					
	Bundle Type	SINGLE					
	Plant Produced	NEW YOR					
	Thickness (mm)	70 mn					
	Bundle	86.80					
	Layer	10.8					
SQFT PER	Sections						
	Stone	0.1					
Layers 8.00							
PER BUNDLE	Sections	0.0					
Sections							
	SqFt	1.2					
	Sections						
SOLDIER LNFT PER	Layer	13.7					
	Bundle	110.2					
	SqFt	5.0					
	Sections						
SAILOR LNFT PER	Layer	55.1					
	Bundle	440.9					
	SqFt	6.4					
UNITS PER	Layer	70.0					
	Bundle	560.0					
	Layer	35					
LBS PER	Sections						
	Bundle	2,79					
Colors	Reflectance	Stoc					

Colors	Reflectance	Stock
Cocoa Brown	SR .34 SRI 37	 ✓
Dark Charcoal	SR n/a SRI n/a	1
Granite Fusion	SR .30 SRI 32	1
Sable Blend	SR .38 SRI 42	 Image: A start of the start of








COCOA BROWN

DARK CHARCOAL



GRANITE FUSION

SABLE BLEND



Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Natural Stone Slabs



APPLICATIONS Pedestrian, Roof Deck


APPEARANCE

Edge Detail - Sawn Surface Texture - Brushed / Riven Joint Spacing - 10 mm


TECHNICAL INFORMATION

SANDSTONE		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 mm	22 mm	22 mm	22 mm
SQFT PER	Crate	180.00	186.00	160.00	180.00
JUFIFER	Units	2.00	3.00	4.00	6.00
UNITS PER	Crate	90.00	62.00	40.00	30.00
UNITS PER	SqFt	0.50	0.33	0.25	0.17
LBS PER	Unit	24	36	48	72
LDSFER	Crate	2,033	2,136	1,836	2,072
Colors	Reflectance	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	1	1	1	1
Greyfield	SR .32 SRI 35	1	1	1	1
Stone Cliff Grey	SR .27 SRI 28	1	1	1	1

LIMESTONE		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 mm	22 mm	22 mm	22 mm
SQFT PER	Crate	180.00	186.00	160.00	180.00
JUFIFER	Units	2.00	3.00	4.00	6.00
UNITS PER	Crate	90.00	62.00	40.00	30.00
UNITSPER	SqFt	0.50	0.33	0.25	0.17
LBS PER	Unit	24	36	48	72
LDJ PER	Crate	2,033	2,136	1,836	2,072
				_	
Colors	Reflectance	Stock	Stock	Stock	Stock
Black River	SR .08 SRI 4	1	1	1	1
Hearthstone	SR .20 SRI 20	1	1	1	1



SINGLE UNITS



24 x 36

590 x 890 x 22mm

23 ¼ x 35 x 1/8"

18 x 24 440 x 590 x 22mm 17 ³/₈ x 23 ¹/₄ x ⁷/₈"









BLACK RIVER

CASCADE GREYFIELD





HEARTHSTONE

Notes: SOLD IN FULL CRATES ONLY It is recommended to install these units with a 10 mm joint space between stones. This product is not intended for vehicular applications. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone All measurements are nominal. Contact Unilock for more information.

24 x 24

590 x 590 x 22mm

23 ½ x 23 ¼ x 7/8"

NEW FOR 2025

Natural Stone Random Bundle

NEW FOR 2025



APPLICATIONS Pedestrian

APPEARANCE

Edge Detail - Sawn Surface Texture - Natural Finish Joint Spacing - 10 mm

TECHNICAL INFORMATION

Visit Unilock.com for more information.

SANDSTONE		4 PC BUNDLE
	Bundle Type	RANDOM
	Thickness (mm)	38 mm
	Crate	120.00
SQFT PER	Units	-
	Crate	32.00
UNITS PER	SqFt	-
	Unit	73
LBS PER	Bundle	2,515
Colors	Reflectance	Stock
Stone Cliff Grey	SR .27 SRI 28	✓

LIMESTONE		4 PC BUNDLE
	Bundle Type	RANDOM
	Thickness (mm)	38 mm
	Crate	120.00
SQFT PER	Units	-
	Crate	32
UNITS PER	SqFt	-
	Unit	73
LBS PER	Bundle	2,315
Colors	Reflectance	Stock
Hearthstone	SR n/a SRI n/a	1




STONE CLIFF GREY

HEARTHSTONE

NaturalStone Fixed RB

LAYING PATTERNS



24 x 24 590 x 590 x 38mm 23 ¹⁄₄ x 23 ¹⁄₄ x 1 ¹⁄₂"

18 x 24 440 x 590 x 38mm 17 ³⁄₈ x 23 ¹⁄₄ x 1 ¹⁄₂" **24 x 36** 590 x 890 x 38mm 23 ¹⁄₄ x 35 x 1 ¹⁄₂"

12 x 24 290 x 590 x 38mm 11 ½ x 23 ¼ x 1 ½

Notes: SOLD IN FULL CRATES ONLY. This project pack must be installed with a 10 mm joint space between stones. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

Natural Stone Coping

NEW FOR 2025



APPLICATIONS


Wall Coping, Pool Coping, Steps Treads





BLACK RIVER

SANDSTONE		48 x 12 FULLNOSE COPING	48 x 12 STRAIGHT EDGE COPING	48 x 12 ROCKFACE COPING	48 x 14 FULLNOSE COPING	48 x 14 STRAIGHT COPING	48 x 14 ROCKFACE COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm
	Crate	20.00	20.00	20.00	20.00	20.00	16.00
UNITS PER	SqFt	4.00	4.00	4.00	4.67	4.67	4.67
	Unit	101	97	106	117	117	113
LBS PER	Crate	2,028	1,927	2,116	2,560	2,247	2,258
		01	o/ 1				
Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a		1	1	1	1	/
Greyfield	SR n/a SRI n/a	1	1	✓	/	1	1
Stone Cliff Grey	SR n/a SRI n/a	1	1	1	1	1	1
LIMESTONE		48 x 12 FULLNOSE COPING	48 x 12 STRAIGHT EDGE COPING	48 x 12 ROCKFACE COPING	48 x 14 FULLNOSE COPING	48 x 14 STRAIGHT COPING	48 x 14 ROCKFACE COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm
	Crate	20.00	20.00	20.00	20.00	20.00	20.00
UNITS PER	SqFt	4.00	4.00	4.00	4.67	4.67	4.67
LBS PER	Unit	112	112	112	130	130	130
	Crate	2,222	2,222	2,222	2,593	2,593	2,593
Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	1	1	1	1	1	J



EDGE DETAIL

49 - 12



48 x 12 1,200 x 300 x 50mm 47 1/2 x 11 7/8 x 2"

COPING

48 x 14 1,200 x 355 x 50mm 47 ½ x 14 x 2"

Notes: Steps, Coping & Pillar Caps require a refundable skid. This product is not intended for vehicular applications. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone All measurements are nominal. Contact Unilock for more information.

Natural Stone Coping

NEW FOR 2025



APPLICATIONS

Wall Coping, Pool Coping, Steps Treads







GREYFIELD STONE

STONE CLIFF GREY BLACK RIVER

SANDSTONE		28 x 14 FULLNOSE CORNER / COPING	28 x 14 STRAIGHT CORNER / COPING	24 x 12 FULLNOSE CORNER / COPING	24 x 12 STRAIGHT CORNER / COPING	24 x 24 INSERT COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm
UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00
UNITSPER	SqFt	4.67	4.67	3.0	3.0	4.67
	Unit	113	113	91	91	106
LBS PER	Crate	2,249	2,249	1,808	1,808	2,120

CASCADE

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	
Cascade	SR n/a SRI n/a	1	1	1	1	1	
Greyfield	SR n/a SRI n/a	1	1	-	-	-	
Stone Cliff Grey	SR n/a SRI n/a	J.	s	-	-	-	
LIMESTONE		28 x 14 FULLNOSE CORNER / COPING	28 x 14 STRAIGHT CORNER / COPING	24 x 12 FULLNOSE CORNER / COPING	24 x 12 STRAIGHT CORNER / COPING	24 x 24 INSERT COPING	
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm	
UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00	
ONITOPER	SqFt		4.08	3.0	3.0	4.0	
LBS PER	Unit	117	117	84	84	90	
	Crate	2,237	2,237	1,676	1,676	1,800	

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	1	1	-	-	-

INSERT COPING


retractable pool covers. Allowing easy access while keeping a continuous look and feel.

Insert coping is ideal for those




24 x 24 600 x 600 x 50mm 24 x 24 x 2"

Corner coping provides seamless 90° corners for pool, walls and so much more. **28 x 14** 710 x 355 x 50mm 28 x 14 x 2"



24 x 12 600 x 300 x 50mm 23 ⁵/8 x 11 ⁷/8 x 2"



EDGE DETAIL

Notes: Steps, (oping & Pillar Caps require a refundable skid. This product is not intended for vehicular applications. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone All measurements are nominal. Contact Unilock for more information.

Natural Stone Steps & Pillar Caps



APPLICATIONS Steps, Pillar

TECHNICAL INFORMATION

Visit Unilock.com for more information.





CASCADE

STONE CLIFF GREY


BLACK RIVER

SANDSTONE		24 x 24 PILLAR CAP	28 x 28 PILLAR CAP	48 x 16 STEP
	Bundle Type	SINGLE	SINGLE	SINGLE
	Thickness (mm)	65 mm	65 mm	150 mm
	Crate	28.00	28.00	24.00
NFT PER Unit		2.33	2.33	4.00
UNITS PER	Crate	14.00	12.00	6.00
	01010	11.00	12.00	0.00
LBS PER	Unit	143	199	421
Crate		1,991	2,385	2,526
Colors	Reflectance	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	1	1	1
Greyfield	SR n/a SRI n/a	1	1	1
Stone Cliff Grey	SR n/a SRI n/a	1	1	1
LIMESTONE		24 x 24 PILLAR CAP	28 x 28 PILLAR CAP	48 x 16 STEP
	Bundle Type	SINGLE	SINGLE	SINGLE
	Thickness (mm)	65 mm	65 mm	150 mm
	Crate	28.00	28.00	24.00
LNFT PER	Unit	2.33	2.33	4.00
UNITS PER	Crate	14.00	12.00	6.00
	Unit	143	207	421
LBS PER	Crate	1,995	2,480	2,526
Colors	Reflectance	Stock	Stock	Stock

1

1

1



Black River

SR n/a SRI n/a

Notes: This product is not intended for vehicular applications. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone All measurements are nominal. Contact Unilock for more information.

NEW FOR 2025

Natural Stone Random Bundle

REGIONAL OFFERINGS



APPLICATIONS Pedestrian

APPEARANCE

Edge Detail - Sawn Surface Texture - Natural Finish Joint Spacing - 10 mm


TECHNICAL INFORMATION

Visit Unilock.com for more information.

		4 PC BUNDLE
	Bundle Type	RANDOM
	Thickness (mm)	38 mm
SQFT PER	Crate	120.00
	Ciale	120.00
	Units	3.63
UNITS PER	Crate	32.00
	SqFt	0.28
r		
LBS PER	Unit	47
	Bundle	2,508
Colors	Reflectance	Stock
Golden Sand	SR n/a SRI n/a	1



GOLDEN SAND

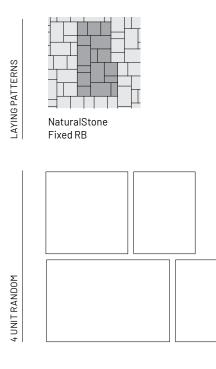

24 x 24 590 x 590 x 38mm 23 ¹⁄₄ x 23 ¹⁄₄ x 1 ¹⁄₂"

18 x 24 440 x 590 x 38mm 17 ³/₈ x 23 ¹/₄ x 1 ¹/₂" **24 x 36** 590 x 890 x 38mm 23 ¹⁄₄ x 35 x 1 ¹⁄₂"

12 x 24 290 x 590 x 38mm 11 ½ x 23 ¼ x 1 ½

Notes: SOLD IN FULL CRATES ONLY. Available only while supplies last. This project pack must be installed with a 10 mm joint space between stones. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

Natural Stone Slabs



APPLICATIONS Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Zero Surface Texture - Brushed / Riven Joint Spacing - 10 mm

TECHNICAL INFORMATION

Visit Unilock.com for more information.



AUTUM HARVEST GOLDEN SAND

IVORY SAND



WINTER MIST

SANDSTONE		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 mm	22 mm	22 mm	22 mm
	Crate	180.00	186.00	160.00	180.00
SQFT PER	Units	2.00	3.00	4.00	6.00
	Units	2.00	5.00	4.00	0.00
UNITS PER	Crate	90.00	62.00	40.00	30.00
UNITS PER	SqFt	0.50	0.33	0.25	0.17
	Linit	24	36	48	72
LBS PER	Unit Crate	24	2,221	40	2,149
	Clate	2,149	2,221	1,910	2,149
Colors	Reflectance	Stock	Stock	Stock	Stock
Autumn Harvest	SR n/a SRI n/a	1	1	1	1
Golden Sand	SR n/a SRI n/a	1	1	1	1
Ivory Sand	SR n/a SRI n/a	1	1	1	1
LIMESTONE		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 mm	22 mm	22 mm	22 mm
	Crate	180.00	186.00	160.00	180.00
SQFT PER	Units	2.00	3.00	4.00	6.00
		1			
UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17
	Unit	24	36	48	72
LBS PER	Crate	2,149	2,221	1,910	2,149
	-				
Colors	Reflectance	Stock	Stock	Stock	Stock
Winter Mist	SR n/a SRI n/a	1	1	1	1

12 x 24 300 x 600 x 22mm 11 ⁷/₈ x 23 ⁵/₈ x ⁷/₈"

SINGLE UNITS

_____ 11 ½ x 23 ½ x `

24 x 36 600 x 900 x 22mm 23 5% x 35 ½ x 7%"

18 x 24

450 x 600 x 22mm

17 ³/₄ x 23 ⁵/₈ x ⁷/₈"

24 x 24 600 x 600 x 22mm 23 ⁵/8 x 23 ⁵/8 x ⁷/8"

REGIONAL OFFERINGS

Natural Stone Coping

REGIONAL OFFERINGS



APPLICATIONS

Wall Coping, Pool Coping, Steps Treads




AUTUM HARVEST

GOLDEN SAND

IVORY SAND

STONE CLIFF GREY **BLACK RIVER**

SANDSTONE		48 x 12 FULLNOSE COPING	48 x 12 ROCK FACED COPING	48 x 16 ROCK FACED COPING	72 x 12 FULLNOSE COPING	72 x 12 ROCK FACED COPING	72 x 16 ROCK FACED COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm
					· · · ·		
UNITS PER	Crate	20.00	20.00	16.00	12.00	12.00	10.00
	SqFt	-	-	-	-	-	-
	Unit	101	106	113	159	159	209
LBS PER	Crate	2,028	2,116	2,258	1,905	1,905	2,094
		_,	2,	2,200	1,000	.,000	2,001
Colors	Reflectance	Stock		Stock	Stock	Stock	Stock
Autumn Harvest	SR n/a SRI n/a	1	1	1	1	1	1
Golden Sand	SR n/a SRI n/a	1	1	1	1	1	1
Ivory Sand	SR n/a SRI n/a	1	1	1	1	1	1
Stone Cliff Grey	SR n/a SRI n/a	1	1	1	1	1	1
		1		r	1		
LIMESTONE		48 x 12 FULLNOSE COPING	48 x 12 ROCKFACED COPING	48 x 16 ROCK FACED COPING	72 x 12 FULLNOSE COPING	72 x 12 ROCK FACED COPING	72 x 16 ROCK FACED COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm
	Crate	20.00	20.00	16.00	12.00	12.00	10.00
UNITS PER	SqFt	-	-	-	-	-	-
	Unit	159	106	141	159	159	209
LBS PER	Crate	3,175	2,116	2,258	1,905	1,905	2,094
Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a		J		J		
		v	· · · · · · · · · · · · · · · · · · ·	V		, , , , , , , , , , , , , , , , , , ,	~



Notes: Available only while supplies last. Steps, Coping & Pillar Caps require a refundable skid. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

Natural Stone Steps & Pillar Caps



APPLICATIONS Steps, Pillar

TECHNICAL INFORMATION

Visit Unilock.com for more information.




SANDSTONE		24 x 24 ROCK FACED PILLAR CAP	28 x 28 ROCK FACED PILLAR CAP	48 x 16 ROCK FACED STEP	72 x 16 ROCK FACED STEF
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	65 mm	65 mm	150 mm	150 mn
FCFT PER	Crate	-	-	32.00	32.0
LNFT PER	Crate	-	-	24.00	24.0
LNFIPER	Unit	-	-	4.00	6.0
UNITS PER	Crate	14.00	12.00	6.00	4.0
	Unit	137	209	421	62
LBS PER	Crate	1,914	2,513	2,526	2,51
Colors	Reflectance	Stock	Stock	Stock	Stoc
Autumn Harvest	SR n/a SRI n/a	1	1	1	
Golden Sand	SR n/a SRI n/a	1	1	1	
Ivory Sand	SR n/a SRI n/a	1	1	1	
Stone Cliff Grey	SR n/a SRI n/a	1	1	1	


LIMESTONE		24 x 24 ROCK FACED PILLAR CAP	28 x 28 ROCK FACED PILLAR CAP	48 x 16 ROCK FACED STEP	72 x 16 ROCK FACED STEP
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	64 mm	64 mm	150 mm	150 mm
FCFT PER	Crate	-	-	-	-
	Crate	-	-	24.00	24.00
LNFT PER	Unit	-	-	4.00	6.00
UNITS PER	Crate	14.00	12.00	6.00	4.00
	Unit	137	186	421	628
LBS PER	Crate	1,914	2,606	2,526	2,513
Colors	Reflectance	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	1	1	1	1
Hearthstone	SR n/a SRI n/a	1	1		
Winter Mist	SR n/a SRI n/a	1	1		



24 x 24




28 x 28 600 x 600 x 64mm 720 x 720 x 64mm 23 ⁵/₈ x 23 ⁵/₈ x 2 ⁵/₈" 28 x 28 x 2 5/8"



48 x 16 1,200 x 400 x 150mm 47 1/4 x 15 3/4 x 5 7/8"

STEP



72 x 16 1,830 x 150 x 400mm 72 x 5 1/8 x 15 3/4"

REGIONAL OFFERINGS

Notes: Available only while supplies last. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

Nordic Cobble[™]

ENDURACOLOR / PERMEABLE



STANDARD



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty, Permeable

APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 0 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1

LAYER CONFIGURATION


\Box		201		100][]
10	001	786	100	180][]
		101	100	100][]
JD		JDL	JDC	100	10
]]	DOI		100	100	
]0		386	100	100	
]0[10[10

LAYING PATTERNS


X

NordicCobble_Fan





NordicCobble



89.9 x 94 x 60mm 648 units/Bundle

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal
Contact Unilock for more information.

	STANDARD		
	Bundle Type	SINGLE	
	Plant Produced		
	Thickness (mm)	60 mm	
	Bundle	58.95	
SQFT PER	Layer	9.83	
JULI LEK	Sections	-	
	Stone	0.05	
PER BUNDLE	Layers	6.00	
PERBUNDLE	Sections		
	SqFt	3.39	
SOLDIER LNFT PER	Sections		
	Layer	33.3	
	Bundle	199.84	
	SqFt		
SAILOR LNFT PER	Sections		
SAILOR LINFT PER	Layer		
	Bundle		
	SqFt	10.99	
UNITS PER	Layer	108.00	
	Bundle	648.00	
	Layer	270	
LBS PER	Sections		
	Bundle	1,618	
Colors	Reflectance	Stock	

Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	1
Granite Fusion	SR n/a SRI n/a	1
Opal Blend	SR n/a SRI n/a	





DARK CHARCOAL

GRANITE FUSION



OPAL BLEND

Optiloc™

ENDURACOLOR



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty


APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 8 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		STANDARE
	Bundle Type	SINGLE
	NEW YORK / UXBRIDGE	
	Thickness (mm)	80 mn
	Bundle	67.66
	Layer	9.67
SQFT PER	Sections	5.07
	Stone	0.54
	Layers	7.00
PER BUNDLE	Sections	7.00
	Sections	
	SqFt	1.59
SOLDIER LNFT PER	Sections	
SOLDIER LINFT PER	Layer	15.3
	Bundle	107.48
	SqFt	1.59
	Sections	
SAILOR LNFT PER	Layer	15.3
	Bundle	107.4
	SqFt	1.86
UNITS PER	Sections	
	Bundle	126.00
	Layer	359
LBS PER	Sections	
	Bundle	2,516
Colors	Reflectance	Stocl
Multiple Colors and Finishes	SR n/a SRI n/a	SO



_AYING PATTERNS		
LA'	Optiloc A	Optiloc B

SINGLE UNIT

> STANDARD 260 x 260 x 80mm 10¼ x 10¼ x 3 1/8" 126 units/Bundle .54 Sq.Ft./Stone

Notes: Made-to-Order. Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Porcelain





APPLICATIONS Pedestrian, Roof Deck

APPEARANCE


Edge Detail - n/a Surface Texture - Stone Finish Joint Spacing - n/a

TECHNICAL INFORMATION

Visit Unilock.com for more information.



		24 x 24	16 x 32 PRESSED EDGE
Bundle Type		PRESSED EDGE SINGLE	SINGLE
	Thickness (mm)	20 mm	20 mm
		2011111	20 1111
	Pallet	248	165
SQFT PER	Box	7.75	6.89
	Unit	3.88	3.45
	Box	32.00	24.00
PER PALLET	SqFt	248.00	165.71
	Unit	64.00	48.00
	Pallet	64.00	48.00
UNITS PER	Box	2.00	2.00
	Unit	36	32
	SqFt	9	9
LBS PER	Box	72	64
	Pallet	2,277	1,538
	Fallet	2,211	1,000
Colors	Reflectance	Stock	Stock
Gotham Grey	SR n/a SRI n/a	1	-
Gotham Nero	SR n/a SRI n/a	1	-
Gotham Bianco	SR n/a SRI n/a	1	-
Nature Carrara	SR n/a SRI n/a	1	-
Nature Dolomite	SR n/a SRI n/a	1	-
New England White	SR n/a SRI n/a	1	1
New England Ivory	SR n/a SRI n/a	1	1
New England Cold Gray	SR n/a SRI n/a	1	1
Travstone Beige	SR n/a SRI n/a	1	J
Travstone Gray	SR n/a SRI n/a	1	J
Quartzite Dark Gray	SR n/a SRI n/a	-	J
Quartzite Sand	SR n/a SRI n/a	-	1



Porcelain 24x24 RB



Porcelain 16x32 HB



DEL CONCA 16 x 32 15 ¾ x 31 ½ x ¾"



400 x 800 x 20mm 3.45 Sq.Ft./Stone

Notes: All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.

SINGLE UNITS

QUARTZITE SAND

TRAVSTONE GRAY QUARTZITE DARK GRAY

Promenade[™]

100mm



APPLICATIONS Pedestrian, Light Vehicular, Roadway Street, Heavy-duty

APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth, Series[™] Exposed, II Campo Brushed Joint Spacing - 4 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		3 x 12	4 x 12	4 x 16	8 x 24
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	NEW YORK	NEW YORK	NEW YORK	NEW YORK
	Thickness (mm)	100 mm	100 mm	100 mm	100 mm
	Bundle	63.94	69.76	62.00	62.00
	Layer	10.66	11.63	10.33	10.33
SQFT PER	Sections	-	-	-	-
	Stone	0.24	0.32	0.43	1.29
PER BUNDLE	Layers	6.00	6.00	6.00	6.00
PER BUNDLE	Sections	-	-	-	-
	SqFt	1.35	1.02	0.76	0.51
SOLDIER LNFT PER	Sections	-	-	-	-
SOLDIER LNFT PER	Layer	14.44	11.81	7.87	5.25
	Bundle	86.61	70.87	47.24	31.50
	SqFt	4.06	3.05	3.05	1.52
SAILOR LNFT PER	Sections	-	-	-	-
SAILOR LNFT PER	Layer	43.31	35.43	31.50	15.75
	Bundle	259.84	212.60	188.98	94.49
	SqFt	4.13	3.10	2.32	0.77
UNITS PER	Layer	44.00	36.00	24.00	8.00
	Bundle	264.00	216.00	144.00	48.00
	Layer	483	532	455	478
LBS PER	Sections	-	-	-	-
	Bundle	2,898	3,191	2,730	2,869
Colors	Reflectance	Stock	Stock	Stock	Stock
Multiple Colors and Finishes	SR n/a SRI n/a	SO	SO	SO	SO

ENDURACOLOR[®] EasyClean[®]

Multiple finishes available by Special Order.

Please contact your Territory Manager for more details.

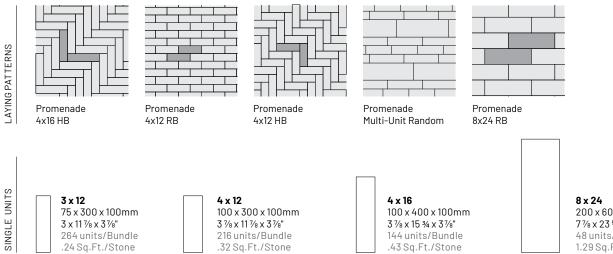

200 x 600 x 100mm 7 1/8 x 23 5/8 x 3 7/8" 48 units/Bundle 1.29 Sq.Ft./Stone

Notes: Made-to-Order. Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Promenade[™] 70mm

ENDURACOLOR EasyClean



APPLICATIONS Pedestrian, Light Vehicular, Roadway Street

APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth & Series™ Exposed, Umbriano Mottled Joint Spacing - 4 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		4 x 12	6 x 24	8 x 24
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	NEW YORK	NEW YORK	NEW YORK
	Thickness (mm)	70 mm	70 mm	70 mm
	Bundle	93.04	93.00	82.67
	Layer	11.63	11.63	10.33
SQFT PER	Sections	-	-	
	Stone	0.32	0.97	1.29
	Layers	8.00	8.00	8.00
PER BUNDLE	Sections	-	-	
	SqFt	1.02	0.51	0.5
	Sections	-	-	
SOLDIER LNFT PER	Layer	11.81	5.91	5.2
	Bundle	94.49	47.24	41.99
	SqFt	3.05	2.03	1.02
	Sections	-	-	
SAILOR LNFT PER	Layer	35.43	23.62	10.5
	Bundle	283.46	188.98	83.9
	SqFt	3.10	1.03	0.7
UNITS PER	Layer	36.00	12.00	8.0
	Bundle	288.00	96.00	64.0
	Layer	393	372	33
LBS PER	Sections	-	-	
	Bundle	3,140	2,977	2,64
Colors	Reflectance	Stock	Stock	Stocl
Multiple Colors and Finishes	SR n/a SRI n/a	SO	SO	SC

Multiple finishes available by Special Order.

Please contact your Territory Manager for more details.

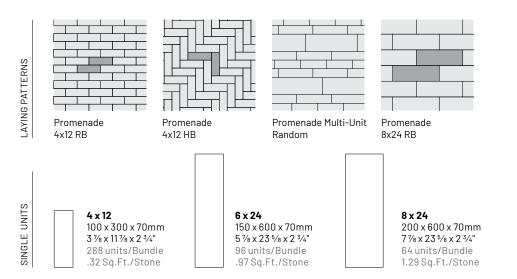

Notes: Made-to-Order. Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Revela[™] Slab

ENDURACOLOR




APPLICATIONS Pedestrian


APPEARANCE


Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - n/a

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits







SINGLE UNITS

18 x 24 450 x 600 x 60mm 17³/₄ x 23⁵/₈ x 2³/₈" 32 units/Bundle 2.91Sq.Ft./Stone

		18 x 24
	Bundle Type	SINGLE
	Plant Produced	UXBRIDGE
	Thickness (mm)	60 mm
	Bundle	93.00
	Layer	11.63
SQFT PER	Sections	
	Stone	2.91
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	0.51
	Sections	
SOLDIER LNFT PER	Layer	5.91
	Bundle	47.25
	SqFt	0.68
	Sections	
SAILOR LNFT PER	Layer	7.87
	Bundle	62.99
	SqFt	0.34
UNITS PER	Layer	4.00
	Bundle	32.00
	Unit	80
LBS PER	Layer	319
	Bundle	2,552
Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Frost	SR n/a SRI n/a	
Metallic Grey	SR n/a SRI n/a	V
Mica Grey	SR n/a SRI n/a	✓
Savannah	SR n/a SRI n/a	/





FROST

DARK CHARCOAL

METTALIC GREY



MICA GREY

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Richcliff[®]

🔁 EasyClean




APPLICATIONS Pedestrian, Light Vehicular

APPEARANCE


Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 10 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1



LAYING PATTERNS



Richcliff Fixed Random B

			LARGE RECTANGLE
	Bundle Type	RANDOM	SINGLE
	Plant Produced	AYR	AYR
	Thickness (mm)	60 mm	60 mm
	Bundle	90.30	82.39
SQFT PER	Layer	11.29	10.30
	Sections	-	-
	Stone	0.56	1.72
	Layers	8.00	8.00
PER BUNDLE	Sections	-	-
	Contonio		
	SqFt	-	0.58
SOLDIER LNFT PER	Sections	-	-
SOLDIER LINFT PER	Layer	-	5.94
	Bundle	-	47.56
	SqFt	1.31	1.01
SAILOR LNFT PER	Sections	-	-
	Layer	14.78	10.39
	Bundle	118.22	83.15
	0-54	1.77	0.58
UNITS PER	SqFt	20.00	6.00
UNITS PER	Layer		
	Bundle	160.00	48.00
	Layer	309	301
LBS PER	Sections	-	-
	Bundle	2,472	2,411
Colors	Reflectance	Stock	Stock
Dawn Mist	SR n/a SRI n/a	1	/



DAWN MIST



SR n/a SRI n/a

SR n/a SRI n/a



Blended on Site

1

1



1

1

PEBBLE TAUPE

PEBBLE TAUPE DAWN MIST

SMOKE SHALE



Pebble Taupe

Smoke Shale

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Richcliff Fixed

Random A

Series[™] 70mm

ENDURACOLOR



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Border/Accents

APPEARANCE

Edge Detail - Chamfer Surface Texture - Series Exposed Joint Spacing -3 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		4 x 8
	Bundle Type	SINGLE
	Plant Produced	NEW YORK
	Thickness (mm)	70 mm
	Bundle	94.4
SQFT PER	Layer	11.8
SQFTPER	Sections	
	Stone	1.3 ⁻
	Layers	8.00
PER BUNDLE	Sections	
	SqFt	1.50
	Sections	
SOLDIER LNFT PER	Layer	17.7
	Bundle	141.7
	SqFt	0.8
	Sections	
SAILOR LNFT PER	Layer	8.8
	Bundle	88.5
	SqFt	4.5
UNITS PER	Layer	54.0
	Bundle	432.0
	Layer	37
LBS PER	Sections	
	Bundle	2,95
Colors	Reflectance	Stocl
Black Granite	SR n/a SRI n/a	



Series 4x8 HB

BLACK GRANITE



Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Skyline™

ENDURACOLOR



APPLICATIONS Pedestrian, Roof Deck

APPEARANCE


Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 2 mm

TECHNICAL INFORMATION

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits

// Perfect for roof decks and other raised floor applications.

Ask us about our Skyview[™] pedestal system. See page 98 for more information.

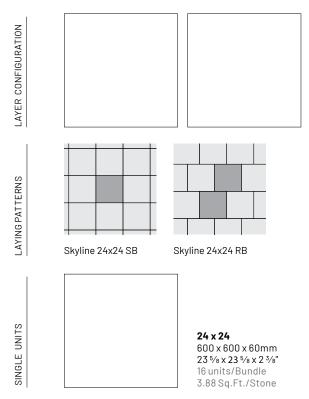

24 x 24 SINGLE Bundle Type Plant Produced NEW YORK Thickness (mm) 60 mm Bundle 62.00 Layer 7.75 SQFT PER Sections -3.88 Stone 8.00 Layers PER BUNDLE Sections -SqFt -Sections -SOLDIER LNFT PER Layer -Bundle -SqFt -Sections -SAILOR LNFT PER Layer -Bundle -0.26 SqFt UNITS PER 2.00 Layer 16.00 Bundle 211 Layer LBS PER Sections _ Bundle 1,690

Colors	Reflectance	Stock
Chamois	SR .41 SRI 46	✓
Silver Grey	SR n/a SRI n/a	✓



Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Product is not intended vehicular applications. Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. All measurements are nominal.

Soreno™

ENDURACOLOR[®] EasyClean[®]



APPLICATIONS Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Micro Surface Texture - Thermal/Flamed and Shot Blast Joint Spacing - 0 mm


TECHNICAL INFORMATION


Conforms to ASTM C 1782 Eligible for LEED v4.1

// Perfect for roof decks and other raised floor applications.

SINGLE UNITS


Ask us about our Skyview[™] pedestal system. See page 98 for more information.







		16 x 3
	Bundle Type	SINGLI
	Plant Produced	CHICAGO
	Thickness (mm)	50 mr
	Bundle	64.2
	Layer	
SQFT PER	Sections	
	Stone	3.5
	Layer	
PER BUNDLE	Sections	
	SqFt	0.3
	Sections	0.0
SOLDIER LNFT PER	Layer	1.3
	Bundle	24.0
	SqFt	0.7
	Sections	
SAILOR LNFT PER	Layer	2.6
	Bundle	48.1
	SqFt	0.2
UNITS PER	Sections	
	Bundle	18.0
	Layer	8
LBS PER	Sections	
	Bundle	1,55
Colors	Reflectance	Stoc
Dark Charcoal	SR n/a SRI n/a	
Light Granite	SR n/a SRI n/a	
Toscana Beige	SR n/a SRI n/a	




Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Thornbury[™] Smooth

ENDURACOLOR / PERMEABLE



RANDOM




APPLICATIONS Pedestrian, Light Vehicular, Permeable

APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 11-18 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits



LAYING PAT TERNS




Random A

Thornbury Fixed Random B



Thornbury Fixed Random C



LARGE RECTANGLE 350 x 420 x 70mm 13 7/8 x 16 5/8 x 2 3/4" 32 Units/Bundle 1.58 Sq.Ft./Stone

MEDIUM RECTANGLE 210 x 350 x 70mm 8 3/8 x 13 7/8 x 2 3/4" 32 units/Bundle 0.79 Sq.Ft./Stone

SMALL RECTANGLE 173 x 210 x 70mm 6 1/8 x 8 3/8 x 2 3/4" 32 units/Bundle .39 Sq.Ft./Stone

Plant Produced UXBRIDGE Thickness (mm) 70 mm 88.61 Bundle Layer 11.08 SQFT PER Sections -Stone -8.00 Layers PER BUNDLE Sections -SqFt -Sections -SOLDIER LNFT PER Layer -Bundle --SqFt Sections -SAILOR LNFT PER Layer -Bundle -SqFt -UNITS PER 12.00 Layer 96.00 Bundle Layer 355 LBS PER Sections -Bundle 2,838

Bundle Type

Colors	Reflectance	Stock
Fossil	SR .22 SRI 21	1
Granite Fusion (Steel Mountain)	SR .30 SRI 31	1





FOSSIL

GRANITE FUSION (Steel Mountain)

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Town Hall[®]





APPLICATIONS Pedestrian, Light Vehicular, Roadway Street, Border/Accents, Permeable

APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 10 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		STANDA
	Bundle Type	SING
	Plant Produced	ONTAF
	Thickness (mm)	70 ו
	Bundle	88
	Layer	11
SQFT PER	Sections	
	Stone	C
	Layers	8
PER BUNDLE	Sections	
	SqFt	1
	Sections	
SOLDIER LNFT PER	Layer	13
	Bundle	104
	SqFt	2
	Sections	
SAILOR LNFT PER	Layer	32
	Bundle	262
	SqFt	3
UNITS PER	Layer	40
	Bundle	320
	Unit	
LBS PER	Layer	
	Bundle	2,

Colors	Reflectance	Stock
Basalt	SR n/a SRI n/a	1
Burgundy Red	SR .35 SRI 38	1
Burnt Clay	SR .36 SRI 40	1
Old Oak	SR .37 SRI 41	





BASALT


BURGUNDY RED






BURNT CLAY

Blended on Site



TownHall 4x10 DHB





Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Transition™

ENDURACOLOR




APPLICATIONS Pedestrian, Light Vehicular, Border/Accents


APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits







		6 x 9
	Bundle Type	SINGLE
	Plant Produced	NEW YORK / UXBRIDGE
	Thickness (mm)	60 mm
	Bundle	125.00
SQFT PER	Layer	12.50
SQFIPER	Sections	-
	Stone	0.42
	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	1.18
	Sections	-
SOLDIER LNFT PER	Layer	14.76
	Bundle	147.64
	SqFt	1.81
	Sections	-
SAILOR LNFT PER	Layer	22.64
	Bundle	226.38
	SqFt	2.40
UNITS PER	Layer	30.00
	Bundle	300.00
	Unit	12
LBS PER	Layer	350
	Bundle	3,500

Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Fossil	SR .22 SRI 21	✓
Sierra	SR n/a SRI n/a	✓
Granite Fusion (Steel Mountain)	SR .30 SRI 32	1





DARK CHARCOAL

FOSSIL



GRANITE FUSION (Steel Mountain) SIERRA

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Treo®




APPLICATIONS Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 4 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936 Eligible for LEED v4.1 credits

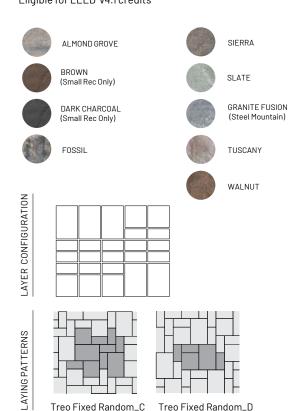

			SMALL RECTANGLE
	Bundle Type	RANDOM	SINGLE
	Plant Produced	NEW YORK / UXBRIDGE	NEW YORK / UXBRIDGE
	Thickness (mm)	60 mm	60 mm
	Bundle	118.90	118.90
	Layer	11.89	11.89
SQFT PER	Sections	-	
	Stone	0.44	0.30
	Layers	10.00	10.00
PER BUNDLE	Sections	-	
	SqFt	-	1.30
SOLDIER LNFT PER	Sections	-	
SOUDIER ENIT PER	Layer	-	15.42
	Bundle	-	154.20
	SqFt	-	2.59
	Sections	-	
SAILOR LNFT PER	Layer	-	30.84
	Bundle	-	308.40
	SqFt	2.29	3.36
UNITS PER	Sections	-	0.00
	Bundle	250.00	400.00
	Layer	349	349
LBS PER	Sections		
LDS PER	Bundle	3,485	3,485
Colors	Reflectance	Stock	Stock
Almond Grove	SR .25 SRI 25	1	
Brown	SR n/a SRI n/a	-	
Dark Charcoal	SR n/a SRI n/a	-	·
Fossil	SR .22 SRI 21		·
Sierra	SR n/a SRI n/a	1	

Colors	Reflectance	Stock	Stock
Almond Grove	SR .25 SRI 25	✓	 ✓
Brown	SR n/a SRI n/a	-	1
Dark Charcoal	SR n/a SRI n/a	-	1
Fossil	SR .22 SRI 21	✓	1
Sierra	SR n/a SRI n/a	✓	1
Slate	SR n/a SRI n/a	✓	1
Granite Fusion (Steel Mountain)	SR .30 SRI 31	✓	1
Tuscany	SR .30 SRI 32	✓	1
Walnut	SR n/a SRI n/a	✓	1

Treo Fixed Random_C Treo Fixed Random_D



235 x 235 x 60mm 9 ½ x 9 ½ x 2 ¾" 50 units/Bundle .59 Sq.Ft./Stone

SMALL RECTANGLE 117.5 x 235 x 60mm 4 ⁵/₈ x 9 ¹/₂ x 2 ³/₈" 150 units/Bundle .30 Sq.Ft./Stone

SINGLE UNIT

SMALL RECTANGLE

117.5 x 235 x 60mm 4 ⁵/₈ x 9 ¹/₂ x 2 ³/₈" 400 units/Bundle .30 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

ENDURACOLOR[®]

Bundle Type Plant Produced

Thickness (mm)

Bundle Layer

Sections

Stone

Layers

SqFt

Layer

Bundle

SqFt

Layer

Bundle

SqFt

Layer

Bundle

Layer

Sections

Reflectance

SR .25 SRI 25

SR .22 SRI 21

SR .30 SRI 31

SR n/a SRI n/a

SR n/a SRI n/a

SR n/a SRI n/a

Bundle

Sections

Sections

Sections

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

Colors

Fossil

Walnut

Slate

Almond Grove

Dark Charcoal

Granite Fusion (Steel Mountain)



SMALL RECTANGLE

SINGLE

60 mm

116.87

11.69

0.29

10.00

-

1.31

15.29

152.89

2.62

30.58

305.77

3.42

40.00

400.00

321

3,208

Stock

1

1

1

-

-

1

.

.

UXBRIDGE

RANDOM

60 mm

116.87

11.69

0.56

10.00

-

-

-

-

-

1.57

18.35

183.46

1.80

21.00

210.00

321

Stock

1

1

1

1

1

-

-3,208

.

NEW YORK / UXBRIDGE



APPLICATIONS Pedestrian, Light Vehicular, Permeable

Treo[®] Smooth

APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits





DARK CHARCOAL (Small Rec Only)

FOSSIL




GRANITE FUSION (Steel Mountain)

SLATE








LAYING PATTERNS

BUNDLE

RANDOM






Treo Fixed Random R

Treo Fixed Random S

.88 Sq.Ft./Stone



SQUARE 233 x 233 x 60mm 91/4 x 91/4 x 2 3/8" 70 units/Bundle .58 Sq.Ft./Stone

SMALL RECTANGLE 116.5 x 233 x 60mm 4 ⁵/₈ x 9¹/₄ x 2 ³/₈" 80 units/Bundle .29 Sq.Ft./Stone



-E UNIT

SINGLI

116.5 x 233 x 60mm 4 ⁵/₈ x 9¹/₄ x 2 ³/₈" 400 units/Bundle .29 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid.Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Tribeca Cobble[™]

ENDURACOLOR[®]





APPLICATIONS Pedestrian, Light Vehicular, Permeable, Roadway Street

APPEARANCE

Edge Detail - Micro Surface Texture - Series Exposed Textured Joint Spacing - 10 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS

LAYER CONFIGURATION

<u> </u>				_
	ᇿ	<u>+</u> +-	ᆣ	T
	TT.		Ļт	L.
	τ†π			Т
	<u>, , , , , , , , , , , , , , , , , , , </u>	╘┲┸		F
다며				¢.
				ф –
┯╧┰╧┧	<u></u>	Ļ	┯┶	
Tribec	aCob	ble	Fixe	d

Random

		CURB	
	Bundle Type	SINGLE	RANDOM
	Plant Produced		NEW YORK
	Thickness (mm)	180 mm	70 mm
	Bundle		97.53
		-	97.53
SQFT PER	Layer Sections	-	12.19
		-	-
	Stone	-	0.32
	Layers	3.00	8.00
PER BUNDLE	Sections	-	-
	SqFt	-	-
	Sections	-	-
SOLDIER LNFT PER	Layer	12.24	-
	Bundle	36.72	-
	SqFt	-	2.34
	Sections	-	-
SAILOR LNFT PER	Layer	-	28.49
	Bundle	-	227.95
	SqFt	_	3.12
UNITS PER	Layer	12.00	38.00
UNITSPER	Bundle	36.00	304.00
	Dullule	30.00	504.00
	Unit	46	-
LBS PER	Layer	555	398
	Bundle	1,664	3,186
Colors	Reflectance	Stock	Stock
Crystalline Basalt	SR n/a SRI n/a	1	1
Peppered Granite	SR .38 SRI 42	1	1





CRYSTALLINE BASALT

PEPPERED GRANITE

RANDOM BUNDLE LARGE RECTANGLE RECTANGLE SMALL RECTANGLE SINGLE UNIT 130 x 305 x 70mm 130 x 230 x 70mm 130 x 175 x 70mm CURB 5 x 9 x 2 ¾" 5 x 12 x 2 ¾" 5 x 6 ½ x 2 ¾" 230 x 290 x 180mm 88 units/Bundle 88 units/Bundle 128 units/Bundle 9 x 11 ½ x 7" .43 Sq.Ft./Stone .25 Sq.Ft./Stone .32 Sq.Ft./Stone 36 units/Bundle

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. For permeable installations, Unilock recommends using granite chips for joint filler. All measurements are nominal. Contact Unilock for more information.

Turfstone[™]





APPLICATIONS Pedestrian, Light Vehicular, Permeable, Roadway Street

APPEARANCE


LAYER CONFIGURATION

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 2 mm


TECHNICAL INFORMATION

Conforms to ASTM C1319 Eligible for LEED v4.1 credits

$() \land \land$



Turfstone



STANDARD 400 x 600 x 80mm 15 ³⁄₄ x 23 ⁵⁄₈ x 3 ¹⁄₈" 28 units/Bundle 2.57 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

	Bundle Type	SINGLE
	Plant Produced	NEW YOR
	Thickness (mm)	80 mn
	Bundle	72.0
	Layer	10.2
SQFT PER	Sections	
	Stone	2.5
	Layers	7.0
PER BUNDLE	Sections	
	SqFt	
	Sections	
SOLDIER LNFT PER	Layer	
	Bundle	
	SqFt	
	Sections	
SAILOR LNFT PER	Layer	
	Bundle	
	SqFt	0.3
UNITS PER	Layer	4.0
	Bundle	28.0
	Unit	6
LBS PER	Layer	25
	Bundle	1,74
Colors	Reflectance	Stoc



NATURAL

Umbriano[®] 50mm Slabs

ENDURACOLOR






APPLICATIONS Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Rounded Surface Texture - Umbriano Mottled Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

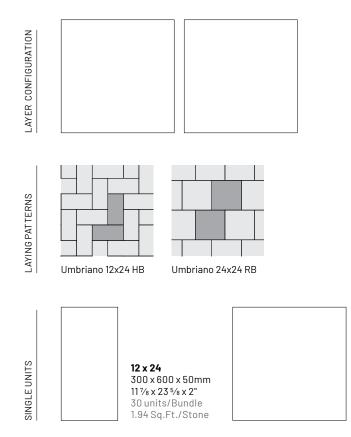

		12 x 24	24 x 24
	Bundle Typ	e SINGLE	RANDON
	Plant Produce	d ONTARIO	ONTARIC
	Thickness (mm	n) 50 mm	50 mm
	Bundle	58.13	38.75
SQFT PER	Layer	11.63	7.75
JUITEN	Sections	-	
	Stone	1.94	3.88
PER BUNDLE	Layers	5.00	5.00
FERBONDEL	Sections	-	
	SqFt	-	0.52
	Sections	-	
SOLDIER LNFT PER	Layer	-	4.00
	Bundle	-	20.00
	SqFt	-	0.52
	Sections	-	
SAILOR LNFT PER	Layer	-	4.00
	Bundle	-	20.00
	SqFt	0.52	0.26
UNITS PER	Sections	-	
	Bundle	30.00	10.00
	Layer	261	175
LBS PER	Sections	-	
	Bundle	1,303	874
Colors	Reflectance	Stock	Stocl
French Grey	SR .18 SRI 17	SO	SC
Grenada White	SR .45 SRI 52	SO	SC
Midnight Sky	SR .17 SRI 15	SO	SC
Summer Wheat	SR .42 SRI 48	SO	SC
Winter Marvel	SR .35 SRI 38	SO	SC
FR	ENCH GREY	GRENADA WHITE	MIDNIGHT SK
x 50mm			

24 x 24 600 x 600 x 50mm 23 5 % x 23 5 % x 2" 10 units/Bundle 3.88 Sq.Ft./Stone

SUMMER WHEAT WINTER MARVEL

Notes: Special Order. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. This product is not inteneded for vehicular use. All measurements are nominal. Contact Unilock for more information.

Umbriano[®] 60mm



APPLICATIONS Pedestrian


APPEARANCE

Edge Detail - Micro Surface Texture - Umbriano Mottled Joint Spacing - 4 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936 Eligible for LEED v4.1 credits

// 80mm Drive friendly available as special order. See page 61





+



RANDOM SMALL RECTANGLE Bundle Type **NEW YORK** ONTARIO Plant Produced Thickness (mm) 60 mm 60 mm Bundle 104.60 94.20 10.46 10.46 Layer SQFT PER Sections -1.31 1.43 Stone 10.00 Layers 9.00 PER BUNDLE Sections --SqFt 0.85 -Sections --SOLDIER LNFT PER Layer _ 8.85 Bundle 79.72 -SqFt 0.82 1.69 Sections -SAILOR LNFT PER 8.61 17.71 Layer Bundle 86.12 159.4 SqFt 0.76 1.43 UNITS PER Sections -Bundle 80.00 135.00 Layer 305 285 LBS PER Sections --Bundle 3,050 2,563 Colors Reflectance Stock Stock French Grey SR .18 SRI 17 1 Grenada White SR .45 SRI 52 1 -1 Midnight Sky SR .17 SRI 15 1 Summer Wheat SR .42 SRI 48 1 _

EasyClean



FRENCH GREY

Winter Marvel











-

GRENADA WHITE

SR .35 SRI 38

MIDNIGHT SKY

SUMMER WHEAT

1

WINTER MARVEL



Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. This product is not inteneded for vehicular use. All measurements are nominal. Contact Unilock for more information.

ENDURACOLOR | 🔁 EasyClean

Umbriano®	60mm	Slabs
-----------	------	-------

APPLICATIONS Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Zero Surface Texture - Umbriano Mottled Joint Spacing - 4 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits



SINGLE UNITS

Umbriano 18 x 36 RB



Umbriano 21 x 36 RB

540 x 900 x 60mm 211/4 x 35 1/2 x 2 3/8" 12 units/Bundle 5.23 Sq.Ft./Stone



18 x 36 450 x 900 x 60mm 17 ³⁄₄ x 35 ¹⁄₂ x 2 ³⁄₈" 12 units/Bundle 4.36 Sq.Ft./Stone

		21 x 36	18 x 36
	Bundle Type	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO
	Thickness (mm)	60 mm	60 mm
	Bundle	62.78	52.31
SQFT PER	Layer	10.46	8.72
SQFIPER	Sections	-	-
	Stone	5.23	4.36
	Layers	6.00	6.00
PER BUNDLE	Sections	-	-
	SqFt	-	0.68
	Sections	-	-
SOLDIER LNFT PER	Layer	3.54	5.91
	Bundle	21.24	35.44
	SqFt	0.57	1.35
	Sections	-	-
SAILOR LNFT PER	Layer	8.91	11.81
	Bundle	35.46	70.87
	SqFt	0.19	0.23
UNITS PER	Sections	-	-
	Bundle	12.00	12.00
	Layer	305	239
LBS PER	Sections	-	-
	Bundle	1,723	1,436
Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	SO	SO
Grenada White	SR .45 SRI 52	SO	SO
Midnight Sky	SR .17 SRI 15	SO	SO
Summer Wheat	SR .42 SRI 48	SO	SO
Winter Marvel	SR .35 SRI 38	SO	SO







FRENCH GREY

GRENADA WHITE MIDNIGHT SKY





SUMMER WHEAT WINTER MARVEL

Notes: Special Order. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. This product is not inteneded for vehicular use. All measurements are nominal. Contact Unilock for more information.

Umbriano[®] 70mm

ENDURACOLOR

8 x 16

SINGLE

ONTARIO

70 mm

82.67

10.33

0.86

8.00

-

Bundle Type Plant Produced

Thickness (mm)

Bundle

Layer

Stone

Layers

Sections

SQFT PER

PER BUNDI E

8 x 24

SINGLE

ONTARIO

70 mm

82.67

10.33

1.29

8.00

-



24 x 24 SINGLE

ONTARIO

70 mm

62.00

7.75

3.88

8.00

0.51

3.94

31.50

0.51

3.94

31.50

0.26

16.00

212

1,702

Stock

S0

S0

S0

S0

_

-

_

-

-

12 x 24

SINGLE

ONTARIO

70 mm

93.00

11.63

-

1.94

8.00

0.51

5.91

47.24

1.02

11.81

94.49

0.52 -

48.00

393 .

2,978

Stock

S0

S0

S0

S0

-

-




APPLICATIONS Pedestrian, Light Vehicular, Roof Deck

APPEARANCE

Edge Detail - Zero Surface Texture - Umbriano Mottled Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits



PER BUNDLE	Sections	-	-	
	SqFt	0.76	0.51	
	•	0.70	0.51	
SOLDIER LNFT PER	Sections	-	-	
LNFIPER	Layer	7.87	5.25	
	Bundle	62.99	41.99	
	SqFt	1.52	1.02	
SAILOR	Sections	-	-	
LNFT PER	Layer	15.75	10.50	
	Bundle	125.98	83.99	
	SqFt	1.16	0.77	
UNITS PER	Sections	-	-	
	Bundle	96.00	64.00	
	Layer	343	331	
LBS PER	Sections	-	-	
	Bundle	2,746	2,647	
Colors	Reflectance	Stock	Stock	
French Grey	SR .18 SRI 17	SO	SO	
Grenada White	SR .45 SRI 52	SO	SO	
Midnight Sky	SR .17 SRI 15	SO	SO	
Summer Wheat	SR .42 SRI 48	SO	SO	
Winter Marvel	SR .35 SRI 38	SO	SO	












FRENCH GREY

GRENADA WHITE

MIDNIGHT SKY

SUMMER WHEAT WINTER MARVEL



8 x 16 200 x 400 x 70mm 7 1/8 x 15 3/4 x 2 3/4" 96 units/Bundle .86 Sq.Ft./Stone

Notes: Special Order. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Umbriano[®] 80mm

Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Section

Stone

Layers

SqFt

Layer

Bundle

SqFt

Section

Layer

Bundle

SqFt

Sections

Bundle

Layer

Sections

Reflectance

SR .18 SRI 17

SR .45 SRI 52

SR .17 SRI 15

SR .42 SRI 48

Bundle

Sections

Sections

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

Colors

French Grey

Grenada White

Summer Wheat

Winter Marvel

Midnight Sky



SMALL RECTANGLE

RANDOM

ONTARIO

80 mm

73.22

10.46

1.31

7.00

-

-

_

-

-

-

0.85

8.86

62.01

0.76

56.00

383

2,680

Stock

SO

S0

S0

S0

SO

-

-

-

SINGLE

ONTARIO

80 mm

73.22

-

-

-7.00

-

0.85

_

-

62.00

1.70

-

-

124.00

1.43

105.00

383

2,680

Stock

SO

S0

S0

S0

SO

-

-




APPLICATIONS Pedestrian, Light Vehicular, Roadway Street, Heavy-duty, Permeable


APPEARANCE

Edge Detail - Zero Surface Texture - Umbriano Mottled Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits






Umbriano Fixed Umbriano Fixed Random B











FRENCH GREY

GRENADA WHITE

MIDNIGHT SKY

SUMMER WHEAT

WINTER MARVEL



Notes: Special Order. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Umbriano[®] 100mm




APPLICATIONS Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded Surface Texture - Umbriano Mottled Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits



36 x 36 900 x 900 x 100mm 35 ½ x 35 ½ x 3 %" 5 units/Bundle 8.72 Sq.Ft./Stone


18 x 36 450 x 900 x 100mm 17 ¾ x 35 ½ x 3 % 10 units/Bundle 4.36 Sq.Ft./Stone

		1000



MIDNIGHT SKY

S0



18 x 36

SINGLE

ONTARIO

100 mm

4.36

EasyClean

36 x 36 SINGLE

ONTARIO

100 mm

43.59

8.72

-8.72

PER BUNDLE	Layers	5.00	5.00
PER DUNDLE	Sections	-	-
	SqFt	0.34	0.34
	Sections	-	-
SOLDIER LNFT PER	Layer	2.95	2.95
	Bundle	14.75	14.75
SAILOR LNFT PER	SqFt	0.68	0.34
	Sections	-	-
SAILOR LNFT PER	Layer	5.90	2.95
	Bundle	29.50	14.75
	0~54	0.23	0.11
	SqFt	0.23	0.11
UNITS PER	Sections	-	-
	Bundle	10.00	5.00
	Layer	399	399
LBS PER	Sections	-	-
	Bundle	1,994	1,994
Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	SO	SO
Grenada White	SR .45 SRI 52	SO	SO
Midnight Sky	SR .17 SRI 15	SO	SO
Summer Wheat	SR .42 SRI 48	SO	SO

ENDURACOLOR

Bundle Type

Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Stone

Sections

SQFT PER



SR .35 SRI 38



SO

SUMMER WHEAT WINTER MARVEL

Notes: Special Order. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. This product is not inteneded for vehicular use. All measurements are nominal. Contact Unilock for more information.

Winter Marvel

SINGLE UNITS

Urban[™] Slabs



APPLICATIONS Pedestrian, Roof Deck


APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits





SLABS

17 ³/₄ x 23 ⁵/₈ x 2 ³/₈"

32 units/Bundle 2.91Sq.Ft./Stone

		18 x 24	9 x 9	SMALL RECTANGLE	18 x
	Bundle Type	SINGLE	SINGLE	SINGLE	SING
	Plant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE	ONTAR
	Thickness (mm)	60 mm	60 mm	60 mm	60 m
	Bundle	93.00	98.08	116.57	52.
	Layer	11.63	10.89	11.66	8.
SQFT PER	Sections	-	-	-	
	Stone	2.91	0.55	0.78	4
	Layers	8.00	9.00	10.00	6
PER BUNDLE	Sections	-	-	-	
	SqFt	0.51	-	0.78	0
SOLDIER	Sections	-	-	-	
LNFT PER	Layer	5.91	-	9.35	5
	Bundle	47.25	-	93.50	35
	SqFt	0.68	1.34	1.60	1
SAILOR	Sections	-	-	-	
SAILOR LNFT PER	Layer	7.87	14.74	18.70	11
	Bundle	62.99	132.63	187.01	70
	SqFt	0.34	1.82	1.29	0
UNITS PER	Layer	4.00	-	15.00	
	Bundle	32.00	180.00	150.00	12
	Unit	80	299	22	
LBS PER	Layer	319	-	332	2
	Bundle	2,552	2,692	3,318	1,7
Colors	Reflectance	Stock	Stock	Stock	Sto
Dark Charcoal	SR .n/a SRI n/a	-	1	-	
ndiana Buff	SR .n/a SRI n/a	1	-		
Fossil	SR .n/a SRI n/a	1	-	-	
Granite Fusion (Steel Mountain)	SR .n/a SRI n/a	1	-	-	
Opal Blend	SR .n/a SRI n/a	1	-	-	
Sterling	SR .n/a SRI n/a	1	-		
	SR .n/a SRI n/a	1	-	-	


DARK CHARCOAL (9x9 Only)

INDIANA BUFF

FOSSIL

ENDURACOLOR

(Steel Mountain)





TUSCANY Notes: Special Order apply for 18x36 only. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

18 x 36

450 x 900 x 60mm

17 ³⁄₄ x 35 ¹⁄₂ x 2 ³⁄₈"

4.36 Sq.Ft./Stone

SPECIAL ORDER

12 units/Bundle

Urban[™] 100mm

ENDURACOLOR[®]



APPLICATIONS Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - n/a

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		18 x 36
	Bundle Type	SINGLE
	Plant Produced	ONTARIO
	Thickness (mm)	100 mm
	Bundle	43.59
0057 050	Layer	8.72
SQFT PER	Sections	-
	Stone	4.36
	Layers	5.00
PER BUNDLE	Sections	-
	SqFt	0.68
OLDIER LNFT PER	Sections	-
SOLDIER LNFT PER	PER Sections Layer Bundle	5.91
	Bundle	29.53
	SqFt	1.35
	Sections	-
SAILOR LNFT PER	Layer	11.81
	Bundle	59.06
	SqFt	0.23
UNITS PER	Layer	2.00
	Bundle	10.00
	Unit	199
LBS PER	Layer	399
	Bundle	1,994
Colors	Reflectance	Stock
Indiana Buff	SR .52 SRI 61	SC
		1

SR .41 SRI 46



INDIANA BUFF


STERLING

S0



Urban 18 x 36 HB-C





Notes: Special Order, Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. This product is not inteneded for vehicular use. All measurements are nominal. Contact Unilock for more information.

Sterling

ENDURACOLOR[®] EasyClean[®]

Westport[™]




APPLICATIONS Pedestrian, Light Vehicular, Border/Accents


APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 3-7mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits





Random_A

LAYING PATTERNS

					_			
	-							
							-	
_						_		
Т								
We	oct	no	rt	F	ive	he		

Westport Fixed Random_B

			5 x 10			
	Bundle Type	RANDOM	SINGLE			
	Plant Produced	UXBRIDGE	UXBRIDGE			
	Thickness (mm)	70 mm	70 mm			
	Bundle	94.19	94.19			
	Layer	11.77	11.77			
SQFT PER	Sections	-	-			
	Stone	0.59	0.34			
		0.00	0.01			
PER BUNDLE	Layers	8.00	8.00			
TERBONDEE	Sections	-	-			
	SqFt	-	1.24			
SOLDIER LNFT PER	Sections	-	-			
	Layer	-	14.58			
	Bundle	-	116.64			
	SqFt	1.24	2.48			
SAILOR LNFT PER	Sections	-	-			
	Layer	14.57	29.16			
	Bundle	116.56	233.28			
	SqFt	1.70	2.97			
UNITS PER	Layer	20.00	35.00			
	Bundle	160.00	280.00			
	Lavas		070			
	Layer Sections	373	373			
LBS PER	Bundle	-	-			
	Bundle	2,985	2,985			
Colors	Reflectance	Stock	Stock			
Dark Charcoal	SR.n/a SRI n/a		✓			
Fossil	SR n/a SRI n/a	✓	✓			
Steel Mountain	SR n/a SRI n/a	1	✓			
Walnut	SR n/a SRI n/a	1	1			



DARK CHARCOAL (5 x 10 Only)





FOSSIL

STEEL MOUNTAIN



WALNUT



Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Brussels Dimensional Stone[®]



APPLICATIONS Garden Wall, Seat Wall, Outdoor Kitchen, Fire Feature, Water Feature

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1

		STANDARD
	Bundle Type	SINGLE
	Plant Produced	UXBRIDGE
	Thickness (mm)	100 mm
	Bundle	36.00
FCFT PER	Layer	6.00
	Stone	0.33
	Layers	6.00
PER BUNDLE	Sections	-
		100.00
LNFT PER	Bundle	108.00
	Unit	1.00
	SqFt	3.00
UNITS PER	Sections	36.00
	Bundle	108.00
	Unit	30
LBS PER	Sections	1,091
	Bundle	3,274
Colors	Reflectance	Stock
Sandstone	SR n/a SRI n/a	1
Charcoal	SR n/a SRI n/a	
Limestone	SR n/a SRI n/a	1





SR n/a SRI n/a



1

SANDSTONE

CHARCOAL

Sierra

LIMESTONE

SIERRA



Notes: Maximum height is 24" (under optimum conditions). Based on an 8" deep wall coverage = 36 sqft. per bundle. *Based on 12" deep wall coverage = 24 sqft. per bundle. All measurements are nominal. Contact Unilock for more information.

SINGLE UNIT

Concord Wall[™]



APPLICATIONS Garden Wall, Structural Wall

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CORNER	XL UNIT	WEDGE CAP UNIT	COPING / STEP TREAD
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE	UXBRIDGE
	Thickness (mm)	150 mm	150 mm	75 mm	75 mm
		/			(
	Bundle	15.00	21.33	16.66	15.50
FCFT PER	Layer	5.00	5.33	2.08	1.94
	Stone	0.83	0.67	0.17	0.97
	Layers	3.00	4.00	8.00	8.00
PER BUNDLE	Sections	-	-	-	2.00
	1	1			
LNFT PER	Bundle	-	-	63.39	64.00
ENTITER	Unit	-	-	0.66	4.00
	SqFt	1.20	1.50	5.88	1.63
UNITS PER	Layer	6.00	8.00	12.00	2.00
	Bundle	18.00	32.00	96.00	16.00
	Unit	46	77	27	145
		40	11	21	145
LBS PER	Sections	-	-	-	-
	Bundle	820	2,455	2,544	2,320
Colors	Reflectance	Stock	Stock	Stock	Stock
Almond Grove	SR n/a SRI n/a	1	J	J	1
Granite	SR n/a SRI n/a	1	1	1	1
Sierra	SR n/a SRI n/a	1	1	1	1





GRANITE



ALMOND GROVE

SIERRA



XL UNIT 400 x 300 x 150 mm 15¾ x 11 ⅔ x 5 ⅔" 32 units/Bundle .67 Fc.Ft./Stone


SINGLE UNITS



CORNER 200 x 300 x 150 mm 7 1/8 x 11 1/8 x 5 1/8" 18 units/Bundle .81 Fc.Ft./Stone



WEDGE CAP UNIT 215 x 323 x 75mm 8 ½ x 12 ¾ x 3" 96 units/Bundle .17 Fc.Ft./Stone



COPING / STEP TREAD 600 x 300 x 75 mm 23 5/8 x 11 7/8 x 3' 16 units/Bundle .97 Fc.Ft./Stone

Notes: Maximum height without setback 36" (under optimum conditions). Maximum height with setback is 42" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. XL units will allow for a minimum 9ft. outside radius. Wedge cap radius = 7°, contains 8 Closed-end units per bundle. Closed-end not sold separately. All Concord Wall* is shipped on refundable skid. Closed-end step tread is available. Unilock, through Risi Stone* Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Contact your local Unilock Representative for details. Retaining wall engineering software is also available free of charge at www.unilock.com.

Dura Hold[®]



APPLICATIONS Structural Walls

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C1372 Eligible for LEED v4.1 credits

		STANDARD	STANDARD HALF	CORNER 45°	CORNER 90°
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
	Thickness (mm)	300 mm	300 mm	300 mm	300 mm
[
	Bundle	6.02	3.00	7.04	7.04
FCFT PER	Layer	6.02	3.00	7.04	7.04
	Stone	6.02	3.00	7.04	7.04
PER	Layers	1.00	1.00	1.00	1.00
BUNDLE	Sections	-	-	-	-
	Bundle	6.00	3.00		
LNFT PER				-	-
	Unit	6.00	3.00	-	-
	SqFt	0.17	0.33	0.14	0.14
UNITS PER	Sections	-	-	-	-
	Bundle	1.00	1.00	1.00	1.00
	Unit	1,680	800	1,480	1,320
	Sections				1,320
LBS PER		-	-	-	-
	Bundle	1,680	800	1,480	1,320
Colors	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO



NATURAL



STANDARD 1830 x 600 x 300mm 72 x 23 5% x 11 %" 1 unit/Bundle 6.02 Fc.Ft./Stone



STANDARD HALF 915 x 600 x 300 mm 36 x 23 % x 11 %" 1 unit/Bundle 3.00 Fc.Ft./Stone



CORNER 45° 1520 x 600 x 300mm 59 % x 23 % x 11%" 1 unit/Bundle 7.04 Fc.Ft./Stone



CORNER 90° 1520 x 600 x 300mm 59 % x 23 % x 11 %" 1 unit/Bundle 7.04 Fc.Ft./Stone

Notes: Special Order. Lead time required. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone[®] Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

SINGLE UNITS

Dura Hold[®]



APPLICATIONS Structural Walls

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C1372 Eligible for LEED v4.1 credits

			COPING	COPING	COPING
		TIE-BACK	HALF	STANDARD	CLOSED-END
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
	Thickness (mm)	300 mm	300 mm	300 mm	300 mm
	Bundle	2.00	2.95	6.02	6.02
FCFT PER		2.00	2.95	6.02	6.02
FULLINEK	Layer				
	Stone	2.00	2.95	6.02	6.02
PER	Layers	1.00	1.00	1.00	1.00
BUNDLE	Sections	-	-	-	-
LNFT PER	Bundle	-	-	6.00	6.00
	Unit	-	-	6.00	6.00
	SqFt	0.50	0.34	0.17	0.17
UNITS PER	Sections	-	-	-	-
	Bundle	1.00	1.00	1.00	1.00
	Unit	1,660	780	1,560	1,560
LBS PER	Sections		-		
LDOTEN	Bundle	1,660	780	1,560	1,560
Colors	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO



NATURAL




TIE-BACK 1830 x 600 x 300mm 72 x 23 5% x 11 %" 1 unit/Bundle 2.00 Fc.Ft./Stone



COPING HALF 915 x 600 x 300mm 36 x 23 % x 11 %" 1 unit/Bundle 2.95 Fc.Ft./Stone



COPING STANDARD 1830 x 600 x 300mm 72 x 23 5% x 11%" 1 unit/Bundle 6.02 Fc.Ft./Stone



COPING CLOSED-END 1830 x 600 x 300mm 72 x 23 % x 11 %" 1 unit/Bundle 6.02 Fc.Ft./Stone

Notes: Special Order. Lead time required. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Unilock, through Risi Stone[®] Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

Dura Hold 2°

			and the second
a free states	WERE AREA		
A CARLES		Dear Min	71
AND DESIGNATION OF THE OWNER OF T		-	
		all the ment	

APPLICATIONS	
Structural Walls	
APPEARANCE	
Surface Texture - Smooth	

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C1372 Eligible for LEED v4.1 credits

		TIE-BACK	CORNER 90°	STANDARD	COPING	COPING CLOSED-END
Bundle Type		SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced		ONTARIO	ONTARIO	ONTARIO	ONTARIO	ONTARIO
	Thickness (mm)	300 mm	300 mm	300 mm	300 mm	300 mm
FCFT PER	Bundle	4.60	16.67	24.10	24.10	24.10
	Layer	2.34	8.34	12.05	12.05	12.05
	Stone	1.17	4.17	6.02	6.02	6.02
PER BUNDLE	Layers	2.00	2.00	2.00	2.00	2.00
	Sections	-	-	-	-	-
LNFT PER	Bundle	-	-	24.00	24.00	24.00
	Unit	-	-	6.00	6.00	6.00
UNITS PER	SqFt	0.85	0.24	0.17	0.17	0.17
	Layer	2.00	2.00	2.00	2.00	2.00
	Bundle	4.00	4.00	4.00	4.00	4.00
LBS PER	Layer	1,876	920	1,876	1,768	1,768
	Sections	-	-	-	-	-
	Bundle	3,752	1,840	3,752	3,536	3,536
Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO	SO




NATURAL




TIE-BACK 1830 x 360 x 300mm 72 x 14 ¼ x 11 %" 4 unit/Bundle 1.17 Fc.Ft./Stone




CORNER 90° 900 x 360 x 300mm 35½ x 14¼ x 11%" 4 unit/Bundle 4.17 Fc.Ft./Stone



STANDARD 1830 x 360x 300mm 72 x 14 ¼ x 11 ‰" 4 unit/Bundle 6.02 Fc.Ft./Stone



COPING 1830 x 360 x 300mm 72 x 14 ¼ x 11 ‰" 4 unit/Bundle 6.02 Fc.Ft./Stone



COPING CLOSED-END 1830x 300 x 360mm 72 x 11 1% x 14 1/4" 4 unit/Bundle 6.02 Fc.Ft./Stone

Notes: Special Order. Lead time required. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. Unilock, through Risi Stone[®] Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

Estate Wall[™]



APPLICATIONS Pillar, Steps, Outdoor Kitchen, Fire Feature, Water Feature, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

// Scan here for Installation PDF

3" PILLAR/CORNER

318 x 229 x 75mm

64 units/Bundle

.26 Fc.Ft./Stone

3" LARGE UNIT

32 units/Bundle

.33 Fc.Ft./Stone

16 x 9 x 3"

406 x 228 x 75mm

12 ½ x 9 x 3"



3" SINGLE UNIT

3" RANDOM BUNDLE

		3" RANDOM BUNDLE	3" PILLAR/ CORNER	6" RANDOM BUNDLE	6" PILLAR/ CORNER	COPING BUNDLE
	Bundle Type	RANDOM	SINGLE	RANDOM	SINGLE	RANDOM
	Plant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE	UXBRIDGE	UXBRIDGE
-	Thickness (mm)	75 mm	75 mm	150 mm	150 mm	75 mm
	Bundle	24.00	16.38	24.00	16.38	14.70
FCFT PER	Layer	3.00	2.05	6.00	4.10	2.10
	Stone	0.25	0.26	0.50	0.51	0.23
	Layers	8.00	8.00	4.00	4.00	7.00
PER BUNDLE	Sections	-	-	-	-	-
LNFT PER	Bundle	-	-	-	-	56.87
	Unit	-	-	-	-	0.90
	SqFt	4.00	3.91	2.00	1.95	4.29
UNITS PER	Layer	12.00	8.00	12.00	8.00	9.00
	Bundle	96.00	64.00	48.00	32.00	63.00
	Layer	271	264	585	444	294
LBS PER	Sections	-	-	-	-	-
	Bundle	2,164	2,110	2,340	1,776	2,060
Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Almond Grove	SR.n/a SRI n/a	1	1	1	1	1
Granite	SR.n/a SRI n/a	1	1	1	1	1
Sierra	SR.n/a SRI n/a	1	1	1	1	1
Charcoal	SR.n/a SRI n/a	-	-	-	-	1









ALMOND GROVE

GRANITE

SIERRA

CHARCOAL (Coping Only)



6" PILLAR/CORNER 318 x 229 x 150mm 12 ½ x 9 x 5 % 32 units/Bundle .51 Fc.Ft./Stone



SINGLE UNIT

ە

3" MEDIUM UNIT 305 x 228 x 75mm 12 x 9 x 3" 32 units/Bundle .24 Fc.Ft./Stone



3" SMALL UNIT 203 x 228 x 75mm 8 x 9 x 3" 32 units/Bundle .16 Fc.Ft./Stone



COPING TAPERED 317.5 x 304.8 x 76.2 mm 12 ½ x 12 x 3" 56 units/Bundle .26 Fc.Ft./Stone



6" LARGE UNIT 406 x 228 x 150mm 16 x 9 x 5 7/8" 16 units/Bundle .66 Fc.Ft./Stone

CLOSED-END COPING UNIT 317.5 x 304.8 x 76.2mm 12 ½ x 12 x 3"

\leq	

7 units/Bundle

.26 Fc.Ft./Stone

6" MEDIUM UNIT 305 x 228 x 150mm 12 x 9 x 5 7/8" 16 units/Bundle .48 Fc.Ft./Stone



6" SMALL UNIT 203 x 228 x 150mm 8 x 9 x 5 7/8" 16 units/Bundle .33 Fc.Ft./Stone

ō Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. 3" and 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. All measurements are nominal. Contact Unilock for more information.

COPING BUNDLE

Lineo[™] Dimensional Stone



APPLICATIONS Pillar, Outdoor Kitchen, Fire Feature, Water Feature, Seat Wall, Garden Wall

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

// Scan here for Installation PDF



			PILLAR / CORNER	
	Bundle Type	RANDOM	SINGLE	
	Plant Produced	UXBRIDGE	UXBRIDGE	
	Thickness (mm)	100 mm	100 mm	
	Bundle	29.92	26.16	
FCFT PER	Layer	9.97	8.72	
	Stone	-	0.32	
PER BUNDLE	Layers	3.00	3.00	
	Sections	-	-	
	Bundle	89.06	79.72	
LNFT PER	Unit	-	0.66	
	SqFt	2.01	3.10	
UNITS PER	Layer	20.00	27.00	
	Bundle	60.00	81.00	
	Unit	-	30	
LBS PER	Layer	881	814	
	Bundle	2,643	2,441	
0.1	Deflectores	0(o(
Colors	Reflectance	Stock	Stock	
Almond Grove	SR.n/a SRI n/a	✓	1	
Granite	SR.n/a SRI n/a			
Graphite	SR.n/a SRI n/a	1	1	
Sierra	SR.n/a SRI n/a	1	1	










ALMOND GROVE

GRAPHITE

GRANITE

SINGLE UNIT

SIERRA



.64 Fc.Ft./Stone

RANDOM BUNDLE



LARGE RECTANGLE 500 x 200 x 100mm 19 ¾ x 7 % x 3 %" 15 units/Bundle .54 Fc.Ft./Stone



RECTANGLE 400 x 200 x 100mm 15 ¾ x 7 ‰ x 3 ‰" 15 units/Bundle .43 Fc.Ft./Stone



SMALL RECTANGLE 300 x 200 x 100mm 11 % x 7 % x 3 %" 15 units/Bundle .32 Fc.Ft./Stone



PILLAR/CORNER 300 x 200 x 100mm 11% x 7% x 3% 81 units/Bundle .32 Fc.Ft./Stone

NOTES: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Spacing strips are shipped with random wall bundles to create even spacing between units. Ledgestone", Unilock Natural Stone or 6"x12" Fullnose complement as possible coping options. All measurements are nominal. Contact Unilock for more information.

Pisa[™] XL Smooth



APPLICATIONS Garden Wall, Seat Wall, Step, Pillar, Structural Walls

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CORNER	XL TAPERED	COPING
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE
	Thickness (mm)	150 mm	150 mm	75 mm
	Bundle	46.52	20.67	15.50
FCFT PER	Layer	11.63	5.17	1.94
	Stone	0.97	0.65	0.3
	Layers	4.00	4.00	8.0
PER BUNDLE	Sections	-	-	
	Bundle		42.00	62.9
LNFT PER	Unit	-	1.31	1.3
	SqFt	1.03	1.55	3.1
UNITS PER	Layer	12.00	8.00	6.0
	Bundle	48.00	32.00	48.0
	Layer	695	627	28
LBS PER	Sections	-	-	
	Bundle	2,780	2,508	2,25
Colors		Stock	Stock	Stoc
Almond Grove	SR.n/a SRI n/a	1	1	
Sandstone	SR.n/a SRI n/a	1	1	v



1

SR.n/a SRI n/a



SANDSTONE

1



1

ALMOND GROVE

GRANITE



CORNER 400 x 150 x 200mm 15 ¾ x 5 ‰ x 7 ‰" 48 units/Bundle .97 Fc.Ft./Stone

SINGLE UNITS



XL TAPERED 400 x 150 x 300mm 15 ¾ x 5 ‰ x 11 ‰" 32 units/Bundle .65 Fc.Ft./Stone



Granite

COPING 400 x 75 x 325mm 15 ³⁄₄ x 3 x 12 ³⁄₄" 48 units/Bundle .32 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Maximum height is 42" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. Unilock, through Risi Stone* Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Contact your local Unilock Representative for details. Retaining wall engineering software is also available free of charge at www.unilock.com.

Pisa[™]Edge



APPLICATIONS

Pillar, Steps, Seat Wall, Garden Wall, Outdoor Kitchen, Structural Walls

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		1	
		STANDARD/ CORNER	COPING/ CLOSED-END
	Bundle Type	2 UNIT	2 UNIT
	Plant Produced	UXBRIDGE	UXBRIDGE
	Thickness (mm)	90 mm	90 mm
	Bundle	20.93	20.93
FCFT PER	Layer	3.49	3.49
	Stone	0.44	0.44
	Layers	6.00	6.00
PER BUNDLE	Sections	-	-
	Bundle	70.87	70.87
LNFT PER	Unit	1.48	1.48
	SqFt	2.29	2.29
UNITS PER	Layer	8.00	8.00
	Bundle	48.00	48.00
	Unit	52	52
LBS PER	Layer	415	415
	Bundle	2,489	2,489
Colors	Reflectance	Stock	Stock
Almond Grove	SR.n/a SRI n/a	1	1
Granite	SR.n/a SRI n/a	1	1
Sandstone	SR.n/a SRI n/a	1	1
Sierra	SR.n/a SRI n/a	1	1









ALMOND GROVE

GRANITE

SANDSTONE

SIERRA

CORNER/CLOSED-END 450 x 260 x 90mm 17 ³/₄ x 10 ¹/₄ x 3 ¹/₂"

24 Units/Bundle

1.26 Fc.Ft/Stone

BUNDLE

UNIT

 \sim



STANDARD 450 x 260 x 90mm 17 ¾ x 10 ¼ x 3 ½" 24 Units/Bundle 1.26 Fc.Ft/Stone



COPING/CLOSED-END 450 x 260 x 90mm 17 ³/₄ x 10 ¹/₄ x 3 ¹/₂" 24 Units/Bundle 1.26 Fc.Ft/Stone



STANDARD 450 x 260 x 90mm 17 ³⁄₄ x 10 ¹⁄₄ x 3 ¹⁄₂" 24 Units/Bundle 1.26 Fc.Ft/Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Unilock, through Risi Stone[®] Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

2 UNIT BUNDLE

Quarry[™] Smooth



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Standard

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		WALL	CORNER
Bundle Type		RANDOM	SINGLE
	Plant Produced	UXBRIDGE	UXBRIDGE
	Thickness (mm)	114 mm	114 mm
	Bundle	33.75	18.24
			-
FCFT PER	Layer	5.63	6.08
	Stone	-	0.38
	Layers	6.00	3.00
PER BUNDLE	Sections	-	
LNFT PER	Bundle	-	18.24
	Unit	-	0.38
	SqFt	-	2.65
	Section	-	
UNITS PER	Layer	15.00	16.00
	Bundle	90.00	48.00
	Lover	498	681
LBS PER	Layer	490	
LBS PER		-	
	Bundle	2,988	1,922
Colors	Reflectance	Stock	Stock
Charcoal	SR.n/a SRI n/a	1	J
Natural Grey	SR.n/a SRI n/a	1	J
Sandstone	SR.n/a SRI n/a	1	







CHARCOAL

SINGLE UNITS

NATURAL GREY

SANDSTONE

RANDOM BUNDLE

15" LARGE TAPERED 380 x 230 x 114mm 15 x 9 x 4 ½" 30 units/Bundle .33 Fc.Ft./Stone



12" MEDIUM TAPERED 305 x 230 x 114mm 12 x 9 x 4 ½" 30 units/Bundle .33 Fc.Ft./Stone



9" SMALL TAPERED 230 x 230 x 114mm 9 x 9 x 4 ½" 30 units/Bundle .55 Fc.Ft./Stone



CORNER 306.6 x 114 x 228.6mm 12 x 9 x 4 ½" 48 units/Bundle .38Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY. And is produced and sold on a required, refundable skid. Maximum height is 36" (under optimum conditions). Pisa XL Smooth coping, Ledgestone[™], Brussels Block' XL, Estate Wall Coping or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

Rivercrest[®] Wall



APPLICATIONS Pillar, Outdoor Kitchen, Water Feature, Steps, Fire Feature, Seat Wall, Garden Wall

APPEARANCE Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1372 LEED Eligible EPD's & HPD's available





BUFF

CORNER BUNDLE

JUMPER RANDOM BUNDLE

UNITS RANDOM BUNDLE

COMING SOON

COASTAL SLATE



LONG CORNER UNIT 450 x 230-250 x 57mm 17 ½ x 9-10 x 2 ¼" 20 Units/Bundle



Jumper UNIT 1 200 x 230-250 x 114mm 8 x 9-10 x 4¹/2" 16 Units/Bundle



STANDARD UNIT 1 200 x 230-250 x 57mm 8 x 9-10 x 2 1⁄4" 32 Units/Bundle



SHORT CORNER UNIT 375 x 230-250 x 57mm 14 ½ x 9-10 x 2 ¼" 20 Units/Bundle



Jumper UNIT 2 / 3 300 x 230-250 x 114mm 12 x 9-10 x 4¹/2 12 Units/Bundle



STANDARD UNIT 2 300 x 230-250 x 57mm 12 x 9-10 x 2 1⁄4" 32 Units/Bundle



COMING SOON JUMPER CORNER 450 x 230-250 x 114mm 12 x 9-10 x 4¹/2" 16 Units/Bundle



JUMPER R CORNER UNIT

JUMPER UNIT 4 425 x 230-250 x 114mm 17 x 9-10 x 4¹/2" 12 Units/Bundle



STANDARD UNIT 3 300 x 230-250 x 57mm 12 x 9-10 x 2 1/4" 32 Units/Bundle



STANDARD UNIT 4 425 x 230-250 x 57mm 17 x 9-10 x 2 1⁄4" 32 Units/Bundle



		WALL	CORNER	JUMPER	CORNER JUMPER
Bundle Type		RANDOM	RANDOM	RANDOM	SINGLE
	Plant Produced	AYR	AYR	AYR	AYR
	Thickness (mm)	57 mm	57 mm	114 mm	114 mm
	Bundle	24.30	16.21	13.73	13.54
FCFT PER	Layer	3.0	4.0	3.43	6.77
	Stone	0.19	0.41	0.34	0.85
PER BUNDLE	Layers	8.00	4.00	4.00	2.00
PER DUNDLE	Sections	-	-	-	-
	Bundle	130.69	-	-	6.56
LNFT PER	Unit	1.02	-	-	0.41
	SqFt	5.27	2.47	2.91	1.18
UNITS PER	Section	-	-	-	-
	Bundle	128.00	40.00	40.00	16.00
	Layer	252	293	408	486
LBS PER	Section	-	-	-	-
	Bundle	2,015	1,173	1,631	973
Colors	Reflectance	Stock	Stock	Stock	Stock
Buff	SR n/a SRI n/a	1	1	1	1
Coastal Slate	SR n/a SRI n/a	1	1	1	1

Rivercrest[®] Pillar & Fire Pit kit





APPLICATIONS Pillar, Outdoor Kitchen, Water Feature, Steps, Fire Feature, Seat Wall, Garden Wall

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

		PILLAR UNIT
	Bundle Type	SINGLE
	Plant Produced	AYR
	Thickness (mm)	114 mm
	Bundle	-
FCFT PER	Layer	-
	Stone	-
	Layers	2.00
PER BUNDLE	Sections	-
		1
LNFT PER	Bundle	-
	Unit	-
	SqFt	-
UNITS PER	Sections	-
	Bundle	4.00
	Layer	441
LBS PER	Sections	-
	Bundle	882
Colors	Reflectance	Stock
Buff	SR n/a SRI n/a	1
Canadal Clata		

Colors	Reflectance	Stock
Buff	SR n/a SRI n/a	1
Coastal Slate	SR n/a SRI n/a	1





BUFF

COASTAL SLATE



500 x 500 x 114mm 20 x 20 x 4 ½" Center opening 9 x 9"



Completed Unit Shown Pillar cap Sold Separately

COMING SOON FIRE PIT KIT



Fire Pit kit inserts and accessories sold separately.

SienaEdge™



APPLICATIONS Seat Wall, Garden Wall, Structural Wall, Steps

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractorwebsite under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1

		STANDARD/ CORNER	COPING
	Bundle Type	SINGLE	SINGLE
	Plant Produced	UXBRIDGE	UXBRIDGE
	Thickness (mm)	180 mm	180 mm
	Bundle	23.25	23.25
FCFT PER		7.75	7.75
FUFTPER	Layer		-
	Stone	1.94	1.94
PER BUNDLE	Layers	3.00	3.00
PERBUNDLE	Sections	-	-
	Bundle	39.37	39.37
LNFT PER			
	Unit	3.28	3.28
	SqFt	0.52	0.52
UNITS PER	Layer	4.00	4.00
	Bundle	12.00	12.00
	Unit	257	257
LBS PER			
LBS PER	Layer	1,029	1,029
	Bundle	3,086	3,086
Colors	Reflectance	Stock	Stock
Almond Grove	SR.n/a SRI n/a	1	1
Granite	SR.n/a SRI n/a	1	J
Sandstone	SR.n/a SRI n/a	1	J








ALMOND GROVE


GRANITE

SANDSTONE

SINGLE UNIS



STANDARD/CORNER 1000 x 290 x 180mm 39 % x 11 ½ x 7" 12 units/Bundle 1.94 Fc.Ft./Stone



COPING 1000 x 290 x 180mm 39 ¾ x 11 ½ x 7" 12 units/Bundle 1.94 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Unilock, through Risi Stone[®] Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

SienaStone™



APPLICATIONS

Structural Wall, Garden Wall, Steps

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1

		CORNER SPLIT	333 SPLIT	500 SPLIT	925 SPLIT	COPING SPLIT	CLOSED-END COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE	UXBRIDGE	UXBRIDGE	GORMLEY
	Thickness (mm)	185 mm	185 mm	185 mm	185 mm	185 mm	185 mn
	Bundle	17.19	18.00	12.00	6.00	12.00	14.43
FCFT PER	Layer	5.73	6.00	4.00	2.00	4.00	4.8
	Stone	2.87	2.00	2.00	2.00	2.00	2.4
PER	Layer	3.00	3.00	3.00	3.00	3.00	3.00
BUNDLE	Sections	-	-	-	-	-	
LNFT	Bundle	-	29.25	19.50	9.75	-	23.70
PER	Unit	-	3.25	3.25	3.25	-	3.9
	SqFt	0.35	0.50	0.50	0.50	0.50	0.42
UNITS PER	Layer	2.00	3.00	2.00	1.00	2.00	2.0
FLN	Bundle	6.00	9.00	6.00	3.00	6.00	6.00
	Unit	477	318	477	954	477	57
LBS PER	Layer	954	954	954	954	927	1,14
	Bundle	2,862	2,862	2,862	2,862	2,780	3,42
Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stoc
Granite	SR.n/a SRI n/a	SO	SO	SO	SO	SO	v
Sierra	SR.n/a SRI n/a	SO	SO	SO	SO	SO	





GRANITE

SIERRA

CORNER SPLIT 90°

925 x 500 x 185mm

36 ½ x 19 ¾ x 7 ¾"

2.87 Fc.Ft./Stone

6 units/Bundle

SINGLE UNITS



STANDARD 333 SPLIT 1000 x 333 x 185mm 39 % x 13 x 7 % 9 units/Bundle 2.00 Fc.Ft./Stone



STANDARD 500 SPLIT 1000 x 500 x 185mm 39 % x 19 % x 7 %" 6 units/Bundle 2.00 Fc.Ft./Stone



STANDARD 925 SPLIT 1000 x 925 x 185mm 39 % x 36 ½ x 7 %" 3 units/Bundle 2.00 Fc.Ft./Stone



COPING SPLIT 1000 x 500 x 185mm 39 3/8 x 19 3/4 x 7 3/8" 6 units/Bundle 2.00 Fc.Ft./Stone



C-E COPING 1200 x 500 x 185mm 47¹/₄ x 19 ³/₄ x 7 ³/₈" 6 units/Bundle 2.41 Fc.Ft./Stone

Notes: Special Order. Lead time required. Product is sold on a required, refundable skid. Coping units can be used to construct steps. Unilock, through Risi Stone[®] Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

U-Cara® Multi-Face Wall System

ENDURACOLOR[®]



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Fire Feature, Seat Wall, Garden Wall, Retaining Walls under-3, Structural Wall

APPEARANCE

Surface Texture - Smooth, Standard, Series Exposed, Umbriano Mottled and Pitched

TECHNICAL INFORMATION

Conforms to ASTM C1372 Eligible for LEED v4.1 credits









1/2 Running Bond with Paver Accents

Stacked Bond







Mixed Bond



Stacked Bond with Accents











LAVANO

SMOOTH

PITCHED

UMBRIANO

SERIES

SUBWAY



U-Cara® Multi-Face Wall System

ENDURACOLOR



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Retaining Walls under-3, Fire Feature, Seat Wall, Garden Wall, Structural Wall

APPEARANCE


Surface Texture - Smooth, Standard, Series™ Exposed, Umbriano® Mottled, Pitched & Flamed

CROSS SECTIONS


All Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C1372 Eligible for LEED v4.1

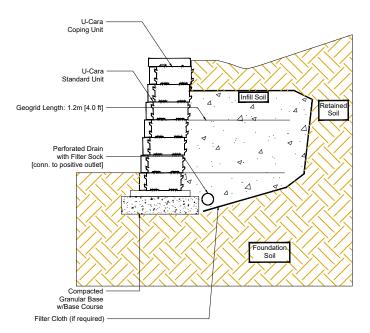

U-CARA RETAINING WALL GEOGRID SECTIONS

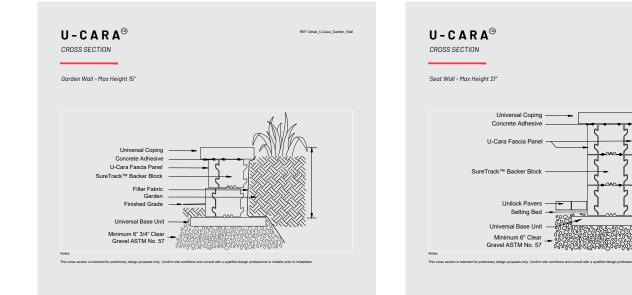

REF: Detail U-Cara Seat Wal

ENDURACOLOR

U-Cara[®] Fascia Panels

		6" STANDARD SMOOTH	6" CLOSED-END SMOOTH	6" STANDARD PITCHED	6" CLOSED-END PITCHED	6 "STANDARD UMBRIANO	6" CLOSED-END UMBRIANO	3" STANDARI SERIES
	Bundle Type	SINGLE	MULTI	SINGLE	MULTI	MULTI	SINGLE	SINGLE
	Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN	MICHIGAN	ONTARIO	ONTARIO	CHICAG
	Thickness (mm)	150 mm	150 mm	150 mm	150 mm	150 mm	150 mm	71 mr
	Bundle	61.52	54.18	61.52	54.18	61.52	54.18	59.3
FCFT PER	Layer	10.25	9.03	10.25	9.03	10.25	9.03	9.8
	Stone	0.73	1.29	0.73	1.29	0.73	1.29	0.1
	Layers	6.00	6.00	6.00	6.00	6.00	6.00	6.0
PER BUNDLE	Sections	-	-	-	-	-	-	
	Bundle	129.50	104.86	129.50	104.86	129.50	104.86	256.7
LNFT PER	Unit	1.54	2.50	1.54	2.50	1.54	2.50	0.7
	SqFt	1.37	0.78	1.37	0.78	1.37	0.78	5.6
UNITS PER	Layer	14.00	7.00	14.00	7.00	14.00	7.00	56.0
	Bundle	84.00	42.00	84.00	42.00	84.00	42.00	336.0
	Layer	252	207	291	236	252	207	25
LBS PER	Sections	-	_	-	-	_	_	
	Bundle	1,513	1,240	1,745	1,415	1,513	1,240	1,50
Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock	Stoc
Fossil	SR.n/a SRI n/a	1	1	J	1	-	-	
Granite Fusion	SR.n/a SRI n/a	1	1	1	ſ	-	-	
Opal Blend	SR.n/a SRI n/a	1	1	-	-	-	-	
Sterling	SR.n/a SRI n/a	1	1	-	-	-	-	
Indiana Buff	SR.n/a SRI n/a	1	1	-	-	-	-	
Dark Charcoal	SR.n/a SRI n/a	1	1	-	-	-	-	
Onyx Black	SR.n/a SRI n/a	-	-	-	-	-	-	
French Grey	SR n/a SRI n/a	-	-	-	-	SO	SO	
Summer Wheat	SR n/a SRI n/a	-	-	-	-	SO	SO	
Winter Marvel	SR n/a SRI n/a	-	-	-	-	SO	SO	
Grenada White	SR n/a SRI n/a	-	-	-	-	SO	SO	
Midnight Sky	SR n/a SRI n/a	-	-	-	-	SO	SO	

SINGLE PANEL BUNDLE



FASCIA PANEL 150 x 466 x 60mm 5 % x 18 % x 2 %" 84 units/Bundle .73 Fc.Ft./Stone



3" FASCIA PANEL 71 x 231 x 60mm 2 % x 9 x 2 % " 336 units/Bundle .18 Fc.Ft./Stone



STANDARD FASCIA HALF PANEL 150 x 233 x 60mm 5 % x 9 1/4 x 2 3/8" 42 units/Bundle 0.36 Fc.Ft./Stone

2 UNIT CLOSE-END BUNDLE



CLOSED-END FASCIA PANEL 150 x 530 x 60mm 5 % x 20 % x 2 %" 42 units/Bundle 24 rights and 18 lefts 0.93 Fc.Ft./Stone

Notes: Special Order Colors Only. Lead time required. Sold in full bundles. Produced and sold on a required refundable skid. Contact Customer Service for details.

U-Cara[®] Fascia Panels

		STANDARD LAVANO	CLOSED-END LAVANO	STANDARD SUBWAY	CLOSED-END SUBWAY
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
	Thickness (mm)	60 mm	60 mm	60 mm	60 mm
	Bundle	61.52	54.18	61.52	54.18
	Layer	10.25	9.03	10.25	9.03
FCFT PER	Sections	-	-	-	-
	Stone	0.73	1.29	0.73	1.29
PER BUNDLE	Layers	6.00	6.00	6.00	6.00
	Sections	-	-	-	-
	Bundle	129.50	104.86	129.50	104.86
LNFT PER	Unit	1.54	2.50	1.54	2.50
	SqFt	1.37	0.78	1.37	0.78
UNITS PER	Sections	-	-	-	-
	Bundle	84.00	42.00	84.00	42.00
	Layer	252	207	252	207
LBS PER	Sections	-	-	-	
	Bundle	1,513	1,240	1,513	1,240
Colors	Reflectance	Stock	Stock	Stock	Stock
Granite Fusion	SR n/a SRI n/a	SO	SO		
Fossil	SR n/a SRI n/a				
Indiana Buff	SR II/a SRI II/a	SO	<u>S0</u>	-	-
	SK II/a SKI II/a	SO	SO	-	-

-

_

SINGLE PANEL BUNDLE

Dark Charcoal

Opal Blend

6" STANDARD FASCIA PANEL 150 x 466 x 60mm 5% x 18 % x 2 % 84 units/Bundle .73 Fc.Ft./Stone

SR n/a SRI n/a

SR n/a SRI n/a



STANDARD FASCIA HALF PANEL 150 x 233 x 60mm 5 % x 9 ¼ x 2 ¾ 42 units/Bundle 0.36 Fc.Ft./Stone



CLOSED-END FASCIA PANEL 150 x 530 x 60mm 5 % x 20 % x 2 %" 42 units/Bundle 24 rights and 18 lefts 0.93 Fc.Ft./Stone

SO

S0

-

-

SO


SO

Notes: Special Order. Lead time required. SOLD IN FULL BUNDLES ONLY. Produced and sold on a required refundable skids. Contact Customer Service for details.

2 UNIT CLOSE-END BUNDLE

U-Cara[®] Fascia Panels

ENDURACOLOR

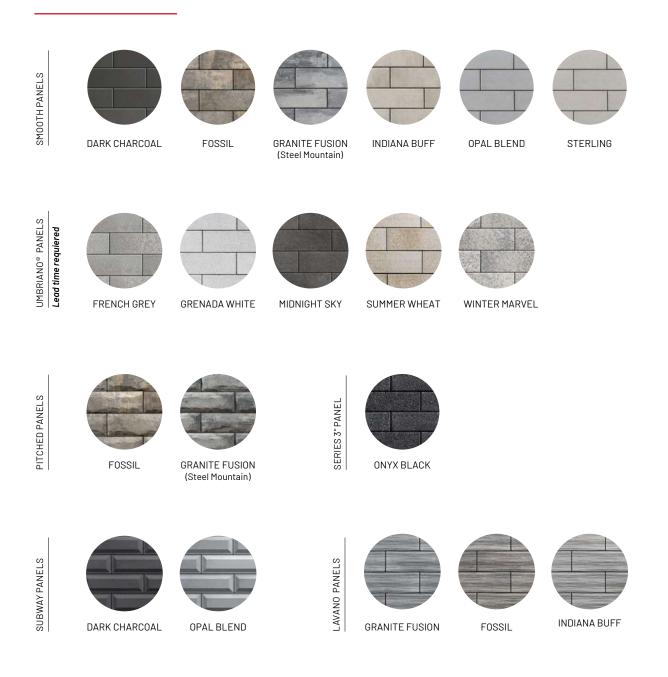

U-Cara[®] Multi-Face Wall System




		CORNER / PILLAR BACKER	LARGE BACKER	STANDARD BACKER
	Bundle Type	SINGLE	SINGLE	SINGLE
PI	ant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE
Th	ickness (mm)	150 mm	150 mm	150 mm
[
	Bundle	42.40	20.35	33.91
FCFT PER	Layer	10.60	6.78	11.30
	Stone	0.76	0.32	0.32
	1			
PER BUNDLE	Layers	4.00	3.00	3.00
	Sections	-	-	-
	Bundle	_	41.34	69.99
LNFT PER	Unit		0.66	0.67
	Onic		0.00	0.01
	SqFt	1.32	3.10	3.10
UNITS PER	Layer	14.00	21.00	35.00
	Bundle	56.00	63.00	105.00
[
	Unit	36	42	22
LBS PER	Layer	498	878	773
	Bundle	1,992	2,635	2,320

EXTRA COMPONENTS





SURE TRACK CORNER BACKER 175 x 150 x 294mm 6 7/8 x 5 7/8 x 11 5/8"



SURE TRACK LARGE BACKER 190 x 150 x 294mm 7 ½ x 5 % x 11 %"



SURE TRACK STANDARD BACKER 190 x 150 x 150mm 7 ½ x 5 % x 5 %"


Notes: SOLD IN FULL BUNDLES ONLY. Product is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

U-Cara® Modular System

ENDURACOLOR

The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Places and Pillars.







NO.	MODEL	DESCRIPTION
UCARA000001	URS	UCARA 8' RAIL (10/PACK)
UCARA000003	URS	ALIGNMENT BARS 39" (10/PACK)
UCARA000007	UL-OSK	CABINET DEPTH CHANGE KIT
RS-UCARA000009	UL-FIR	U-CARA FIREPLACE
RS-UCARA000010	UL-FIR-M	U-CARA FIREPLACE MANTLE
RS-UCARA000015	UL-HCK-CC	U-CARA HEIGHT CONVERSION CORNER CAB
RS-UCARA000016	UL-FIR-MW	U-CARA FIREPLACE MANTLE WIDE UNIT
RS-UCARA000017	UL-FIR-CH	U-CARA FIREPLACE CHIMNEY UNIT
RS-UCARA000018	UL-FIR-CH-MW	U-CARA FIREPLACE CHIMNEY WIDE UNIT
RS-UCARA000019	UL-FIR-RTN	U-CARA FIREPLACE RETURN
RS-UCARA000020	UL-FIR-RTN-OS	U-CARA FIREPLACE RETURN OVERSIZED
UCARA001000	UL-GC	UNIVERSAL GRILL CABINET (fits 36-42" grill)
UCARA002000	UL-BC	BASE CABINET (fits fire table or fridge)
UCARA003000	UL-CC	CORNER CABINET 27.5" x 27.5"
UCARA003001	UL-CC-OS	CORNER CABINET 27.5" x 36.5" OS
UCARA003002	UL-CC-BP	CORNER CABINET BACK PANEL
UCARA004000	UL-ECK	END CLAD KIT 27.5"
UCARA004001	UL-ECK-OS	END CLAD KIT 36.5" OS
UCARA005000	UL-BS	BACKSPLASH-GRILL/BASE UNIT 641/2"
UCARA005001	UL-BS-CC	BACKSPLASH CORNER CABINET
UCARA005002	UL-BS-CC-OS	BACKSPLASH CORNER CABINET OS
UCARA006000	UL-DD	STAINLESS DOUBLE ACCESS DOORS 27"
UCARA007000	UL-PU	PILLAR UNIT (183%" x 183%")
RS-UCARA001002	UL-GC-36	UNIVERSAL GRILL CABINET (FITS 36"-42" GRILL)
RS-UCARA002001	UL-BC-36	BASE CABINET (FITS FIRE TABLE OR FRIDGE)
RS-UCARA003004	UL-CC-OS-36	CRNR CABINET 27.5X36.5 OS
RS-UCARA003005	UL-CC-36	CORNER CABINET 27.5X27.5
RS-UCARA004002	UL-ECK-36	END CLAD KIT 27.5"
RS-UCARA004003	UL-ECK-OS-36	END CLAD KIT 36.5" OS

ENDURACOLOR[®]

U-Cara° Wall Mount System



The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.



U-CARA ALIGNMENT BAR: 39" LENGTH - SOLD IN PACKS OF 10 PIECES

U-CARA RAILS: 8' LENGTH - SOLD IN PACKS OF 10 PIECES





Universal Base

ENDURACOLOR



APPLICATIONS Garden Wall, Retaining Wall, Seat Wall, Fire Feature, Structural Walls

APPEARANCE

Surface Texture - Standard / Smooth


TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		UNIVERSAL BASE CLASSIC
	Bundle Type	SINGLE
	Plant Produced	UXBRIDGE
	Thickness (mm)	55 mm
	Bundle	-
FCFT PER	Layer	-
	Stone	-
	Layers	9.00
PER BUNDLE	Sections	5.00
	Sections	
	Bundle	85.50
LNFT PER	Unit	1.58
	SqFt	-
UNITS PER	Section	-
	Bundle	54.00
	Layer	280
LBS PER	Section	
LDOTER	Bundle	2,502
	Durraic	2,302
Colors	Reflectance	Stock
Natural	SR.n/a SRI n/a	1



NATURAL



482 x 355 x 55mm 19 x 14 x 2 ¼" 54 units/Bundle

Notes: SOLD IN FULL BUNDLES ONLY and is shipped on a required, refundable skid. Universal base unit is recommended as a base for all walls. All measurements are nominal. Contact Unilock for more information.

Architectural



APPLICATIONS Wall Coping, Pillar

APPEARANCE Surface Texture - Smooth

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		28 x 28 PILLAR CAP	12 x 2 COPIN
	Bundle Type	SINGLE	SINGLE
	Plant Produced	NEW YORK	UXBRIDGE
	Thickness (mm)	100 mm	60 mn
	Bundle	3.06	14.4
FCFT PER	Layer	0.77	2.4
	Stone	0.77	0.4
PER BUNDLE	Layers	4.00	6.0
PER BUNDLE	Sections	-	
LNFT PER	Bundle	9.36	73.
	Unit	2.34	2.0
	SqFt	1.31	0.4
UNITS PER	Layer	1.00	6.0
	Bundle	4.00	36.0
	Layer	234	34
LBS PER	Sections	-	
	Bundle	935	2,04

Colors	Reflectance	Stock	Stock
Light Grey	SR n/a SRI n/a	1	1
Dark Charcoal	SR n/a SRI n/a	1	1
Sandstone	SR n/a SRI n/a		1







LIGHT GREY

DARK CHARCOAL SA

ENDURACOLOR[®]

SANDSTONE (Coping Only)

PILLAR CAP 711 x 711 x 100 mm 28 x 28 x 3%" 4 unit/Bundle .77 Fc.Ft./Stone



COPING 310 x 620 x 60mm 12 x 24 x 2 3/8" 36 units/Bundle .40 Fc.Ft/Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Coping units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. All measurements are nominal. Contact Unilock for more information.

SINGLE UNIT

Beacon Hill[™] Coping



APPLICATIONS Pillar, Water Feature, Pool Coping, Fire Feature, Wall Coping, Steps

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CHAMFERED	FULLNOSE
	Bundle Type	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO
	Thickness (mm)	60 mm	60 mm
	Bundle	9.30	9.30
FCFT PER	Layer	-	-
	Stone	0.39	0.39
	Layers	6.00	6.00
PER BUNDLE	Sections	-	-
	Bundle	47.24	47.24
LNFT PER	Unit	1.97	1.97
	SqFt	-	-
UNITS PER	Layer	4.00	4.00
	Bundle	24.00	24.00
	Unit	63	63
LBS PER	Sections	337	337
	Bundle	1,510	1,510
Colors	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	1	1
Granite Fusion	SR n/a SRI n/a	1	1
Oat Beige	SR n/a SRI n/a	J.	1
Opal Blend	SR n/a SRI n/a	1	1





ENDURACOLOR[®]

DARK CHARCOAL

GRANITE FUSION






OAT BEIGE

OPAL BLEND



CHAMFERED 600 x 360 x 60 mm 24 x 14 x 2 ³/₈ 24 units/Bundle



FULLNOSE 600 x 360 x 60 mm 24 x 14 x 2 ³/₈ 24 units/Bundle

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Coping units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. All measurements are nominal. Contact Unilock for more information.

Fullnose[™] 6 x12



APPLICATIONS Wall Coping, Pillar

APPEARANCE Surface Texture - Smooth

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		STANDARD
	Bundle Type	SINGLE
	Plant Produced	UXBRIDGE
	Thickness (mm)	60 mm
	Bundle	-
FCFT PER	Layer	-
	Stone	-
	Layers	4.00
PER BUNDLE	Sections	-
	Bundle	104.00
LNFT PER	Unit	0.50
	SqFt	2.00
UNITS PER	Layer	52.00
	Bundle	208.00
	Unit	14
LBS PER	Layer	698
	Bundle	2,791
Colors	Reflectance	Stock
Almond Grove	SR n/a SRIn/a	1

Colors	Reflectance	Stock
Almond Grove	SR. n/a SRI n/a	✓ ✓
Charcoal	SR. n/a SRI n/a	✓
Limestone	SR. n/a SRI n/a	1
Sierra	SR. n/a SRI n/a	1




LIMESTONE

SIERRA



ALMOND GROVE

CHARCOAL



6 x 12 150 x 300 x 60mm 5 % x 11 % x 2 %" 208 units/Bundle

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. All measurements are nominal. Contact Unilock for more information.

Ledgestone[™] Coping & Closed-End Coping



APPLICATIONS Pillar, Outdoor Kitchen, Water Feature, Fire Feature, Structural Wall, Steps

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1776 Eligible for LEED v4.1 credits

LayersCOPINGCOPINGCLOSED-ENDCOPINGCLOSED-INGPER BUNDLESINGLESINGLESINGLESINGLESINGLESINGLELayersSectionsUNITS PERSqFt2.542.182.181.7530.0033UNITS PERSectionsUNITS PERSqFt2.542.182.181.75-UNITS PERSqFt2.542.182.181.75-UNITS PERSectionsUnit52646694LBS PERUnit52646694							
Plant Produced CHICAGO TO mm 70 mm					-		LARGE CLOSED-END
Thickness (mm) 60 mm 70 mm		Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Bundle 5.12 5.52 5.52 6.87 Layer -		Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
FCFT PER Layer		Thickness (mm)	60 mm	70 mm	70 mm	70 mm	70 mm
FCFT PER Layer			·				
PER Layer - </td <td>FOFT</td> <td>Bundle</td> <td>5.12</td> <td>5.52</td> <td>5.52</td> <td>6.87</td> <td>6.87</td>	FOFT	Bundle	5.12	5.52	5.52	6.87	6.87
PER BUNDLE Layers - - - - Sections -		Layer	-	-	-	-	-
BUNDLE Sections - - - <		Stone	0.39	0.46	0.46	0.57	0.57
BUNDLE Sections - - - <							
LNFT PER Bundle 26.00 24.00 24.00 30.00 3 Unit 2.00 2.00 2.00 2.00 2.50 3 UNITS PER SqFt 2.54 2.18 2.18 1.75 3 UNITS PER Sections - - - - - Unit 13.00 12.00 12.00 12.00 1 1 LBS PER Unit 52 64 66 94 -			-	-	-	-	-
Link I Unit 2.00 10.00 12.00 11.00	BUNDLE	Sections	-	-	-	-	-
UNITS PER SqFt 2.54 2.18 2.18 1.75 Junits Sections - - - - Bundle 13.00 12.00 12.00 12.00 1 LBS Unit 52 64 66 94 - Sections - - - - - - -	LNFT	Bundle	26.00	24.00	24.00	30.00	30.00
UNITS PER Sections - - - - Bundle 13.00 12.00 12.00 12.00 1 LBS PER Unit 52 64 66 94 -	PER	Unit	2.00	2.00	2.00	2.50	2.50
UNITS PER Sections - - - - Bundle 13.00 12.00 12.00 12.00 1 LBS PER Unit 52 64 66 94 -		0.5	0.54	0.40	0.40	4.75	4.75
Der Sections - - - - Bundle 13.00 12.00 12.00 12.00 1 LBS PER Unit 52 64 66 94 -	UNITS	· ·	2.54	2.18	2.18	1./5	1.75
LBS PER Unit 52 64 66 94		Sections	-	-	-	-	-
LBS PER Sections		Bundle	13.00	12.00	12.00	12.00	12.00
PER Sections		Unit	52	64	66	94	93
		Sections	-	-	-	-	-
		Bundle	667	772	796	1,128	1,116
Colora Doffectanoa Staak Staak Staak S	0.1	Deflector	01	0(01	01	Stock


Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Buff	SR.n/a SRI n/a	1	1	1	1	1
Grey	SR.n/a SRI n/a	1	1	1	1	1




SINGLE UNITS



FULLNOSE COPING 610 x 305 x 60mm 24 x 12 x 2 3/6" 13 unit/Bundle .39 Fc.Ft./Stone




STANDARD COPING 610 x 305 x 70mm 24 x 12 x 2 ³⁄4" 12 unit/Bundle .46 Fc.Ft./Stone



STANDARD CLOSED-END COPING 610 x 305 x 70mm 24 x 12 x 2 ³/4" 12 unit/Bundle .46 Fc.Ft./Stone



LARGE COPING 762 x 343 x 70mm 30 x 13½ x 2 ¾" 12 unit/Bundle .57 Fc.Ft./Stone



LARGE CLOSED-END COPING 762 x 343 x 70mm 30 x 13 ½ x 2 ¾" 12 unit/Bundle .57 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY. This product is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping is rock faced on three sides. Units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. All measurements are nominal. Contact Unilock for more information.

Ledgestone[™] Pillar Cap



APPLICATIONS Pillar, Steps, Step Treads

APPEARANCE Surface Texture - Textured

TECHNICAL INFORMATION Conforms to ASTM C 1776 Eligible for LEED v4.1 credits

		24 x 24"
	Bundle Type	
	Plant Produced	CHICAGO
	Thickness (mm)	100 mm
	Bundle	3.28
FCFT PER	Layer	0.66
	Stone	0.66
PER BUNDLE	Layers	5.00
	Sections	-
	Bundle	10.04
LNFT PER	Unit	2.01
	SqFt	1.52
UNITS PER	Sections	-
	Bundle	5.00
	Unit	159
LBS PER	Sections	-
	Bundle	795
Colors	Reflectance	Stock
Buff	SR.n/a SRI n/a	1
Grey	SR.n/a SRI n/a	<i>✓</i>



SINGLE UNIT



24 x 24" 610 x 610 x 100mm 24 x 24 x 3%" 5 unit/Bundle .66 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY. This product is produced and sold on a required, refundable skid. Pillar Cap is rock faced all four sides; All measurements are nominal. Contact Unilock for more information.

Umbriano[®] Coping

ENDURACOLOR[®]



APPLICATIONS Pillar, Water Feature, Pool Coping, Fire Feature, Wall Coping, Steps

APPEARANCE

Surface Texture - Umbriano Mottled

TECHNICAL INFORMATION Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CHAMFERED 24 x 14	FULLNOSE 24 x 14
	Bundle Type	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO
	Thickness (mm)	60 mm	60 mm
		0.00	0.00
	Bundle	9.30	9.30
FCFT PER	Layer	-	-
	Stone	0.39	0.39
	Layers	6.00	6.00
PER BUNDLE	Sections	-	-
	Duradla	47.00	17.00
LNFT PER	Bundle	47.20	47.20
	Unit	0.98	0.98
	SqFt	-	-
UNITS PER	Layer	4.00	4.00
	Bundle	24.00	24.00
	Unit	63	63
LBS PER		252	252
LD3 PER	Layer		
	Bundle	1,510	1,510
Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	1	1
Grenada White	SR .45 SRI 52	1	1
Midnight Sky	SR .17 SRI 15	1	1
Summer Wheat	SR .42 SRI 48	1	ſ
Winter Marvel	SR .35 SRI 38	1	1





EasyClean

FRENCH GREY

GRENADA WHITE

MIDNIGHT SKY





SUMMER WHEAT

WINTER MARVEL



CHAMFERED 600 x 360 x 60 mm 24 x 14 x 2 ³/₈ 24 Units/Bundle



FULLNOSE 600 x 360 x 60 mm 24 x 14 x 2 3⁄8 24 Units/Bundle

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. All measurements are nominal. Contact Unilock for more information.

Urban[™] Coping



APPLICATIONS Pillar, Water Feature, Pool Coping, Fire Feature, Wall Coping, Steps

APPEARANCE

Surface Texture - Smooth

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CHAMFERED 36 x 19	FULLNOSE 36 x 19	CHAMFERED 24 x 14	FULLNOSI 24 x 1
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGL
	Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARI
	Thickness (mm)	60 mm	60 mm	60 mm	60 m
	Bundle	3.75	3.75	9.26	9.2
FCFT PER	Layer	-	-	1.54	1.5
	Stone	0.31	0.31	0.38	0.3
	Layers	6.00	6.00	6.0	6
PER BUNDLE	Sections	-	-	-	
	Bundle	35.4	35.4	47.08	47.(
LNFT PER	Unit	2.9	2.9	1.96	1.9
	SqFt	-	-	0.43	0.4
UNITS PER	Layer	2.00	2.00	4.00	4.0
	Bundle	12.00	12.00	24.00	24.0
	Unit	128.7	128.7	62.48	62.4
LBS PER	Layer	257	257	249	24
	Bundle	1,544	1,544	1,499	1,49
Colors	Reflectance	Stock	Stock	Stock	Stoc
Dark Charcoal	SR.n/a SRI n/a	1	1	1	
Indiana Buff	SR.n/a SRI n/a	1	1	1	
Sterling	SR.n/a SRI n/a	1	1	1	






INDIANA BUFF



ENDURACOLOR[®]

DARK CHARCOAL

STERLING



36 x 19 FULLNOSE 900 x 485 x 60 mm 35½ x 19 x 2¾ 12 units/Bundle

36 x 19 CHAMFERED 900 x 485 x 60 mm 35½ x 19 x 2¾ 12 units/Bundle



24 x 14 FULLNOSE 600 x 300 x 60 mm 23 ⁵/₈ x 11 ⁷/₈ x 2³/₄" 24 units/Bundle



24 x 14 CHAMFERED 600 x 300 x 60 mm 23 5/8 x 11 7/8 x 2³/4" 24 units/Bundle

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. All measurements are nominal. Contact Unilock for more information.

Lineo[™] Dimensional Fire Pit



APPLICATIONS Fire Feature,

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		SQUAR
	Bundle Type	SINGLE
	Plant Produced	UXBRIDGE
	Thickness (mm)	100 mn
	Outside	43
DIAMETER (inch)	Inside	29
(1101)	Insert	27
LAYER PER UNIT		
UNIT PER LAYER		1
UNIT PER PALLET		Ę
LBS PER PALLET		1,62
Colors		Stoc
Almond Grove		
Granite		
Graphite		
Sierra		





ALMOND GROVE

GRAPHITE

GRANITE

SIERRA



LINEO FIRE PIT 1100 x 1100 x 400mm

Manager for details.

SINGLE UNIT

ACCESSORIES

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.





NOTES: Firepit uses 48 units total. There will be 6 extra units. Spacing strips are shipped with fire pit bundles to create even spacing between units. Ledgestone", Unilock Natural Stone or 6"x12" Fullnose complement as possible coping options. All measurements are nominal. Contact Unilock for more information.

(Special Order only)

RomanStack[™] Fire Pit Kit



APPLICATIONS Fire Feature

APPEARANCE Surface Texture - Split

TECHNICAL INFORMATION

Conforms to ASTM C 1776 Eligible for LEED v4.1 credits

		ROMANSTACK ROUN	
Bundle Type		SINGLE	
Dimension Metric		1525 x 1525 x 400 mm	
Dimension Imperial		60 x 60 x 15 3/4	
	Outside	6	
DIAMETER (inch)	Inside	4	
	Insert	4	
LAYER PER UNIT			
UNIT PER LAYER		2	
UNIT PER PALLET		9	
LBS PER PALLET		1,72	
Colors	Reflectance	Stoc	
Almond Grove	SR. n/a SRI n/a	•	
Granite	SR. n/a SRI n/a	•	
Sierra	SR. n/a SRI n/a		





GRANITE

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety,



ALMOND GROVE

FIRE PIT WARNING

SIERRA



ROMANSTACK ROUND 1525 x 1525 x 400mm 60 x 60 x 15 34"

ACCESSORIES

SINGLE UNIT

The following accessories are available for any fire pit kit. Contact your local Territory Manager for details.



24" SWING AWAY GRILL



KETTLE HOOK



always use a spark screen over the fire.

ACCESSORY POST WITH COLLAR

Notes: All measurements are nominal. Contact Unilock for more information.

96 **UNILOCK**

Sunset Fire Pit Kit



APPLICATIONS Fire Feature

APPEARANCE Surface Texture - Standard

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		SQUARE	ROUND
Bundle Type		SINGLE	SINGLE
Dimension Metric		1100 x 1100 x 400 mm	1300 x 1300 x 400 mm
Dimension Imperial		43 3/8 x 43 3/8 x 15 3/4"	51 1/4 x 51 1/4 x 15 3/4"
DIAMETER (inch)	Outside	43	52
	Inside	29	36
	Insert	27	35
LAYER PER UNIT		4	4
UNIT PER LAYER		12	18
UNIT PER PALLET		48	72
LBS PER PALLET		1,357	1,499
Colors	Reflectance	Stock	Stock
Sandstone	SR. n/a SRI n/a	1	1
Limestone	SR. n/a SRI n/a	1	1
Sierra	SR. n/a SRI n/a	1	1





Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of

the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a

For your safety, always use a spark screen over the fire.



SANDSTONE

FIRE PIT WARNING

sand bed.

LIMESTONE

SIERRA

PIT INSERT

SINGLE UNIT

UNILOCK REDUCED

ACCESSORIES

SMOKE INSERT

SUNSET SQUARE 1100 x 1100 x 400mm 43 3/8 x 43 3/8 x 15 3/4"



SUNSET ROUND 1300 x 1300 x 400mm 51 1⁄4 x 51 1⁄4 x 15 ¾"

SUNSET ROUND FIRE PITS AVAILABLE WITH ZENTRO TECHNOLOGY FIRE

There's nothing like relaxing around a firepit to bring family and friends


closer together. But with ordinary firepits, smoke always blows in someone's face - usually yours. With Unilock Reduced Smoke Inserts, stinging eyes are a thing of the past. Zentro's patent-pending technology reburns smoke before it gets anywhere near your eyes. Say hello to good







Manager for details.



times and good-bye to smoke.



(works with Sunset Round only)



KETTLE HOOK

ACCESSORY POST WITH COLLAR

Notes: All measurements are nominal. Contact Unilock for more information.

UNILOCK 97



NEW from Unilock, the SkyView Roof Deck System is a comprehensive product lineup that includes adjustable pedestals, invisible wind uplift solutions, roof deck slabs, wood tile, and fiberglass grate. Together, these components offer unmatched flexibility, empowering designers to create elevated rooftop spaces that are visually stunning, durable and high-performing. The system's intuitive design also simplifies installation for contractors, ensuring efficiency without compromising quality. With SkyView, reimagine what's possible for roof deck design and construction.

SKYVIEW PEDESTAL SYSTEM

Unilock SkyView Pedestals are patent pending, fully adjustable structural supports for elevating paving materials. Our pedestals ensure unmatched flexibility, ease of installation and durability.



- 1/2" and 1" Waffles available for low profile applications.
- 10" Cores and Collars available for taller applications up to 31".

SKYVIEW WIND UPLIFT SYSTEM

When the below components are combined with the SkyView Pedestal System, they create a rafted paving surface with an invisible tie-down mechanism that resists wind uplift pressures without compromising project aesthetics.

1 Wind Uplift Slabs

24 x 24" slabs featuring a kerfed undercut that spans the length of two opposing sides.



2 | Wind Uplift Kit

This 3-part kit is easily added to SkyView Pedestals to form a tie-down mechanism that works seamlessly with our Wind Uplift Slabs.



SCREW



KEYWAY


LOCKDOWN BAR



PUCK

SKYVIEW GRATE

When this 48 x 48" fibreglass grate is placed on SkyView Pedestals, it creates a stable surface for installing smaller paver units on an elevated roof deck.



SKYVIEW IPE WOOD TILE

Sustainably harvested and FSC certified, these 24 x 24" tiles have a dense hardwood composition that makes them perfect for use on SkyView Pedestals.



Ask your Unilock Represenative about the made to order roof deck slab options available for your projects.

Cleaners



GATOR CLEAN XP OIL AND GREASE REMOVER RS-CLN009-1quarter; 6/box

24 boxes/pallet (144 units)

Use it on concrete, paver or stone. Do not use on asphalt (blacktop). Not recommended for synthetic oil stains.

- · Biodegradable and phosphate-free
- · Easily lifts & absorbs embedded oil stains
- No scrubbing, no rinsing, no mess
- Not recommended for synthetic oil stains

TECHNISEAL SR SLURRY REMOVER FOR PAVERS AND SLABS

RS-CLN004-1gallon; 4/box This is the most effective product available for removing cement slurry and polymeric sand haze on concrete or clay pavers and slabs. 1 gallon of concentrated product cleans up to 600 sq.ft. Coverage will depend on surface condition and product dilution.



GATOR EFFLORESCENCE CLEANER RS-CLN075-1gallon; 4/box 24 boxes/pallet (96 units) RS-CLN076-5 gallons; 48 pails/pallet Remove any efflorescence stains trapped in the concrete pavers & natural stone pores. It will make the pavers look more clean and vibrant. This efflorescence cleaning is a necessary step before a sealer is applied. The sealer will be able to get a deeper penetration into the now clean pores.



TECHNISEAL ORGANIC STAIN REMOVER RS-CLN018-25 ounces; 6/box 90 boxes/pallet (540 units)

Formulated to remove moss and mildew as well as tough organic stains such as dead leaves, blood, wine and non-greasy food stains on concrete pavers, slabs and walls, natural stone, etc; requires minimal scrubbing.



EACO CHEM EF-FORTLESS RS-CLN106-2 - 1 gallon; 4/case

RS-CLN107-1 - 5 gallons EF-Fortless is a soap solution that melts away

powdery efflorescence and haze from clean-up efflorescence, and helps control its return.


- Helps control the return of efflorescence · Safe on glass when used as directed
- · Does not require a pressure washer to rinse

EACO CHEM NMD80

RS-CLN108 - 1 gallon; 4/case RS-CLN109 - 5 gallons

NMD 80 is a powerful detergent-based solution designed for safe and effective removal of mortar smears and efflorescence from masonry surfaces. It works great to remove polymeric sand haze.

- · Will not harm most glass or anodized window frames when used as directed.
- Reduces water-in-wall issues, such as efflorescence.
- No respirator required when used outdoors (other safety precautions apply).
- For use on vertical and horizontal surfaces.
- · Effective way to remove large scale efflorescence.
- Biodegradable



GATOR SEAL SIGNATURE SERIES

RS-SEAL200-1gallon; 4/box; 24 boxes/pallet (96 units) This sealer penetrates deep into the concrete pavers, walls, masonry and natural stones, therefore helps prevent the oil and dirt penetration, corrosion from de-icing salt, the effects from the UV rays and stains up to 10 years.



Sealers

GATOR SATIN LOOK SEALER

RS-SEAL207-1 gallon; 4/box; 24 boxes/pallet (96 units) RS-SEAL208 - 5 gallons; 48 pails/pallet

Made from acrylic-based polymers GATOR SATIN LOOK SEALER penetrates deep into the concrete pavers, therefore helps prevent the oil and dirt penetration, corrosion from de-icing salt and the effects from the UV rays. Specifically formulated to be used on unsealed surfaces only.



GATOR WET LOOK SEALER

RS-SEAL205-1gallon; 4/box; 24 boxes/pallet (96 units) RS-SEAL206 - 5 gallons; 48 pails/pallet Made from acrylic-based polymers GATOR WET LOOK SEALER penetrates deep into the concrete pavers, therefore helps prevent the oil and dirt penetration, corrosion from de-icing salt and the effects from the UV rays. Specifically formulated to be used on unsealed surfaces only.

SUREBOND 8700 WET LOOK JOINT SAND STABILIZER WITH FUNGICIDE

RS-SEAL151-1 gallon; 4/case; 36 cases/skid (27 cases) RS-SEAL152 - 5 gallons; 36 ea/skid (22 ea.)

- · Seals & enhances surface while hardening jointing sand.
- · Deeply enhances surface with stain-resistant semi-gloss finish.
- Formulated with antifungal to stop growth of mold, fungi and moss.
- Rain safe in 90 minutes; approx. coverage 80-120 sq.ft.
- 1,000 lbs. HAZMAT weight restriction applies with this product.



BACK TO BLACK SEALER

RS-SEAL238 - 1 liter; 3 liter/case

- Quickly revives and enhances faded, dark limestone.
- · Provides stain & water-resistant surface
- 1 Liter covers up to 400 sqft with one coat depending on surface porosity.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

Paver Edging

Permeable Chip Products

units.

ALLIANCE GATOR AQUA ROCK

RS-AGG033 - 2200 lb./Super Sack

RS-AGG042 - 50lb./bag, 56 bags/skid

· Meets ASTM No. 9 requirement for permeable joint

• High-strength granite ideal for bedding course &

• Coverage: 20-25 Sq.Ft./bag|880-1100 Sq.Ft./

PERMAPAK

RS-EDGE087-30 Packets per box; 1lb per packet YIELDS/MIXING/INSTALLATION



- Open graded base: 1 Perma Pak/50-60# bag of concrete will produce a 12'-16' open graded/clear base (chip bedding)
- Dense Base: 1Perma Pak/50-60# bag of concrete will produce 17'-21' dense/crushed base (sand bedding)
- NOTE: yields may vary depending on the thickness of the bedding layer used. A thicker bedding layer will take more product, yielding fewer linear edging feet.
- One Perma Pak per 50-60 lb. bag of concrete
- Three Perma Paks per two 80 lb. bags of concrete



ALLIANCE GATOR XTREME EDGE

RS-EDGE076 - 50 lb bag; 56 bags per skid.

- The ultimate fiber-reinforced structural edging solution for any hardscape project.
- Can be used for any traditional, open-graded, permeable, Gator Base or overlay application using concrete pavers or slabs, natural and wet cast stones.
- Offers permanent continuous lateral support.
- Approximate Coverage: 20-25 sqft. per bag.



SEK EDGECRETE

RS-EDGE075 - 50lb bag; 56 bags/skid

- Paver restraint in a a bag Just Add Water. • Fiber-reinforced concrete edge restraint.
- Simple to install No spikes needed.
- · Approximate coverage: Std. Base 17 Ln.Ft./bag; Permeable & Open Base- 13 Ln.Ft./bag







2500 lb Super Sack:

jointing material.

Super Sack.

SEK PERM CHIPS

50lb./bag • 56 bags/skid

RS-AGG036 - Eclipse Black

RS-AGG039 - Saturn Tan

RS-AGG041 - Stormy Grey

- High-strength crushed and washed granite meets ASTM No. 9 Stone Specifications for permeable joint filler
- Ideal for permeable paving stone installations, both

as a bedding course and as a joint filler

SABLE MARCO EV EVOLUTION PRO+SAND

Coverage: 30-35Sq.Ft./bag|1500-1750 Sq.Ft./ Super Sack

Sands



Adhesive



ALLIANCE XP GATOR BLOCK ADHESIVE

RS-ADH035 - 10 oz: 12/case: 90 cases/skid: 1.080 units/skid RS-ADH038 - 28 oz; 12/case; 60 cases/skid; 720 units/skid

- · Bonds permanently in 24 hours
- Material may be repositioned for up to 30 minutes •
- Works in termperatures above 32°F
- 850 psi in 24 hrs (-1,000 psi in 7 days)



SUREBOND SB-10 ADHESIVE

RS-ADH009-1-10 oz; 12/case; 140 cases/skid (1680 ea) RS-ADH015-1-28 oz; 12/case; 60 cases/skid (720 ea)

- Fast set-up, quick curing.
- · Can be applied to wet, damp & frozen block.
- Temeratures ranging from 0 100°F.
- 900 psi.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

replacing existing joints on sidewalks, patios, sloped driveways or walkways Will remain stable and flexible and maintain its

A specially formulated high performance mix of

graded sand and binding agent to fill pavers joints Ideal for the installation of pavers or slabs as well as

- flexibility and durability in the most extreme weather conditions.
- Contains no pigment or dyes

50 lb/bag; 63 bags/skid (3,150 lbs/skid)

RS-SAND104 - Beige

RS-SAND105 - Grey

RS-SAND106 - Black

Coverage: Approx. 100 sq.ft./ bag for narrow joints, larger joints will require more sand.

Note: Extra care must be taken when using on Courtstone, Copthorne, Richcliff and Town Hall. Not recommended for II Campo, Series or Umbriano.

POLYBIND G2 SAND

RS-SAND150 - Nevada Tan RS-SAND151 - Oxford Grey 50 lb/bag; 56 bags/skid (2,850 lbs/skid)

NO DUST • HAZE FREE • NO BLOWER • ONE WATERING • RAIN SAFE IN 16 MINUTES

- Designed for paver joints up to 2".
- A unique mix of polymer binders and calibrated sand.
- Installation almost identical to regular paver joint • sand, except for the application of water. Becomes very firm when set & locks between the paver joints.
- Coverage: 65-85 sq.ft./ bag for narrow joints, larger joints will require more sand.

















RS-SAND078 - Nevada Tan RS-SAND080 - Oxford Grey

- 50 lb/bag 56 bags/skid (2,850 lbs/skid) • Unique mixture of polymer binders and calibrated sand
- The installation of POLYBIND SAND is almost identical to using regular paver joint sand except for the application of water. Once POLYBIND SAND sets, it becomes very firm and locks between the paver joints while still retaining flexibility and providing a long lasting, durable jointing material
- Recommended for a variety of uses including pool decks, patios, footpaths, driveways, parking spaces, pavements, etc
- · Coverage: 65-85 sq.ft./ bag for narrow joints, larger joints will require more sand.

POLYBIND G2 COMPLETE SAND

RS-SAND152 - Nevada Tan RS-SAND153 - Oxford Grey RS-SAND154 - Jet Black RS SAND155 - Ivory White 50 lb/bag; 56 bags/skid (2,850 lbs/skid) NO DUST • HAZE FREE • NO BLOWER • ONE WATERING

Designed for paver joints up to 2".

- RAIN SAFE IN 16 MINUTES · Made with calibrated sand mixed with sophisticated intelligent polymers, which
- neutralizes haze and dust . Recommended for a variety of uses including pool decks, patios, footpaths, driveways, parking spaces, pavements, etc
- · Coverage: 65-85 sq.ft./bag for narrow joints, larger joints will require more sand


ROMEX ECOFINE SAND RS-SAND206 - Beige

RS-SAND207 - Grey RS-SAND208 - Basalt/Anthracite 27.5 lb/Pail • 80 pails/skid (2,240 lbs/skid)

Sustainable Paving Joint Mortar for Narrow Joints

- Designed for paver joints up to 1/8" (porcelain) to 2"(concrete pavers)
- Made from 98% natural, recycled or renewable raw materials
- Resin film free
- Weed resistant
- Ant resistant
- Highly water permeable •
- Frost resistant .
- Installation almost identical to regular paver • joint sand, except for the application of water. Becomes very firm when set & locks between the paver joints
- Coverage: 30 40 sq.ft./bucket for narrow joints, larger joints will require more sand





RS-SAND173 - Tan RS-SAND174 - Urban Grey RS-SAND181 - Granite Grey 50 lb/Bag; 56 bags/skid (2,860 lbs/skid) Designed for paver joints up to a maximum of 1 inch.

- Benefits from the Nextgel technology for cleaner application and faster wetting.
- A smart choice for residential driveways, patios, etc.
- Offers great resistance to weed growth, insect invasion and erosion; fast-setting within minutes of water activation.
- Coverage: 65-85 sg.ft. coverage per bag for narrow joints, larger joints will require more sand installation. Recommended with extra care for use with Copthorne[®], Courtstone[®], Richcliff[®], Town Hall[®] & Umbriano[®] products. It is not suitable for use with

Il Campo°, Series™ and Unigranite°. Umbriano's surface must be cleaned with a foam squeegee post installation.

TECHNISEAL® HP NEXTGEL SAND

RS-SAND131 - Tan RS-SAND133 - Urban Grey RS-SAND130 - Granite Grey RS-SAND203 - Black 50 lb/Bag; 56 bags/skid (2,860 lbs/skid)

NO DUST • NO HAZE • NO WASTE

Designed for paver joints up to a maximum of 1 inch.

- · Ideal in high-humidity environments, heavy-vehicular traffic areas & steeper terrain.
- Fast, clean, durable and profitable installation thanks to Nextgel technology.
- Offers great resistance to weed growth, insect invasion and erosion; fast-setting within minutes of water activation.
- Coverage: 65-85 sg.ft. coverage per bag for narrow joints, larger joints will require more sand.

ALLIANCE GATOR NITRO SAND

RS-SAND196 - Beige RS-SAND197 - Grey RS-SAND198 - Black

RS-SAND236 - Silver 40 lb/Pail; 48 pails/pallet (1,970 lbs/pallet)

- · Ready to use permeable jointing material.
- · Can be installed in wet or dry weather.
- Formulated for joints from 1/2" to 2".
- · Ideal for concrete & wetcast pavers, Natural Stone & Porcelain Tile
- Coverage: 10-84 Sq.Ft./bucket depending on joint width

GATOR NITRO-X FINE JOINT NEW

Black | Grey | Gunmetal | Taupe | Platinum | Vanilla 27.5 lbs Pail; 48 Pails/Pallet

- Rapid Flow Technology
- · Fast and simple installation
- Xtra Fine gradation jointing sand
- Xtra Low permeability
- Xtra Strength from top to bottom ***
- · Apply rain or shine
- Joint width from 1/8" to 2" (3 mm to 50 mm)****
- 5-year limited warrantywidth.

*** Gator Nitro-X Fine Joint Sand will harden from top to bottom up to 2 3/8" (60 mm). **** Ensure there is ABSOLUTELY NO paver, porcelain tile or

stone movement prior to installation to prevent joint cracking.



POLYBIND





RAPID FLOW TECHNOLOGY





Sealer Best Practices

- The paver surface should be **clean** and free from oil, dirt, dust and any loose material. This ensures a uniform result and allows the sealer to better penetrate the surface.
- The pavers should be free of any visible efflorescence.
- If pavers have been sealed before, make sure to reseal with compatible product.
- Surface must be dry (48 hours without precipitation) and warm to the touch (morning).
- Joint sand must also be dry.
- Make sure lawn sprinklers are shut off.
- Best air temperature is between **50 degrees to 80 degrees** with no rain forecasted for the next 24 hours.
- It is best to apply product under constant weather conditions and use the same application method from start to finish.
- The paver joints should be completely filled with dry correctly-graded joint sand. The top level should not exceed the bottom of the chamfer or **1/8**" **below** the surface on the non-beveled or tumbled paver surface.
- Always test the product on a small hidden area to ensure the results will meet your expectations.
- Always show homeowners samples to ensure expectations.

At this point read all sealer instructions and determine the best sealer for your desired goal. Do you want to retain the original look, enhance the color, or stabilize the sand joint?

- Read application information as each sealer can be applied differently.
- Make sure you have the correct equipment based on type of sealer. Solvent based sealers need solvent resistant sprayers, watering cans or paint trays. Water base sealers can be generally applied using plastic equipment. Example: solvent based sealers come in metal containers and water based sealers come in plastic containers.
- Care should be taken that no excess sealer material is pooled on the surface during application always back roll. When using solvent based sealers make sure roller is solvent resistant or for all paints. Foam rollers work best and are less likely to pull sand from the joints.
- Stabilizing sealers are generally sprayed or flood coated with a watering can, then back rolled.
- Acrylic non-stabilizing sealers can be sprayed, then back rolled or rolled on using a metal paint tray.
- Send your most experienced worker to do sealing projects.

Polysand Best Practices

- Ensure that paver surface has **proper drainage runoff** (Min 1" over 8'). Finished paver height should always be higher than grade to allow proper surface drainage.
- **Do not set pavers in limestone screenings.** This product holds moisture and does not meet the gradation, drainage qualities or strength of coarse concrete sand.
- Make sure pavers are clean of all construction dust. Residual construction dust will haze pavers!
- Compact pavers into setting bed to create proper interlock.
- Read and review all polysand manufacturers methods of application. (Read Directions)
- Don't rush polysand installation.
- Paver area must be completely dry.
- Lay bags of polysand over paver area. Stage bags in areas of coverage. Example: one bag for 60 square feet.
- Do not over sweep sand. Sweep sand back and forth within coverage area to fill paver joints.
- Compact sand into joints. This is a must in achieving proper density of the sand joint (repeat 3 times). Compaction is critical to assuring sand strength.
- Do not fill sand above the chamfer of paver. Sand should sit 1/8" below bottom of chamfer.
- Use a fine-bristle broom to remove any excess sand from the paver surface.
- Use a **leaf blower** remove any sand or binder residue.
- Review all watering directions (each manufacturer has different watering instructions.) This is VERY IMPORTANT!
- Always start watering at the **bottom of the slope**.
- Always start watering in **controlled areas** per manufacturers recommendations. Example: complete watering in 200 sq. ft. area then move on to the next 200 sq. ft. and repeat.
- During final watering of poly sand, **clean surface by removing excess water** with leaf blower or squeegee depending on paver surface texture. This will remove any leftover binder residue or sand.
- Final thoughts Always be aware of the weather when installing poly sand. (Temperature and setting time ratings differ between products.)
- Refer to all manufacturers websites for installation videos.

Edge Restraints

Unilock Drivegrid System™

SNAPEDGE

- Only one part required for straight runs or curved installations
- Built-in connector fastens one piece to the next convenient 96" size, makes them easy to transport
- Unique 'Snip and Flex' feature speeds installation of curves and corners without pre-planning

13/8"

Side Wall

- The open design allows a root system to grow
 through SnapEdge, further reinforcing the installation.
- Engineered to provide a strong, easy-to-install edge restraint for concrete/clay pavers
- Nail hole bosses are full-length cylinders. Hammer blows will not fracture or force nail heads through edging

Also available in low profile





SnapEdge

Low Profile Integral Connection






LANDSCAPE SPIKES 50lb case



UNILOCK DRIVEGRID[™] SYSTEM 120'x12.5' Roll, 1,500 SqFt/Roll



WHY DRIVEGRID SYSTEM"?

Easy to install
 Reduces overall project cost

✓ Inexpensive
 ✓ Proven Tensar[®] TriAx[®] Technology

Paver Spacers



X & T SLAB SPACERS

RS-ACC237 - X spacers 2" x 2"

- RS-ACC236 T spacers 2" x 1"
- Unilock recommends using slab spacers when installing Arcana and Soreno.
- "T" spacers are needed for running bond patterns; "X" spacers are needed for stack bond patterns.
- Packaging: 250 per bag; X & T bagged separately

Please contact your Territory Manager for more information

UNILOCK PERMEABLE SPACER NEW

RS-T00L165-1

- Create a permeable installation using
- non-permeable pavers

Hollow, weather-proof polypropylene (PP)
plastic cylindrical elements allow rainwater
to flow through into the sub-base

• Rigid and durable, ideal for both vehicular and pedestrian loads

Specifications / Packaging:

- Color: Black
 - Dimension: 37mm (h) x 29mm (w)
 - Post diameter: 10mm w/6mm drain hole diameter
 - Weight: 6g
 - Packaging: Bulk



Geotextile & Fabric Products



STRATAGRID GEOGRIDS

RS-FAB101 - SGU060 6.25' x 288' (200 Sq Yd) • 85 lbs/roll RS-FAB010 - SGB030

4' x 50' (22.22 Sq Yd)

• Geogrid reinforcement for soil and aggregates • Engineered to be mechanically & chemically durable in harsh construction and aggressive soil environments

GATOR GRID 30-30

Packaging & Unilock SKU (Minimum Case Purchase = MCP): RS-FAB070 - 4' x 50/12 rolls/case, 60 rolls/skid * MCP * RS-FAB071 SPECIAL ORDER - 6' x 50' - 40 rolls/skid RS-FAB072 - 6' x 150'/25 rolls/skid

- A biaxial geogrid, provides strength, longevity, excellent stress transfer and prevents failure to the internal structure of landing areas, retaining walls and steep slopes
- Has a high molecular weight as well as high-tenacity polyester yards which are woven in tension and finished with a PVC coating

GATOR FABRIC NON-WOVEN 4.4

Packaging & Unilock SKU (Minimum Case Purchase = MCP): RS-FAB043 - 3' x 100 - 6 rolls/case, 24 rolls/skid SPECIAL ORDER * MCP *

RS-FAB044 - 4' x 100' - 6 rolls/case, 36 rolls/skid $\,^*$ MCP * RS-FAB046 - 6' x 100' - 30 rolls/skid $\,^*$ MCP *

- RS-FAB047 6' x 300' 16 rolls/skid $\,^*\,\text{MCP}\,^*$
- A needle punched non-woven geotextile made of polypropylene fiber, ideal for drainage, filtration and will allow water flow of 135 gallons per minutes per square foot (613 L/min/sq. m.) in paver or retaining wall applications
- Its filament fibers are used for soil separation and drainage and combine high durability along with excellent physical and hydraulic properties
- · Non-biodegradable and resistant to most soil chemicals

PaverSaver Uni Mat





PAVERSAVER UNI MAT RS-T00L121

Universal Design - for use on most compactors

The PaverSaver Uni Mat is made out of a specially formulated urethane rubber. Material soft enough to protect the paver surface yet hard enough to minimally affect travel speed. The universal sizing fits most compactor plates and easily attaches and detaches from the compactor.

Stainless Steel Fireplace Insert


STAINLESS STEEL FIREPLACE INSERT


RS-FIR033 - 36" Unit; Order with RS-FIR041 (18" Flue Pipe), RS-FIR042 (36" Flue Pipe) & RS-FIR036-1 (Termination Cap)

RS-FIR034 - 42" Unit; (SPECIAL ORDER); Order with RS-FIR042 (36" Flue Pipe) & RS-FIR036-1 (Termination Cap)

- Outdoor, Wood-burning Fireplace.
- Insert comes with refractory panels, mesh spark screen and solid steel log grate.
- 254 lbs./Full Kit










RIGHT SIDE

GAS LINE







Tools & Accessories

UniLyft

INSTALL UP TO 700 SQ. FT. PER HOUR!

- Access tight or narrow areas
- Eliminate the need for a forklift on site
- Reduce labor costs
- Reduce shoulder, hand & knee pain and injury
- Improve your bottom line

Contact your Territory Manager for details





STANDARD AND CUSTOM HEADS AVAILABLE FOR LIFTING ALMOST ANYTHING!

- Small or Large
- Smooth or Rough
- Textured Designs
- Exposed Aggregate
- Patterned
- Natural Stone
- Retaining Walls



IMPORTANT NOTES

UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee^{*} on the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.





Scan for full Guarantee details

*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at unilock.com and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at Unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

TRADEMARK & LEGAL INFORMATION

Umbriano^{*} is a trademark of Metten Stein + Design GmbH & Co KG used under license by Unilock. Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area. Not all products shown are available at all Unilock locations. Log on to www.unilock.com for availability. Measurements throughout this portfolio are nominal.

©2025 Hengestone Holdings, Inc.

UNILOCK° COLLECTIONS

Beacon Hill

Pavers & Slabs Wall

Coping

Umbriano

Wall –



DESIGNED TO TAKE THE GUESSWORK OUT OF PRODUCT SELECTION.

Pavers & Slabs

Streamline the process by offering pavers, walls, steps and coping that will work well together. **Scan to explore our full range of collections.**



LET'S BUILD YOUR BUSINESS TOGETHER.

CHICAGO (630) 892-9191

MILWAUKEE (262)742-3890

KANSAS (913) 417-7985

BOSTON (508) 278-4536

NEW YORK (845) 278-6700

MID-ATLANTIC (202)798-2060

MICHIGAN (248) 437-7037

ONTARIO (416) 646-9000



OUÉBEC

/ TN / IN (513) 202-0219

OHIO / WESTERN PA / WNY & CNY (330) 927-4000

