R A N S F O R M I N G H A R D S C A P E S

ELEVATE YOUR CRAFT WITH UVISION 3D LANDSCAPE CREATOR.



UVISION ALLOWS YOU TO VISUALLY COMMUNICATE YOUR DESIGN IDEAS TO YOUR CLIENT IN BOTH 2D PLAN VIEW AND 3D PERSPECTIVE VIEW

Whether you're coming from the hand-drawn world, or a 2D AutoCAD background, the biggest impact you'll see from adopting this new 3D design software is in how well the client will understand the project you are selling. **Uvision 3D Landscape Creator** is an easy-to-use software that helps bring your designs ideas to life.





Scan the QR code for more information or to download a free 30-day trial.



TABLE OF CONTENTS

PAVERS		RETAINING WALLS		ACCESSORIES	
Arcana™	4	Brussels Dimensional Stone®	61	Skyview [™]	95
Artline™	5	DuraHold®	62	Paver Cleaners	96
Beacon Hill™ Flagstone	7	DuraHold2°	64	Paver Sealers	96
Beacon Hill™ Smooth	9	Estate Wall™	65	Adhesives	97
Bristol Valley®	12	Lineo™ Dimensional Stone	66	Sands	98
Brussels Block [®]	13	Pisa [™]	67	Edge Restraints	100
Copthorne®	14	Pisa [™] Smooth XL	68	DriveGrid, Gator Grid & Gator Base	101
Courtstone®	15	Quarry [™] Smooth	69	Large Equipment (Unilyft)	102
Eco-Hex™	16	Rivercrest [®]	70		
Eco-Priora [™]	17	SienaEdge [™]	72		
Eco-Promenade® Ecoterra	19	SienaStone™	73	PRODUCT & INSTALLATION INFORMATION	
Eco-Promenade®	20	U-Cara®	76		
Granito™	22			Bedding Chart / Basic Depth	104
Hex™	23			Important Notes	105
Holland Premier [™]	24	COPING, STEPS, PILLAR CAPS		Finishes	106
Hollandstone™	25				
II Campo®	26	Beacon Hill™	85		
Mattoni™	27	Brussels Fullnose [™]	86		
Natural Stone	28	Ledgestone™	87		
Nordic Cobble [™]	36	Umbriano°	89		
Porcelain	37	Universal	90		
Promenade™	39	Urban™	91		
Richcliff®	42				
Series™	43				
Skyline [™]	44				
Soreno™	45	FIRE FEATURES			
Thornbury™	46				
Town Hall®	47	Sunset Fire Pit			
Treo°Smooth	48	Unilock Elements	93		
Tribeca Cobble™	49				
Turfstone™	50				
Umbriano°	51				
Urban™					
Westport™	60				

DESCRIPTION OF EDGE DETAILS









Zero-Edge

Chamfered Edge

Rounded Bevel


Micro Bevel



Bundle Type

12 x 24

SINGLE



18 x 24

SINGLE

24 x 24

SINGLE



APPLICATIONS

Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 0 mm


TECHNICAL INFORMATION

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits

// Perfect for roof decks and other raised floor applications.

Ask us about our Skyview[™] pedestal system. See page 95 for more information.





12 x 24

 $301 \times 606 \times 50 mm$

11% x 23% x 2"

18 Units/Bundle

2 Sq.Ft./Stone

	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	50 mm	50 mm	50 mm
	Bundle	36.00	54.00	72.00
	Layer	2.00	3.00	4.00
SQFT PER	Sections	-	-	-
	Stone	2.00	3.00	4.00
	Layers	18.00	18.00	18.00
PER BUNDLE	Sections	-	-	-
	SgFt	0.99	0.99	0.99
	Sections	-	-	-
SOLDIER LNFT PER	Layer	1.98	2.97	3.98
	Bundle	35.55	53.50	71.57
	SqFt	1.99	1.33	0.99
CAU OD I NET DED	Sections	-	-	-
SAILOR LNFT PER	Layer	3.98	3.98	3.98
	Bundle	71.57	71.57	71.57
	SqFt	0.50	0.33	0.25
UNITS PER	Sections	-	-	-
	Bundle	18.00	18.00	18.00
	Layer	48	72	96
LBS PER	Sections	-	-	-
	Bundle	864	1,296	1,728
Colors	Reflectance	Stock	Stock	Stock
Avorio	SR .56 SRI 66	S0	S0	S0
Corvara	SR .32 SRI 34	S0	S0	S0
		1	İ	





Modena

Vivanto

18 x 24 453 x 606 x 50mm 17% x 23% x 2" 18 Units/Bundle 3 Sq.Ft./Stone

SR .46 SRI 53

SR .18 SRI 16



S0

S0

S0

SO

SO

S0

24 x 24 $606 \times 606 \times 50 mm$ 23% x 23% x 2" 18 Units/Bundle 4 Sq.Ft./Stone

VIVANTO

Notes: Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. Product is not intended for vehicular applications. All measurements are nominal. Unilock recommends to install Arcana using T and X Slab spacers. Please contact your Territory Manager for more information.

SINGLE UNITS

LAYING PATTERNS

Artline™ Smooth & IL Campo Finish



0.49

2.06

2,986



APPLICATIONS


Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Micro Surface Texture - Smooth and Brushed Joint Spacing - 3 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits





LAYING PATTERNS



UNIT A

125 x 169 x 70mm $4\% \times 6\% \times 2\%$ 32 Units/Bundle .23 Sq.Ft./Stone

UNITE

187.5 x 225 x 70mm 7½ x 8% x 2¾" 32 Units/Bundle .45 Sq.Ft./Stone

UNIT B

125 x 262.5 x 70mm 4 % x 10 3/8 x 2 3/4" 32 Units/Bundle .35 Sq.Ft./Stone

UNIT F

187.5 x 337.5 x 70mm 7½ x 13¾ x 2¾" 16 Units/Bundle .58 Sq.Ft./Stone

UNIT C

BIRCH

125 x 337.5 x 70mm 4 % x 13 % x 2 ¾" 32 Units/Bundle .45 Sq.Ft./Stone

UNIT G

187.5 x 450 x 70mm 7½ x 17¾ x 2¾" 16 Units/Bundle .91 Sq.Ft./Stone

MULTIPLE SIZES Bundle Type RANDOM MICHIGAN Plant Produced Thickness (mm) 70 mm 93.25 Bundle 11.66 Layer **SQFT PER** Section

Stone

PER BUNDLE	Layers	8.00
PER DUNDLE	Sections	-
	SqFt	-
COLDIED LINET DED	Section	-
SOLDIER LNFT PER	Layer	-
	Bundle	-

	SqFt	-
SAILOR LNFT PER	Section	-
SAILUR LINFT PER	Layer	-
	Bundle	-

SqFt

Bundle

UNITS PER Section - Bundle 192.00 Layer 373 LBS PER Section -		·	
Layer 373	UNITS PER	Section	-
7		Bundle	192.00
7			
LBS PER Section -		Layer	373
	LBS PER	Section	-

Colors	Reflectance	Stock
Birch	SR .28 SRI 30	✓
Granite Fusion	SR .28 SRI 29	/
Granite Fusion (Il Campo Finish)	SR .28 SRI 29	SO



GRANITE FUSION





GRANITE FUSION (IL Campo Finish)

UNIT D 125 x 450 x 70mm 4 1/8 x 17 3/4 x 2 3/4" 32 Units/Bundle .61Sq.Ft./Stone

Notes: II Campo finish is a Special Order (SO) - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Artline™ Umbriano® Finish





MULTIPLE SIZES RANDOM



APPLICATIONS


Pedestrian, Light Vehicular

APPEARANCE


Edge Detail - Micro Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits







UNIT A

125 x 169 x 70mm 4 1/8 x 6 1/8 x 2 3/4" 32 Units/Bundle .23 Sq.Ft./Stone

UNITE 187.5 x 225 x 70 mm $7\frac{3}{8} \times 8\frac{7}{8} \times 2\frac{3}{4}$ " 32 Units/Bundle .45 Sq.Ft./Stone

UNIT B

125 x 262.5 x 70mm 4 1/8 x 10 3/8 x 2 3/4" 32 Units/Bundle .35 Sq.Ft./Stone

UNITF 187.5 x 337.5 x 70mm

 $7\frac{3}{8} \times 13\frac{3}{8} \times 2\frac{3}{4}$ " 16 Units/Bundle .58 Sq.Ft./Stone

CHICAGO Plant Produced Thickness (mm) 70 mm Rundle

Bundle Type

		Duriule	95.25
	SQFT PER	Layer	11.66
		Sections	-
		Stone	0.49

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

		SqFt	-
	SAILOR LNFT PER	Sections	-
	SAILOR ENFT PER	Layer	-
		Bundle	-

	SqFt	2.06
UNITS PER	Sections	-
	Bundle	192.00

	Layer	414
LBS PER	Sections	-
	Bundle	3,310

Colors	Reflectance	Stock
French Grey	SR .35 SRI 38	SO
Midnight Sky	SR .35 SRI 38	SO
Winter Marvel	SR .18 SRI 17	S0





FRENCH GREY MIDNIGHT SKY

WINTER MARVEL

UNIT D 125 x 450 x 70mm 4 1/8 x 17 3/4 x 2 3/4" 32 Units/Bundle .61 Sq.Ft./Stone

UNIT G 187.5 x 450 x 70mm $7\frac{3}{8} \times 17\frac{1}{4} \times 2\frac{3}{4}$ " 16 Units/Bundle .91Sq.Ft./Stone

125 x 337.5 x 70mm

4 1/8 x 13 1/4 x 2 3/4"

32 Units/Bundle

.45 Sq.Ft./Stone

UNIT C

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

LAYING PATTERNS

Beacon Hill™ Flagstone 60mm



RANDOM

MICHIGAN 60 mm

104.91

Bundle Type

Plant Produced

Thickness (mm)

Bundle



APPLICATIONS


Pedestrian

APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 7 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936 Eligible for LEED v4.1 credits






LAYING PATTERNS

3 UNIT RANDOM BUNDLE



BH Fixed Random B





LARGE RECTANGLE	SQUARE
380 x 570 x 60mm	380 x 380 x 60mm
15 x 22 ½ x 2 3/8"	15 x 15 x 2 3/8"
18 Units/Bundle	27 Units/Bundle
2.08 SqFt/Stone	1.39 Sq.Ft./Stone

Layer 11.66 **SQFT PER** Section Stone 1.46 9.00 Layers PER BUNDLE Sections SqFt Section SOLDIER LNFT PER Layer Bundle SqFt 0.80 Section SAILOR LNFT PER 9.35 Layer Bundle 84.15 SqFt 0.69 **UNITS PER** Section Bundle 72.00 320 Layer **LBS PER** Section Bundle 2,879

	Colors	Reflectance	Stock
	Birch	SR n/a SRI n/a	/
	Fossil	SR .22 SRI 21	/
	Granite Fusion	SR .30 SRI 32	/
Ì	Sierra	SR n/a SRI n/a	✓



SIERRA



GRANITE FUSION

SMALL RECTANGLE

380 x 190 x 60mm 15 x 7 ½ x 2 3/8" 27 Units/Bundle .69 Sq.Ft./Stone

Beacon Hill™ Flagstone 80mm





APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE


Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 4 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936 Eligible for LEED v4.1 credits







BH Fixed Random B



BH Multi-Unit Random C

Bundle Type	RANDOM
Plant Produced	OHIO
Thickness (mm)	80 mm

	Thickness (mm)	80 mm
	Bundle	73.22
	Layer	10.46
SQFT PER	Sections	-
	Stone	1.31
	Layers	7.00
PER BUNDLE	Sections	-
	SqFt	
	Sections	
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	0.85
	Sections	-
SAILOR LNFT PER	Layer	8.86
	Bundle	62.00
	SqFt	0.76
UNITS PER	Sections	-
	Bundle	56.00
	Layer	362
LBS PER	Sections	-
	Bundle	2,548

Colors	Reflectance	Stock
Birch	SR n/a SRI n/a	SO
Fossil	SR .22 SRI 21	SO
Granite Fusion	SR .30 SRI 32	SO
Sierra	SR n/a SRI n/a	SO



BIRCH



FOSSIL



SIERRA



GRANITE FUSION



LARGE RECTANGLE $360 \times 540 \times 80 mm$ 14 x 21 x 3 1/8" 14 Units/Bundle 2.09 Sq.Ft./Stone

SQUARE $360 \times 360 \times 80 mm$ 14 x 14 x 3 1/8"" 21 Units/Bundle 1.40 Sq.Ft./Stone

SMALL RECTANGLE 180 x 360 x 80mm 7 x 14 ½ x 3 ½" 21 Units/Bundle 0.70 Sq.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

LAYER CONFIGURATION

LAYING PATTERNS

3 UNIT RANDOM BUNDLE



SMALL RECTANGLE



APPLICATIONS


Pedestrian


APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits







are nominal. Contact Unilock for more information.

LAYING PATTERNS

3 UNIT RANDOM BUNDLE

XL UNIT 950 x 570 x 60mm 37½ x 22½ x 2¾" 14 Units/Bundle 5.83 Sq.Ft./Stone



380 x 190 x 60mm 15 x 71/2 x 23/8" 150 Units/Bundle

Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
Thickness (mm)	60 mm	60 mm	60 mm
Bundle	104.91	81.60	104.91
.ayer	11.66	11.66	11.66
Section	-	-	-
Stone	1.46	5.83	0.78
ayers	9.00	7.00	9.00
Sections	-	-	-
6qFt	-	0.32	0.80
Section	-	-	-
.ayer	-	3.74	9.35
Bundle	-	26.18	84.15
SqFt	0.80	0.53	1.60
Section	-	-	-
.ayer	9.35	6.23	18.70
Bundle	84.15	43.61	168.31
SqFt	0.69	0.17	1.29
Section	-	-	-
Bundle	72.00	14.00	135.00
ayer	320	320	320
Section	-	-	-
Bundle	2,879	2,239	2,879
	Plant Produced Thickness (mm) Bundle Bayer Section Bayers Bections Bundle Bection Bayer Bundle Bection Bayer Bundle Bection Bundle Bection Bayer	Plant Produced MICHIGAN Thickness (mm) 60 mm Bundle 104.91 Bayer 11.66 Section - Sections - Sections - Sections - Section - Section - Sundle - Section - Sundle 84.15 Section - Bundle 72.00 Bundle 320 Section -	Plant Produced MICHIGAN MICHIGAN Thickness (mm) 60 mm 60 mm Bundle 104.91 81.60 Bayer 11.66 11.66 Section - - Stone 1.46 5.83 Bayers 9.00 7.00 Sections - - Section - - Bundle - 0.32 Section - - Bundle - 0.53 Section - - Bundle 84.15 43.61 Section - - Bundle 72.00 14.00 Bundle 72.00 14.00 Bundle 72.00 14.00

Colors	Reflectance	Stock	Stock	Stock
Birch	SR n/a SRI 30	1	-	-
Dark Charcoal	SR n/a SRI n/a	-	-	/
Fossil	SR n/a SRI 21	✓	✓	/
Granite Fusion	SR .28 SRI 29	✓	1	/
Grindstone	SR n/a SRI n/a	✓	-	-
Oat Beige	SR n/a SRI n/a	1	-	/
Opal Blend	SR .24 SRI 24	✓	/	/



.78 Sq.Ft./Stone



BIRCH








DARK CHARCOAL



GRANITE FUSION GRINDSTONE








27 Units/Bundle

380 x 190 x 60mm 15 x 71/2 x 23/8" 27 Units/Bundle












Pedestrian

APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

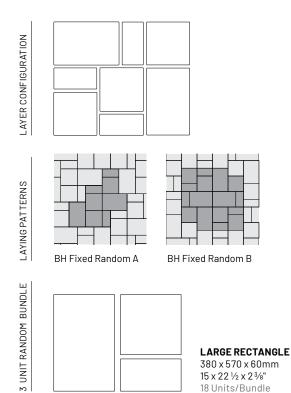

			SMALL RECTANGLE
Bundle Type		RANDOM	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	60 mm	60 mm
	Bundle	104.91	104.91
SQFT PER	Layer	11.66	11.66
SUFIFER	Section	-	-
	Stone	1.46	0.78
PER BUNDLE	Layers	9.00	9.00
PER BUNDLE	Sections	-	-
	SqFt	-	0.80
COLDIED LAIFT DED	Section	-	-
SOLDIER LNFT PER	Layer	-	9.35
	Bundle	-	84.15
	SqFt	0.80	1.60
SAILOR LNFT PER	Section	-	-
SAILOR LINFT PER	Layer	9.35	18.70
	Bundle	84.15	168.31
	SqFt	0.69	1.29
UNITS PER	Section	-	-
	Bundle	72.00	135.00
	Layer	320	320
LBS PER	Section	-	-
	Bundle	2,879	2,879
Colors	Reflectance	Stock	Stock
Oat Beige	SR n/a SRI n/a	SO	SO
Opal Blend	SR .24 SRI 24	SO	S0



S0

S0

SQUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 27 Units/Bundle

18 Units/Bundle

Platinum

SMALL RECTANGLE $380 \times 190 \times 60 \text{mm}$ 15 x 7½ x 23/8" 27 Units/Bundle

SR .30 SRI 32

SOLDSEPARATELY



SMALL RECTANGLE 380 x 190 x 60mm $15 \times 7\frac{1}{2} \times 2\frac{3}{8}$ " 150 Units/Bundle .78 Sq.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY. XL unit is produced and sold on a required refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Beacon Hill™ Smooth 80mm





APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYER CONFIGURATION		
LAYING PATTERN	BH Fixed Random A	BH Fixed Random B
3 UNIT RANDOM BUNDLE		LARG 360 x 14 1/2 x 14 Un

Bundle Type RANDO		
	MICHIGAN	
	Thickness (mm)	80 mm
	Bundle	73.22
	Layer	10.46
SQFT PER	Section	-
	Stone	1.31
	Layers	7.00
PER BUNDLE	Sections	-
	SqFt	-
001 DIED 1 NET DED	Section	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	0.85
OAN OR LINET REP	Section	-
SAILOR LNFT PER	Layer	8.86
	Bundle	62.01
	SqFt	0.76
UNITS PER	Section	-
	Bundle	56.00
	Layer	383
LBS PER	Section	-
	Bundle	2,679

Colors	Reflectance	Stock
Fossil	SR n/a SRI 21	/
Granite Fusion	SR .28 SRI 29	✓





FOSSIL

GRANITE FUSION


LARGE RECTANGLE 360 x 540 x 80mm 141/8 x 211/4 x 31/8"

14 Units/Bundle

SQUARE 360 x 360 x 80mm 14 1/8 x 14 1/8 x 3 1/8" 21 Units/Bundle

SMALL RECTANGLE 360 x 180 x 80mm $14\frac{1}{8} \times 7\frac{1}{16} \times 3\frac{1}{8}$ " 21 Units/Bundle








Pedestrian

APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits



BV Fixed Random A

LARGE RECTANGLE $380 \times 570 \times 60$ mm $15 \times 22 \frac{1}{2} \times 2\frac{3}{8}$ " 20 Units/Bundle 2.08 SqFt/Stone

BV Fixed Random B

SQUARE 380 x 380 x 60mm $15\times15\times2\,^{3}\!/\!\!\mathrm{s}"$ 30 Units/Bundle 1.39 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are

SMALL RECTANGLE 380 x 190 x 60mm $15 \times 7 \frac{1}{2} \times 2 \frac{3}{8}$ " 30 Units/Bundle .69 Sq.Ft./Stone

	Bundle Type	RANDOM
	Plant Produced	HARRISON
	Thickness (mm)	60 mm
	Bundle	116.57
2057 DED	Layer	11.66
SQFT PER	Section	-
	Stone	1.46
DED DUNDLE	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	-
	Section	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	0.80
	Section	-
SAILOR LNFT PER	Layer	9.35
	Bundle	93.50
	SqFt	0.69
UNITS PER	Section	-
	Bundle	80.00
LBS PER	Layer	311
	Section	-
	Bundle	3,113

Colors	Reflectance	Stock
Bavarian	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	1
Steel Mountain	SR n/a SRI n/a	/







BAVARIAN **FOSSIL**

STEEL MOUNTAIN

Brussels Block®



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Zero Surface Texture - Weathered Joint Spacing - 2 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

RATION		
LAYER CONFIGURATION		







Brussels Multi-Unit Random X

		HALF	STANDARD	XL
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
	Thickness (mm)	70 mm	70 mm	70 mm
	Bundle	99.79	95.94	95.94
SQFT PER	Layer	12.47	11.99	9.59
SUFIFER	Section	14.26	15.99	-
	Stone	0.20	0.40	0.80
PER BUNDLE	Layers	8.00	8.00	10.00
PER BUNDLE	Sections	7.00	6.00	-
	SqFt	1.72	1.42	0.85
SOLDIER LNFT PER	Section	24.57	22.70	-
SOLDIER LNF1 PER	Layer	21.50	17.03	8.19
	Bundle	172.00	136.22	81.90
	SqFt	2.95	1.71	1.43
SAILOR LNFT PER	Section	42.04	27.30	-
SAILOR LIFT PER	Layer	36.79	20.47	13.70
	Bundle	294.30	163.78	137.00
	SqFt	5.05	2.50	1.25
UNITS PER	Section	72.00	40.00	-
	Bundle	504.00	240.00	120.00
	Layer	399	384	307
LBS PER	Section	457	512	-
	Bundle	3,195	3,072	3,072

Colors	Reflectance	Stock	Stock	Stock
Charcoal	SR n/a SRI n/a	/	-	-
Limestone	SR .28 SRI 29	/	✓	/
Mahogany Ash	SR n/a SRI n/a	/	✓	/
Coffee Creek	SR n/a SRI n/a	/	✓	/
Sandstone	SR .41 SRI 46	/	✓	/
Sierra	SR n/a SRI n/a	✓	1	1



CHARCOAL



LIMESTONE



MAHOGANY ASH



COFFEE CREEK

COPING

LAYING PATTERNS

SINGLE UNITS

FULLNOSE COPING 150 x 300 x 70mm 5 1/8 x 11 1/8 x 2 3/8"

HALF 104 x 1

104 x 173 x 70mm 4 1/8 x 6 7/8 x 2 3/4" 504 Units/Bundle .20 Sq.Ft./Stone



173 x 208 x 70mm 67% x 81/4 x 23/4" 240 Units/Bundle .40 Sq.Ft./Stone



208 x 348 x 70mm 8½ x 13¾ x 2¾" 120 Units/Bundle .80 Sq.Ft./Stone




SANDSTONE



SIERRA







Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - n/a Surface Texture - Textured Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	Bundle Type	SINGLE
	Plant Produced	AYR
	Thickness (mm)	60 mm
	Bundle	89.20
	Layer	11.15
SQFT PER	Section	-
	Stone	0.15
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	1.43
	Section	-
SOLDIER LNFT PER	Layer	15.99
	Bundle	127.95
	SqFt	4.41
	Section	-
SAILOR LNFT PER	Layer	49.21
	Bundle	393.70
	SqFt	6.73
UNITS PER	Section	-
	Bundle	600.00
	Layer	294
LBS PER	Section	
LDO I LIK	Bundle	2,349

Colors	Reflectance	Stock
Arctic Grey	SR n/a SRI n/a	✓
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓
Steel Blue	SR n/a SRI n/a	✓









BURGUNDY RED



BURNT CLAY

STEEL BLUE









3 COLOR BLEND

OLD OAK



BASALT 3 COLOR GREY BLEND Blended on Site

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.







Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 15 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	Bundle Type	RANDOM
	Plant Produced	AYR
	Thickness (mm)	60 mm
	Bundle	98.30
		12.29
SQFT PER	Layer	12.29
	Sections	-
	Stone	-
DED DUNDLE	Layers	8.00
PER BUNDLE	Sections	-
	SgFt	_
	Sections	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	2.25
SAILOR LNFT PER	Sections	-
O/ II ZOTY ZITI T T ZITY	Layer	27.69
	Bundle	221.52
	SqFt	3.91
UNITS PER	Sections	-
	Bundle	384.00
	Layer	291
LBS PER	Sections	-
LDOFEN	Bundle	2,326

Colors	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓ /
Belgian Blue	SR n/a SRI n/a	S0
Basalt / Belgian Blue	SR n/a SRI n/a	S0
Dawn Mist	SR n/a SRI n/a	S0
Pebble Taupe	SR n/a SRI n/a	S0



Random A

LAYING PATTERNS

RANDOM BUNDLE

5 UNIT



BASALT



BELGIAN BLUE



BASALT

BELGIAN BLUE

Blended on Site








DAWN MIST PEE

PEBBLE TAUPE DAWN MIST
PEBBLE TAUPE
Blended on Site



XL RECTANGLE 215 x 130 x 60mm 8 % x 5 % x 2 %" 128 Units/Bundle .30 SqFt/Stone

LARGE RECTANGLE185 x 130 x 60mm
7¼ x 5½ x 2¾"
64 Units/Bundle
.28 SqFt/Stone


RECTANGLE165 x 130 x 60mm
6½ x 5⅓ x 2¾"
64 Units/Bundle
.23 SqFt/Stone

SMALL RECTANGLE 145 x 130 x 60mm 5 34 x 5 1/8 x 2 3/8" 64 Units/Bundle .20 SqFt/Stone

SQUARE130 x 130 x 60mm
51/8 x 51/8 x 23/8"
64 Units/Bundle
.18 SqFt/Stone

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.









Pedestrian, Light Vehicular, Permeable

APPEARANCE

Edge Detail Umbriano - Rounded Surface Texture - Umbriano Joint Spacing - 2 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1

LAYER CONFIGURATION	
ゴ	



Hex Paver A

\vdash	ı
=	ı
5	ı
ш	ı
_	ı
9	ı
=	ı
S	1

LAYING PATTERNS



200 x 200 x 60mm 7 1/8 x 7 1/8 x 2 3/8" 216 Units/Bundle .45 SqFt/Stone



		8 x 8
	Bundle Type	SINGLE
	Plant Produced	MARENGO
	Thickness (mm)	60 mm
	Bundle	108.31
SQFT PER	Layer	10.83
SQF1 PER	Sections	-
	Stone	0.45
PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	-
SOLDIER	Sections	-
LNFT PER	Layer	-
	Bundle	-
	SqFt	-
SAILOR	Sections	-
LNFT PER	Layer	-
	Bundle	-
	SqFt	2.22
UNITS PER	Layer	24
	Bundle	240.00
	Layer	276
LBS PER	Sections	-
	Bundle	2,762

Colors	Reflectance	Stock
French Grey	SR .18 SRI 17	SO
Midnight Sky	SR .17 SRI 15	SO
Winter Marvel	SR .35 SRI 38	SO







FRENCH GREY

MIDNIGHT SKY

WINTER MARVEL

Eco-Priora[™]





APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty , Permeable

APPEARANCE

LAYER CONFIGURATION

LAYING PATTERNS

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 7mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

EcoPriora 5x10 RB

		5 40
		5 x 10
Bundle Type		SINGLE
	Plant Produced	MICHIGAN
	Thickness (mm)	80 mm
	Bundle	75.95
	Layer	10.85
SQFT PER	Section	-
	Stone	0.31
	Layers	7.00
PER BUNDLE	Sections	7.00
	COULDING	
	SqFt	1.27
SOLDIER LNFT PER	Section	-
SOLDIER LNFT PER	Layer	13.78
	Bundle	96.46
	CaEt	2.54
	SqFt Section	2.54
SAILOR LNFT PER		07.50
	Layer	27.56
	Bundle	192.91
	SqFt	3.23
UNITS PER	Section	-
	Bundle	245.00
	Layer	397
LBS PER	Section	-
	Bundle	2,778

Colors	Reflectance	Stock
Beechwood	SR .n/a SRI n/a	1



BEECHWOOD

Eco-Priora[™] Premier







APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty, Permeable

APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 7mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

EcoPriora 5x10 RB	EcoPriora 5x10 HB

SINGLE UNITS	5 x 10 120 x 240 x 80mm 4 3/4 x 9 1/2 x 3 1/8 245 Units/Bundle
$\overline{\circ}$.31 Sq.Ft./Stone

		5 x 10
Bundle Type		SINGLE
	Plant Produced	MICHIGAN
	Thickness (mm)	80 mm
	Bundle	75.95
	Lover	10.05

	Bundle	75.95
SQFT PER	Layer	10.85
JUFIFER	Section	-
	Stone	0.31

PER BUNDLE	Layers	7.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	1.27
	Section	-
	Layer	13.78
	Bundle	96.46

SAILOR LNFT PER	SqFt	2.54
	Section	-
	Layer	27.56
	Bundle	192.91

UNITS PER	SqFt	3.23
	Section	-
	Bundle	245.00

	Layer	397
LBS PER	Section	-
	Bundle	2,778

Colors	Reflectance	Stock
Fossil	SR .n/a SRI n/a	✓
Granite Fusion	SR .n/a SRI n/a	✓





FOSSIL

GRANITE

LAYING PATTERNS









Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded Surface Texture - Shot Blasted Joint Spacing - n/a

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	Bundle Type	SINGLE
Bundle Type		SINGEL
Plant Produced		ONTARIO
	Thickness (mm)	80 mm
	Bundle	81.37
SQFT PER	Layer	11.63
SUFIFER	Section	-
	Stone	0.32
PER BUNDLE	Layers	7.00
PER BUNDLE	Sections	-
	SqFt	3.00
SOLDIER LNFT PER	Section	-
SOLDIER LINFT PER	Layer	11.81
	Bundle	82.67
	SqFt	0.32
SAILOR LNFT PER	Section	-
SAILOR LINFT PER	Layer	35.43
	Bundle	248.03
	SqFt	3.09
UNITS PER	Layer	36
	Bundle	252
	Layer	360
LBS PER	Section	-
	Bundle	2,516


Colors	Reflectance	Stock
Light Opal Blend	SR n/a SRI n/a	S0
Light Steel Gray	SR n/a SRI n/a	S0





LIGHT OPAL BLEND

LIGHT STEEL GRAY



4x12 RB



Eco-Promenade 4x12 HB

SINGLE UNIT

LAYING PATTERNS



4 x 12 100 x 300 x 80mm 3 1/8 x 11 1/8 x 3 1/8" 252 units/Bundle .32 Sq.Ft./Stone

Eco-Promenade® Series







APPLICATIONS


Pedestrian, Light Vehicular, Permeable

APPEARANCE

Edge Detail - Micro Surface Texture - Series Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits



3 x 12 PERMEABLE
100 x 300 x 80mm
3 1/8 x 11 1/8 x 3 1/8"
21 Units/Bundle
0.70 Sq.Ft./Stone

UNILOCK

	3 x 12
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	80 mm

	Bundle	93.04
SQFT PER	Layer	11.63
SQFIPER	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

	SqFt	1.02
COLDIED I NET DED	Section	-
SOLDIER LNFT PER	Layer	11.81
	Bundle	94.49

	SqFt	3.05
SAILOR LNFT PER	Section	-
SAILOR LINFT PER	Layer	35.43
	Bundle	283.46

	SqFt	3.10
UNITS PER	Section	-
	Bundle	288.00

	Layer	426
LBS PER	Section	-
	Bundle	3,404

Colors	Reflectance	Stock
Arctic Grey	SR n/a SRI n/a	SO
Nordic Star	SR n/a SRI n/a	SO





ARCTIC GREY

NORDIC STAR

LAYING PATTERN










Pedestrian, Light Vehicular, Permeable

APPEARANCE

Edge Detail - Micro Surface Texture - Umbriano Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits



\vdash	
Z	
\supset	
щ	
9	

3 x 12 100 x 300 x 80mm 31/8 x 11 1/8 x 3 1/8" 288 Units/Bundle

surfaces. All measurements are nominal. Contact Unilock for more information.

		3 x 12
Bundle Type Plant Produced		SINGLE
		MARENGO
	Thickness (mm)	80 mm
	Bundle	93.04
	Layer	11.63
SQFT PER	Section	-
	Stone	0.32
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	1.02
	Section	1.02
SOLDIER LNFT PER	Layer	11.81
	Bundle	94.49
	Bullule	34.43
	SqFt	3.05
SAILOR LNFT PER	Section	-
SAILOR ENT I FER	Layer	35.43
	Bundle	283.46
	SqFt	3.10
UNITS PER	Section	-
	Bundle	288.00
	Layer	426
LBS PER	Section	-
l	Bundle	3,404
Colors	Reflectance	Stock

Colors	Reflectance	Stock	
French Grey	SR .n/a SRI n/a	S0	
Midnight Sky	SR .n/a SRI n/a	S0	
Winter Marvel	SR .n/a SRI n/a	S0	








FRENCH GREY

Notes: Special Order (SO). Minimum quantities apply, Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured

MIDNIGHT SKY

WINTER MARVEL







Pedestrian


APPEARANCE

Edge Detail - Rounded Surface Texture - Granito Textured Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

|--|--|--|







Granito Hex Paver A

		HEX
Bundle Type	RANDOM	SINGLE
Plant Produced	PICKERING	PICKERING
Thickness (mm)	60 mm	70 mm
Bundle	94.14	73.92
 Layer	10.46	9.24

	Duriule	34.14	13.92
SQFT PER	Layer	10.46	9.24
Section Stone	Section	-	-
	Stone	-	2.6

PER BUNDLE	Layers	9.00	8.00
PER BUNDLE	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-
•			

		SqFt	0.85	-
	SAILOR LNFT PER	Section	-	-
	SAILOR LINFT PER	Layer	8.86	-
		Bundle	79.72	-

	SqFt	-	0.39
UNITS PER	Section	-	-
	Bundle	72.00	192.00

	Layer	287	306.24
LBS PER	Section	-	-
	Bundle	2,583	2,450

Colors	Reflectance	Stock	Stock
Notte	SR n/a SRI n/a	S0	S0
Sabia	SR n/a SRI n/a	S0	S0
Scuro	SR n/a SRI n/a	S0	S0













NOTTE

SINGLE UNIT

SCURO

SABIA

3-UNIT RANDOM BUNDLE

LAYING PATTERN

LAYER CONFIGURATION



SMALL RECTANGLE 180 x 360 x 60mm 7 x 14 ½ x 2 3/8" 27 Units/Bundle

SQUARE 360 x 360 x 60mm 14 1/4 x 14 1/4 x 2 3/8" 27 Units/Bundle

LARGE RECTANGLE 360 x 540 x 60mm 14 ½ x 21 ½ x 2 3/8" 18 Units/Bundle



HEX $200 \times 200 \times 70 mm$ 71/8 x 7 1/8 x 23/4" 192 Units/Bundle .42 Sq.Ft./Stone

(Note:Only Hex is drive friendly)

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.





Pedestrian, Light Vehicular

APPEARANCE


Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYER CONFIGURATION				_ < < <

LAYING PATTERNS



Hex Paver A

SINGLE UNIT



8 x 8 200 x 200 x 70mm 7 % x 7 % x 2 ¾" 192 Units/Bundle .42 Sq.Ft./Stone

	8 x 8
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	70 mm
Dundle	72.00

SQFT PER	Bundle	73.92
	Layer	9.24
	Section	-
	Stone	0.39

PER BUNDLE	Layers	8.00	
PER BUNDLE	Sections	_	

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

	SqFt	-
SAILOR LNFT PER	Section	-
SAILOR LINFT PER	Layer	-
	Bundle	-

	SqFt	2.60
UNITS PER	Section	-
	Bundle	192.00

	Layer	306
LBS PER	Section	-
	Bundle	2,450

Colors	Reflectance	Stock
Dark Charcoal	SR .n/a SRI n/a	✓
Granite Fusion	SR .n/a SRI n/a	/





DARK CHARCOAL

GRANITE FUSION

Holland Premier[™]



4.58

81.00

486.00

324

486

2,914



APPLICATIONS


Pedestrian, Light Vehicular, Borders and accents

APPEARANCE


Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits







HollandPremier 4x8 RB

HollandPremier 4x8 BW

LIN∩		
NGLE		
$\overline{\circ}$		

4 x 8 100 x 200 x 60mm 3 1/8 x 7 1/8 x 2 3/8" 486 Units/Bundle .22 Sq.Ft./Stone

		4 x 8		
Bundle Type		SINGLE		
	Plant Produced	MICHIGAN		
	Thickness (mm)	60 mm		
	Bundle	106.20		
	Layer	11.80		
SQFT PER	Section	17.70		
	Stone	0.22		
PER BUNDLE	Layers	9.00		
-	Sections	6.00		
	SqFt	1.50		
COLDIED LAIET DED	Section	26.57		
SOLDIER LNFT PER	Layer	17.72		
	Bundle	159.45		
0.51				
	SqFt Section	3.00 53.15		
SAILOR LNFT PER				
	Layer	35.43		
	Bundle	318.90		

Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Charleston	SR n/a SRI n/a	/
Fossil	SR .22 SRI 21	/
Granite Fusion	SR n/a SRI n/a	✓
Indiana Buff	SR n/a SRI n/a	✓

SqFt

Section

Bundle

Layer

Section

Bundle

UNITS PER

LBS PER



LAYER CONFIGURATION

LAYING PATTERNS

Hollandstone™



APPLICATIONS

Pedestrian, Light Vehicular

80mm only: Roadway Street, Heavy-duty

APPEARANCE


Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYER CONFIGURATION

LAYING PATTERNS



Hollandstone 4x8 RB



4 x 8
100 x 200 x 80mm
31/8 x 71/8 x 31/8"
378 Units/Bundle
22 Sa Et /Stone

Hollandstone 4x8 HB

(Note: Only 80mm is Roadway Street and Heavy Duty application)

		4 x 8	4 x 8
	Bundle Type	SINGLE	SINGLE
	Plant Produced	MICHIGAN	MICHIGAN
	Thickness (mm)	60 mm	80 mm
	Bundle	106.20	82.60
0057 050	Layer	11.80	11.80
SQFT PER	Section	17.70	13.77
	Stone	0.22	0.22
	Layers	9.00	7.00
PER BUNDLE	Sections	6.00	6.00
	SqFt	1.50	1.50
	Section	26.57	20.67
SOLDIER LNFT PER	Layer	17.72	17.71
	Bundle	159.45	124.00
	0.5	0.00	
	SqFt	3.00	-
SAILOR LNFT PER	Section	53.15	-
	Layer	35.43	-
	Bundle	318.90	-
	SqFt	4.58	4.58
UNITS PER	Section	81.00	63.00
	Bundle	486.00	378.00
	Layer	324	426
LBS PER	Section	486	497
	Bundle	2,914	2,985

Colors	Reflectance	Stock	Stock
Beechwood	SR n/a SRI n/a	/	SO
Rustic Red	SR n/a SRI n/a	/	SO
Terra Cotta	SR n/a SRI n/a	/	SO







RUSTIC RED **BEECHWOOD**

TERRA COTTA



4 x 8



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Border/Accents

APPEARANCE

Edge Detail - Rounded Surface Texture - II Campo® Brushed Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		BRUSHED
	Bundle Type	SINGLE
Plant Produced		PICKERING
	Thickness (mm)	70 mm
	T	
	Bundle	94.40
SQFT PER	Layer	11.80
JULITER	Section	15.73
	Stone	0.22
	1	0.00
PER BUNDLE	Layers	8.00
l	Sections	6.00
	SqFt	1.50
SOLDIER LNFT PER	Section	23.62
SOLDIER LINFT PER	Layer	17.72
	Bundle	141.73
	054	2.00
	SqFt	3.00
SAILOR LNFT PER	Section	47.24
	Layer	35.43
	Bundle	283.46
	SqFt	4.58
	· ·	

	Bundle	3,014
Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	1

Section

Bundle

Layer

Section



72.00


432.00

377

502

DARK CHARCOAL

			_
\Box	$\overline{}$		L
			1
			+
			+
	\top		+
			+
	T'T	_	+
			+



IICampo 4x8 RB

IICampo 4x8 SB

SINGLE UNIT

4 x 8 100 x 200 x 70mm 3% x 7% x 2 3/4" 432 Units/Bundle .22 Sq.Ft./Stone **UNITS PER**

LBS PER

LAYING PATTERNS





Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Zero Surface Texture - Timeworn Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		$\overline{}$	
		=	=
		$\overline{}$	
		=	
		=	
	\equiv	$\overline{}$	
		$\overline{}$	

LAYER CONFIGURATION

LAYING PATTERNS

Mattoni DHB	Mattoni HB

3	Mattoni HB	Mattoni RB

	STANDARD SMOOTH
Bundle Type	SINGLE
Plant Produced	AURORA
Thickness (mm)	60 mm

	60 mm	
	D dla	444.00
	Bundle	111.60
SQFT PER	Layer	11.16
	Section	-
	Stone	0.16
PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	1.27
SOLDIER LNFT PER	Section	-
SOLDIER LINFT PER	Layer	14.17
	Bundle	141.73
	SqFt	5.08
SAILOR LNFT PER	Section	-
SAILOR LNF1 PER	Layer	56.69
	Bundle	566.93
	SqFt	6.45
UNITS PER	Section	-
	Bundle	720.00
	Layer	306
LBS PER	Section	-
	Bundle	3,063

Colors	Reflectance	Stock
Cocoa Brown	SR n/a SRI n/a	/
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	/
Sable Blend	SR n/a SRI n/a	✓





COCOA BROWN

DARK CHARCOAL





GRANITE FUSION

SABLE BLEND

STANDARD

60 x 240 x 60mm $2 \frac{3}{8} \times 9 \frac{1}{2} \times 2 \frac{3}{8}$ " 720 Units/Bundle






Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Sawn Surface Texture - Brushed / Riven Joint Spacing - 10 mm

TECHNICAL INFORMATION

Visit Unilock.com for more information.



Multi-Unit Multi-Uni				
	12 x 24 290 x 590 x 22mm			

11 ½ x 23 ¼ x 1/8"

24 x 36 590 x 890 x 22mm 23 ½ x 35 x ½"



18 x 24

440 x 590 x 22mm $17\frac{3}{8} \times 23\frac{1}{4} \times \frac{7}{8}$ "



24 x 24 590 x 590 x 22mm $23 \frac{1}{4} \times 23 \frac{1}{4} \times \frac{7}{8}$ "

SANDSTONE		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 mm	22 mm	22 mm	22 mm
SQFT PER	Crate	180.00	186.00	160.00	180.00
JUFIFER	Units	2.00	3.00	4.00	6.00
UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17
LBS PER	Unit	24	36	48	72
	Crate	2,033	2,136	1,836	2,072

Colors	Reflectance	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	S0	80	S0	S0
Greyfield	SR .32 SRI 35	S0	S0	S0	S0
Stone Cliff Grey	SR .27 SRI 28	S0	S0	SO	S0

LIMESTONE		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 mm	22 mm	22 mm	22 mm
SQFT PER	Crate	180.00	186.00	160.00	180.00
SQFT PER	Units	2.00	3.00	4.00	6.00
\	·				
UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17
LBS PER	Unit	24	36	48	72
	Crate	2,033	2,136	1,836	2,072

Colors	Reflectance	Stock	Stock	Stock	Stock
Black River	SR .08 SRI 4	/	/	/	/
Hearthstone	SR .20 SRI 20	1	/	1	/

CASCADE





GREYFIELD STONE CLIFF GREY





HEARTHSTONE **BLACK RIVER**

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL CRATES ONLY and all units except the 24x24" require a refundable skid. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

SINGLE UNITS

LAYING PATTERNS



Pedestrian

APPEARANCE

Edge Detail - Sawn Surface Texture - Natural Finish Joint Spacing - 10 mm

TECHNICAL INFORMATION

Visit Unilock.com for more information.

<u> </u>
NaturalStone Fixed RB

LAYING PATTERNS

4 UNIT RANDOM

24 x 24 590 x 590 x 38mm 23 ½ x 23 ½ x 1½"

18 x 24 440 x 590 x 38mm 17 ³/₈ x 23 ¹/₄ x 1 ¹/₂" **24 x 36** 590 x 890 x 38mm 23 ½ x 35 x 1½"

Hearthstone

12 x 24 290 x 590 x 38mm 11 ½x 23 ¼ x 1½

SANDSTONE		4 PC BUNDLE				
	Bundle Type					
	Thickness (mm)	38 mm				
	Crate	120.00				
SQFT PER	Units	-				
	Crate	32.00				
UNITS PER	SqFt	-				
	Unit	73				
LBS PER	Bundle	2,515				
Colors	Reflectance	Stock				
Stone Cliff Grey	SR .27 SRI 28	SO				

LIMESTONE		4 PC BUNDLE				
	Bundle Type					
	38 mm					
OOET DED	Crate	120.00				
SQFT PER	Units	-				
LIMITO DED	Crate	32				
UNITS PER	SqFt	-				
	Unit	73				
LBS PER	Bundle	2,315				
Colors	Reflectance	Stock				



SR n/a SRI n/a



S0

STONE CLIFF GREY

HEARTHSTONE



Wall Coping, Pool Coping, Steps Treads









CASCADE

GREYFIELD

STONE CLIFF GREY

BLACK RIVER

SANDSTONE		48 x 12 FULLNOSE COPING	48 x 12 STRAIGHT EDGE COPING	48 x 12 ROCKFACE COPING	48 x 14 FULLNOSE COPING	48 x 14 STRAIGHT COPING	48 x 14 ROCKFACE COPING
Bundle Type		SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)		50 mm	50 mm	50 mm	50 mm	50 mm	50 mm
UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00	16.00
UNITS PER	SqFt	4.00	4.00	4.00	4.67	4.67	4.67
LBS PER	Unit	101	97	106	117	117	113
	Crate	2,028	1,927	2,116	2,560	2,247	2,258

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	S0	SO	SO	SO	SO	S0
Greyfield	SR n/a SRI n/a	SO	S0	SO	SO	SO	S0
Stone Cliff Grey	SR n/a SRI n/a	1	✓	✓	✓	✓	/

LIMESTONE		48 x 12 FULLNOSE COPING	48 x 12 STRAIGHT EDGE COPING	48 x 12 ROCKFACE COPING	48 x 14 FULLNOSE COPING	48 x 14 STRAIGHT COPING	48 x 14 ROCKFACE COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm
UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00	20.00
UNITS PER	SqFt	4.00	4.00	4.00	4.67	4.67	4.67
LBS PER	Unit	112	112	112	130	130	130
	Crate	2,222	2,222	2,222	2,593	2,593	2,593


Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	1	✓	/	1	1



48 x 12 1,200 x 300 x 50mm 47 ½ x 11 % x 2"



48 x 14 1,200 x 355 x 50mm 47 ½ x 14 x 2"



Notes: Special Order (SO). Minimum quantities apply. Lead time required. Steps, Coping & Pillar Caps require a refundable skid. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



Wall Coping, Pool Coping, Steps Treads









CASCADE

GREYFIELD

STONE CLIFF GREY

BLACK RIVER

		91.	007.122	0.0	02 02.	011111211
SANDSTONE		28 x 14 FULLNOSE CORNER / COPING	28 x 14 STRAIGHT CORNER / COPING	24 x 12 FULLNOSE CORNER / COPING	24 x 12 STRAIGHT CORNER / COPING	24 x 24 INSERT COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm
				T		
UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00
UNITOFER	SqFt	4.67	4.67	3.0	3.0	4.67
1 DO DED	Unit	113	113	91	91	106
LBS PER	Crate	2,249	2,249	1,808	1,808	2,120
Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	S0	S0	S0	S0	S0
Greyfield	SR n/a SRI n/a	SO	S0	S0	S0	SO
Stone Cliff Cray	CD n/o CDI n/o					

Stone Cliff Grey SR n/a SRI n/a		1	1	-	-	-
LIMESTONE		28 x 14 FULLNOSE CORNER / COPING	28 x 14 STRAIGHT CORNER / COPING	24 x 12 FULLNOSE CORNER / COPING	24 x 12 STRAIGHT CORNER / COPING	24 x 24 INSERT COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)		50 mm	50 mm	50 mm	50 mm
UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00
UNITS FER	SqFt	4.08	4.08	3.0	3.0	4.0
I DC DED	Unit	117	117	84	84	90
LBS PER	Crate	2,237	2,237	1,676	1,676	1,800

Colors		Reflectance	Stock	Stock	Stock	Stock	Stock
Black Riv	/er	SR n/a SRI n/a	✓	✓	-	-	-

INSERT COPING


Insert coping is ideal for those retractable pool covers. Allowing easy access while keeping a continuous look and feel.




24 x 24 600 x 600 x 50mm 24 x 24 x 2"

CORNER COPING

Corner coping provides seamless 90° corners for pool, walls and so much



28 x 14 710 x 355 x 50mm 28 x 14 x 2"



24 x 12 $600 \times 300 \times 50 mm$ 23 5/8 x 11 7/8 x 2"

STRAIGHT EDGE



Notes: Special Order (SO). Minimum quantities apply. Lead time required. Steps, Coping & Pillar Caps require a refundable skid. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

EDGE DETAIL



APPLICATIONS

Steps, Pillar

TECHNICAL INFORMATION

Visit Unilock.com for more information.





GREYFIELD





STONE CLIFF GREY


BLACK RIVER

SANDSTONE		24 x 24 PILLAR CAP	28 x 28 PILLAR CAP	48 x 16 STEP
Bundle Type		SINGLE	SINGLE	SINGLE
	Thickness (mm)	65 mm	65 mm	150 mm
	Crate	28.00	28.00	24.00
LNFT PER	Unit	2.33	2.33	4.00
UNITS PER Crate		14.00	12.00	6.00
I DO DED	Unit	143	199	421
LBS PER	Crate	1,991	2,385	2,526


Colors	Reflectance	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	SO	SO	S0
Greyfield	SR n/a SRI n/a	S0	S0	SO
Stone Cliff Grey	SR n/a SRI n/a	1	1	1

LIMESTONE		24 x 24 PILLAR CAP	28 x 28 PILLAR CAP	48 x 16 STEP
	Bundle Type	SINGLE	SINGLE	SINGLE
	Thickness (mm)	65 mm	65 mm	150 mm
LNFT PER	Crate	28.00	28.00	24.00
LNFIPER	Unit	2.33	2.33	4.00
UNITS PER	Crate	14.00	12.00	6.00
LBS PER	Unit	143	207	421
LDS PER	Crate	1,995	2,480	2,526


Colors	Reflectance	Stock	Stock	Stock
Black River	SR n/a SRI n/a	1	1	✓




24 x 24 600 x 600 x 64mm 23 5/8 x 23 5/8 x 25/8"



28 x 28 710 x 710 x 64mm 28 x 28 x 2⁵/₈"



48 x 16 1,200 x 400 x 150mm 47 ½ x 15 ³⁄₄ x 5 ⁷⁄₈"



Notes: Special Order (SO). Minimum quantities apply. Lead time required. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

PILLAR CAPS



Pedestrian, Roof Deck

APPEARANCE


LAYING PATTERNS

SINGLE UNITS

Edge Detail - Zero Surface Texture - Brushed / Riven Joint Spacing - 10 mm

TECHNICAL INFORMATION

Visit Unilock.com for more information.



SANDSTONE		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 mm	22 mm	22 mm	22 mm
SQFT PER	Crate	180.00	186.00	160.00	180.00
SQFIFER	Units	2.00	3.00	4.00	6.00
UNITS PER	Crate	90.00	62.00	40.00	30.00
UNITS PER	SqFt	0.50	0.33	0.25	0.17
I DO DED	Unit	24	36	48	72
LBS PER	Crate	2,149	2,221	1,910	2,149

Colors	Reflectance	Stock	Stock	Stock	Stock
Golden Sand	SR n/a SRI n/a	✓	✓	/	1
Ivory Sand	SR n/a SRI n/a	✓	✓	/	1
Stone Cliff Gray	SR n/a SRI n/a	✓	✓	✓	/

LIMESTONE		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 mm	22 mm	22 mm	22 mm
SQFT PER	Crate	180.00	186.00	160.00	180.00
SQFIPER	Units	2.00	3.00	4.00	6.00
UNITS PER	Crate	90.00	62.00	40.00	30.00
UNITS PER	SqFt	0.50	0.33	0.25	0.17
LBS PER	Unit	24	36	48	72
LDS PER	Crate	2,149	2,221	1,910	2,149

Colors	Reflectance	Stock	Stock	Stock	Stock	
Black River	SR n/a SRI n/a	/	/	1	/	







GOLDEN SAND

IVORY SAND

STONE CLIFF GREY

12 x 24 300 x 600 x 22mm 11 % x 23 5% x 7%" 2.0 Sq.Ft./Unit

24 x 36

600 x 900 x 22mm

 $23 \frac{5}{8} \times 35 \frac{1}{2} \times \frac{7}{8}$ "

6.0 Sq.Ft./Unit

18 x 24 450 x 600 x 22mm 17 ³/₄ x 23 ⁵/₈ x ⁷/₈" 3.0 Sq.Ft./Unit



24 x 24 600 x 600 x 22mm 23 ⁵/₈ x 23 ⁵/₈ x ⁷/₈" 4.0 Sq.Ft./Unit



BLACK RIVER

Notes: SOLD IN FULL CRATES ONLY. Natural Stone is available for purchase by Unilock Authorized Dealers only. Unilock offers adjustable and stackable pedestal system; please contat your Territory Manager for pricing and availability. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone. **Important:** Natural Stone is covered under Unilock's Transferable Lifetime Guarantee. All measurement are nominal. **Product is not intended for vehicular applications.**



APPLICATIONSWall Coping, Pool Coping, Steps Treads

SANDSTONE		48 x 14 FULLNOSE COPING	48 x 12 FULLNOSE COPING	48 x 12 ROCKFACE COPING	48 x 14 ROCKFACE COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm
UNITS PER	Crate	20.00	20.00	20.00	20.00
UNITS PER	SqFt	-	-	-	-
LBS PER	Unit	-	-	-	-
	Crate	2,557	2,116	2,116	2,557

Colors	Reflectance	Stock	Stock	Stock	Stock
Golden Sand	SR n/a SRI n/a	/	/	1	/
Ivory Sand	SR n/a SRI n/a	/	/	1	/
Stone Cliff Gray	SR n/a SRI n/a	✓	1	/	/
Black River	SR n/a SRI n/a	/	1	1	✓

LIMESTONE		48 x 14 FULLNOSE COPING	48 x 12 FULLNOSE COPING	48 x 12 NATURAL EDGE COPING	48 x 14 NATURAL EDGE COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm
UNITS PER	Crate	20.00	20.00	20.00	20.00
UNITS PER	SqFt	-	-	-	-
LBS PER	Unit	-	-	-	-
	Crate	2,557	2,116	2,116	2,557

Colors	Reflectance	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	1	/	/	/









GOLDEN SAND

IVORY SAND


SAND STO

STONE CLIFF GREY


BLACK RIVER



1,200 x 300 x 50mm



48 x 14 1,200 x 356 x 50mm 47 ½ x 13 % x 2"



Notes: Steps, Coping & Pillar Caps require a refundable skid. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



Steps, Pillar

TECHNICAL INFORMATION

Visit Unilock.com for more information.

SANDSTONE LIMESTONE		48 x 16 STEP
	Bundle Type	SINGLE
	Thickness (mm)	150 mm
FCFT PER	Crate	32.00
LNFT PER	Crate	24.00
UNITS PER	Crate	6.00
LBS PER	Bundle	2,526
Colors	Reflectance	Stock
Black River	SR n/a SRI n/a	✓

SANDSTONE		24 x 24 PILLAR CAP	28 x 28 PILLAR CAP
Bundle Type		SINGLE	SINGLE
Thickness (mm)		65 mm	65 mm
UNITS PER	Crate	14.00	12.00
	SqFt	-	-
LBS PER	Unit	137	210
LDS PER	Bundle	1,914	2,514

Colors	Reflectance	Stock	Stock
Golden Sand	SR n/a SRI n/a	/	-
Ivory Sand	SR n/a SRI n/a	✓	-
Stone Cliff Grey	SR n/a SRI n/a	/	✓

LIMESTONE		24 x 24 PILLAR CAP	28 x 28 PILLAR CAP
	Bundle Type	SINGLE	SINGLE
	Thickness (mm)	65 mm	65 mm
UNITS PER	Crate	14.00	12.00
	SqFt	-	-
LBS PER	Unit	137	210
	Bundle	1,914	2,514
Colors	Reflectance	Stock	Stock



SR n/a SRI n/a






GOLDEN SAND

IVORY SAND


STONE CLIFF GREY




BLACK RIVER



48 x 16 1,200 x 400 x 150mm 47 ½ x 15 ¾ x 5 ½"



24 x 24 600 x 600 x 65mm 23 5/8 x 23 5/8 x 2 5/8"



28 x 28 711 x 711 x 65mm 28 x 28 x 2 5/8"

Black River

PILLAR CAPS







Pedestrian, Light Vehicular, Roadway Street, Heavy-duty, Permeable


APPEARANCE

Edge Detail - Zero Surface Texture - Cobble

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


	ı
NO	
$\stackrel{\square}{=}$	
⋖	
L H	
F1G	
Z	
00	
22	
Ϋ́E	
⋖	



S	
ERN	
E	
PA	
NG	
۸۲	









NordicCobble_Fan

NordicCobble_Circle

NordicCobble_A



		STANDARD
Bundle Type		SINGLE
Plant Produced		CHICAGO
	Thickness (mm)	60 mm
	Bundle	98.25
	Layer	98.23
SQFT PER	Section	3.02
	Stone	0.09
PER BUNDLE	Layers	10.00
T EIN BONDLE	Sections	-
	SqFt	3.39
	Section	_
SOLDIER LNFT PER	Layer	33.30
	Bundle	333.07
	0.5	1
	SqFt	-
SAILOR LNFT PER	Section	-
	Layer	-
	Bundle	-
	SqFt	10.99
UNITS PER	Section	-
	Bundle	1,080
	Lover	230.10
L DO DED	Layer	230.10
LBS PER	Section	-
	Bundle	2,301

Colors	Reflectance	Stock
Granite Fusion	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Opal Blend	SR n/a SRI n/a	✓





GRANITE FUSION

DARK CHARCOAL



OPAL BLEND





SINGLE UNITS





APPLICATIONS

NATURE

CARRARA

NEW ENGLAND

WHITE

NEW ENGLAND

IVORY

Pedestrian, Roof Deck


TECHNICAL INFORMATION

Visit Unilock.com for more information.



		24 x 24 PRESSED EDGE
	Bundle Type	SINGLE
	Thickness (mm)	20 mm
	Pallet	248.00
SQFT PER	Вох	7.75
	Unit	3.88
	Вох	32.00
PER PALLET	SqFt	248.00
	Unit	64.00
UNITS PER	Pallet	64.00
UNITS PER	Вох	2.00
	Unit	36
LBS PER	SqFt	9
LB3 PEK	Box	72
	Pallet	2,289

Colors	Reflectance	Stock
Chamonix Beige	n/a	S0
Chamonix Bianco	n/a	80
Chamonix Dark Gray	n/a	S0
Chamonix Gray	n/a	S0
Gotham Bianco	n/a	S0
Gotham Gray	n/a	S0
Gotham Nero	n/a	S0
Travstone Beige	n/a	S0
Travstone Gray	n/a	80
West 57th Bianco	n/a	S0
West 57th Gray	n/a	SO
Essential White	n/a	S0
Essential Gray	n/a	S0
Essential Graphite	n/a	S0
Essential Beige	n/a	S0
Nature Dolomite	n/a	S0
Nature Carrara	n/a	S0
New England White	n/a	S0
New England Ivory	n/a	S0
New England Cold Gray	n/a	S0





24 x 24 600 x 600 x 20mm 23 5% x 23 5% x 3/4" 3.88 Sq.Ft./Stone

SINGLE UNIT

Notes: Special Order (50). Minimum quantities apply. Lead time required. SOLD IN FULL PALLETS ONLY. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.

NEW ENGLAND

COLD GRAY





APPLICATIONS

Pedestrian, Roof Deck

TECHNICAL INFORMATION

Visit Unilock.com for more information.

		16 x 32 PRESSED EDGE
	Bundle Type	SINGLE
	Thickness (mm)	20 mm
	Pallet	165.36
SQFT PER	Вох	6.89
	Unit	3.45
	Box	24.00
PER PALLET	SqFt	165.36
I LICI ALLEI	Unit	48.00
UNITS PER	Pallet	48.00
O.M. O. I. E. K	Вох	2.00
	Unit	32
	SqFt	9
LBS PER	Вох	64
	Pallet	1,538

Colors	Reflectance	Stock
Arbor Bianco	n/a	S0
Travstone Beige	n/a	SO SO
Travstone Gray	n/a	SO SO
New England White	n/a	S0
New England Ivory	n/a	S0
New England Cold Gray	n/a	S0
Quartzite Bianco	n/a	S0
Quartzite Dark Gray	n/a	SO SO
Quartzite Gray	n/a	SO SO
Quartzite Sand	n/a	S0



Notes: Special Order (SO). Minimum quantities apply, Lead time required. SOLD IN FULL PALLETS ONLY. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.

3.45 Sq.Ft./Stone





Pedestrian, Light Vehicular

APPEARANCE


Edge Detail - Rounded Surface Texture - Smooth, Series™ Exposed & II Campo® Brushed Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		SMOOTH	IL CAMPO	SERIES
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	PICKERING	PICKERING	GEORGETOWN
	Thickness (mm)	100 mm	100 mm	100 mm
	Bundle	58.13	58.13	58.13
SQFT PER	Layer	11.63	11.63	11.63
JULIFER	Section	-	-	-
	Stone	0.32	0.32	0.32
PER BUNDLE	Layers	5.00	5.00	5.00
I EN BONDEE	Sections	-	-	-
	SqFt	1.02	1.02	1.02
SOLDIER LNFT PER	Section	-	-	-
SOLDIER ENIT FER	Layer	11.81	11.81	11.81
	Bundle	59.06	59.06	59.06
	SqFt	3.05	3.05	3.05
SAILOR LNFT PER	Section	-	-	-
SAILON LINI I FLIX	Layer	35.43	35.43	35.43
	Bundle	177.17	177.17	177.17
	SqFt	3.10	3.10	3.10
UNITS PER	Section	-	-	-
	Bundle	180.00	180.00	180.00
	Layer	532	526	532
LBS PER	Section	-	-	-
	Bundle	2,659	2,629	2,659

Colors	Reflectance	Stock	Stock	Stock
Black Granite	SR n/a SRI n/a	-		SO
Dark Charcoal	SR n/a SRI n/a	-	S0	-
Granite Fusion	SR n/a SRI n/a	-	S0	-
Light Gray	SR n/a SRI n/a	-	S0	-
Opal Blend	SR .24 SRI 24	S0	-	-
Sandy Beige	SR n/a SRI n/a	SO	-	-
Steel Gray Blend	SR n/a SRI n/a	S0	-	-



SINGLE UNITS

4 x 12 **SMOOTH** 100 x 300 x 100mm 3 % x 11 % x 3 1/8" 180 Units/Bundle .32 Sq.Ft./Stone

4 x 12 **SERIES** 100 x 300 x 100mm 3 % x 11 % x 3 %" 180 Units/Bundle .32 Sq.Ft./Stone



BLACK GRANITE



DARK CHARCOAL



GRANITE FUSION



LIGHT GREY



OPAL BLEND



SANDY BEIGE



IL CAMPO BRUSHED

100 x 300 x 100mm

3 % x 11 % x 3 %"

180 Units/Bundle

.32 Sq.Ft./Stone

4 x 12





Pedestrian, Light Vehicular

APPEARANCE


Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		SMOOTH	IL CAMPO
	Bundle Type	SINGLE	SINGLE
	Plant Produced	PICKERING / MI	PICKERING
	Thickness (mm)	100 mm	100 mm
	Bundle	51.67	51.67
SQFT PER	Layer	10.33	10.33
SUFFER	Section	-	-
	Stone	0.43	0.43
PER BUNDLE	Layers	5.00	5.00
PER BUNDLE	Sections	-	-
	SqFt	0.76	0.76
SOLDIER LNFT PER	Section	-	-
SOLDIER LIFT PER	Layer	7.87	7.87
	Bundle	39.37	39.37
	SqFt	3.05	3.05
SAILOR LNFT PER	Section	-	-
SAILOR LINFT PER	Layer	31.50	31.50
	Bundle	157.48	157.48
	SqFt	2.32	2.32
UNITS PER	Section	-	-
	Bundle	120.00	120.00
	Layer	488	488
LBS PER	Section	-	-
	Bundle	2,440	2,440

Colors	Reflectance	Stock	Stock
Opal Blend	SR .24 SRI 24	SO	-
Steel Gray Blend	SR n/a SRI n/a	S0	-
Dark Charcoal	SR n/a SRI n/a	-	SO
Granite Fusion	SR n/a SRI n/a	-	SO
Light Gray	SR n/a SRI n/a	-	SO



4 x 16 SM00TH 100 x 400 x 100mm 3% x 15¾ x 3%" 120 Units/Bundle .43 Sq.Ft./Stone





OPAL BLEND

STEEL GREY BLEND





DARK CHARCOAL

GRANITE FUSION

LIGHT GREY

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.

All measurements are nominal. Contact Unilock for more information. SPECIAL ORDER PRODUCT - NON-STOCK

SINGLE UNIT





Pedestrian, Light Vehicular

APPEARANCE


Edge Detail - Rounded Surface Texture - Smooth, Series™ Exposed & II Campo® Brushed Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


		SMOOTH	IL CAMPO	SERIES
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	PICKERING	PICKERING	GEORGETOWN
	Thickness (mm)	100 mm	100 mm	100 mm
	Bundle	51.67	51.67	51.67
0057.050	Layer	10.33	10.33	10.33
SQFT PER	Section	-	-	-
	Stone	1.29	1.29	1.29
DED DUNDLE	Layers	5.00	5.00	5.00
PER BUNDLE	Sections	-	-	-
	SqFt	0.51	0.51	0.51
SOLDIER LNFT PER	Section	-	-	-
SOLDIER LNFT PER	Layer	5.25	5.25	5.25
	Bundle	26.25	26.25	26.25
	SqFt	1.52	1.52	1.52
SAILOR LNFT PER	Section	-	-	-
SAILUR LINFT PER	Layer	15.75	15.75	15.75
	Bundle	78.74	78.74	78.74
	SqFt	0.77	0.77	0.77
UNITS PER	Section	-	-	-
	Bundle	40.00	40.00	40.00
	Layer	478	478	478
LBS PER	Section	-	-	-
	Bundle	2,391	2,391	2,391
Colors	Reflectance	Stock	Stock	Stock

Colors	Reflectance	Stock	Stock	Stock
Black Granite	SR n/a SRI n/a	-	-	S0
Dark Charcoal	SR n/a SRI n/a	-	S0	-
Granite Blend	SR n/a SRI n/a	-	S0	-
Light Gray	SR n/a SRI n/a	-	S0	-
Opal Blend	SR .24 SRI 24	S0	-	-
Steel Gray Blend	SR n/a SRI n/a	S0	-	-



SINGLE UNITS

Promenade 8x24 HB Promenade 8x24 RB









BLACK GRANITE

DARK CHARCOAL

GRANITE FUSION

LIGHT GREY



8 x 24 SERIES EXPOSED 200 x 600 x 100mm $7\% \times 23\% \times 3\%$ " 40 Units/Bundle 1.29 Sq.Ft./Stone

8 x 24 IL CAMPO BRUSHED 200 x 600 x 100mm $7\% \times 23\% \times 3\%$ " 40 Units/Bundle 1.29 Sq.Ft./Stone



OPAL BLEND



SANDY BEIGE STEEL GREY BLEND

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information. SPECIAL ORDER PRODUCT - NON-STOCK





LARGE

1.72

0.50

1.01

2,411



APPLICATIONS


Pedestrian, Light Vehicular


APPEARANCE

Edge Detail - n/a Surface Texture - Textured Joint Spacing - 10 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits





Richcliff Fixed Random A



Richcliff Fixed Random B



Richcliff Large Rec.HB

			RECTANGLE
	Bundle Type	RANDOM	SINGLE
	Plant Produced	AYR	AYR
	Thickness (mm)	60 mm	60 mm
	Bundle	90.30	82.39
SQFT PER	Layer	11.29	10.30
	Section	-	-

PER BUNDLE	Layers	8.00	8.00
PER BUNDLE	Sections	-	-

0.56

1.31

2,472

Stone

SqFt

Section

Bundle

SOLDIER LNFT PER	SqFt	-	0.58
	Section	-	-
	Layer	-	5.94
	Bundle	-	47.56

	•		
SAILOR LNFT PER	Section	-	-
SAILOR LINFT PER	Layer	14.78	10.39
	Bundle	118.22	83.15
	SqFt	1.77	0.58

	Bundle	160.00	48.00
	Layer	309	301
LBS PER	Section	-	-

Colors	Reflectance	Stock	Stock
Dawn Mist	SR n/a SRI n/a	1	S0
Pebble Taupe	SR n/a SRI n/a	/	S0
Smoke Shale	SR n/a SRI n/a	1	SO



UNITS PER

DAWN MIST




PEBBLE TAUPE



PEBBLE TAUPE **DAWN MIST** Blended on Site



SMOKE SHALE



RECTANGLE 226 x 300 x 60mm 8 % x 11 % x 2 3/8" 64 Units/Bundle .75 SqFt/Stone

SQUARE 226 x 226 x 60mm $8\% \times 8\% \times 2\%$ " 32 Units/Bundle .58 Sq.Ft./Stone

SMALL RECTANGLE 150 x 226 x 60mm $5\% \times 8\% \times 2\%$ " 64 Units/Bundle .38 Sq.Ft./Stone



LARGE RECTANGLE 302 x 528 x 60mm $11\% \times 20\% \times 2\%$ " 48 Units/Bundle 1.72 Sq.Ft./Stone (Not drive friendly)

Notes: Special Order (SO). Minimum quantities apply, Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. The Large Rectangle unit is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

LAYING PATTERNS







Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Chamfer Surface Texture - Series Exposed Joint Spacing - 3mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		4 x 8	4 x 12 PERMEABLE
	Bundle Type		SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	60 mm	80 mm
	Bundle	117.90	93.04
		11.80	11.63
SQFT PER	Layer		11.03
	Section	19.67	-
	Stone	0.22	0.32
PER BUNDLE	Layers	10.00	8.00
PER BUNDLE	Sections	6.00	-
	SqFt	1.50	1.02
	Section	29.53	1.02
SOLDIER LNFT PER			11.81
	Layer	17.72	
	Bundle	177.17	94.49
	SqFt	3.00	3.05
CAU OR LAIFT BED	Section	59.06	-
SAILOR LNFT PER	Layer	35.43	35.43
	Bundle	354.33	283.46
	SqFt	4.58	3.10
UNITS PER	Section	90.00	3.10
UNITS PER	Bundle	540.00	288.00
	Bundle	540.00	200.00
	Layer	306	426
LBS PER	Section	511	-
	Bundle	3,065	3,404

Colors	Reflectance	Stock	Stock
Onyx Black	SR n/a SRI n/a	/	-
Arctic Gray	SR n/a SRI n/a	-	S0
Nordic Star	SR n/a SRI n/a	-	SO








ONYX BLACK

ARCTIC GRAY

NORDIC STAR



SINGLE UNITS

4 x 8 100 x 200 x 60mm 3 1/8 x 7 1/8 x 2 3/8" 540 Units/Bundle .22 Sq.Ft./Stone



100 x 300 x 80mm 3 1/8 x 11 1/8 x 3 1/8" 288 Units/Bundle .32 Sq.Ft./Stone



Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.





Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 2 mm

TECHNICAL INFORMATION

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits

// Perfect for roof decks and other raised floor applications.

Ask us about our Skyview[™] pedestal system. See page 95 for more information.

LAYER CONFIGURATION				
LAYING PATTERNS	Skyline 24x24 SB	Sk	yline 24x24 RB	

		24 x 24
	Bundle Type	SINGLE
	Plant Produced	HARRISON
	Thickness (mm)	50 mm
	Bundle	80.00
SQFT PER	Layer	8.00
SQFIPER	Sections	-
	Stone	3.88
PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	0.50
	Sections	-
SOLDIER LNFT PER	Layer	4.00
	Bundle	40.00
	SqFt	-
	Sections	-
SAILOR LNFT PER	Layer	-
	Bundle	-
	SqFt	0.25
UNITS PER	Layer	-
	Bundle	20.00
	Layer	183
LBS PER	Sections	-
	Bundle	1,756
Colors	Reflectance	Stock

SR .41 SRI 46

Chamois

Silver Grey



CHAMOIS


SILVER GREY



24 x 24 606 x 606 x 50mm 23 5/8 x 23 5/8 x 2" 20 Units/Bundle 3.88 Sq.Ft./Stone

SINGLE UNITS







Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Micro Surface Texture - Thermal/Flamed and Shot Blast Joint Spacing - 0 mm

TECHNICAL INFORMATION


Conforms to ASTM C 1782 Eligible for LEED v4.1 credits

// Perfect for roof decks and other raised floor applications.

 $\mathsf{Ask}\,\mathsf{us}\,\mathsf{about}\,\mathsf{our}\,\mathsf{Skyview}^{\scriptscriptstyle{\mathsf{TM}}}\mathsf{pedestal}\,\mathsf{system}.$ See page 95 for more information.



X & T Slab Spacers **Bagged Separately**



LAYING PATTERNS

UNITS				
SINGLE UNITS				

16 x 32 407 x 815 x 50mm 16 x 32 x 2" 18 Units/Bundle 3.57 Sq.Ft./Stone

		16 x 32	SHOT BLAST
	Bundle Type	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	50 mm	50 mm
	Bundle	64.27	64.27
SQFT PER	Layer	3.57	3.57
OQLITER	Section	-	-
	Stone	3.57	3.57
	Layers	18.00	18.00
PER BUNDLE		10.00	10.00
	Sections	-	-
	SqFt	0.37	0.38
COLDIED LAFT DED	Section	-	-
SOLDIER LNFT PER	Layer	1.34	1.34
	Bundle	24.04	24.12
	0.5	0.75	0.75
	SqFt	0.75	0.75
SAILOR LNFT PER	Section	-	-
	Layer	2.67	2.67
	Bundle	48.13	48.06
	SqFt	0.28	0.28
UNITS PER	Section	-	-
	Bundle	18.00	18.00
	T .		
	Layer	86	86
LBS PER	Section	-	-
	Bundle	1,549	1,549

Colors	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	-	S0
Light Granite	SR n/a SRI 50	S0	-
Toscana Beige	SR n/a SRI 77	S0	-

DARK CHARCOAL



LIGHT GRANITE **TOSCANA BEIGE**



RANDOM



APPLICATIONS


Pedestrian, Light Vehicular, Permeable


APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 11-18 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits





	bullate Type	TANDOW
	Plant Produced	MICHIGAN
	Thickness (mm)	70 mm
	Bundle	88.61
SQFT PER	Layer	11.08
	Section	-
	Stone	0.92
	Layers	8.00
PER BUNDLE	Sections	0.00
	Codions	
	SqFt	-
COLDIED LNET DED	Section	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	0-54	
	SqFt	-
SAILOR LNFT PER	Section	-
	Layer	-
	Bundle	-
	SqFt	1.08
UNITS PER	Section	-
	Bundle	96.00
	Layer	355
LBS PER	Section	-
	Bundle	2,837

Bundle Type


Colors	Reflectance	Stock
Birch	SR n/a SRI n/a	/
Sierra	SR n/a SRI n/a	✓





BIRCH

SIERRA



LARGE RECTANGLE 350 x 420 x 70mm 13 % x 16 5/8 x 2 3/4" 32 Units/Bundle

MEDIUM RECTANGLE 210 x 350 x 70mm 8 3/8 x 13 7/8 x 2 3/4" 32 Units/Bundle

SMALL RECTANGLE 173 x 210 x 70mm $6\% \times 8\% \times 2\%$ 32 Units/Bundle

Notes: SOLD IN FULL BUNDLES ONLY and is produced on an optional, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

LAYING PATTERNS







4 x 10



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Border/Accents, Permeable

APPEARANCE

Edge Detail - n/a Surface Texture - Textured Joint Spacing - 10 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	Bundle Type	SINGLE
	Plant Produced	AYR
	Thickness (mm)	70 mm
	Bundle	88.41
0057.050	Layer	11.05
SQFT PER	Section	-
	Stone	.28
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	1.19
	Section	-
SOLDIER LNFT PER	Layer	13.12
	Bundle	104.99
	SqFt	2.97
CALLOD LINET DED	Section	-
SAILOR LNFT PER	Layer	32.81
	Bundle	262.47
	SqFt	3.62
UNITS PER	Section	-
	Bundle	320.00
	Layer	361
LBS PER	Section	-
	Bundle	2,888
Colors	Reflectance	Stock
Basalt	SR n/a SRI n/a	/

SR n/a SRI n/a

SR n/a SRI n/a

SR n/a SRI n/a









Burgundy Red

Burnt Clay

Old Oak


1

/









Pedestrian, Light Vehicular, Permeable

APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 7 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936 Eligible for LEED v4.1 credits

CONFIGURATION			
CONFIG			
LAYER			









LARGE RECTANGLE 225 x 337.5 x 60mm $8\% \times 13\% \times 2\%$ 54 Units/Bundle .82 Sq.Ft./Stone

Treo Fixed Random S

SQUARE 225 x 225 x 60mm $8\% \times 8\% \times 2\%$ " 63 Units/Bundle .55 Sq.Ft./Stone

SMALL RECTANGLE 112.5 x 225 x 60mm $4 \frac{1}{2} \times 8 \frac{7}{8} \times 2 \frac{3}{8}$ " 72 Units/Bundle .27 Sq.Ft./Stone

		SMOOTH
	Bundle Type	RANDOM
	Plant Produced	MICHIGAN
	Thickness (mm)	60 mm
	Bundle	105.18
0057.050	Layer	11.69
SQFT PER	Section	-
	Stone	0.56
	Layers	9.00
PER BUNDLE	Sections	-
	SqFt	_
COLDIED I NET DED	Section	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	1.57
0411 00 1 1157 050	Section	-
SAILOR LNFT PER	Layer	18.35
	Bundle	165.11
	SqFt	1.80
UNITS PER	Section	-
	Bundle	189.00
	Layer	321
LBS PER	Section	-

Colors	Reflectance	Stock
Fossil	SR n/a SRI n/a	✓
Granite	SR n/a SRI n/a	✓
Tuscany	SR n/a SRI n/a	✓
Limestone O	SR n/a SRI n/a	✓
Grindstone O	SR n/a SRI n/a	/

Bundle









2,886

LIMESTONE 0 GRINDSTONE 0

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

RANDOM BUNDLE







Pedestrian, Light Vehicular, Permeable

APPEARANCE

Edge Detail - Micro Surface Texture - Series Exposed Granite Joint Spacing - 10 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits



TribecaCobble Fixed Random

		SERIES EXPOSED TEXTURED	
	Bundle Type	RANDOM	
Plant Produced		CHICAGO	
	Thickness (mm)	70 mm	
	D	07.50	
	Bundle	97.53	
SQFT PER	Layer	12.19	
·	Section	-	
	Stone	0.32	
	Layers	8.00	
PER BUNDLE	Sections	-	
	330000		
	SqFt	-	
SOLDIER LNFT PER	Section	-	
SOLDIER LINFT PER	Layer	-	
	Bundle	-	
0.5			
	SqFt Section	2.34	
SAILOR LNFT PER		-	
	Layer	28.49	
	Bundle	227.95	
	SqFt	3.12	
UNITS PER	Section	-	
	Bundle	304.00	
	Layer	378	
LBS PER	Section	-	
	Bundle	3,021	

Colors	Reflectance	Stock
Cobalt Gray	SR n/a SRI n/a	S0
Peppered Granite	SR .38 SRI 42	S0





COBALT GREY

PEPPERED GRANITE

RANDOM BUNDLE

LAYING PATTERNS

LAYER CONFIGURATION



LARGE RECTANGLE130 x 305 x 70mm
5 x 12 x 2 ¾"
88 Units/Bundle
.43 Sq.Ft./Stone

RECTANGLE130 x 230 x 70mm
5 x 9 x 2 ¾"
88 Units/Bundle
.32 Sq.Ft./Stone

SMALL RECTANGLE 130 x 175 x 70mm 5 x 6 % x 2 ¾" 128 Units/Bundle .25 Sq.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. For permeable installations, Unilock recommends using granite chips for joint filler. For traditional applications, please refer to the Polymeric Sand Best Practices on page 99. All measurements are nominal. Contact Unilock for more information.

$Turfstone^{\text{TM}}$





APPLICATIONS

Pedestrian, Light Vehicular, Permeable, Roadway Street


APPEARANCE

Edge Detail - Zero Surface Texture - Standard Joint Spacing - 2 mm


TECHNICAL INFORMATION

Conforms to ASTM C1319 Eligible for LEED v4.1 credits

NO!	
≓	
RA	
⋽	
FIG	
ž	
CON	
~-	
Æ	
Ā	
_	







Turfstone A

_
=
Z
\supset
ш
9
Z
\overline{S}



STANDARD400 x 600 x 80mm
15 ¾ x 23 ½ x 3 ½"
32 Units/Bundle
2.50 Sq.Ft./Stone

		SMOOTH	
Bundle Type		SINGLE	
Plant Produced		MICHIGAN	
	Thickness (mm)	80 mm	
	Bundle	80.00	
SQFT PER	Layer	10.00	
	Section	-	
	Stone	2.50	
	Layers	8.00	
PER BUNDLE	Sections	-	
	COGGOTIO		
	SqFt	-	
SOLDIER LNFT PER	Section	-	
SOLDIER LINFT PER	Layer	-	
	Bundle	-	
	0.5		
	SqFt	-	
SAILOR LNFT PER	Section	-	
	Layer	-	
	Bundle	-	
	SqFt	0.40	
UNITS PER	Section	_	
	Bundle	32.00	
02.00			
	Layer	247	
LBS PER	Section	-	
	Bundle	1,975	

Reflectance

SR .30 SRI 32

Colors

Natural



Stock

NATURAL







Pedestrian

LAYING PATTERNS

SINGLE UNITS

APPEARANCE

Edge Detail - Rounded Surface Texture - Umbriano Mottled Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits





	Bundle Type	12 x 24	24 x 24
Plant Produced		ONTARIO	ONTARIO
	Thickness (mm)		50 mm
	Bundle	58.13	38.75
SQFT PER	Layer	11.63	7.75
	Sections	-	-
	Stone	1.94	3.88
	Layers	5.00	5.00
PER BUNDLE	Sections	-	0.00
	Geolions	_	_
	SqFt	-	0.52
SOLDIER LNFT PER	Sections	-	-
SOLDIER LIFT PER	Layer	-	4.00
	Bundle	-	20.00
	SqFt	-	0.52
	Sections	_	-
SAILOR LNFT PER	Layer	-	4.00
	Bundle	-	20.00
	SqFt	0.52	0.26
UNITS PER	Sections	-	-
	Bundle	30.00	10.00
	Layer	261	175
LBS PER	Sections		-
	Bundle	1,303	874
	1	1	

Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	SO	S0
Grenada White	SR .45 SRI 52	SO	S0
Midnight Sky	SR .17 SRI 15	SO	S0
Summer Wheat	SR .42 SRI 48	S0	S0
Winter Marvel	SR .35 SRI 38	SO	S0







FRENCH GREY

GRENADA WHITE

MIDNIGHT SKY





24 x 24 $600 \times 600 \times 50 mm$ 23 5/8 x 23 5/8 x 2" 10 Units/Bundle 3.88 Sq.Ft./Stone





SUMMER WHEAT WINTER MARVEL

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. This product is not inteneded for vehicular use. All measurements are nominal. Contact Unilock for more information.







Pedestrian

APPEARANCE

Edge Detail - Zero Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	Bundle Type	RANDOM	SMALL RECTANGLE
Plant Produced		GEORGETOWN	GEORGETOWN
	Thickness (mm)	60 mm	60 mm
	Bundle	94.14	94.20
	Layer	10.46	10.46
SQFT PER	Section	-	-
	Stone	1.31	1.43
	Layers	9.00	9.00
PER BUNDLE	Sections	-	-
	SqFt	-	0.85
	Section	-	-
SOLDIER LNFT PER	Layer	-	8.85
	Bundle	-	79.72
	SqFt	0.85	1.69
	Section	-	-
SAILOR LNFT PER	Layer	8.86	17.71
	Bundle	79.72	159.4
	SqFt	0.76	1.43
UNITS PER	Section	-	-
	Bundle	72.00	135.00
	Layer	287	-
LBS PER	Section	-	-
	Bundle	2,583	-
Colors	Reflectance	Stock	Stock

Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	✓	-
Grenada White	SR .45 SRI 52	✓	-
Midnight Sky	SR .17 SRI 15	✓	SO
Summer Wheat	SR .42 SRI 48	✓	-
Winter Marvel	SR .35 SRI 38	✓	-











FRENCH GREY

GRENADA WHITE

MIDNIGHT SKY

SUMMER WHEAT

WINTER MARVEL



LARGE RECTANGLE 360 x 540 x 60mm 14 x 21 x 2 3/8"

18 Units/Bundle

SQUARE 360 x 360 x 60mm 14 ½ x 14 ½ x 2 3/8" 27 Units/Bundle


SMALL RECTANGLE 180 x 360 x 60mm $7 \times 14 \frac{1}{4} \times 2 \frac{3}{8}$ " 27 Units/Bundle

SINGLE UNIT

SMALL RECTANGLE 180 x 360 x 60mm 7 x 14 ½ x 2 3/8" 30 Units/Bundle .70 Sq.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.







Pedestrian

APPEARANCE


Edge Detail - Zero Surface Texture - Umbriano Mottled Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		21 x 36	18 x 36	
Bundle Type		SINGLE	SINGLE	
Plant Produced		ONTARIO	ONTARIO	
	Thickness (mm)	60 mm	60 mm	
	Bundle	62.76	52.31	
	Layer	10.46	8.72	
SQFT PER	Sections	10.40	0.72	
	Stone	5.23	4.36	
	Storie	5.23	4.30	
PER BUNDLE	Layers	6.00	6.00	
PER BUNDLE	Sections	-	-	
	SqFt	0.34	0.68	
	Sections	0.04	0.00	
SOLDIER LNFT PER	Layer	3.54	5.91	
	Bundle	21.26	35.44	
	Duriule	21.20	35.44	
	SqFt	0.56	1.35	
CALLOD LAIFT DED	Sections	-	-	
SAILOR LNFT PER	Layer	5.91	11.81	
	Bundle	35.43	70.87	
	SqFt	0.19	0.23	
LINUTO DED	Sections	0.19	0.23	
UNITS PER		-	-	
	Bundle	12.00	12.00	
	Layer	287	239	
LBS PER	Sections	-	-	
	Bundle	1,722	1,436	

Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	S0	-
Grenada White	SR .45 SRI 52	S0	-
Midnight Sky	SR .17 SRI 15	S0	S0
Summer Wheat	SR .42 SRI 48	S0	-
Winter Marvel	SR .35 SRI 38	SO	-






540 x 900 x 60mm $21\frac{1}{4} \times 35\frac{1}{2} \times 2\frac{3}{8}$ " 12 Units/Bundle 5.23 Sq.Ft./Stone

SINGLE UNITS



18 x 36 450 x 900 x 60mm $17\frac{3}{4} \times 35\frac{1}{2} \times 2\frac{3}{8}$ " 12 Units/Bundle 4.36 Sq.Ft./Stone



FRENCH GREY **GRENADA WHITE**



SUMMER WHEAT WINTER MARVEL



Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. This product is not inteneded for vehicular use. All measurements are nominal. Contact Unilock for more information.







Pedestrian

APPEARANCE


Edge Detail - Zero Surface Texture - Umbriano Mottled Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		8 x 16	8 x 24	12 x 24	24 x 24
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
	Thickness (mm)	70 mm	70 mm	70 mm	70 mm
	Bundle	82.67	82.67	93.00	62.00
SQFT PER	Layer	10.33	10.33	11.63	7.75
JULITER	Sections	-	-	-	-
	Stone	0.86	1.29	1.94	3.88
	Laviana	8.00	0.00	9.00	8.00
PER BUNDLE	Layers		8.00	8.00	
	Sections	-	-	-	-
	SqFt	0.76	0.51	0.51	0.51
SOLDIER	Sections	-	-	-	-
LNFT PER	Layer	7.87	5.25	5.91	3.94
	Bundle	62.99	41.99	47.24	31.50
	SqFt	1.52	1.02	1.02	0.51
SAILOR	Sections	-	-	-	-
LNFT PER	Layer	15.75	10.50	11.81	3.94
	Bundle	125.98	83.99	94.49	31.50
	SqFt	1.16	0.77	0.52	0.26
UNITS PER	Sections	-	-	-	-
	Bundle	96.00	64.00	48.00	16.00
	Lovor	343	331	393	258
I De DED	Layer	343	331	393	200
LBS PER		0.740	- 0.647	2 4 4 0	- 0.055
	Bundle	2,746	2,647	3,142	2,055

Colors	Reflectance	Stock	Stock	Stock	Stock
French Grey	SR .18 SRI 17	S0	S0	S0	S0
Grenada White	SR .45 SRI 52	S0	S0	S0	S0
Midnight Sky	SR .17 SRI 15	S0	S0	S0	S0
Summer Wheat	SR .42 SRI 48	S0	S0	SO	S0
Winter Marvel	SR .35 SRI 38	S0	S0	S0	S0













FRENCH GREY

GRENADA WHITE

MIDNIGHT SKY

SUMMER WHEAT

WINTER MARVEL

SINGLE UNITS

24 x 24 600 x 600 x 70mm 2 35/8 x 23 5/8 x 2 3/4" 16 Units/Bundle 3.88 Sq.Ft./Stone



12 x 24 300 x 600 x 70mm 11 1/8 x 23 5/8 x 2 3/4" 48 Units/Bundle 1.94 Sq.Ft./Stone





8 x 16 200 x 400 x 70mm 7 1/8 x 15 3/4 x 2 3/4" 96 Units/Bundle .86 Sq.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.








Pedestrian, Light Vehicular,

APPEARANCE

Edge Detail - Zero Surface Texture - Umbriano Mottled Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits







SINGLEUNITS

RANDOM BUNDLE



4 x 12 100 x 300 x 80mm 3 % x 11 % x 3 %" 288 Units/Bundle .32 Sq.Ft./Stone

			7 x 14	4 x 12 PERMEABLE
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	GEORGETOWN	GEORGETOWN	MARENGO
	Thickness (mm)	80 mm	80 mm	80 mm
	Bundle	73.22	73.24	93.04
COST DED	Layer	10.46	-	11.63
SQFT PER	Section	-	-	-
	Stone	1.31	-	0.32
DED DUNDLE	Layers	7.00	7.00	8.00
PER BUNDLE	Sections	-	-	-
	SqFt	-	62.01	1.02
	Section	-	0.59	-
SOLDIER LNFT PER	Layer	-	-	11.81
	Bundle	-	-	94.49
	SqFt	0.85	1.77	1.77
SAILOR LNFT PER	Section	-	-	-
SAILUR LNF1 PER	Layer	8.86	-	-
	Bundle	62.01	62.01	62.01
	SqFt	0.76	-	3.10
UNITS PER	Section	-	-	-
	Bundle	56.00	105.00	288.00
	Layer	383	383	426
LBS PER	Section	-	-	-
	Bundle	2,680	2,680	3,404
Colors	Reflectance	Stock	Stock	Stock
French Grey	SR .18 SRI 17	S0	S0	S0
Grenada White	SR .45 SRI 52	S0	S0	-
Midnight Sky	SR .17 SRI 15	S0	S0	S0
Summer Wheat	SR .42 SRI 48	S0	S0	-
Winter Marvel	SR .35 SRI 38	S0	\$0	S0







FRENCH GREY

GRENADA WHITE

MIDNIGHT SKY



LARGE RECTANGLE

360 x 540 x 80mm $14 \times 21 \times 3 \frac{1}{8}$ " 14 Units/Bundle 2.09 Sq.Ft./Stone

SQUARE 360 x 360 x 80mm 14 x 14 x 3 1/8"" 21 Units/Bundle 1.40 Sq.Ft./Stone

SMALL RECTANGLE 180 x 360 x 80mm 7 x 14 ½ x 3 ½" 21 Units/Bundle 0.70 Sq.Ft./Stone



WINTER MARVEL SUMMER WHEAT

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when **compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.







Pedestrian, Light Vehicular


APPEARANCE

Edge Detail - Rounded Surface Texture - Umbriano Mottled Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits





36 x 36 900 x 900 x 100mm 35 ½ x 35 ½ x 31/8" 5 Units/Bundle 8.72 Sq.Ft./Stone



18 x 36
450 x 900 x 100mm
17 ³ / ₄ x 35 ¹ / ₂ x 3 ⁷ / ₈ "
10 Units/Bundle
4.36 Sq.Ft./Stone

	Bundle Type	18 x 36	36 x 36
	Bundle Type	SINGLE	SINGLE
Plant Produced		ONTARIO	ONTARIO
	Thickness (mm)	100 mm	100 mm
	Bundle	43.59	43.59
	Layer	8.72	8.72
SQFT PER	Sections	-	-
	Stone	4.36	8.72
	Layers	5.00	5.00
PER BUNDLE	Sections	-	-
	SqFt	0.34	0.34
	Sections	-	-
SOLDIER LNFT PER	Layer	2.95	2.95
	Bundle	14.75	14.75
	SqFt	0.68	0.34
	Sections	-	-
SAILOR LNFT PER	Layer	5.90	2.95
	Bundle	29.50	14.75
	SqFt	0.23	0.11
UNITS PER	Sections	-	-
	Bundle	10.00	5.00
	Layer	399	399
LBS PER	Sections	-	-
	Bundle	1,994	1,994

Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	SO	SO
Grenada White	SR .45 SRI 52	SO	SO
Midnight Sky	SR .17 SRI 15	SO	SO
Summer Wheat	SR .42 SRI 48	SO	SO
Winter Marvel	SR .35 SRI 38	S0	S0







MIDNIGHT SKY

FRENCH GREY GRENADA WHITE





SUMMER WHEAT

WINTER MARVEL

Notes: Special Order (SO). Minimum quantities apply, Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

LAYING PATTERNS

SINGLEUNITS





Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS	
LAYING	Urban Fixed Random E

SMALL RECTANGLES SINGLE UNITS

9 x 9 228 x 228 x 60mm 9 x 9 x 2 3/8"



190 x 380 x 60mm $7\frac{1}{2} \times 15 \times 2\frac{3}{8}$ "

			9 x 9	8 x 16
Bundle Type		RANDOM	SINGLE	SINGLE
	Plant Produced		ONTARIO	ONTARIO
	Thickness (mm)	60 mm	60 mm	60 mm
	Bundle	104.91	98.90	116.57
SQFT PER	Layer	11.66	10.99	11.66
SQFIPER	Sections	-	-	-
	Stone	1.46	0.55	0.78
DED DUNDLE	Layers	9.00	9.00	10.00
PER BUNDLE	Sections	-	-	-
	CaEt	_	_	0.78
	SqFt	-	<u>-</u>	0.76
SOLDIER LNFT PER	Sections	-	-	-
	Layer	-	-	9.35
	Bundle	-	-	93.50
	SqFt	0.80	1.34	1.60
	Sections	-	-	-
SAILOR LNFT PER	Layer	9.35	14.74	18.70
	Bundle	84.15	132.63	187.01
	0-54	0.69	1.82	1.29
	SqFt	0.09	1.02	1.29
UNITS PER	Layer	-	-	-
	Bundle	72.00	180.00	150.00
	Layer	320	299	332
LBS PER	Section	-	-	-
	Bundle	2,878	2,692	3,318

Colors	Reflectance	Stock	Stock	Stock
Dark Charcoal	SR .n/a SRI n/a	-	1	-
Indiana Buff	SR .n/a SRI n/a	1	-	/
Sterling	SR .n/a SRI n/a	✓	-	✓
Linen Buff 🕕	SR .n/a SRI n/a	-	-	-
Linen Grey 🕞	SR .n/a SRI n/a	-	-	-











DARK CHARCOAL

INDIANA BUFF

STERLING

LINEN BUFF

LINEN GREY

RANDOM BUNDLE



LARGE RECTANGLE

380 x 570 x 60mm $15 \times 22 \, \frac{1}{2} \times 2 \, \frac{3}{8}"$ 14 Units/Bundle 2.09 Sq.Ft./Stone **SQUARE** 380 x 380 x 60mm $15 \times 15 \times 2 \frac{3}{8}$ " 21 Units/Bundle 1.40 Sq.Ft./Stone

SMALL RECTANGLE 190 x 380 x 60mm $7\frac{1}{2} \times 15 \times 2\frac{3}{8}$ " 21 Units/Bundle

0.70 Sq.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.







Pedestrian, Roof Deck

APPEARANCE

LAYER CONFIGURATION

LAYING PATTERNS

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 4 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits




		18 x 24 ENDURACOLOR	18 x 24 EASYCLEAN	18 x 36
Bundle Type		SINGLE	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO	ONTARIO
	Thickness (mm)	60 mm	60 mm	60 mm
	Bundle	93.00	69.75	52.31
	Layer	11.63	11.63	8.72
SQFT PER	Sections	-	-	_
	Stone	2.91	2.91	4.36
PER BUNDLE	Layers	8.00	6.00	6.00
PER BUNDLE	Sections	-	-	-
	SqFt	0.51	0.51	0.68
SOLDIER LNFT PER	Sections	-	-	-
SOLDIER LIFT PER	Layer	5.91	5.91	5.91
	Bundle	47.25	35.44	35.44
	SqFt	0.68	0.68	1.35
OAU OR LIVET REP	Sections	-	-	-
SAILOR LNFT PER	Layer	7.87	7.87	11.81
	Bundle	62.99	47.24	70.87
	SqFt	0.34	0.34	0.23
UNITS PER	Layer	4.00	-	-
	Bundle	32.00	24.00	12.00
	Unit	80	319	290
LBS PER	Layer	319.00	-	-
	Bundle	2,552	1,914	1,739

Colors	Reflectance	Stock	Stock	Stock
Indiana Buff	SR .n/a SRI n/a	1	-	1
Sterling	SR .n/a SRI n/a	1	-	1
Linen Buff 👵	SR .n/a SRI n/a	-	SO	SO
Linen Grey 🕕	SR .n/a SRI n/a	-	SO	S0



18 x 24 450x 600 x 60mm 17 ³/₄ x 23 ⁵/₈ x 2 ³/₈" 32 Units/Bundle 2.91 Sq.Ft./Stone



18 x 36 450 x 900 x 60mm 17 ³/₄ x 35 ¹/₂ x 2 ³/₈" 12 Units/Bundle 4.36 Sq.Ft./Stone



LINEN GREY

LINEN BUFF

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

SINGLE UNITS







Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - n/a

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits





LAYING PATTERNS

SINGLE UNITS

18 x 36 450 x 900 x100mm $17\frac{3}{4} \times 35\frac{1}{2} \times 2\frac{3}{8}$ " 10 Units/Bundle 4.36 Sq.Ft./Stone

		18 x 36
Bundle Type		SINGLE
	Plant Produced	ONTARIO
	Thickness (mm)	100 mm
	Bundle	43.59
	Layer	8.72
SQFT PER	Sections	-
	Stone	4.36
	Stone	4.30
PER BUNDLE	Layers	5.00
PER BUNDLE	Sections	-
	SqFt	0.68
	Sections	
SOLDIER LNFT PER		5.91
	Layer	
	Bundle	29.53
	SqFt	1.35
SAILOR LNFT PER	Sections	-
SAILOR LNFT PER	Layer	11.81
	Bundle	59.06
	CaEt	0.23
UNITE DED	SqFt	0.23
UNITS PER	Layer	-
	Bundle	10.00
	Unit	399
LBS PER	Layer	-
	Bundle	1,994

Colors	Reflectance	Stock
Indiana Buff	SR .52 SRI 61	S0
Sterling	SR .41 SRI 46	S0
Linen Buff 🕕	SR .n/a SRI n/a	S0
Linen Grey 😈	SR .n/a SRI n/a	S0



LINEN BUFF LINEN GREY





Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 3-7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits



Westport Fixed Random A

RANDOM BUNDLE		
RAN		

LARGE RECTANGLE 254 x 380 x 70 mm 10 x 15 x 2 ³/₄" 32 Units/Bundle

SQUARE 254 x 254 x 70mm 10 x 10 x 2 ³/₄" 56 Units/Bundle

SMALL RECTANGLE127 x 254 x 70mm
5 x 10 x 2 ³/₄"
72 Units/Bundle

	Bundle Type	RANDOM
	Plant Produced	
	Thickness (mm)	70 mm
	Bundle	94.19
	Layer	11.77
SQFT PER	Section	-
	Stone	0.59
		0.00
PER BUNDLE	Layers	8.00
	Sections	-
	SqFt	-
	Section	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	0-54	1.24
	SqFt	1.24
SAILOR LNFT PER	Section	-
	Layer	14.57
	Bundle	116.56
	SqFt	1.70
UNITS PER	Section	-
	Bundle	160.00
	Laver	367
	Lavel	307

	Layer	367
LBS PER	Section	-
	Bundle	2,937

Colors	Reflectance	Stock
Beechwood	SR n/a SRI n/a	✓
Granite	SR n/a SRI n/a	✓





GRANITE

BEECHWOOD

LAYER CONFIGURATION

LAYING PATTERNS

Brussels Dimensional Stone®



APPLICATIONS

Garden Wall, Seat Wall, Outdoor Kitchen, Fire Feature, Water Feature

APPEARANCE

Surface Texture - Tumbled

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		STANDARD		
	Bundle Type	SINGLE		
	Plant Produced	MICHIGAN		
	Thickness (mm)	100 mm		
	Bundle	32.00		
FCFT PER	Layer	5.33		
	Stone	0.33		
PER BUNDLE	Layers	6.00		
T EIN BONDEL	Sections	4.00		
LNFT PER	Bundle	96.00		
LINITIEN	Unit	1.00		
	SqFt	3.00		
UNITS PER	Section	24.00		
	Bundle	96.00		
	Layer	473		
LBS PER	Section	709		
	Bundle	2,836		

Colors	Reflectance	Stock
Coffee Creek	SR n/a SRI n/a	/
Charcoal	SR n/a SRI n/a	/
Limestone	SR n/a SRI n/a	/
Mahogany Ash	SR n/a SRI n/a	/
Sandstone	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓







COFFEE CREEK

EK CHARCOAL

LIMESTONE








MAHOGANY ASH

SANDSTONE

SIERRA



STANDARD300 x 200 x 100mm
11% x 7% x 3%"
96 Units/Bundle
.33 Fc.Ft./Stone







Notes: SOLD IN FULL BUNDLES ONLY on an optional skid. Maximum height is 24" (under optimum conditions). "Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle. Ledgestone, Brussels XL complement as a possible coping unit. All measurements are nominal. Contact Unilock for more information.

DuraHold®



APPLICATIONS

Structural Walls

APPEARANCE

Surface Texture - Standard

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits


		STANDARD	STANDARD HALF	CORNER 45°	CORNER 90°
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY
	Thickness (mm)	300 mm	300 mm	300 mm	300 mm
	Bundle	6.02	3.00	7.04	7.04
FCFT PER	Layer	6.02	3.00	7.04	7.04
	Stone	6.02	3.00	7.04	7.04
PER BUNDLE	Layers	1.00	1.00	1.00	1.00
T EK BONDEL	Sections	-	-	-	-
LNFT PER	Bundle	6.02	3.00	-	-
	Unit	6.02	3.00	-	-
	SqFt	0.17	0.33	0.14	0.14
UNITS PER	Section	-	-	-	-
	Bundle	1.00	1.00	1.00	1.00
	Layer	1,680	800	1,480	1,320
LBS PER	Section	-	-	-	-
	Bundle	1,680	800	1,480	1,320
Colors	Reflectance	Stock	Stock	Stock	Stock
	00 / 00/ /				

SO



SO

NATURAL



STANDARD 1830 x 600 x 300mm 72 x 235/8 x 117/8" 1unit/Bundle 6.02 Fc.Ft./Stone



Natural

STANDARD HALF 915 x 600 x 300mm $36 \times 23\% \times 11\%$ 1unit/Bundle 3.00 Fc.Ft./Stone



SR n/a SRI n/a

CORNER 45° 1520 x 600 x 300mm $59\% \times 23\% \times 11\%$ " 1unit/Bundle 7.04 Fc.Ft./Stone



S0

CORNER 90° 1520 x 600 x 300mm 59% x 23% x 11%" 1unit/Bundle 7.04 Fc.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on an required, refundable skid. PALLETIZED 2 PIECES PER PALLET. Closed—end coping units are closed on both ends so that they may be used as left or right units. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone* Systems International, can provide preliminary site engineering for most commercial projects, Soil information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

SINGLE UNITS



SO

DuraHold® Coping



APPLICATIONS

Structural Walls

APPEARANCE

Surface Texture - Standard

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		COPING HALF	COPING STANDARD	COPING CLOSED-END
Bundle Type		SINGLE	SINGLE	SINGLE
	Plant Produced	GORMLEY	GORMLEY	GORMLEY
	Thickness (mm)	300 mm	300 mm	300 mm
	Bundle	2.95	6.02	6.02
FCFT PER	Layer	2.95	6.02	6.02
	Stone	2.95	6.02	6.02
PER BUNDLE	Layers	1.00	1.00	1.00
FER DONDEE	Sections	-	-	-
LNET DED	Bundle	-	-	-
LNFT PER	Unit	-	-	-
	0-54	0.24	0.47	0.47
	SqFt	0.34	0.17	0.17
UNITS PER	Section	-	-	-
	Bundle	1.00	1.00	1.00
	Layer	780	1,560	1,560
LBS PER	Section	-	-	-
	Bundle	780	1,560	1,560
Colors	Reflectance	Stock	Stock	Stock

S0



S₀


SO

NATURAL




SINGLE UNITS

COPING HALF 915 x 600 x 300mm 36 x 23% x 11%" 1 unit/Bundle 2.95 Fc.Ft./Stone



Natural

COPING STANDARD 1830 x 600 x 300mm 72 x 23% x 11%" 1 unit/Bundle 6.02 Fc.Ft./Stone



SR n/a SRI n/a

CLOSED-END COPING1830 x 600 x 300mm
72 x 235/6 x 111/6"
1 unit/Bundle
6.02 Fc.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on an required, refundable skid. PALLETIZED, 2 PIECES PER PALLET. Closed—end coping units are closed on both ends so that they may be used as left or right units. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone* Systems International, can provide preliminary site engineering for most commercial projects. Soil information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

DuraHold 2°



APPLICATIONS

Structural Walls

APPEARANCE

Surface Texture - Standard

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		STANDARD	CORNER 90°	COPING	COPING CLOSED-END
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY
	Thickness (mm)	300 mm	300 mm	300 mm	300 mm
	Bundle	24.10	16.67	24.08	24.08
FCFT PER	Layer	6.02	4.17	6.02	6.02
PER	Stone	6.02	4.17	6.02	6.02
PER	Layers	4.00	4.00	4.00	4.00
BUNDLE	Sections	-	-	-	-
LNFT	Bundle	24.10	-	24.10	24.10
PER	Unit	6.02	-	6.02	6.02
	SqFt	0.17	0.24	0.17	0.17
UNITS PER	Section	-	-	-	-
	Bundle	4.00	4.00	4.00	4.00
LBS PER	Layer	938	460	884	884
	Section	-	-	-	-
	Bundle	3,752	1,840	3,536	3,536
Colors	Reflectance	Stock	Stock	Stock	Stock

S0

SO




S0

SO


NATURAL




CORNER 90° 900 x 360 x 300mm 35 ½ x 14 ¼ x 11 ½° 4 unit/Bundle 4.17 Fc.Ft./Stone



STANDARD1830 x 360 x 300mm
72 x 14 ¼ x 11 ⅙"
4 unit/Bundle
6.02 Fc.Ft./Stone



COPING1830 x 360 x 300 mm
72 x 14 1/4 x 11 1/6"
4 unit/Bundle
6.02 Fc.Ft./Stone



CLOSED-END COPING 1830 x 360 x 300 mm 72 x 14 ¼ x 11 %" 4 unit/Bundle 6.02 Fc.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on an required, refundable skid. Must order corner as a left or right closed—end coping units are closed on both ends so that they may be used as left or right units. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soil information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

Natural

SR n/a SRI n/a

SINGLE UNITS

Estate Wall™



APPLICATIONS

Pillar, Steps, Outdoor Kitchen, Fire Feature, Water Feature, Structural Walls, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		TAPERED SPLIT	CORNER SPLIT	COPING TAPERED
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 mm	150 mm	75 mm
	Bundle	31.25	20.83	18.74
FCFT PER	Layer	6.25	4.17	2.34
	Stone	0.52	0.52	0.26
	T			
PER BUNDLE	Layers	5.00	5.00	8.00
. EN BONDEE	Sections	4.00	4.00	3.00
	Bundle	62.30	41.60	66.00
LNFT PER				
	Unit	1.04	1.04	.92
	SqFt	1.92	1.92	3.84
UNITS PER	Section	15.00	10.00	24.00
	Bundle	60.00	40.00	72.00
		-		
LBS PER	Layer	608	452.8	299
	Section	760	566	797
	Bundle	3,040	2,264	2,392





SINGLE UNITS





GRANITE

SANDSTONE

SIERRA

RIVER



LARGE TAPERED 380 x 230 x 150mm 15 x 9 x 5 %" 20 Units/Bundle .63 Fc.Ft./Stone

RANDOM BUNDLE



MEDIUM TAPERED 320 x 230 x 150mm 12 % x 9 x 5 % " 20 Units/Bundle .52 Fc.Ft./Stone



SMALL TAPERED 250 x 230 x 150 mm 9 % x 9 x 5 % " 20 Units/Bundle .42 Fc.Ft./Stone



CORNER SPLIT 320 x 230 x 150mm 12 % x 9 x 5 % " 40 Units/Bundle .52 Sq.Ft./Stone



COPING TAPERED 320 x 300 x 75mm 12 % x 11 % x 3" 72 Units/Bundle .26 Sq.Ft./Stone

Notes: Special Order (50). Minimum quantities apply. Lead time required. 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. Ledgestone coping, Brussels Block® XL or Brussels Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

Lineo™ Dimensional Stone



APPLICATIONS

Pillar, Outdoor Kitchen, Fire Feature, Water Feature, Seat Wall, Garden Wall

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

			DUL 4D / 005::==
			PILLAR / CORNER
Bundle Type		RANDOM	SINGLE
	Plant Produced	MICHIGAN	MICHIGAN
	Thickness (mm)	100 mm	100 mm
	Bundle	29.92	29.97
FCFT PER	Layer	9.97	9.99
	Stone	0.50	0.33
PER BUNDLE	Layers	3.00	3.00
T EN BONDLE	Sections	3.00	-
	Bundle	89.06	
LNFT PER	Unit	1.48	-
	SqFt	2.01	3.00
UNITS PER	Section	20.00	-
	Bundle	60.00	90.00
	Layer	881	893
LBS PER	Section	881	-
	Bundle	2,643	2,679

Colors	Reflectance	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓
Graphite	SR.n/a SRI n/a	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓







GRANITE

GRAPHITE

SANDSTONE

LINEO FIRE PIT



Fire pit Insert sold separately



XL RECTANGLE 600 x 200 x 100mm 235/8 x 71/8 x 31/8" 15 Units/Bundle



LARGE RECTANGLE 500 x 200 x 100mm 193/4 x 71/8 x 31/8" 15 Units/Bundle



RECTANGLE 400 x 200 x 100mm 153/4 x 71/8 x 31/8" 15 Units/Bundle



SMALL RECTANGLE 300 x 200 x 100mm 11% x 7% x 3%" 15 Units/Bundle



PILLAR/CORNER 300 x 200 x 100mm 11% x 7% x 3%" 90 Units/Bundle .33 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on an optional, refundable skid. Spacing strips are shipped with random wall and pillar bundles to create even spacing between units. Ledgestone" or Unilock Natural Stone complement as possible coping options. All measurements are nominal. Contact Unilock for more information.

RANDOM BUNDLE



Pillar, Steps, Structural Walls, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CORNER DOUBLE SPLIT	TAPERED SPLIT	COPING
	Bundle Type	DOUBLE UNIT	DOUBLE UNIT	DOUBLE UNIT
	Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
	Thickness (mm)	150 mm	150 mm	75 mm
	l	20.4=	20.00	00.04
	Bundle	20.17	20.00	20.34
FCFT PER	Layer	6.72	6.67	2.91
	Stone	1.68	0.67	0.48
	I			I
PER BUNDLE	Layers	3.00	3.00	7.00
FLK DONDLL	Sections	4.00	2.00	2.00
	Bundle	-	40.00	82.95
LNFT PER	Unit	-	1.33	1.97
	SqFt	0.59	1.50	2.06
UNITS PER	Section	3.00	15.00	21.00
	Bundle	12.00	30.00	42.00
	I			
	Layer	440	860	393
LBS PER	Section	330	1,290	1,375
	Bundle	1,320	2,580	2,750

Colors	Reflectance	Stock	Stock	Stock
Beechwood	SR.n/a SRI n/a	✓	/	✓
Charcoal	SR.n/a SRI n/a	1	/	1
Granite	SR.n/a SRI n/a	1	/	1
Sandstone	SR.n/a SRI n/a	1	/	1



BEECHWOOD



CHARCOAL



GRANITE



SANDSTONE



SINGLE UNITS

CORNER 300 x 200 x 150mm 11% x 7% x 5%" 12 Units/Bundle 1.68 Fc.Ft./Stone



TAPERED SPLIT 300 x 200 x 150mm 11% x 7% x 5%" 30 Units/Bundle .67 Fc.Ft./Stone



COPING300 x 300 x 75mm
11% x 11% x 3"
42 Units/Bundle
.48 Fc.Ft./Stone

Notes: * TAPERED WALL UNITS ARE DOUBLE UNITS AND ARE SOLD IN FULL BUNDLES ONLY. 12" Coping bundle has 16 units of closed-end coping (8 left and 8 right). Closed-end 12" coping is not sold separately. Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa wall is %" every course or 1½" every 2 courses. Min radius is 5 ft. Retaining wall engineering software is also available free of charge at www.unilock.com. Walls greater than 4" in height require professional engineering. All measurements are nominal. Contact Unilock for more information.

Pisa[™] Smooth XL



APPLICATIONS

Pillar, Steps, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		XL TAPERED	CORNER	COPING
Bundle Type		SINGLE	SINGLE	MULTI-COMPONENT
	Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
	Thickness (mm)	150 mm	150 mm	75 mm
	Bundle	20.67	46.52	15.50
FCFT PER	Layer	5.17	11.63	1.94
	Stone	0.65	0.97	0.32
PER BUNDLE	Layers	4.00	4.00	8.00
PER BONDEL	Sections	-	-	-
		T.		
LNFT PER	Bundle	42.00	-	62.99
	Unit	1.31	-	1.31
			T	·
	SqFt	1.55	1.03	3.10
UNITS PER	Section	-	-	-
	Bundle	32.00	48.00	48.00
	Layer	627	695	282
LBS PER	Section	-	-	-
l .				

Colors	Reflectance	Stock	Stock	Stock
Charcoal	SR.n/a SRI n/a	✓	✓	✓
Fieldstone	SR.n/a SRI n/a	1	/	✓ /
Granite	SR.n/a SRI n/a	/	/	1

2,508







2,256

CHARCOAL

FIELDSTONE

2,780

GRANITE



XL TAPERED400 x 300 x 150mm
15 3/4 x 11 1/8 x 5 1/8 "
32 Units/Bundle
.65 Fc.Ft./Stone



CORNER400 x 200 x 150mm
15 3/4 x 7 1/8 x 5 1/8"
48 Units/Bundle
.97 Fc.Ft./Stone



Bundle

COPING - MULTI-COMPONENT 400 x 325 x 75mm 15 ¾ x 12 ¾ x 3" 48 Units/Bundle .32 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY. 12" (coping bundle has 48 units of coping (32 regular coping and 8 closed-end units per bundle). Closed-end 12" coping is not sold separately. Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. Min radius is 7.3" outside, with an 8mm (3 degree). Retaining wall engineering software is also available free of charge at www.unilock.com. Walls greater than 4' in height require professional engineering. All measurements are nominal. Contact Unilock for more information.

Quarry[™] Smooth Coming Soon



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Standard

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		WALL	CORNER
Bundle Type		RANDOM	SINGLE
Plant Produced		WISCONSIN	WISCONSIN
	Thickness (mm)	114 mm	114 mm
	Bundle	33.75	18.24
FCFT PER	Layer	5.63	6.08
	Stone	-	0.38
		·	
PER BUNDLE	Layers	6.00	3.00
TER BONDEE	Sections	-	-
	Bundle	-	18.24
LNFT PER	Unit	-	0.38
	SqFt	-	2.65
UNITS PER	Section	-	-
UNITS PER	Layer	15.00	16.00
	Bundle	90.00	48.00
	Layer	498	641
LBS PER	Section	450	041
LD3 PER	Bundle	2,988	1,922
	Bullule	2,900	1,922

Colors	Reflectance	Stock	Stock
Charcoal	SR.n/a SRI n/a	1	/
Natural Grey	SR.n/a SRI n/a	/	✓
Sandstone	SR.n/a SRI n/a	/	/







CHARCOAL

NATURAL GREY

SANDSTONE



15" LARGE TAPERED 380 x 230 x 114mm 15 x 9 x 4 ½" 30 Units/Bundle .33 Fc.Ft./Stone

RANDOM BUNDLE



12" MEDIUM TAPERED 305 x 230 x 114mm 12 x 9 x 4 ½" 30 Units/Bundle .33 Fc.Ft./Stone



9" SMALL TAPERED 230 x 230 x 114mm 9 x 9 x 4 ½" 30 Units/Bundle .55 Fc.Ft./Stone





CORNER 306.6 x 114 x 228.6mm 12 x 9 x 4 ½" 48 Units/Bundle .38Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY. Corner and wall bundles are produced and sold on a required, refundable skid. Structural retaining walls greater than 2' high require professional engineering. Connector units provided with every bundle upon request.

Use plastic connectors on set-back walls. Quarry tubing is added to orders when requested. Tubing may be used to set back walls. Ledgestone[™], Olde Quarry [™] Coping, Brussels Block [™] XL, Brussels Fullnose [™] or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.



JUMPER

RANDOM

AYR

114 mm

13.73

3.43

0.34

4.00

2.91

40.00

408

1,631

Stock

/

CORNER

JUMPER

SINGLE

114 mm

13.54

6.77

0.85

2.00

6.56

0.41

1.18

16.00

486

973

Stock

/

AYR



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Steps, Fire Feature, Seat Wall, Garden Wall

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits





BUFF

CORNER BUNDLE

JUMPER RANDOM BUNDLE

COMING SOON

COASTAL SLATE



LONG CORNER UNIT 450 x 230-250 x 57mm 17 ½ x 9-10 x 2 ¼"



20 Units/Bundle

JUMPER UNIT 1 200 x 230-250 x 114mm 8 x 9-10 x 4½" 16 Units/Bundle



STANDARD UNIT 1 200 x 230-250 x 57mm 8 x 9-10 x 2 1/4" 32 Units/Bundle



SHORT CORNER UNIT 375 x 230-250 x 57mm 14 ½ x 9-10 x 2 ¼" 20 Units/Bundle



JUMPER UNIT 2 / 3 300 x 230-250 x 114mm 12 x 9-10 x 41/2" 12 Units/Bundle



STANDARD UNIT 2 300 x 230-250 x 57mm 12 x 9-10 x 2 1/4" 32 Units/Bundle





JUMPER CORNER 450 x 230-250 x 114mm 12 x 9-10 x 41/2" 16 Units/Bundle

WALL

AYR

57 mm

24.30

3.0

0.19

8.00

130.69

1.02

5.27

128.00

252

2.015

Stock

1

RANDOM

Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Stone

Layers

Sections

Bundle

Unit

SqFt

Section

Bundle

Layer

Section

Bundle

Reflectance

SR n/a SRI n/a

SR n/a SRI n/a

FCFT PER

PER BUNDLE

LNFT PER

UNITS PER

LBS PER

Colors

Coastal Slate

Buff

CORNER

RANDOM

AYR

57 mm

16.21

4.0

0.41

4.00

2.47

40.00

293

1.173

Stock

1 1



JUMPER UNIT 4 425 x 230-250 x 114mm 17 x 9-10 x 4½" 12 Units/Bundle



STANDARD UNIT 3 300 x 230-250 x 57mm 12 x 9-10 x 2 1/4" 32 Units/Bundle



STANDARD UNIT 4 425 x 230-250 x 57mm 17 x 9-10 x 2 1/4" 32 Units/Bundle

UNITS RANDOM BUNDLE

Rivercrest® Pillar and Fire Pit kit





APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Steps, Fire Feature, Seat Wall, Garden Wall

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		PILLAR UNIT			
Bundle Type		SINGLE			
	Plant Produced				
	Thickness (mm)				
	Bundle	-			
FCFT PER	Layer	-			
	Stone	-			
	Layers	2.00			
PER BUNDLE	Sections	-			
	Bundle				
LNFT PER		-			
	Unit	-			
	SqFt	-			
UNITS PER	Sections	-			
	Bundle	4.00			
LBS PER	Layer	441			
	Sections	-			
	Bundle	882			
Colors	Reflectance	Stock			
Buff	SR n/a SRI n/a	✓			
Coastal Slate	SR n/a SRI n/a	/			





BUFF

COASTAL SLATE

PILLAR UNIT



500 x 500 x 114mm 20 x 20 x 4 ½" Center opening 9 x 9"



Completed Unit Shown Pillar cap Sold Separately

FIRE PIT KIT



Fire Pit kit inserts and accessories sold separately.

SienaEdge™



APPLICATIONS

Seat Wall, Garden Wall, Structural Wall, Steps

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		STANDARD CORNER	COPING
	Bundle Type	SINGLE	SINGLE
Plant Produced		HARRISON	HARRISON
	Thickness (mm)	180 mm	180 mm
	Bundle	23.25	23.25
FCFT PER	Layer	7.75	7.75
	Stone	1.94	1.94
PER BUNDLE	Layers	3.00	3.00
PER BONDEL	Sections	3.00	-
LNFT PER	Bundle	39.37	-
LINITIEN	Unit	3.28	-
	1		
	SqFt	0.52	0.52
UNITS PER	Section	4.00	-
	Bundle	12.00	12.00
	Layer	1,029	1,029
LBS PER	Section	1,029	-
	Bundle	3,086	3,086

Colors	Reflectance	Stock	Stock
Fieldstone	SR n/a SRI n/a	/	✓
Granite	SR n/a SRI n/a	/	✓
Charcoal	SR n/a SRI n/a	/	✓









CHARCOAL

FIELDSTONE

GRANITE



STANDARD/CORNER 1000 x 290 x 180mm 39 3/8 x 11 1/2 x 7" 12 Units/Bundle 1.94 Fc.Ft./Stone



COPING 1000 x 290 x 180mm $39\,\%$ x 11 ½ x 7" 12 Units/Bundle 1.94 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

SINGLE UNIS



SienaStone™



APPLICATIONS

Structural Wall, Garden Wall, Steps

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CORNER 90°	CORNER 45°	STANDARD 500	STANDARD 925	COPING	COPING C-E
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
F	Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY	GORMLEY	GORMLEY
Т	hickness (mm)	185 mm	185 mm	185 mm	185 mm	185 mm	185 mm
	Bundle	19.11	-	14.43	7.21	14.43	14.43
FCFT PER	Layer	6.37	-	4.81	2.40	4.81	4.81
PER	Stone	3.19	-	2.41	2.40	2.41	2.41
	1	2.00	2.00	2.00	2.00	2.00	2.00
PER BUNDLE	Layers	3.00	3.00	3.00	3.00	3.00	3.00
DONDEL	Sections	-	-	3.00	-	3.00	3.00
LNFT	Bundle	-	-	24.00	12.00	23.70	23.70
PER	Unit	-	-	4.00	4.00	3.95	3.95
	0-54	0.31		0.42	0.42	0.42	0.42
UNITS	SqFt		-	-	0.42		·
PER	Section	-	-	2.00	-	2.00	2.00
	Bundle	6.00	6.00	6.00	3.00	6.00	6.00
	Layer	1,140	1,050	1,140	1,140	1,140	1,140
LBS	Section	-	-	1,140	-	1,140	1,140
PER	Bundle	3,420	3,150	3,420	3,420	3,420	3,420

Stock

SO

Stock

SO

Stock

SO



SO

NATURAL





SINGEE UNIS



CORNER 45° SPLIT 1100 x 500 x 185mm 43 3/8 x 19 3/4 x 7 3/8" 6 Units/Bundle

Colors

Natural

Reflectance

n/a

Stock

SO



STANDARD 500 SPLIT 1200 x 500 x 185mm 47 1/4 x 19 3/4 x 7 3/6" 6 Units/Bundle 2.41 Fc.Ft./Stone



STANDARD 925 SPLIT 1200 x 925 x 185mm 47¼ x 36½ x 7¾ " 3 Units/Bundle 2.40 Fc.Ft./Stone



COPING SPLIT1200 x 500 x 185mm
47 1/4 x 19 3/4 x 7 3/8"
6 Units/Bundle
2.41 Fc.Ft./Stone



COPING C-E SPLIT 1200 x 500 x 185mm 47 1/4 x 19 3/4 x 7 3/8" 6 Units/Bundle 2.41 Fc.Ft./Stone

Notes: Special Order (SD). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is sold on a required, refundable skid. Stocked CE is sold by the piece. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

SienaStone® Smooth



APPLICATIONS

Seat Wall, Structural Wall, Steps

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		38½" DOUBLE CORNER	48" WALL	48" COPING	48" COPING CLOSED-END R & L
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY
7	Γhickness (mm)	180 mm	180 mm	180 mm	180 mm
	Bundle	15.71	20.93	20.93	20.93
FCFT PER	Layer	5.24	6.98	6.98	6.98
	Stone	5.24	2.33	2.33	2.33
PER BUNDLE	Layers	3.00	3.00	3.00	3.00
T EN BONDEE	Sections	-	-	-	-
	Bundle	-	36.00	36.00	36.00
LNFT PER	Unit	-	4.00	4.00	4.00
	SqFt	0.19	0.43	0.43	0.43
UNITS PER	Section	-	-	-	-
	Bundle	3.00	9.00	9.00	9.00
	Layer	648	1,182	1,185	1,185
LBS PER	Section	-	-	-	-
	Bundle	1,944	3,546	3,555	3,555


Colors	Reflectance	Stock	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	1	✓	1	✓
Safari	SR.n/a SRI n/a	S0	S0	S0	S0






GRANITE


SAFARI




CORNER UNIT 375 975 x 375 x 180mm 38 ½ x 14 % x 7" 3 Units/Bundle 5.24 Fc.Ft./Stone



STANDARD 375 1200 x 375 x 180mm 47 1/4 x 14 1/8 x 7" 9 Units/Bundle 2.33 Fc.Ft./Stone



48" COPING 1200 x 383 x 180mm 47 1/4 x 15 x 7" 9 Units/Bundle 2.33 Fc.Ft./Stone



48" COPING CLOSED-END R OR L 1200 x 383 x 180mm 471/4 x 15 x 7" 9 Units/Bundle 2.33 Fc.Ft./Stone

SINGLE UNIS

SienaStone® Smooth Step



APPLICATIONS

Steps

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		48" STEP	72" STEP
	Bundle Type	SINGLE	SINGLE
	Plant Produced	GORMLEY	GORMLEY
	Thickness (mm)	180 mm	180 mm
	Bundle	13.95	6.97
FCFT PER	Layer	4.65	3.49
	Stone	2.33	3.49
PER BUNDLE	Layers	3.00	2.00
PER BUNDLE	Sections	-	-
LNFT PER	Bundle	24.00	11.81
LWITTEN	Unit	4.00	5.91
		I	
	SqFt	0.43	0.29
UNITS PER	Section	-	-
	Bundle	6.00	2.00
	Layer	1,081	798
LBS PER	Section	-	-
	Bundle	3,242	1,596

Colors	Reflectance	Stock	Stock
Dusk	SR.n/a SRI n/a	✓	SO
Granite Blend	SR.n/a SRI n/a	✓	S0
Charcoal	SR.n/a SRI n/a	/	SO
Safari	SR.n/a SRI n/a	/	S0










DUSK


GRANITE BLEND

CHARCOAL

SAFARI



48" STEP1200 x 500 x 180mm
47 1/4 x 19 3/4 x 7"
6 Units/Bundle
2.33 Fc.Ft./Stone



72" STEP1800 x 500 x 180mm
70 % x 19 3/4 x 7"
2 Units/Bundle
3.49 Fc.Ft./Stone





APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Fire Feature, Seat Wall, Garden Wall, Retaining Walls under-3, Structural Wall

APPEARANCE

Edge Detail - n/a Surface Texture - Smooth, Series Exposed, Umbriano® Mottled & Pitched


TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits







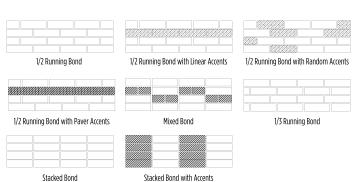















UMBRIANO PITCHED

SERIES

SUBWAY

LAVANO

U-Cara® Multi-Face Wall System





APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Retaining Walls under-3, Fire Feature, Seat Wall, Garden Wall, Structural Wall

APPEARANCE

Surface Texture - Smooth, Series Exposed, Umbriano® Mottled & Pitched

CROSS SECTIONS


All Cross Sections are available on Unilock's Contractor website under Products:


contractor.unilock.com


TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

U-CARA RETAINING WALL GEOGRID SECTION

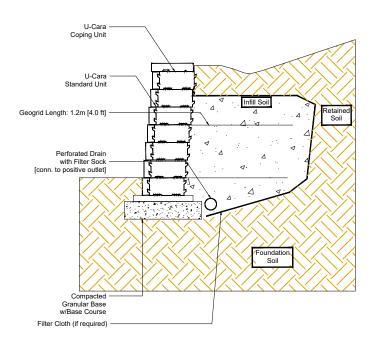

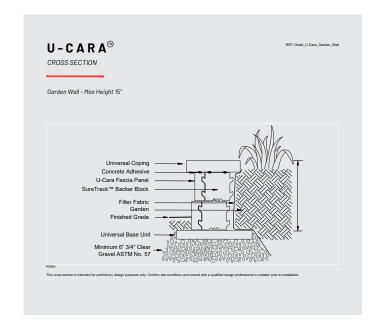

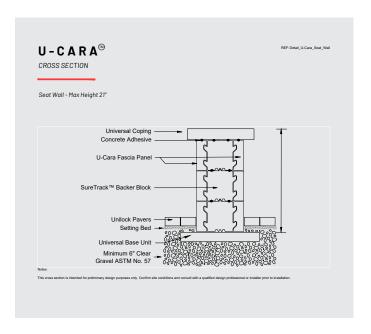

U-Cara® Fascia Panels



		STANDARD 6" FASCIA SMOOTH	CLOSED-END 6" FASCIA SMOOTH	STANDARD 3" FASCIA SMOOTH	STANDARD 6" FASCIA UMBRIANO	CLOSED-END 6" FASCIA UMBRIANO	STANDARD 6" FASCIA PITCHED	CLOSED-END 6" FASCIA PITCHED	STANDARD 3" FASCIA SERIES EXPOSED
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN	GEORGETOWN	GEORGETOWN	MICHIGAN	MICHIGAN	CHICAGO
	Thickness (mm)	150 mm	150 mm	71 mm	150 mm	150 mm	150 mm	150 mm	71 mm
	D dl -	04.50	54.40	02.00	04.50	54.40	04.50	54.40	50.00
	Bundle	61.52	54.18	63.20	61.52	54.18	61.52	54.18	59.32
FCFT PER	Layer	10.25	9.03	10.53	10.25	9.03	10.25	9.03	9.89
	Stone	0.73	1.29	0.19	0.73	1.29	0.73	1.29	0.18
	Layers	6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00
PER BUNDLE	Sections	-	-	-	-	-	-	-	
	Bundle	129.50	104.86	-	-	104.86	129.50	104.86	
LNFT PER	Unit	1.54	2.50	-	-	2.50	1.54	2.50	
	SqFt	1.37	0.78	5.32	1.37	0.78	1.37	0.78	5.66
UNITS PER	Section	-	-	-	-	-	-	-	
	Bundle	84.00	42.00	336.00	84.00	42.00	84.00	42.00	336.00
	Layer	252	207	242	252	213	291	236	250
LBS PER	Section	-	-	-	-	-	-	-	
	Bundle	1,513	1,240	1,453	1,513	1,240	1,745	1,415	1,501
Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Dark Charcoal	SR.n/a SRI n/a	1	1	-	-	-	-	-	-
Fossil	SR.n/a SRI n/a	1	1	-	-	-	✓	✓	-
Granite Fusion	SR.n/a SRI n/a	1	1	-	-	-	1	✓	-
Opal Blend	SR.n/a SRI n/a	1	1	-	-	-	-	-	-
Indiana Buff	SR.n/a SRI n/a	/	1	-	-	-	-	-	-
Sierra	SR.n/a SRI n/a	/	1	-	-	-	1	1	-
Sterling	SR.n/a SRI n/a	**	**	-	-	-	-	-	-
French Grey	SR.n/a SRI n/a	-	-	-	**	**	-	-	-
Grenada White	SR.n/a SRI n/a	-	-	-	**	**	-	-	-
Midnight Sky	SR.n/a SRI n/a	-	-	-	**	**	-	-	-
Summer Wheat	SR.n/a SRI n/a	-	-	-	**	**	-	-	-
Winter Marvel	SR.n/a SRI n/a	-	-	-	**	**	-	-	-
Onyx Black	SR.n/a SRI n/a	-	-	-	-	-	-	-	✓





FASCIA PANEL 5 % x 18 % x 2 % " 150 x 466 x 60mm 84 Units/Bundle .73 Sq.Ft./Stone



3" FASCIA PANEL 2% x 9 x 2 3%" 71 x 231 x 60mm 336 Units/Bundle .18 Sq.Ft./Stone



STANDARD FASCIA HALF PANEL5 % x 9 ½ x 2 ¾ "
150 x 233 x 60mm



CLOSED-END FASCIA PANEL 5 % x 20 % x 2 3/6" 150 x 530 x 60mm

Close-End panels: 24 rights/18 lefts per pallet

Notes: Special Order (SO). Minimum quantities apply. **Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

2 UNIT CLOSE-END BUNDLE


U-Cara® Fascia Panels



		LAVANO STANDARD	SUBWAY STANDARD	CLOSED END/ HALF PANEL
	Bundle Type	SINGLE	SINGLE	BUNDLE
	Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
	Thickness (mm)	150 mm	150 mm	150 mm
	Bundle	64.50	61.52	54.18
		61.52		
FCFT PER	Layer	10.25	10.25	9.03
	Stone	0.73	0.73	1.29
PER BUNDLE	Layers	6.00	6.00	6.00
. EK BONDEE	Sections	-	-	-
LNFT PER	Bundle	129.50	129.50	104.86
LWITTER	Unit	1.54	1.54	2.50
	SqFt	1.37	1.37	0.78
UNITS PER	Section	-	-	-
	Bundle	84.00	84.00	42.00
	Layer	252.00	252.00	207.00
LBS PER	Section	-	-	-
	Bundle	1,513	1,513	1,240


Colors	Reflectance	Stock	Stock	Stock
Indiana Buff	SR n/a SRI n/a	-	-	1
Granite Fusion	SR n/a SRI n/a	✓	-	✓
Fossil	SR n/a SRI n/a	✓	-	✓
Dark Charcoal	SR n/a SRI n/a	-	✓	✓
Opal Blend	SR n/a SRI n/a	-	1	✓






STANDARD FASCIA PANEL5 % x 18 % x 2 % "
150 x 466 x 60mm
84 Units/Bundle
.73 Fc.Ft./Stone

2 UNIT CLOSE-END BUNDLE



HALF FASCIA PANEL5 % x 9 1/4 x 2 3/8"
150 x 233 x 60mm



CLOSED-END FASCIA PANEL 5% x 20 % x 2 3/8" 150 x 530 x 60mm

U-Cara® Fascia Panels



SMOOTH PANELS



DARK CHARCOAL



FOSSIL



GRANITE FUSION



INDIANA BUFF



OPAL BLEND



SIERRA (while supplies last)



STERLING

UMBRIANO® PANELS
**Lead time requiered



FRENCH GREY



GRENADA WHITE



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

PITCHED PANELS



FOSSIL



GRANITE FUSION



SIERRA



ONYX BLACK

SUBWAY PANELS



DARK CHARCOAL



OPAL BLEND



INDIANA BUFF



GRANITE FUSION



FOSSIL

U-Cara® Multi-Face Wall System



		LARGE BACKER	STANDARD BACKER
Bundle Type		SINGLE	SINGLE
	Plant Produced	MICHIGAN	MICHIGAN
	Thickness (mm)	150 mm	150 mm
	Bundle	15.82	33.91
FCFT PER	Layer	3.96	11.30
	Stone	0.28	0.32
PER BUNDLE	Layers	4.00	3.00
FER BONDLE	Sections	-	-
	Bundle	-	69.99
LNFT PER	Unit	-	0.67
	SqFt	3.54	3.10
UNITS PER	Section	-	-
	Bundle	56.00	105.00
	Layer	503	812
LBS PER	Section	-	-
	Bundle	2,012	2,437

COMPONENTS




SURE TRACK LARGE BACKER5% x 6% x 115%"
150 x 175 x 294mm



SURE TRACK STANDARD BACKER5% x 5% x 7%"
150 x 150 x 195mm

RECOMMENDED BASE UNIT



UNIVERSAL BASE 482 x 355 x 55 mm 19 x 14 x 2 1/4" 54 Units/Bundle

EXTRA COMPONENTS



Ò

SURE TRACK CORNER INSERT L = 2" 50mm 40pcs/bag


Notes: Sold in full pallets only on a refundable skid. All measurements are nominal. Contact Unilock for more information.

U-Cara® Modular System



The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Places and Pillars.







NO.	MODEL	DESCRIPTION
UCARA000001	URS	UCARA 8' RAIL (10/PACK)
UCARA000003	URS	ALIGNMENT BARS 39"(10/PACK)
UCARA000007	UL-0SK	CABINET DEPTH CHANGE KIT
UCARA000009	UL-FIR	U-CARA FIREPLACE
UCARA000010	UL-FIR-M	U-CARA FIREPLACE MANTLE
UCARA000016	UL-FIR-MW	U-CARA FIREPLACE MANTLE WIDE UNIT
UCARA000017	UL-FIR-CH	U-CARA FIREPLACE CHIMNEY UNIT
UCARA000018	UL-FIR-CH-MW	U-CARA FIREPLACE CHIMNEY WIDE UNIT
UCARA000019	UL-FIR-RTN	U-CARA FIREPLACE RETURN
UCARA000020	UL-FIR-RTN-0S	U-CARA FIREPLACE RETURN OVERSIZED
UCARA001000	UL-GC	UNIVERSAL GRILL CABINET (fits 36-42" grill)
UCARA002000	UL-BC	BASE CABINET (fits fire table or fridge)
UCARA003000	UL-CC	CORNER CABINET 27.5" x 27.5"
UCARA003001	UL-CC-OS	CORNER CABINET 27.5" x 36.5" OS
UCARA003002	UL-CC-BP	CORNER CABINET BACK PANEL
UCARA004000	UL-ECK	END CLAD KIT 27.5"
UCARA004001	UL-ECK-OS	END CLAD KIT 36.5" OS
UCARA005000	UL-BS	BACKSPLASH-GRILL/BASE UNIT 641/2"
UCARA005001	UL-BS-CC	BACKSPLASH CORNER CABINET
UCARA005002	UL-BS-CC-OS	BACKSPLASH CORNER CABINET OS
UCARA006000	UL-DD	STAINLESS DOUBLE ACCESS DOORS 27"
UCARA007000	UL-PU	PILLAR UNIT (183/6" x 183/6")
UCARA001002	UL-GC-36	UNIVERSAL GRILL CABINET (FITS 36"-42" GRILL)
UCARA002001	UL-BC-36	BASE CABINET (FITS FIRE TABLE OR FRIDGE)
UCARA003004	UL-CC-0S-36	CRNR CABINET 27.5X36.5 OS
UCARA003005	UL-CC-36	CORNER CABINET 27.5X27.5
UCARA004002	UL-ECK-36	END CLAD KIT 27.5"
UCARA004003	UL-ECK-OS-36	END CLAD KIT 36.5" OS

U-Cara® Wall Mount System





The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.



U-CARA ALIGNMENT BAR: 39" LENGTH - SOLD IN PACKS OF 10 PIECES

U-CARA RAILS: 8' LENGTH - SOLD IN PACKS OF 10 PIECES

U-Cara® Wall Mount System Installation

Alignment Bar

38-5/8" tall (up to 7 courses of 6" fascia panels)

Pre-punched to accommodate both 3" & 6" panels Eliminates the need to measure for rail spacing

Speeds up installation

10 per bundle

Horizontal Rail

8' long with pre-punched holes every 8"

Heavy duty galvanized steel

10 per bundle

U-Cara Fascia Panels


EnduraColor Technology

Available in 4 different finishes and several colors

Apply adhesive and hang on wall mount system




Wood Substrate Application



CARLISLE

Barrithane VP






Sharp Point Roofing Screw #12 x 1-1/2"

Hex head Rubber washer Corrosion resistant

coating

Concrete Substrate Application






Titen 2 Hex Head 3/16" x 1-3/4"



Improved thread design Increased load capacity Reduced snapping 450+ pound tension load


275+ pound shear load

U-Cara® Wall Mount System Installation




Step 1: Determine finished top height, mark with chalk line. Align orange painted end of alignment bar with chalk line.

Alignment bars should be placed 16" in from end of horizontal rail, and every 32".




Step 2: Fasten both horizontal rail and alignment bars to substrate at points 1, 2, and 3; ensuring the rail is level.

The first four screws are the most important, as they will establish your grid pattern for all your horizontal rails in this section.




Step 4: Fasten the bottom horizontal rail and alignment bars at points 5 and 6.



Step 3: Fasten the bottom horizontal rail and alignment bar at point 4; use a level or a square to ensure alignment bar is plumb

You have now established your grid pattern for the rest of your horizontal rails in this section.



Step 5: Fasten remaining horizontal rails.

All horizontal rail should be fastened to substrate every 16" and on both ends.

Beacon Hill™ Coping





APPLICATIONS

Pillar, Water Feature, Pool Coping, Fire Feature, Wall Coping, Steps

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CHAMFERED	FULLNOSE
	Bundle Type	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO
	Thickness (mm)	60 mm	60 mm
		0.00	0.00
	Bundle	9.30	9.30
FCFT PER	Layer	-	-
	Stone	0.39	0.39
PER BUNDLE	Layers	6.00	6.00
T ER BORBLE	Sections	-	-
	Ъ	47.04	47.04
LNFT PER	Bundle	47.24	47.24
	Unit	1.97	1.97
	SqFt		_
LINITO DED		4.00	4.00
UNITS PER	Layer	4.00	4.00
	Bundle	24.00	24.00
	Unit	63	63
LBS PER	Sections	337	337
	Bundle	1,510	1,510

Colors	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	✓	/
Granite Fusion	SR n/a SRI n/a	✓	✓
Oat Beige	SR n/a SRI n/a	✓	/
Opal Blend	SR n/a SRI n/a	/	/





DARK CHARCOAL

GRANITE FUSION






OAT BEIGE

OPAL BLEND

SINGLE UNITS



CHAMFERED 600 x 360 x 60 mm 24 x 14 x 2 3/8 24 Units/Bundle



FULLNOSE600 x 360 x 60 mm
24 x 14 x 2 3/8
24 Units/Bundle

Notes: Coping units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. Product is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

Brussels Fullnose™



APPLICATIONS

Steps, Pillar, Water Feature, Pool Coping, Wall Coping, Fire Feature

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		STANDARD
	SINGLE	
	Plant Produced	MICHIGAN
	Thickness (mm)	70 mm
	Bundle	_
FCFT PER	Layer	-
	Stone	-
PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	4.00
	Bundle	96.00
LNFT PER	Unit	0.50
	SqFt	-
UNITS PER	Section	48.00
	Bundle	192.00
	Layer	384
LBS PER	Section	769
	Bundle	3,074

Colors	Reflectance	Stock
Charcoal	SR. n/a SRI n/a	✓
Coffee Creek	SR. n/a SRI n/a	✓
Limestone	SR. n/a SRI n/a	✓
Mahogany	SR. n/a SRI n/a	/
Sandstone	SR41 SRI 46	/
Sierra	SR. n/a SRI n/a	✓





DARK CHARCOAL

COFFEE CREEK

LIMESTONE







MAHOGANY

SANDSTONE

SIERRA



6 x 12 150 x 300 x 70mm 5 % x 11 % x 2 3 4 " 192 Units/Bundle

Ledgestone[™] Coping & Closed-End Coping



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Fire Feature, Structural Wall, Steps


APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1776 Eligible for LEED v4.1 credits

		FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END	LARGE COPING	LARGE CLOSED-END
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	60 mm	70 mm	70 mm	70 mm	70 mm
	T					
FCFT	Bundle	5.12	5.52	5.52	6.87	6.87
PER	Layer	0.39	1.38	1.38	1.72	1.72
	Stone	0.39	0.46	0.46	0.57	0.57
PER	Layers	13.00	4.00	4.00	4.00	4.00
BUNDLE	Sections	-	-	-	-	-
LNFT	Bundle	26.00	24.00	24.00	30.00	30.00
PER	Unit	2.00	2.00	2.00	2.50	2.50
	SgFt	2.54	2.18	2.18	1.75	1.75
UNITS PER	Section	-	-	-	-	-
I LIX	Bundle	13.00	12.00	12.00	12.00	12.00
	ĺ					1
LDC	Layer	56	193	199	282	279
LBS PER	Section	-	-	-	-	-
	Bundle	723	772	796	1,128	1,116







BUFF

GREY




FULLNOSE COPING 610 x 305 x 60mm 24 x 12 x 2 3/8" 13 unit/Bundle .39 Fc.Ft./Stone


SINGLE UNITS




STANDARD COPING 610 x 305 x 70mm 24 x 12 x 2 ¾" 12 unit/Bundle .46 Fc.Ft./Stone



STANDARD CLOSED-END COPING 610 x 305 x 70mm 24 x 12 x 2 ³/₄" 12 unit/Bundle .46 Fc.Ft./Stone



LARGE COPING 762 x 343 x 70mm 30 x 13 ½ x 2 ¾" 12 unit/Bundle .57 Fc.Ft./Stone



LARGE CLOSED-END COPING 762 x 343 x 70mm 30 x 13 ½ x 2 ¾" 12 unit/Bundle .57 Fc.Ft./Stone

Notes: Lead time is required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping are rock faced on three sides. Fullnose is rounded only on one side, no Closed-end available. All measurements are nominal. Contact Unilock for more information.

Ledgestone™

Pillar Caps, Steps & Fire Pit Coping



APPLICATIONS

Pillar, Steps, Step Treads

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1776 Eligible for LEED v4.1 credits






GREY

		48" STEP	72" STEP	24" PILLAR CAP	29" PILLAR CAP	21½" FIRE PIT COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	MULTI-PLANT	MULTI-PLANT	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 mm	150 mm	100 mm	100 mm	65 mm
	Bundle	5.91	8.86	3.28	-	-
FCFT PER	Layer	1.97	2.95	0.66	-	-
	Stone	1.97	2.95	0.66	-	-
PER	Layers	3.00	3.00	5.00	5.00	6.00
BUNDLE	Sections	-	-	-	-	-
LNFT PER	Bundle	12.00	18.00	10.04	-	-
LNFIPER	Unit	4.00	6.00	2.01	-	-
	SqFt	0.51	0.34	1.52	-	-
UNITS PER	Section	-	-	-	-	-
	Bundle	3.00	3.00	5.00	5.00	24.00
	Layer	556	813	159	206	142
LBS PER	Section	-	-	-	-	-
	Bundle	1,669	2,439	795	1,030	852

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Buff	SR.n/a SRI n/a	1	80	1	1	1
Grey	SR.n/a SRI n/a	1	S0	1	/	1


SINGLE UNIT




ROCKFACE FIRE PIT COPING 254 x 546 x 65mm 10 x 21 ½ x 2 5/8"

24 Units/Bundle

8 pieces per Fire pit, Outside Diameter 54" Inside Diameter 34"




ROCKFACE 24" 610 x 610 x 100mm 24 x 24 x 3 1/8" 5 Units/Bundle .66 Fc.Ft./Stone



ROCKFACE 28" 740 x 740 x 100mm $28 \frac{1}{2} \times 28 \frac{1}{2} \times 4$ " 5 Units/Bundle .66 Fc.Ft./Stone



ROCKFACE 48" 1220 x 610 x 150mm $48 \times 24 \times 5 \%$ " 3 Units/Bundle 1.97 Fc.Ft./Stone



ROCKFACE 72" 1830 x 610 x 150mm $72 \times 24 \times 5 \%$ " 3 Units/Bundle 2.95 Fc.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply, Lead time required. Produced and sold on a required, refundable skid. Step is rock-faced on 3 sides, while the Pillar Caps are rock-faced on all 4 sides. All measurements are nominal. Contact Unilock for more information.

SINGLE UNITS

PILLAR CAP







APPLICATIONS

Pillar, Water Feature, Pool Coping Fire Feature, Wall Coping, Steps

APPEARANCE

Edge Detail - Chamfered, Rounded Surface Texture - Umbriano Mottled

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		CHAMFERED 24 x 14	FULLNOSE 24 x 14
	Bundle Type	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO
	Thickness (mm)	60 mm	60 mm
	Bundle	9.30	9.30
FCFT PER	Layer	-	-
	Stone	0.39	0.39
PER BUNDLE	Layers	6.00	6.00
T EN BONDEE	Sections	-	-
LNFT PER	Bundle	47.20	47.20
EMITTER	Unit	0.98	0.98
	0.5		
	SqFt	-	-
UNITS PER	Layer	4.00	4.00
	Bundle	24.00	24.00
	Unit	63	63
LBS PER	Layer	252	252
	Bundle	1,510	1,510

Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	SO	SO
Grenada White	SR .45 SRI 52	SO	SO
Midnight Sky	SR .17 SRI 15	SO	SO
Summer Wheat	SR .42 SRI 48	S0	S0
Winter Marvel	SR .35 SRI 38	S0	S0







FRENCH GREY

GRENADA WHITE

MIDNIGHT SKY





SUMMER WHEAT

WINTER MARVEL





CHAMFERED 600 x 360 x 60 mm 24 x 14 x 2 3/8" 24 Units/Bundle



FULLNOSE 600 x 360 x 60 mm 24 x 14 x 2 3/8" 24 Units/Bundle

Universal Coping





APPLICATIONS

Pillar, Water Feature, Pool Coping, Fire Feature, Wall Coping, Steps

APPEARANCE

Surface Texture - Standard / Smooth

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

	COPING / STEP
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	70 mm

	Bundle	17.44
FCFT PER	Layer	2.18
	Stone	0.36

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

LNFT PER	Bundle	75.90
LNFIPER	Unit	1.58

UNITS PER	SqFt	2.75
	Section	-
	Rundle	48.00

	Layer	343
LBS PER	Section	-
	Bundle	2,747

Colors	Reflectance	Stock
Dark Charcoal	SR.n/a SRI n/a	✓
Natural	SR.n/a SRI n/a	✓
Sandstone	SR.n/a SRI n/a	/








DARK CHARCOAL

NATURAL


SANDSTONE



UNIVERSAL COPING482 x 355 x 70mm
19 x 14 x 2 34"
48 Units/Bundle
.36 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is shipped on an optional, refundable skid. Two (2) End Coping units per Layer (1 Left & 1 Right). All measurements are nominal. Contact Unilock for more information.







APPLICATIONS

Pillar, Water Feature, Pool Coping, Fire Feature, Wall Coping, Steps

APPEARANCE

Surface Texture - Smooth

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CHAMFERED 36 x 19	FULLNOSE 36 x 19	CHAMFERED 24 x 14	FULLNOSE 24 x 14
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
	Thickness (mm)	60 mm	60 mm	60 mm	60 mm
	Bundle	3.75	3.75	9.30	9.30
FCFT PER	Layer	-	-	11.63	11.63
	Stone	0.31	0.31	1.94	1.94
PER BUNDLE	Layers	6.00	6.00	8.0	8.0
FER BONDEL	Sections	-	-	-	-
		0.5.4	0- 4	47.00	47.00
LNFT PER	Bundle	35.4	35.4	47.20	47.20
	Unit	2.9	2.9	0.98	0.98
	SqFt	-	-	-	-
UNITS PER	Layer	2.00	2.00	4.00	4.00
	Bundle	12.00	12.00	24.00	24.00
	Unit	128.7	128.7	63	63
LBS PER	Layer	257	257	252	252
	Bundle	1,544	1,544	1,510	1,510

Colors	Reflectance	Stock	Stock	Stock	Stock
Dark Charcoal	SR.n/a SRI n/a	✓	✓	✓	✓
Indiana Buff	SR.n/a SRI n/a	✓	✓	✓	1
Sterling	SR.n/a SRI n/a	✓	✓	✓	✓
Linen Buff 🗿	SR.n/a SRI n/a	S0	SO	SO	SO
Linen Grey 👩	SR.n/a SRI n/a	S0	S0	S0	S0












DARK CHARCOAL

INDIANA BUFF

STERLING

LINEN BUFF

LINEN GREY



SINGLE UNITS

36 x 19 FULLNOSE $900 \times 485 \times 60 \text{ mm}$ 35½ x 19 x 23/8 12 units/Bundle



24 x 14 FULLNOSE 600 x 300 x 60 mm 23 5/8 x 11 7/8 x 23/4" 24 units/Bundle





24 x 14 CHAMFERED 600 x 300 x 60 mm $23 \frac{5}{8} \times 11 \frac{7}{8} \times 2^{3}\frac{4}{4}$ 24 units/Bundle

Notes: Special Order (SO). Lead time required (*). Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. All measurements are nominal. Contact Unilock for more information.

Sunset Fire Pit Kit



APPLICATIONS

Fire Feature

APPEARANCE

Surface Texture - Standard / Tumbled

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

	ROUND
Bundle Type	SINGLE
Dimension Metric	1300 x 1300 x 300mm
Dimension Imperial	51 1/4 x 51 1/4 x 11 7/8"
Thickness (mm)	300 MM

DIAMETER (inch)	Outside	52.00
	Inside	36.00
	Insert	34.00

LAYER PER UNIT	3.00
UNIT PER LAYER	20.00
UNIT PER PALLET	60.00

LBS PER PALLET	1,125	
----------------	-------	--

Colors	Reflectance	Stock
Coffee Creek	SR. n/a SRI n/a	/
Limestone	SR. n/a SRI n/a	✓
Mahogany Ash	SR. n/a SRI n/a	✓
Sandstone	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	√







COFFEE CREEK

LIMESTONE


MAHOGANY ASH






SANDSTONE

SIERRA



INSERT DIAMETER 34"



INSERT DIAMETER 38"



SUNSET ROUND W/INSERT

1300 x 1300 x 300mm $51\frac{1}{4} \times 51\frac{1}{4} \times 11\frac{7}{8}$ "

FIRE PIT INSERTS SOLD SEPARATELY

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

Notes: All measurements are nominal. Contact Unilock for more information.

SINGLE UNIT

Unilock Elements

TUSCANY COLLECTION



TUSCANY FIREPLACE
Sandstone with Copthorne* (3 Color Blend)
SPECIAL ORDER



TUSCANY FIREPLACE
Sierra with Copthorne* (3 Color Blend)
SPECIAL ORDER

WEIGHTS Tuscany Collection

Fireplace Top -2,925 lbs Fireplace Bottom -4,225 lbs Wood Boxes -4,005 lbs Arched Hearth -1,170 lbs

BARCELONA COLLECTION



Fireplace Top — 2,725 lbs Fireplace Bottom — 4,170 lbs Wood Boxes — 4,200 lbs Arched Hearth — 1,200 lbs

Barcelona Collection

WEIGHTS:

BARCELONA FIREPLACE
Sierra with Umbriano* (Summer Wheat)
SPECIAL ORDER




MODA SPECIAL ORDER

WEIGHTS

Moda Base — 3,550 lbs Moda Top — 1,915 lbs


The Moda pre-built fireplace is constructed from Lineo Dimensional Stone and Series™ accent.

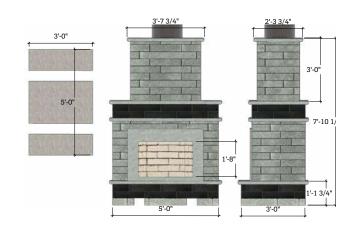


Note: Items shown are Tuscany units. Please contact Unilock for more information on special order items. Units and measurements may not be exactly as shown.

Unilock Elements

TUSCANY & BARCELONA FIREPLACE

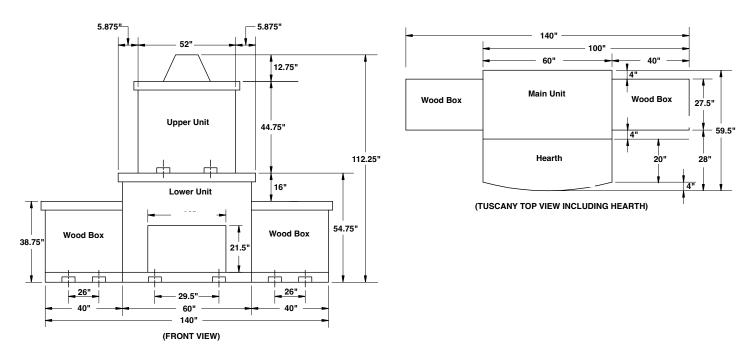

TYPICAL CROSS SECTION FOR CONCRETE PAD INSTALLATION

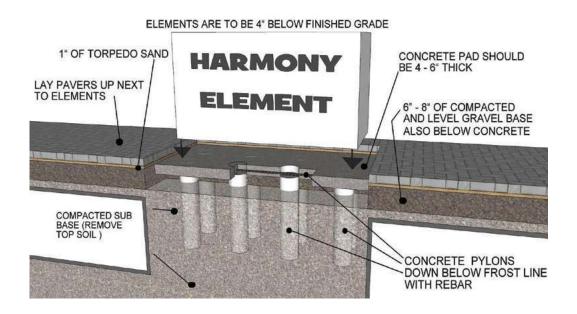

GUARANTEE

The standard Unilock guarantee applies to the units used to construct Unilock Elements. (See Unilock literature for details.) Third party grills and fireboxes carry their respective manufacturer's warranty, and may change without notice.

Note: Unilock reserves the right to change model designs, accessories and colors without notice. Unilock will not be responsible for improper use or handling that results in property damage. Some models may not be exactly as shown. Fireplaces come complete with UL- approved stainless steel fireboxes. Check local building codes and regulations prior to ordering and installing Unilock Elements.



NEW from Unilock, the SkyView Roof Deck System is a comprehensive product lineup that includes adjustable pedestals, invisible wind uplift solutions, roof deck slabs, wood tile, and fiberglass grate. Together, these components offer unmatched flexibility, empowering designers to create elevated rooftop spaces that are visually stunning, durable and high-performing. The system's intuitive design also simplifies installation for contractors, ensuring efficiency without compromising quality. With SkyView, reimagine what's possible for roof deck design and construction.

SKYVIEW PEDESTAL SYSTEM

Unilock SkyView Pedestals are patent pending, fully adjustable structural supports for elevating paving materials. Our pedestals ensure unmatched flexibility, ease of installation and durability.



- 1/2" and 1" Waffles available for low profile applications.
- 10 $\!\!\!^{\prime\prime}$ Cores and Collars available for taller applications up to 31 $\!\!\!^{\prime\prime}$.

SKYVIEW WIND UPLIET SYSTEM

When the below components are combined with the SkyView Pedestal System, they create a rafted paving surface with an invisible tie-down mechanism that resists wind uplift pressures without compromising project aesthetics.

1 | Wind Uplift Slabs

24 x 24" slabs featuring a kerfed undercut that spans the length of two opposing sides.



2 | Wind Uplift Kit

This 3-part kit is easily added to SkyView Pedestals to form a tie-down mechanism that works seamlessly with our Wind Uplift Slabs.



SKYVIEW GRATE

When this 48 x 48" fibreglass grate is placed on SkyView Pedestals, it creates a stable surface for installing smaller paver units on an elevated roof deck.



SKYVIEW IPE WOOD TILE

Sustainably harvested and FSC certified, these 24×24 " tiles have a dense hardwood composition that makes them perfect for use on SkyView Pedestals.



Ask your Unilock Represenative about the made to order roof deck slab options available for your projects.

Paver Cleaners



POLYBIND™ SHAMPOO

CLN047 (1 Gallon) 1 & 5 Gallon available 1 US Gal/Box

Polybind Shampoo removes ground-in dirt from the surface of concrete pavers and natural stones. This shampoo will make your patio, walkway, driveway, etc. look clean and vibrant. Use it before sealer application to assure you of a deeper penetration into the cleaned surface. No muriatic acid in product – washes off with water.

Note: 5 Gallon is SPECIAL ORDER



POLYBIND OIL & GREASE REMOVER

CLN050 (1 Quart) 1 Quart Container (6/Box)

Polybind Oil & Grease Remover is effective in removing oil and grease from the surface of concrete pavers and natural stones. Easy to use - dissolves, dislodges and removes oil and grease. No hydrochloric acid in product - washes off with water.



POLYBIND EFFLORESCENCE CLEANER

CLN045 (1 Gallon) & CLN046 (5 Gallon)

Polybind Efflorescence Cleaner will remove any efflorescence stains trapped in the concrete paver and natural stone pores. It will make the pavers look more clean and vibrant. This efflorescence cleaning is a necessary step before a sealer is applied. The sealer will be able to get a deeper penetration into the now-clean pores.



POLYBIND RUST REMOVER

CLN051 (1 Quart) (6/Box)

Polybind Rust Remover is effective in removing rust from the surface of concrete pavers. Contains no muriatic acid.



POLYBIND SEALER STRIPPER

CLN068 (1 Gallon) & CLN069 (5 Gallon) (Box of 4 x 1 US Gallon)

Polybind Sealer Stripper is extremely effective for removing either water-based or solvent-based sealers from concrete pavers or stone. It is environmentally responsible (water-based), yet it removes multiple layers in a single application. It is a paste which is easily applied with a brush or roller.



GATOR EFFLORESCENCE AND SLURRY REMOVER

5 Gallon; 48 pails

Will remove any efflorescence stains trapped in the concrete pavers, wet cast and natural stone pores. It will make the pavers look more clean and vibrant without discoloring or damaging the paver surface. This Professional Grade efflorescence cleaner is also a slurry remover. This is a necessary step prior to sealer application to allow for a deeper penetration into the now clean pores.acid in product – washes off with water.

Sealers



SUREBOND 8700 WET LOOK JOINT SAND STABILIZER WITH FUNGICIDE

SEAL151 1 gallon; 4/case; 36 cases/skid (27 cases)

- Seals & enhances surface while hardening jointing sand.
- Deeply enhances surface with stain-resistant semi-gloss finish.
- Formulated with antifungal to stop growth of mold, fungi and moss.
- · Rain safe in 90 minutes; approx.
- · Coverage 80-120 sq.ft.
- 1,000 lbs. HAZMAT weight restriction applies with this product.



POLYBIND™ HIGH GLOSS SEALER (BLUE)

SEAL145 (1 Gallon) & SEAL146 (5 Gallon) 1 & 5 Gallon Available Box of 4 x 1 US Gallon

This water based sealer offers a high-gloss finish for all concrete pavers that have never been sealed or pre-sealed in the manufacturing process.



POLYBIND ECO SEAL HIGH GLOSS SEALER + COLOR ENHANCER WB

SEAL185 (1 Gallon) & SEAL186 (5 Gallon) 1 & 5 Gallon Available Box of 4 x 1 US Gallon

This high gloss sealer is 100% pure, high-grade acrylic used to seal concrete, clay pavers and natural stone, by penetrating deep into their pores, thus reducing oil and dirt penetration as well as protecting them from the corrosion of de-icing salt. It provides a high-gloss finish as well as vibrant color enhancement.

Sealers (continued)

Un' GLOSS

POLYBIND ECO SEAL LOW GLOSS SEALER + COLOR ENHANCER WB

SEAL178 (1 Gallon) & SEAL179 (5 Gallon) 1 & 5 Gallon Available Box of 4 x 1 Us Gallon

Polybind Eco Low Gloss Sealer + Color Enhancer is 100% pure high-grade acrylic for concrete pavers. It penetrates deep into the concrete paver pores, reducing oil and dirt penetration as well as corrosion from de-icing salt.



POLYBIND™ ECO SEAL LOW GLOSS

SEAL147 (1 Gallon) & SEAL148 (5 Gallon) Box of 4 x 1 US Gallon

Polybind Eco Seal Low Gloss is 100% pure, highgrade acrylic used to seal concrete pavers, clay pavers and natural stone. It penetrates deep into the pavers and natural stone pores, thus reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.



POLYBIND RESEALER SB

SEAL155 (1 Gallon) & SEAL156 (5 Gallon) 1 & 5 Gallon Available Box of 4 x 1 Us Gallon

Polybind Resealer penetrates the existing sealer and reactivates it to create rejuvenated protection of the paver surface, thus reducing oil and dirt penetration as well as protecting it from the corrosion of de-icing salt.



POLYBIND™ WET LOOK SEALER SB

SEAL143 (1 Gallon) & SEAL144 (5 Gallon) 1 & 5 Gallon Available Box of 4 x 1 US Gallon

This wet look sealer is made from acrylic-based polymers that penetrate deep into the concrete paver and natural stone pores, This results in reduced oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.



POLYBIND™ SEAL SATIN LOOK

SEAL141 for 1 Gallon & SEAL142 for 5 Gallon

Sealer is made from acrylic-based polymers. Polybind Satin Look Sealer penetrates deep into the concrete pavers, thus reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt. Specifically formulated to be used on unsealed surfaces only.



GATOR SEAL SLIT FOAM ROLLER FOR SOLUTION BASED SEALERS 9.5"

CLN070

For Semi-Rough and Rough Surfaces

- Applies Sealers Evenly
- Works Great on Textured Surfaces
- Remains Spongy and will not Compress



BACK TO BLACK SEALER FOR NATURAL STONE SEAL 238

- Quickly revives and enhances faded dark limestone
- Provides a strong and uniform color enhancement
- Excellent water resistance
- Single coat provides a rich enhanced color
- 1 liter covers up to 40m2 based on one coat, depending on surface porosity

Adhesives



SUREBOND SB-10 ADHESIVE

ADH002 28oz tube; 12/Case; 60 Cases/skid (Conforms to UN-STD. 1804, ASTM 2339-70 & FHA UM-60)

Surebond SB-10 adhesive is a fast set-up, quick curing, superior strength, structural grade hardscape adhesive. Adheres well in extreme conditions such as temperatures ranging from 0° to 100° F, frozen and/or damp substrates.

Light Tan • Low odor • VOC compliant • 900 psi



POLYBIND XTRA PERFORMANCE (XP) POLYURETHANE ADHESIVE

ADH035 (10 oz) & ADH038 (28 oz) 10 oz. Tube = 20' at ¼" bead & 28 oz. Tube = 52' at ¼" bead

Formulated for fast cure time, extra bond strength and durability. Applications include concrete pavers and walls, overlays, pool copings, steps & wall caps, wetcast and natural stones. It can be applied above 32° & on either dry or damp surfaces. Drying times vary depending on factors such as humidity, porosity, temperature and materials bonded together.



TECHNISEAL STRUCTURE BOND™ FOAM ADHESIVE

ADH048 (24 oz)

Canister = 600 linear feet at 3/8" bead (12/Case)

An innovative super-strength foam adhesive that bonds a wide range of construction products with an application time up to $50\,\%$ faster than with conventional tube adhesives. Materials are bonded in just 8 minutes and adhesive is fully cured within 24 hours. Made from high-quality modified polyurethanes with excellent long-term resistance to weathering, dilute acids and caustic solutions.



TECHNISEAL STRUCTURE BOND™ GUN II TOOL378 1 Dispenser (12/Case)

The Gun II dispenser for application enables you to gain access to hard-to-reach areas and greatly limits excessive spillage or dripping, while also reducing user-fatigue, with total control on product flow. The gun allows for a precise adhesive delivery with a single pull of the trigger that stops as soon as you let go. Requires no pumping, cutting or puncturing of cartridge nozzles.



TECHNISEAL STRUCTURE BOND™ FOAM CLEANER

CLN093 (16 oz) 1 Canister = (12/Case)

Structure Bond Gun Cleaner is a powerful cleansing formula that rapidly dissolves any uncured Structure Bond adhesive residue. Specifically designed to fit Structure Bond Gun II dispensers. Simply screw a canister onto the gun and press the trigger to cleanse the tool from uncured product. The built-in sprayer nozzle will dissolve any spill, drip or adhesive residue.

Sands



ALLIANCE GATOR NITRO SAND

SAND196 - Beige, SAND197 - Gray, SAND198 - Black SAND236-Silver

Packaging: 40 lb/bucket 48 buckets/skid Coverage: 10-56sf = 50lb bucket.

Ready-to-use mixture of calibrated sand and resins which cure when exposed to air.

This product hardens from top to bottom of the joint. This can be installed in wet or dry weather, in joints ranging from a minimum 3/16" (5mm) to a maximum 2" (50mm) joint width. The minimum jointing depth is 1" (25mm).



Black | Grev | Gunmetal | Taupe | Platinum | Vanilla 27.5 lbs Pail; 48 Pails/Pallet

- · Rapid Flow Technology
- · Fast and simple installation
- · Xtra Fine gradation jointing sand
- · Xtra Low permeability
- Xtra Strength from top to bottom ***
- Apply rain or shine
- Joint width from 1/8" to 2" (3 mm to 50 mm)****
- · 5-year limited warrantywidth.

*** Gator Nitro-X Fine Joint Sand will harden from top to bottom

up to 2 3/8" (60 mm).
***** Ensure there is ABSOLUTELY NO paver, porcelain tile or stone movement prior to installation to prevent joint cracking.

POLYBIND G2 COMPLETE SAND



RAPID FLOW TECHNOLOGY

SAND152 (Nevada Tan), SAND153 (Oxford Gray), SAND154 (Jet Black), SAND155 (Ivory White -SPECIAL ORDER - Full Skid Quantities Only) Packaging: 50lb/bag 56 bags/skid 65-85 sq.ft./bag for narrow joints Designed for paver joints up to a maximum of 4 inches. Drainage & Non-Drainage Applications No Dust - No Haze - No Blower - One Watering. This is the cleanest, fastest and easiest polymeric sand installed in the industry. It can be used with concrete pavers, wetcast & natural stones. This is recommended for use in patios, pool decks, walkways, driveways, etc.

POLYBIND DUST



SAND072 (Dust Tan), SAND073 (Dust Gray) A unique mixture of polymer binders and calibrated stone available in Beige and Gray. Once Polybind Dust sets, it becomes very firm and locks between the wet cast or natural stone joints while still retaining flexibility and providing a long lasting, durable jointing material. Polybind Dust is recommended for a variety of uses including pool decks, patios, footpaths, and any other pedestrian applications.

SEK POLYSWEEP SAND



SAND045 (Tan), SAND046 (Gray), SAND147 (Platinum) Packaging: 50 lb/bag 56 bags/skid For concrete paver, cast stone pavements, slabs and natural stone joints up to 3/4". PolySweep polymeric sand is a blend of native sands and high quality synthetic polymers specially formulated to allow the joints to expand and contract with elements such as extreme heat, extreme cold and freeze/thaw cycles.



EUROSTONE BOND

SAND097 - SLATE GRAY 50lb. bag (56 bags/skid) For Driveway Aprons Application & Cobblestone Joints up to 3.5cm / 1"

Eurostone Bond is the first polymeric sand specifically designed for drainage and nondrainage base systems and can be used with natural stones and cobblestone. Recommended for many uses, including streets, plazas (pedestrian and vehicular traffic) paths, sloping areas, around pools, etc. Sets above freezing (0°C / 32°F) and can be used for joints up to a maximum of 3.5 cm/1".

PS-1500 RJS REACTIVE RESIN JOINT SAND SYSTEM

SAND233 (Pebble), SAND234 (Slate), SAND235 (Driftwood)

Made with a new generation synthetic resin that hardens when it reacts with the air. It can be used in new or existing installations to create beautiful yet extremely durable hardened sand joints that will withstand the rigors of residential vehicle traffic and harsh freeze/thaw conditions.



SEK JOINTING SAND

SAND001-1 - Tan SAND148 - Platinum Kiln dried and angular shaped in order to flow easily and stay in place. Packaging: 50 lb/bag 56 bags/skid

Sands continued

ESTIMATED POLYMERIC SAND COVERAGE BY PRODUCT

PRODUCT	COVERAGE PER BAG
Anchorlock™	60-65 sf
Artline™	60-65 sf
Beacon Hill™	50-60 sf
Boulevard™	50-60 sf
Bristol Valley™	55-60 sf
Brussels Block®	80-85 sf
Copthorne®	50-60 sf
Courtstone®	30-40 sf
Eco-Optiloc™	40-50 sf
Eco-Priora™	50-60 sf
Eco-Promenade®	40-50 sf
Granito™	50-60 sf
Hex Paver™	50-60 sf
Hollandstone™	70-75 sf
Holland Premier™	70-75 sf
II Campo®	70-75 sf
Mattoni™	45-50 sf
Natural Stone	N/A
Nordic Cobble™	20-25 sf
Porcelain	N/A
Promenade™	20 sf
Promenade Ecoterra ®	50-60 sf
Richcliff®	45-50 sf
Series™	50-60 sf
Skyline™	60-65 sf
Thornbury™ (Permeable)	40-45 sf
Town Hall®	20-30 sf
Tribeca Cobble™	40-45 sf
Treo®	50-60 sf
Umbriano® 6cm Random	55-60 sf
Umbriano® 7cm	60-65 sf
Urban™	55-60 sf
Westport™	55-60 sf

Approximate Coverage: Jointing material type, paver thickness, joint width, and bedding course type may affect quantities required. Installation practices may affect the amount of sand used per product.

IMPORTANT NOTICE

1. **EXTRA CARE** Extra Care must be exercised when using polymeric sand on all Unilock products.

Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Polymeric Jointing Sand have a natural tendency to adhere to the surface. Therefore extra diligence must be taken to pre-clean the surface prior to "wetting the sand in" and squeegee off the surface post application. Failure to do so will result in a "whitish haze" on the surface that is difficult to remove.

2. **DO NOT USE** Polymeric Jointing Sand on the following products:

Series[™] II Campo[®] Tribeca Cobble[™]

If joint stabilization is required, use ordinary jointing sand and apply a stabilizing sealer. Contact your local Unilock office for recommended sealants and application specifics.

3. <u>IMPORTANT COMPACTION NOTICE</u>: Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric Sand can then be swept into the joints. Always use a compactor with a protective membrane attached to the bottom of the plate.

Polymeric Jointing Sand, cleaners and sealers, <u>must</u> always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.

NOTICE: Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of polymeric sand, sealers or cleaners. Additionally, any issues related to the installation or application of polymeric sand, jointing sand, sealers or cleaners should be handled through the manufacturer of that specific product.

Edge Restraints

SNAPEDGE - One-Piece Edging That Does It All!

EDGE001


- · Only one part required for straight runs or curved installations
- Built-in connector fastens one piece to the next
- · Convenient 96" size, makes them easy to transport
- Unique 'Snip and Flex' feature speeds installations of curves and corners without pre-planning
- The open design allows a root system to grow through SnapEdge, further reinforcing the installation
- Engineered to provide a strong, easy-to-install edge restraint for concrete/clay pavers
- · Nail hole bosses are full-length cylinders. Hammer blows will not fracture or force nail heads through edging

PRODUCT INFORMATION:

8'(96") length pcs. Sidewall: 17/8"

Pieces per Pallet: 672 (5,376 In. ft.) Pieces per Bundle: 24 (192 In. ft.)

Bundles per Pallet: 28 Pallet Weight: 3,360 lbs. Pallet Size: 98" I x 48"w x 50" h



POLYBIND EDGE EDGING

- · Rigid has Twist & Lock connection system
- Rigid can be changed to a partial flex by cutting the bridge
- Tile Edge provides stability and strong lateral support for all porcelain tile installations



RIGID FDGF

EDGE056 - Rigid

Product Information:

8'(96") length pcs. Sidewall: 13/4"

Pieces per Bundle: 24 (192 ln. ft.) Pieces per Pallet: 672 (5376 In. ft.)



SNAPEDGE PERMEABLE PAVER EDGING

• Holds pavement edges securely in place.

· Does straight and curved edges.

TILE EDGE:


EDGE061 - Tile Edge

Product Information: 8'(96") length pcs.


Sidewall: 5/8"

Pieces per Bundle: 24 (192 ln. ft.) Pieces per Pallet: 384 (3072 In. ft.)


TIPS FOR QUICK AND EASY INSTALLATION WITHOUT PRE-PLANNING




Sharp Inside Corner



Sharp Outside Corner





Gentle Outside Curves



EDGE033 SPECIAL ORDER

base material.

PRODUCT INFORMATION:

8'(96") length pcs.

• Designed specifically for permeable pavement with open-graded

Weight per Unit: 2.5 lbs. Pieces per Pallet: 64 (512 In. ft.)


Pallet Weight: 320 lbs.




ALLIANCE GATOR XTREME EDGE

EDGE076


- The ultimate fiber-reinforced structural edging solution for any hardscape project.
- Can be used for any traditional, open-graded, permeable, Gator Base or overlay application using concrete pavers or slabs, natural and wet cast stones.
- Offers permanent continuous lateral support.
- Packaging: 50 lb bag / 56 bags per skid.
- Coverage: 20-25 sqft coverage per bag for a 60mm paver.



Proper Wall Installation



Gentle Inside Curves



Pieces Snap Together

Gator Base



FEATURES: For Pedestrian use only. Replaces concrete foundations and is used to replace 6" of crushed stone. The interlocking panels distribute all dynamic and static loads to a very wide area, practically eliminating any pressure on the ground. Gator Base is a unique evolution in base technology. Manufactured using lightweight high-density polypropylene. Environmentally friendly and 100% recyclable. Extremely durable, will not degrade in the ground. Designed with LOCK-N-GO tongue and groove system. Packaging: 10 units per pack, 12 packs

Gator Base Screws

GATOR BASE SCREWS

FAB033 - 1 Box of 50

- Fastens Gator Edge to Gator Base
- Reinforces the outside perimeter, creating strong lateral support



Miscellaneous Items



X & T SLAB SPACERS

per Box,

120 units per pallet SAND109

RS-ACC237 - X Spacers; 2" x 2"; 250 pcs./bag RS-ACC236 - T Spacers; 2" x 1"; 250pcs./bag

- Unilock recommends using slab spacers when installing Arcana on an open grade surface
- "T" spacers are needed for running bond patterns; "X" spacers for stack bond patters. Please contact your sales manager for more information
- X & T bagged separately



When figuring spacer quantity needed: *Using T-Spacers for running bond pattern Divide total SqFt by 1.78 *Using X-Spacers for stack bond pattern Divide total SqFt by 3.56

Drainage, Separation and Reinforcement



GATOR GRID 30-30

Gator Grid 30-30, a biaxial geogrid, provides strength, longevity, excellent stress transfer and prevents failure to the internal structure of landing areas, retaining walls and steep slopes. It has a high molecular weight as well as high-tenacity polyester yards which are woven in tension and finished with a PVC coating.

Packaging & Unilock SKU

4' x 50' - FAB070 / 6' x 50' - FAB071 / 6' x 150' - FAB072



GATOR FABRIC NON-WOVEN 3.5

Gator Fabric Non-Woven 3.5 geotextile is ideal for drainage, filtration and will allow water flow in a paver or retaining wall application. It is designed for soil separation for added stability, has high strength and is dimensionally stable.

Packaging & Unilock SKU

4' x 100' - FAB038 / 6' x 100' - FAB040



GATOR FABRIC NON-WOVEN 4.4

Gator Fabric Non-Woven 4.4 geotextile is ideal for drainage, filtration and will allow water flow in a paver or retaining wall application. It is designed for soil separation for added stability, has high strength and is dimensionally stable. Packaging & Unilock SKU

4' x 100' - FAB044 / 3' x 100' - FAB043 / 6' x 100' - FAB046



GATOR FABRIC WOVEN 5

Gator Fabric Woven 5 is a woven geotextile made from polypropylene yarns and can achieve higher tensile strength at low elongation. It is an excellent heavy-loading geotextile, ideal for driveways, alleyways, pathways and retaining walls.

Packaging & Unilock SKU

4' x 100' FAB049 / 6.25' x 300' - FAB052



DRIVEGRID™ TENSAR GRID 12.5x120

FAB104

• 12.5' x 120' Roll - 1,572 sq. ft./54 lbs per roll

Large Equipment



- Install up to 700 sq. ft. per hour!
- Access tight or narrow areas
- Eliminate the need for a forklift on site
- Reduce labor costs
- Reduce shoulder, hand & knee pain and injury
- Improve your bottom line

SPECIAL ORDER

Contact your local rep for details.

VIBRATORY PLATES CF 3

Operating weight: 108 kgWorking width: 50cmCentrifugal force: 20 KnFrequency:95Hz

• Engine: Hatz 1 B 20 (Diesel)

Power output, max.: 3.4 kW (4.6 HP)



VPR 700 PAVER ROLLER

Centrifugal Force: 3,147 lbs
Machine Weight: 386 lbs
Base Plate Width: 26"

• Engine: Honda GX160 Four-Stroke

SPECIAL ORDER

VPR 450 PAVER ROLLER

Centrifugal Force: 1,798 lbsMachine Weight: 238 lbsBase Plate Width: 16.5"

• Engine: Honda GX160 Four-Stroke

SPECIAL ORDER

U-LEVEL™

- Easy to use
- Accurate readings
- · Low maintenance
- Works in difficult locations
- · Large working area

A PRECISION TOOL NO HARDSCAPER SHOULD BE WITHOUT

ONLINE ORDERING ONLY









BASE THICKNESS CHART (GENERAL)

GRAVEL BASE	BEDDING COURSE	BACKFILL WIDTH (WALLS ONLY)
4"- 6" (10cm - 15cm)	1" (2.5cm)	
8" - 12" (20cm - 30cm)	1" (2.5cm)	
6" (15cm)	0 - 1/8" (0cm3cm)	8"- 12" (20cm - 30cm)
6" (15cm)	0 - 1/8" (0cm3cm)	12" (30cm)
6" (15cm)	0 - 1/8" (0cm3cm)	16" (50cm)
	4"- 6" (10cm - 15cm) 8" - 12" (20cm - 30cm) 6" (15cm) 6" (15cm)	4"-6"(10cm - 15cm) 1"(2.5cm) 8" - 12"(20cm - 30cm) 1"(2.5cm) 6"(15cm) 0 - 1/8"(0cm3cm) 6"(15cm) 0 - 1/8"(0cm3cm)

Soil condition - In areas with poor soil conditions, (e.g., heavy clay, disturbed soils) increase the depth of the base to provide more stability. Where poor soil conditions exist, it may be advisable to contract an engineer when constructing a retaining wall in excess of 24" in height.

Area = (Length) x (Width)
Area of a Circle = 3.14 x (Radius) x (Radius)
Area of a Half Circle = 1.57 x (Radius) x (Radius)
Area of a Quarter Circle = .78 x (Radius) x (Radius)
Area of a Triangle = (1/2 Base) x (Height)
Perimeter of a Circle = 6.28 x (Radius)
Perimeter of a Half Circle = 3.14 x (Radius)
Perimeter of a Quarter Circle = 1.57 x (Radius)

Metric Equivalents

1 inch = 2.5400 centimeters

1 foot = 0.3048 meter

1 yard = 0.9144 meter

1 sq. foot = 929.030 sq.centimeters

1 sq. meter = 1.196 sq. yards

27 cu. feet = 1 cu. yard

1 centimeter = 0.3937 inch 1 meter = 39.3701 inches

THE IMPORTANCE OF ASPECT RATIO

Simply defined, aspect ratio is the overall length of a paver divided by its height.

LENGTH/HEIGHT = ASPECT RATIO

If an insufficient aspect ratio is used, any flexing or rocking caused by movement on the surface such as vehicular traffic, could result in breakage of the paver units. Not only is this breakage unsightly, but it can also compromise the integrity of the segmental system.



OVER 5:1 Pedestrian Only



4:1 Light-Duty Vehicular





3:1 OR LESS Heavy-Duty Vehicular

LAYING PATTERN CONSIDERATIONS

The laying pattern used in your application can also add a significant amount of strength to your design. A herringbone pattern provides the best 'lock-up', adding strength against rotational forces such as tires at a roadway intersection in the same way the 'L' shaped paver provides maximum performance.







HEAVY-DUTY CONSIDERATIONS


Unilock has a variety of shapes and sizes available to fit your heavy-duty application and style preferences. For maximum performance where twisting and tipping will be factors, consider the unique "L" interlocking shape as it provides superior resistance under heavy loads. The patented locking features work in tandem with the "tri-axis" technology. The result? A stronger, more stable pavement surface.

Heavy-duty Unilock paving systems are also designed for rapid mechanized installation, making them competitive and affordable.



H-20 & HS-20 LOAD RATING

Similar to top of deck stresses per AASHTO H-20 loading conditions (32,000 lbs/14,500 kg), Unilock pavers can support 3-4 axle vehicles. This would include delivery, fire and semi-truck and trailer traffic in light-duty roadway applications.



Speak with your Unilock Representative for more information.

BEDDING MATERIALS CHART (APPROXIMATE IMPERIAL TONS)

Bedding Course

Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0	2.3	2.5	28	3.0
100	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
150	0.8	1.5	2.3	3.0	3.8	4.5	5.3	6.0	6.8	7.5	8.3	9.0
200	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0
250	1.3	2.5	3.8	5.0	6.3	7.5	8.8	10.0	11.36	12.5	13.8	15.0
300	1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15.0	16.5	18.0
350	1.8	3.5	5.3	7.0	8.8	10.5	12.3	14.0	15.8	17.5	19.3	21.0
400	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.2	22.0	24.0
450	2.3	4.5	6.8	9.8	11.3	13.5	15.8	18.0	20.3	22.5	24.8	27.0
500	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0
550	2.8	5.5	8.3	11.0	13.8	16.5	19.3	22.0	24.8	27.5	30.3	33.0
600	3.0	6.0	9.0	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0
650	3.3	6.5	9.8	13.0	16.3	19.5	22.8	26.0	29.3	32.5	35.8	39.0
700	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0
750	3.8	7.5	11.36	15.0	18.8	22.5	26.3	30.0	33.8	37.5	41.3	45.0
800	4.0	8.0	12.0	16.0	20.0	24.0	28.0	32.0	36.0	40.0	44.0	48.0
850	4.3	8.5	12.8	17.0	21.3	25.5	29.8	34.0	38.3	42.5	46.8	51.0
900	4.5	9.0	13.5	18.0	22.5	27.0	31.5	36.0	40.5	45.0	49.5	54.0
950	4.8	9.5	14.3	19.0	23.8	28.5	33.3	38.0	42.8	47.5	52.3	57.0
1000	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0

BASE DEPTH CHARTS (CUBIC YARDS)

Bedding Course

Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.5	1.7	1.9
100	0.3	0.6	0.9	1.2	1.5	1.9	2.2	2.5	2.8	3.1	3.4	3.7
150	0.5	0.9	1.4	1.9	2.3	2.8	3.2	3.7	4.2	4.6	5.1	5.6
200	0.6	1.2	1.9	2.5	3.1	3.7	4.3	4.9	5.6	6.2	6.8	7.4
250	0.8	1.5	2.3	3.1	3.9	4.6	5.4	6.2	6.9	7.7	8.5	9.3
300	0.9	1.9	2.8	3.7	4.6	5.6	6.5	7.4	8.3	9.3	10.2	11.1
350	1.1	2.2	3.2	4.3	5.4	6.5	7.6	8.6	9.7	10.8	11.9	13.0
400	1.2	2.5	3.7	4.9	6.2	7.4	8.6	9.9	11.1	12.3	13.6	14.8
450	1.4	2.8	4.2	5.6	6.9	8.3	9.7	11.1	12.5	13.9	15.3	16.7
500	1.5	3.1	4.6	6.2	7.7	9.3	10.8	12.3	13.9	15.4	17.0	18.5
550	1.7	3.4	5.1	6.8	8.5	10.2	11.9	13.6	15.3	17.0	18.7	20.4
600	1.9	3.7	5.6	7.4	9.3	11.1	13.0	14.8	16.7	18.5	20.4	22.2
650	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.1	20.1	22.1	24.1
700	2.2	4.3	6.5	8.6	10.8	13.0	15.1	17.3	19.4	21.6	23.8	25.9
750	2.3	4.6	6.9	9.3	11.6	13.9	16.2	18.5	20.8	23.1	25.5	27.8
800	2.5	4.9	7.4	9.9	12.3	14.8	17.3	19.8	22.2	24.7	27.2	29.6
850	2.6	5.2	7.9	10.5	13.1	15.7	18.4	21.0	23.6	26.2	28.9	31.5
900	2.8	5.6	8.3	11.1	13.9	16.7	19.4	22.2	25.0	27.8	30.6	33.3
950	2.9	5.9	8.8	11.7	14.7	17.6	20.5	23.5	26.4	29.3	32.3	35.2
1000	3.1	6.2	9.3	12.3	15.4	18.5	21.6	24.7	27.8	30.9	34.0	37.0

Actual volume may vary due to type of materials, moisture content, and compaction. Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

IMPORTANT NOTES

UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee* on the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.





Scan for full Guarantee details

*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at unilock.com and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at Unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

TRADEMARK & LEGAL INFORMATION

Umbriano* is a trademark of Metten Stein + Design GmbH & Co KG used under license by Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area. Not all products shown are available at all Unilock locations. Log on to www.unilock.com for availability. Measurements throughout this portfolio are nominal.

©2025 Hengestone Holdings, Inc.

UNILOCK FINISHES

When considering the finish, think about the look you are trying to achieve as well as practical performance. From traditional smooth and flagstone, to enhanced surfaces, modern granite looks and timeworn patina, Unilock offers it all.

SMOOTH FINISH



Sometimes, simple is best. A smooth surface suits contemporary styles and is available in a wide variety of shapes for paving and verticals.

FLAGSTONE FINISH



Popular for centuries, a flagstone finish never fails to add warmth to outdoor spaces.

ANTIQUED FINISH




A variety of methods are used to achieve this distressed finish, but in every case, it lends a relaxed, rustic vibe.

TIMEWORN



Our exclusive Elegance line offers the look of centuries-old cobblestone, brick, and natural stone with unsurpassed product durability.

BRUSHED FINISH



Only Unilock offers II Campo*, a unique surface enhanced with graphically interesting etched lines. This finish has long been a favorite of commercial designers.

UMBRIANO




Umbriano is an exclusive finish only available from Unilock with color and granite particles that are randomly dispersed to achieve a unique mottled surface that is reminiscent of granite.

EXPOSED GRANITE



Granite, Quartz and Marble particles are embedded in the product's surface and then revealed using additional processing methods.

ENHANCED SURFACE



The surface of these products is enhanced using a special process to reveal a variety of distinctive colors and textures.





LET'S **BUILD YOUR BUSINESS** TOGETHER.

CHICAGO (630)892-9191

MILWAUKEE (262) 742-3890

KANSAS (913) 417-7985

BOSTON (508) 278-4536 **NEW YORK**

(845) 278-6700

MID-ATLANTIC (202)798-2060

MICHIGAN

(248) 437-7037

ONTARIO (416)646-9000 OUÉBEC

(450) 546-2797

CINCINNATI / KY /TN/IN

(513) 202-0219

OHIO / WESTERN PA / WNY & CNY (330) 927-4000

