

2024 **PRODUCT** **DATA**



TRANSFORMING
HARDSCAPES

UNILOCK®

THE **ONE** INNOVATOR WITH GAME-CHANGING PRODUCTS

BUILD VERTICALS FASTER

When the plan calls for pillars, a grill island or any vertical feature, the U-Cara Modular System lets you create customizable features in hours - not days!

Simply build the sturdy, aluminum frame in any configuration and choose from a wide selection of fascia panels to clad it with.



Learn more

UNI-CARA
MODULAR SYSTEM

TABLE OF CONTENTS - BOSTON

PAVERS

ADA Paver	04
Arcana™	05
Artline™ Smooth	06
Artline™ Umbriano®	07
Beacon Hill™ Flagstone	08
Beacon Hill™ Smooth	10
Bristol Valley®	12
Brussels Block®	13
Camelot®	14
Camelot® Premier	15
Cophorne®	16
Courtstone®	17
Dura-Mat™	18
Eco-Line®	19
Eco-Optiloc™	20
Eco-Priora™	21
Eco-Promenade®	22
Eco-Stone™	23
Granito™	24
Hex™	25
Hollandstone™	26
Holland Premier™	27
Il Campo®	28
Mattoni™	29
Natural Stone Sandstone	30
Natural Stone Limestone	33
Nordic Cobble™	35
Optiloc™	36
Porcelain	37
Promenade™	38
Promenade EcoTerra™	39
Revela™	40
Richcliff®	42
Series™	43
Skyline™	44
Soreno™	45
Thornbury™ Smooth	46
Town Hall®	47
Transition™	48
Treo® Premier	49
Treo® Smooth	50
Tribeca Cobble™	51
Turfstone™	52
Umbriano®	53
Urban™	55
Westport™	56

RETAINING WALLS

Brussels Dimensional System™	57
Concord Wall™	58
DuraHold®	60
DuraHold2®	62
Estate Wall™	63
Lineo™ Dimensional Stone	68
Pisa™ Edge	70
Rivercrest® Wall	71
SienaEdge™	72
SienaStone™	73
Umbriano® Coping	74
U-Cara® Multi Face Wall System	75
U-Cara® Wall Mount System	80
U-Cara® Modular System	81

COPING, STEPS, PILLAR CAPS

Architectural Coping	84
Fullnose Edger™	85
Ledgestone™	86
Universal Coping & Base	88


FIRE FEATURES

Sunset Fire Pit	89
RomanStack™ Fire Pit	90


ACCESSORIES

Natural Stone Cleaners	91
Natural Stone Sealers	91
Paver Cleaners	91
Paver Sealers	91
Adhesive	92
Sands	93
Edge Restraints	93
Large Equipment	94
Base/Drainage Systems	94
Landscape Fabric & Grid System	95
Drivecel™	96

APPLICATION INDEX

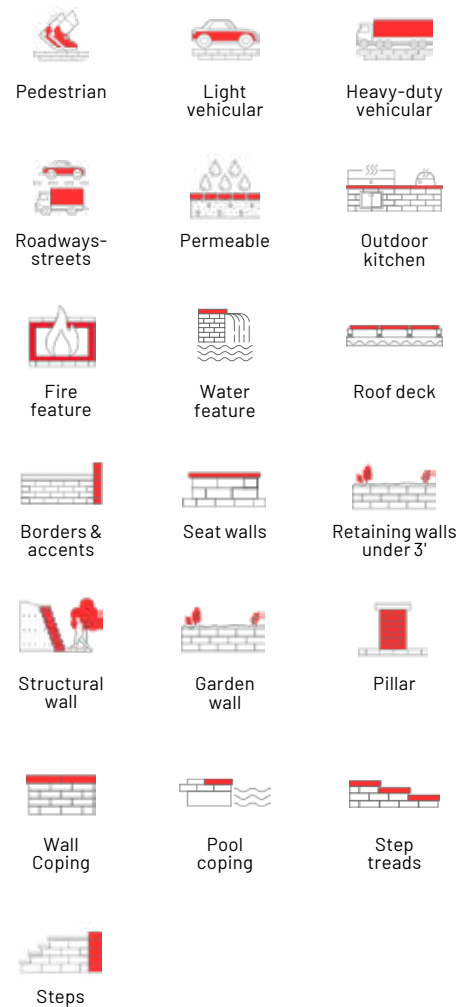

DESCRIPTION OF EDGE DETAILS

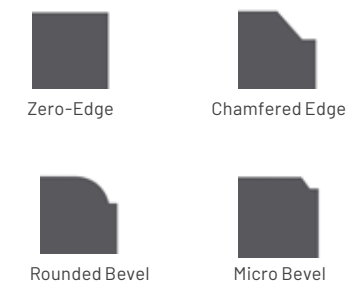



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
Truncated
Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

DRIVE FRIENDLY

Can handle vehicular loads

TECHNICAL INFORMATION

Conforms to ASTM C936
Eligible for LEED v4.1 credits

	12 x 12
Bundle Type	SINGLE
Plant Produced	NEW YORK
Thickness (mm)	70 MM

SQFT PER	Bundle	93.04
	Layer	11.63
	Section	-
	Stone	0.97

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	11.81
	Bundle	94.49

SAILOR LNFT PER	SqFt	1.02
	Section	-
	Layer	11.81
	Bundle	94.49

UNITS PER	SqFt	1.03
	Section	-
	Bundle	96.00

LBS PER	Layer	415
	Section	-
	Bundle	3,316

COLORS	Reflectance	Stock
Charcoal	SR n/a SRI n/a	SO
Red	SR n/a SRI n/a	SO



CHARCOAL



RED

Single Unit



STANDARD
300 x 300 x 70mm
11 7/8 x 11 7/8 x 2 3/4
96 units/Bundle
.97 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY.** All measurements are nominal. Contact Unilock for more information.



	12 x 24	18 x 24	24 x 24
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	50 MM	50 MM	50 MM

SQFT PER	Bundle	36.00	54.00	72.00
	Layer	4.00	6.00	8.00
	Section	-	-	-
	Stone	2.00	3.00	4.00

PER BUNDLE	Layers	9.00	9.00	9.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	0.49	0.50	0.50
	Section	-	-	-
	Layer	1.98	2.97	3.98
	Bundle	17.78	26.75	35.79

SAILOR LNFT PER	SqFt	0.99	0.66	0.50
	Section	-	-	-
	Layer	3.98	3.98	3.98
	Bundle	35.79	35.79	35.79

UNITS PER	SqFt	0.50	0.33	0.25
	Section	-	-	-
	Bundle	18.00	18.00	18.00

LBS PER	Layer	96	144	192
	Section	-	-	-
	Bundle	864	1,296	1,728

COLORS	Reflectance	Stock	Stock	Stock
Avorio	SR .56 SRI 66	SO	SO	SO
Corvara	SR .30 SRI 34	SO	SO	SO
Modena	SR .46 SRI 53	SO	SO	SO
Vivanto	SR .18 SRI 16	SO	SO	SO

APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth
 Joint Spacing - 0 mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color




EASYCLEAN™

Factory Sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 1782
 Eligible for LEED v4.1 credits

LAYING PATTERNS

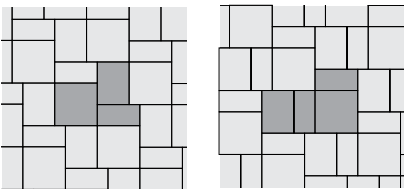

X & T Slab Spacers Bagged Separately



AVORIO



CORVARA



MODENA



VIVANTO

Single Units



12 x 24
 301 x 606 x 50mm
 11⁷/₈ x 23⁷/₈ x 2"
 18 units/Bundle
 2 Sq.Ft./Stone
SPECIAL ORDER



18 x 24
 453 x 606 x 50mm
 17⁷/₈ x 23⁷/₈ x 2"
 18 units/Bundle
 3 Sq.Ft./Stone
SPECIAL ORDER



24 x 24
 606 x 606 x 50mm
 23⁷/₈ x 23⁷/₈ x 2"
 18 units/Bundle
 4 Sq.Ft./Stone
SPECIAL ORDER

Notes: **Special Order - Lead time required. SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. **Product is not intended for vehicular applications.** All measurements are nominal. Unilock recommends to install Arcana using T and X Slab spacers. Please contact your sales manager for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth
 Joint Spacing - 3 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



FOSSIL



STEEL MOUNTAIN

		SMOOTH FINISH
	Bundle Type	RANDOM
	Plant Produced	NEW YORK
	Thickness (mm)	70 MM

SQFT PER	Bundle	93.25
	Layer	11.66
	Section	-
	Stone	-

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	-
	Section	-
	Bundle	192.00

LBS PER	Layer	388
	Section	-
	Bundle	3,100

COLORS	Reflectance	Stock
Fossil	SR .22 SRI 21	✓
Steel Mountain	SR .30 SRI 32	✓

7 Unit Random Bundle					
	<p>UNIT A 125 x 169 x 70mm 4 7/8 x 6 7/8 x 2 3/4" 32 units/Bundle .23 Sq.Ft./Stone</p>	<p>UNIT B 125 x 262.5 x 70mm 4 7/8 x 10 3/8 x 2 3/4" 32 units/Bundle .35 Sq.Ft./Stone</p>			
7 Unit Random Bundle					
	<p>UNIT C 125 x 337.5 x 70mm 4 7/8 x 13 1/4 x 2 3/4" 32 units/Bundle .45 Sq.Ft./Stone</p>	<p>UNIT D 125 x 450 x 70mm 4 7/8 x 17 3/4 x 2 3/4" 32 units/Bundle .61 Sq.Ft./Stone</p>	<p>UNIT E 187.5 x 225 x 70mm 7 3/8 x 8 7/8 x 2 3/4" 32 units/Bundle .45 Sq.Ft./Stone</p>	<p>UNIT F 187.5 x 337.5 x 70mm 7 3/8 x 13 3/8 x 2 3/4" 16 units/Bundle .58 Sq.Ft./Stone</p>	<p>UNIT G 187.5 x 450 x 70mm 7 3/8 x 17 1/4 x 2 3/4" 16 units/Bundle .91 Sq.Ft./Stone</p>

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Umbriano Mottled
 Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

EASYSOAK™

Factory Sealed to provide integral stain resistance


COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Artline Random A



FRENCH GREY



WINTER MARVEL

UMBRIANO FINISH	
Bundle Type	RANDOM
Plant Produced	NEW YORK
Thickness (mm)	70 MM

SQFT PER		
Bundle		93.25
Layer		11.66
Section		-
Stone		-

PER BUNDLE		
Layers		8.00
Sections		-

SOLDIER LNFT PER		
SqFt		-
Section		-
Layer		-
Bundle		-


SAILOR LNFT PER		
SqFt		-
Section		-
Layer		-
Bundle		-

UNITS PER		
SqFt		-
Section		-
Bundle		192.00


LBS PER		
Layer		414
Section		-
Bundle		3,310

COLORS	Reflectance	Stock
French Grey	SR .35 SRI 38	✓
Winter Marvel	SR .18 SRI 17	✓

7 Unit Random Bundle




UNIT A
 125 x 169 x 70mm
 4 7/8 x 6 7/8 x 2 3/4"
 32 units/Bundle
 .23 Sq.Ft./Stone




UNIT B
 125 x 262.5 x 70mm
 4 7/8 x 10 3/8 x 2 3/4"
 32 units/Bundle
 .35 Sq.Ft./Stone


7 Unit Random Bundle




UNIT C
 125 x 337.5 x 70mm
 4 7/8 x 13 1/4 x 2 3/4"
 32 units/Bundle
 .45 Sq.Ft./Stone




UNIT D
 125 x 450 x 70mm
 4 7/8 x 17 3/4 x 2 3/4"
 32 units/Bundle
 .61 Sq.Ft./Stone



UNIT E
 187.5 x 225 x 70mm
 7 3/8 x 8 7/8 x 2 3/4"
 32 units/Bundle
 .45 Sq.Ft./Stone



UNIT F
 187.5 x 337.5 x 70mm
 7 3/8 x 13 3/8 x 2 3/4"
 16 units/Bundle
 .58 Sq.Ft./Stone



UNIT G
 187.5 x 450 x 70mm
 7 3/8 x 17 1/4 x 2 3/4"
 16 units/Bundle
 .91 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Textured
 Joint Spacing - 7 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

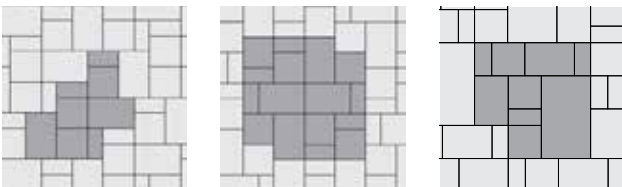

ALMOND GROVE




FOSSIL



SIERRA



STEEL MOUNTAIN



TUSCANY



WALNUT

Bundle Type		RANDOM
Plant Produced		UXBRIDGE/ BREWSTER
Thickness (mm)		60 MM

SQFT PER	Bundle	116.57
	Layer	11.66
	Section	-
	Stone	-

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	9.35
	Bundle	93.50

UNITS PER	SqFt	0.69
	Section	-
	Layer	80.00

LBS PER	Layer	328
	Section	-
	Bundle	3,279

COLORS	Reflectance	Stock
Almond Grove	SR .25 SRI 25	✓
Fossil	SR .22 SRI 21	✓
Steel Mountain	SR .30 SRI 32	✓
Sierra	SR n/a SRI n/a	✓
Tuscany	SR n/a SRI n/a	SO
Walnut	SR n/a SRI n/a	SO

3 Unit Random Bundle



LARGE RECTANGLE
 380 x 570 x 60mm
 15 x 22 1/2 x 2 3/8"
 20 Units/Bundle
 2.33 SqFt/Stone



SQUARE
 380 x 380 x 60mm
 15 x 15 x 2 3/8"
 30 units/Bundle
 1.55 Sq.Ft./Stone



SMALL RECTANGLE
 380 x 190 x 60mm
 15 x 7 1/2 x 2 3/8"
 30 units/Bundle
 .78 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Textured
 Joint Spacing - 7 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

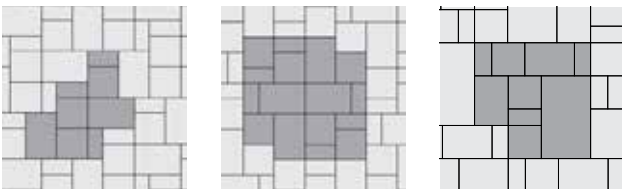

Bundle Type	RANDOM
Plant Produced	NEW YORK
Thickness (mm)	80 MM

SQFT PER	Bundle	81.59
	Layer	11.65
	Sections	-
	Stone	1.46

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Sections	-
	Layer	9.35
	Bundle	65.45

UNITS PER	SqFt	0.69
	Sections	-
	Bundle	56.00

LBS PER	Layer	427
	Sections	-
	Bundle	2,988

COLORS	Reflectance	Stock
Fossil	SR .22 SRI 21	✓
Steel Mountain	SR .30 SRI 32	✓
Walnut	SR n/a SRI n/a	SO



FOSSIL

STEEL MOUNTAIN

WALNUT

3 Unit Random Bundle		LARGE RECTANGLE 380 x 570 x 80mm 15 x 22½ x 3 ⅛" 14 Units/Bundle 2.33 SqFt./Stone		SQUARE 380 x 380 x 80mm 15 x 15 x 3 ⅛" 21 units/Bundle 1.55 Sq.Ft./Stone		SMALL RECTANGLE 380 x 190 x 80mm 15 x 7½ x 3 ⅛" 21 units/Bundle .78 Sq.Ft./Stone
----------------------	--	--	--	---	--	---

Notes. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 4 mm
 Void - n/a


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Beacon Hill Fixed Random A



Beacon Hill Fixed Random B

		XL	SMALL RECTANGLE SINGLE
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE
Thickness (mm)	60 MM	60 MM	60 MM

SQFT PER	Bundle	116.57	81.59	116.57
	Layer	11.66	11.66	11.66
	Section	-	-	-
	Stone	1.46	5.83	0.78

PER BUNDLE	Layers	10.00	7.00	10.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	-	0.32	0.80
	Section	-	-	-
	Layer	-	3.74	9.35
	Bundle	-	26.18	93.50

SAILOR LNFT PER	SqFt	0.80	0.53	1.60
	Section	-	-	-
	Layer	9.35	6.23	18.70
	Bundle	93.50	43.61	187.01

UNITS PER	SqFt	0.69	0.17	1.29
	Layer	-	2.00	15.00
	Bundle	80.00	14.00	150.00

LBS PER	Layer	336	320	332
	Section	-	-	-
	Bundle	3,360	2,240	3,318

COLORS	Reflectance	Stock	Stock	Stock
Almond Grove	SR .25 SRI 25	✓	✓	✓
Dark Charcoal	SR n/a SRI n/a			✓
Fossil	SR .22 SRI 21	✓	✓	✓
Opal Blend	SR .24 SRI 24	✓	✓	✓
Steel Mountain	SR .30 SRI 32	✓	✓	✓
Tuscany	SR n/a SRI n/a	SO	SO	✓
Walnut	SR n/a SRI n/a	SO		✓



ALMOND GROVE



DARK CHARCOAL



FOSSIL



OPAL BLEND



STEEL MOUNTAIN



TUSCANY



WALNUT

3 Unit Random Bundle		LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 1/2 x 2 3/8" 20 Units/Bundle 2.08 SqFt/Stone		SQUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone		SMALL RECTANGLE 380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 30 units/Bundle .69 Sq.Ft./Stone	Single Unit		XL UNIT 950 x 570 x 60mm 37 1/2 x 22 1/2 x 2 3/8" 14 units/Bundle 5.83 Sq.Ft./Stone	Single Unit		SMALL RECTANGLE 380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 135 units/Bundle .78 Sq.Ft./Stone
----------------------	--	--	--	---	--	--	-------------	--	--	-------------	--	---

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

- Edge Detail - Rounded
- Surface Texture - Smooth
- Joint Spacing - 4 mm
- Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory Sealed to provide integral stain resistance


COMFORT STEP™

Ultra-smooth surface texture


TECHNICAL INFORMATION

- Conforms to ASTM C 936
- Eligible for LEED v4.1 credits

LAYING PATTERNS



BeaconHill Fixed Random A



BeaconHill Fixed Random B

		EASYCLEAN
	Bundle Type	RANDOM
	Plant Produced	NEW YORK
	Thickness (mm)	60 MM

SQFT PER	Bundle	116.57
	Layer	11.66
	Section	-
	Stone	0.78

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	0.80
	Section	-
	Layer	9.35
	Bundle	93.50

SAILOR LNFT PER	SqFt	1.60
	Section	-
	Layer	18.70
	Bundle	187.01

UNITS PER	SqFt	1.29
	Layer	15.00
	Bundle	150.00

LBS PER	Layer	332
	Section	-
	Bundle	3,318


COLORS	Reflectance	Stock
Almond Grove	SR .25 SRI 25	✓
Steel Mountain	SR .30 SRI 32	✓
Opal Blend	SR .24 SRI 24	✓



ALMOND GROVE



STEEL MOUNTAIN



OPAL BLEND

3 Unit Random Bundle



LARGE RECTANGLE
380 x 570 x 60mm
15 x 22 1/2 x 2 3/8"
20 Units/Bundle
2.08 SqFt./Stone



SQUARE
380 x 380 x 60mm
15 x 15 x 2 3/8"
30 units/Bundle
1.39 Sq.Ft./Stone



SMALL RECTANGLE
380 x 190 x 60mm
15 x 7 1/2 x 2 3/8"
30 units/Bundle
.69 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Textured
 Joint Spacing - 7 mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

EASYCLEAN™

Factory Sealed to provide integral stain resistance


COMFORT STEP™

Ultra-smooth surface texture


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Bristol Valley Fixed
 Random A



Bristol Valley Fixed
 Random B

Bundle Type	RANDOM
Plant Produced	UXBRIDGE
Thickness (mm)	60 MM

SQFT PER	Bundle	116.57
	Layer	11.66
	Section	-
	Stone	-

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Section	-
	Layer	9.35
	Bundle	93.50

UNITS PER	SqFt	-
	Section	-
	Bundle	-

LBS PER	Layer	296
	Section	-
	Bundle	2,957

COLORS	Reflectance	Stock
Fossil	SR .22 SRI 21	✓
Steel Mountain	SR .30 SRI 32	✓
Walnut	SR n/a SRI n/a	✓



FOSSIL



STEEL MOUNTAIN



WALNUT

3 Unit Random Bundle		LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 1/2 x 2 3/8" 20 Units/Bundle 2.08 SqFt./Stone		SQUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone		SMALL RECTANGLE 380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 30 units/Bundle .69 Sq.Ft./Stone
----------------------	--	---	--	---	--	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Smooth
 Joint Spacing - 2 mm

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix


ANTIQUED

Distressed, timeworn finish


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits


LAYING PATTERNS



Brussels Multi-Unit
Random AC



Brussels Multi-Unit
Random AD



Brussels Multi-Unit
Random AE



ALMOND GROVE



LIMESTONE



SIERRA



CHARCOAL

	HALF	STANDARD	XL
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE
Thickness (mm)	70 MM	70 MM	70 MM

SQFT PER	Bundle	88.70	88.60	76.56
	Layer	-	-	-
	Section	12.67	12.66	25.52
	Stone	0.20	0.40	0.80

PER BUNDLE	Layers	-	-	-
	Sections	7.00	7.00	3.00

SOLDIER LNFT PER	SqFt	1.72	1.44	0.86
	Section	21.84	18.27	21.84
	Layer	-	-	-
	Bundle	152.86	127.87	65.51

SAILOR LNFT PER	SqFt	2.87	1.73	1.43
	Section	36.33	21.84	36.54
	Layer	-	-	-
	Bundle	254.28	152.86	109.61

UNITS PER	SqFt	5.05	2.53	1.25
	Section	64.00	32.00	32.00
	Bundle	448.00	224.00	96.00

LBS PER	Layer	-	-	-
	Section	398	455	843
	Bundle	2,789	3,187	2,528

COLORS	Reflectance	Stock	Stock	Stock
Almond Grove	SR n/a SRI n/a	✓	✓	✓
Limestone	SR .28 SRI 29	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓
Charcoal	SR n/a SRI n/a		✓	

Single Units



HALF
 104 x 173 x 70mm
 4 x 6⁷/₈ x 2³/₄"
 448 units/Bundle
 .20 Sq.Ft./Stone



STANDARD
 173 x 208 x 70mm
 6⁷/₈ x 8¹/₄ x 2³/₄"
 224 units/Bundle
 .40 Sq.Ft./Stone



XL
 208 x 348 x 70mm
 8¹/₄ x 13³/₄ x 2³/₄"
 96 units/Bundle
 .80 Sq.Ft./Stone

Notes: **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfler
 Surface Texture - Smooth
 Joint Spacing - 3 mm

TECHNOLOGIES


CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits


LAYING PATTERNS

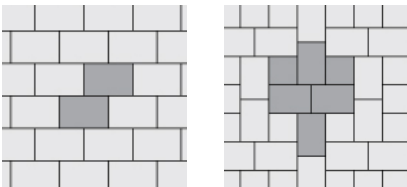

ALMOND GROVE



GRANITE



CHARCOAL

	SQUARE	RECTANGLE
Bundle Type	SINGLE	SINGLE
Plant Produced	UXBRIDGE	UXBRIDGE
Thickness (mm)	60 MM	60 MM

SQFT PER	Bundle	115.50	111.33
	Layer	-	-
	Section	16.50	22.27
	Stone	0.28	0.41

PER BUNDLE	Layers	-	-
	Sections	7.00	5.00

SOLDIER LNFT PER	SqFt	1.79	1.19
	Section	29.53	26.57
	Layer	-	-
	Bundle	206.69	132.87

SAILOR LNFT PER	SqFt	1.79	1.79
	Section	29.53	39.86
	Layer	-	-
	Bundle	206.69	199.31

UNITS PER	SqFt	3.64	2.43
	Section	60.00	54.00
	Bundle	420.00	270.00

LBS PER	Layer	-	-
	Section	464	630
	Bundle	3,247	3,150

Colors	Reflectance	Stock	Stock
Almond Grove	SR n/a SRI n/a	✓	✓
Granite	SR .26 SRI 27	✓	✓
Charcoal	SR n/a SRI n/a		✓

Single Unit



SQUARE

159.8 x 159.8 x 60mm
 6 3/8 x 6 3/8 x 2 3/8"
 420 Units/Bundle
 .28 SqFt/Stone



RECTANGLE

160 x 240 x 60mm
 6 3/8 x 9 1/2 x 2 3/8"
 270 Units/Bundle
 .41 SqFt/Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfler
 Surface Texture - Smooth
 Joint Spacing - 3 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

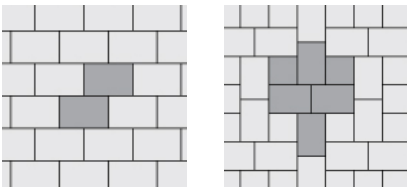

ALMOND GROVE



GRANITE



RUSTIC RED



DARK CHARCOAL

	SQUARE	RECTANGLE
Bundle Type	SINGLE	SINGLE
Plant Produced	UXBRIDGE	UXBRIDGE
Thickness (mm)	60 MM	60 MM

SQFT PER	Bundle	115.50	111.33
	Layer	-	-
	Section	16.50	22.27
	Stone	0.28	0.41

PER BUNDLE	Layers	-	-
	Sections	7.00	5.00

SOLDIER LNFT PER	SqFt	1.79	1.19
	Section	29.53	26.57
	Layer	-	-
	Bundle	206.69	132.87

SAILOR LNFT PER	SqFt	1.79	1.79
	Section	29.53	39.86
	Layer	-	-
	Bundle	206.69	199.31

UNITS PER	SqFt	3.64	2.43
	Section	60.00	54.00
	Bundle	420.00	270.00

LBS PER	Layer	-	-
	Section	464	630
	Bundle	3,247	3,150

Colors	Reflectance	Stock	Stock
Almond Grove	SR n/a SRI n/a	✓	✓
Fossil	SR n/a SRI n/a	✓	✓
Granite	SR .26 SRI 27	✓	✓
Rustic Red	SR n/a SRI n/a	✓	✓
Dark Charcoal	SR n/a SRI n/a		✓

Single Unit



SQUARE
 159.8 x 159.8 x 60mm
 6 3/8 x 6 3/8 x 2 3/8"
 420 Units/Bundle
 .28 SqFt/Stone



RECTANGLE
 160 x 240 x 60mm
 6 3/8 x 9 1/2 x 2 3/8"
 270 Units/Bundle
 .41 SqFt/Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
 Surface Texture - Textured
 Joint Spacing - 3 mm

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

EASYSOAK™

Factory Sealed to provide integral stain resistance

REALA™

Cast from historical brick



ULTIMA™

Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



BASALT

BURGUNDY RED

BURNT CLAY

OLD OAK

ARCTIC GREY

STEEL BLUE

Bundle Type		SINGLE
Plant Produced		AYR
Thickness (mm)		60 MM

SQFT PER	Bundle	89.20
	Layer	11.15
	Section	-
	Stone	0.15

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.43
	Section	-
	Layer	15.99
	Bundle	127.95

SAILOR LNFT PER	SqFt	4.41
	Section	-
	Layer	49.21
	Bundle	393.70

UNITS PER	SqFt	6.73
	Section	-
	Bundle	600.00

LBS PER	Layer	294
	Section	-
	Bundle	2,349

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓
Arctic Grey	SR n/a SRI n/a	✓
Steel Blue	SR n/a SRI n/a	✓

Single Unit



STANDARD
 65 x 200 x 60mm
 2 5/8 x 7 7/8 x 2 3/8"
 600 Units/Bundle
 .15 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

- Edge Detail - Zero
- Surface Texture - Textured
- Joint Spacing - 15 mm

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

EASYSOAK™

Factory Sealed to provide integral stain resistance

REALA™

Cast from European cobblestones


ULTIMA™

Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION

- Conforms to ASTM C 936
- Eligible for LEED v4.1 credits

LAYING PATTERNS



BASALT

Bundle Type		RANDOM
Plant Produced		AYR
Thickness (mm)		60 MM

SQFT PER	Bundle	98.30
	Layer	12.29
	Section	-
	Stone	-

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	2.25
	Section	-
	Layer	27.69
	Bundle	221.52


UNITS PER	SqFt	3.91
	Section	-
	Bundle	384.00

LBS PER	Layer	291
	Section	-
	Bundle	2,326

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓

5 Unit Random Bundle		XL RECTANGLE 215 x 130 x 60mm 8 3/8 x 5 1/8 x 2 3/8" 128 Units/Bundle .30 SqFt/Stone		LARGE RECTANGLE 185 x 130 x 60mm 7 1/4 x 5 1/8 x 2 3/8" 64 Units/Bundle .28 SqFt/Stone		RECTANGLE 165 x 130 x 60mm 6 1/2 x 5 1/8 x 2 3/8" 64 Units/Bundle .23 SqFt/Stone		SMALL RECTANGLE 145 x 130 x 60mm 5 3/4 x 5 1/8 x 2 3/8" 64 Units/Bundle .20 SqFt/Stone		SQUARE 130 x 130 x 60mm 5 1/8 x 5 1/8 x 2 3/8" 64 Units/Bundle .18 SqFt/Stone
----------------------	--	---	--	---	--	---	--	---	--	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

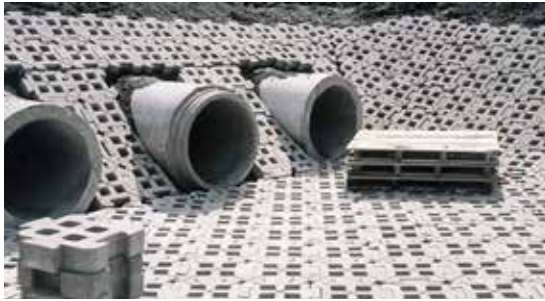

APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Smooth
 Joint Spacing - n/a
 Void - 34.2%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits



NATURAL

Single Unit



STANDARD
 500 x 500 x 100mm
 19 3/4 x 19 3/4 x 3 7/8"
 28 units/Bundle
 2.80 Sq.Ft./Stone

		CLASSIC FINISH
	Bundle Type	SINGLE
	Plant Produced	GORMLEY
	Thickness (mm)	100 MM

SQFT PER	Bundle	78.40
	Layer	11.20
	Section	-
	Stone	2.80

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	0.36
	Section	-
	Bundle	28.00


LBS PER	Layer	320
	Section	-
	Bundle	2,240

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	SO

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth / Exposed / Brushed / Umbriano Mottled
 Joint Spacing - 6.25 mm
 Void - 5.80%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYSOAK™ (Umbriano)

Factory Sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	MULTIPLE FINISHES	
	Bundle Type	RANDOM
	Plant Produced	NEW YORK
	Thickness (mm)	100 MM

SQFT PER	Bundle	66.20
	Layer	11.03
	Section	-
	Stone	0.34

PER BUNDLE	Layers	6.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-









UNITS PER	SqFt	2.90
	Section	-
	Bundle	192.00

LBS PER	Layer	504
	Section	-
	Bundle	3,027

COLORS	Reflectance	Stock
Multiple Colors and Finishes	SR n/a SRI n/a	SO
Please contact your Territory Manager for more color options.		

LAYING PATTERNS



8 Unit Random Bundle								
	UNIT A 357 x 84 x 100mm 14 x 3 3/16 x 3 7/8" 20 Units/Bundle .32 SqFt/Stone	UNIT B 317 x 84 x 100mm 12 1/2 x 3 3/16 x 3 7/8" 20 Units/Bundle .29 SqFt/Stone	UNIT C 277 x 84 x 100mm 12 x 3 3/16 x 3 7/8" 20 Units/Bundle .25 SqFt/Stone	UNIT D 237 x 84 x 100mm 9 3/8 x 3 3/16 x 3 7/8" 20 Units/Bundle .21 SqFt/Stone	UNIT E 357 x 114 x 100mm 14 x 4 1/2 x 3 7/8" 20 Units/Bundle .44 SqFt/Stone	UNIT F 317 x 114 x 100mm 12 1/2 x 4 1/2 x 3 7/8" 20 Units/Bundle .39 SqFt/Stone	UNIT G 277 x 84 x 100mm 11 x 4 1/2 x 3 7/8" 20 Units/Bundle .34 SqFt/Stone	UNIT H 237 x 84 x 100mm 9 3/8 x 4 1/2 x 3 7/8" 20 Units/Bundle .29 SqFt/Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 12mm
 Void - 7.3%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through


CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



		CLASSIC FINISH
	Bundle Type	SINGLE
	Plant Produced	UXBRIDGE
	Thickness (mm)	80 MM

SQFT PER	Bundle	63.56
	Layer	9.08
	Section	-
	Stone	0.50

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.98
	Section	-
	Bundle	126.00

LBS PER	Layer	292
	Section	-
	Bundle	2,047

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	SO

Single Unit




STANDARD
 250 x 250 x 80mm
 9 7/8 x 9 7/8 x 3 1/8"
 126 Units/Bundle
 .50 SqFt/Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth
 Joint Spacing - 7mm
 Void - 4.6 - 7.08%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

CLASSIC

Budget-friendly traditional product mix


ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

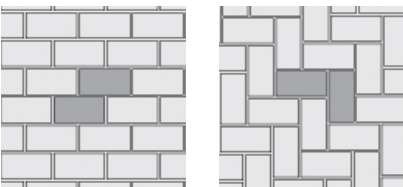

		5 x 10 SMOOTH CLASSIC	5 x 10 SMOOTH ENDURA
	Bundle Type	SINGLE	SINGLE
	Plant Produced	UXBRIDGE	UXBRIDGE
	Thickness (mm)	80 MM	80 MM

SQFT PER	Bundle	75.95	75.95
	Layer	-	-
	Section	-	-
	Stone	0.31	0.31

PER BUNDLE	Layers	-	-
	Sections	-	-


SOLDIER LNFT PER	SqFt	1.27	1.27
	Section	-	-
	Layer	-	-
	Bundle	96.46	96.46

SAILOR LNFT PER	SqFt	2.54	2.54
	Section	-	-
	Layer	-	-
	Bundle	192.91	192.91

UNITS PER	SqFt	3.23	3.23
	Section	-	-
	Bundle	245.00	245.00

LBS PER	Layer	-	-
	Section	-	-
	Bundle	2,620	2,620

COLORS	Reflectance	Stock	Stock
Granite	SR .26 SRI 27	✓	
Steel Grey	SR n/a SRI n/a		✓
Opal	SR n/a SRI n/a		✓
Steel Mountain	SR n/a SRI n/a		✓




GRANITE



STEEL GREY



OPAL



STEEL MOUNTAIN

Single Unit



RECTANGLE
 120 x 240 x 80mm
 4 ¾ x 9 ½ x 3 ⅛
 245 units/Bundle
 .31 Sq.Ft./Stone

Notes: Available in other finishes. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth & Series Exposed
 Joint Spacing - 7 mm
 Void - 10.12 %

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYSOAK™ (Umbriano)

Factory Sealed to provide integral stain resistance


COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

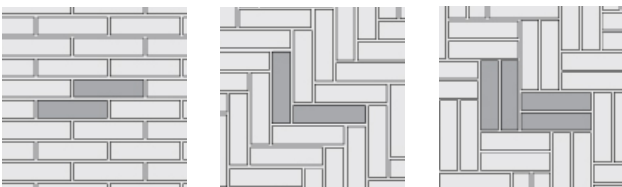

	3 x 12	4 x 16
Bundle Type	SINGLE	SINGLE
Plant Produced	NEW YORK	NEW YORK
Thickness (mm)	100 MM	100 MM

SQFT PER	Bundle	63.96	62.00
	Layer	10.66	10.33
	Section	-	-
	Stone	0.24	0.43

PER BUNDLE	Layers	6.00	6.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	1.02	0.76
	Section	-	-
	Layer	10.83	7.87
	Bundle	64.96	47.24


SAILOR LNFT PER	SqFt	4.06	3.05
	Section	-	-
	Layer	43.31	31.50
	Bundle	259.84	188.98

UNITS PER	SqFt	4.13	2.32
	Section	-	-
	Bundle	264.00	144.00


LBS PER	Layer	488	455
	Section	-	-
	Bundle	2,927	2,730

COLORS	Reflectance	Stock	Stock
Multiple Colors and Finishes	SR n/a SRI n/a	SO	SO

Single Units



3 x 12
 75 x 300 x 100mm
 3 x 11 7/8 x 3 7/8"
 220 units/Bundle
 .24 Sq.Ft./Stone



4 x 16
 100 x 400 x 100mm
 3 7/8 x 15 3/4 x 3 7/8"
 120 units/Bundle
 .43 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 6mm
 Void - 10.18%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	CLASSIC FINISH
Bundle Type	SINGLE
Plant Produced	NEW YORK
Thickness (mm)	80 MM

SQFT PER	Bundle	67.00
	Layer	9.57
	Section	-
	Stone	0.27

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	3.66
	Section	-
	Bundle	245.00

LBS PER	Layer	349
	Section	-
	Bundle	2,445

COLORS	Reflectance	Stock
Natural	SR n/a SRI n/a	SO

Single Unit



STANDARD
 115 x 230 x 80mm
 4 5/8 x 9 x 3 1/8"
 245 Units/Bundle
 .27 SqFt/Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



	8 x 8 HEX	
Bundle Type	SINGLE	RANDOM
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	70 MM	60 MM

SQFT PER	Bundle	73.92	94.14
	Layer	9.24	10.46
	Section	-	-
	Stone	0.39	1.31

PER BUNDLE	Layers	8.00	9.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-

SAILOR LNFT PER	SqFt	-	0.85
	Section	-	-
	Layer	-	8.86
	Bundle	-	79.72

UNITS PER	SqFt	2.60	0.76
	Section	-	-
	Bundle	192.00	72.00

LBS PER	Layer	306	287
	Section	-	-
	Bundle	2,450	2,583

COLORS	Reflectance	Stock	Stock
Notte Hex	SR n/a SRI n/a	SO	
Sabia Hex	SR n/a SRI n/a	SO	
Notte Random	SR n/a SRI n/a		SO
Sabia Random	SR n/a SRI n/a		SO

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Granito/Granito Textured (Random)
 Joint Spacing - 7 mm

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

ARTISTA™

Boldly mottled color finish

EASYCLEAN™




Factory Sealed to provide integral stain resistance


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Granito Hex_A



Granito Fixed Random A



NOTTE HEX



SABIA HEX

3-Unit Random Bundle		SMALL RECTANGLE 180 x 360 x 60mm 7 x 14 1/4 x 2 3/8" 27 units/Bundle .79 Sq.Ft./Stone		SQUARE 360 x 360 x 60mm 14 1/4 x 14 1/4 x 2 3/8" 27 units/Bundle 1.40 Sq.Ft./Stone		LARGE RECTANGLE 360 x 540 x 60mm 14 1/4 x 21 1/4 x 2 3/8" 18 units/Bundle 2.09 Sq.Ft./Stone	Single Unit		HEX 200 x 200 x 70mm 7 7/8 x 7 7/8 x 3 1/8" 192 units/Bundle .39 Sq.Ft./Stone
----------------------	---	--	---	---	---	--	-------------	---	--

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro Surface Texture
 Smooth/Exposed
 Joint Spacing - 3 mm

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

EASYCLEAN™ (Umbriano)

Factory Sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	HEX	HEX PERMEABLE
Bundle Type	SINGLE	SINGLE
Plant Produced	NEW YORK	NEW YORK
Thickness (mm)	70 MM	80 MM

SQFT PER	Bundle	73.92	59.24
	Layer	9.24	8.46
	Section	-	-
	Stone	0.39	0.42

PER BUNDLE	Layers	8.00	7.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-


SAILOR LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-

UNITS PER	SqFt	2.60	2.36
	Section	-	-
	Bundle	192.00	140.00

LBS PER	Layer	306	310
	Section	-	-
	Bundle	2,450	2,167

COLORS	Reflectance	Stock	Stock
Opal	SR .n/a SRI n/a	✓	SO
Steel Mountain	SR .n/a SRI n/a	✓	SO
Steel Grey	SR .n/a SRI n/a	✓	SO

LAYING PATTERNS



Hex Paver A



OPAL



STEEL MOUNTAIN



STEEL GREY

Single Units



HEX
 200 x 200 x 70mm
 7 7/8 x 7 7/8 x 2 3/4"
 192 Units/Bundle
 .39 SqFt/Stone



HEX PERMEABLE
 200 x 200 x 80mm
 7 7/8 x 7 7/8 x 3 1/8"
 140 Units/Bundle
 .42 SqFt/Stone



Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 3 mm


TECHNOLOGIES

CLASSIC
 Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

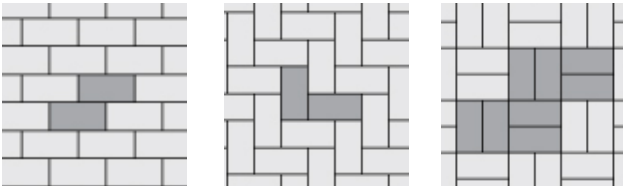

ALMOND GROVE



CHARCOAL



GRANITE

	SMOOTH
Bundle Type	SINGLE
Plant Produced	UXBRIDGE
Thickness (mm)	60 MM

SQFT PER	Bundle	106.20
	Layer	-
	Section	17.70
	Stone	0.22

PER BUNDLE	Layers	-
	Sections	6.00

SOLDIER LNFT PER	SqFt	1.50
	Section	26.57
	Layer	-
	Bundle	159.45

SAILOR LNFT PER	SqFt	3.00
	Section	53.15
	Layer	-
	Bundle	318.90

UNITS PER	SqFt	4.58
	Section	81.00
	Bundle	486.00

LBS PER	Layer	-
	Section	478
	Bundle	2,868

COLORS	Reflectance	Stock
Almond Grove	SR n/a SRI n/a	✓
Charcoal	SR .12 SRI 9	✓
Granite	SR .26 SRI 27	✓

Single Unit



**4 x 8
 STANDARD**
 100 x 200 x 60mm
 3 7/8 x 7 7/8 x 2 3/8"
 486 units/Bundle
 .22 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 3 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits.

LAYING PATTERNS

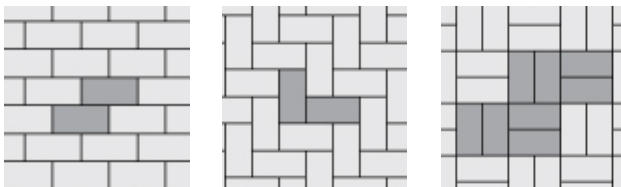

ALMOND GROVE



DARK CHARCOAL



FOSSIL



STEEL MOUNTAIN



RUSTIC RED

	SMOOTH FINISH
Bundle Type	SINGLE
Plant Produced	UXBRIDGE
Thickness (mm)	60 MM

SQFT PER	Bundle	118.2
	Layer	11.80
	Section	-
	Stone	0.22

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.50
	Section	-
	Layer	17.72
	Bundle	177.17

SAILOR LNFT PER	SqFt	3.00
	Section	-
	Layer	35.43
	Bundle	354.33

UNITS PER	SqFt	4.58
	Section	-
	Bundle	540.00

LBS PER	Layer	330
	Section	-
	Bundle	3,305

COLORS	Reflectance	Stock
Almond Grove	SR n/a sRI n/a	✓
Dark Charcoal	SR n/a sRI n/a	✓
Fossil	SR .22 sRI 21	✓
Steel Mountain	SR n/a sRI n/a	✓
Rustic Red	SR n/a sRI n/a	✓

Single Unit



STANDARD
 100 x 200 x 60mm
 3 7/8 x 7 7/8 x 2 3/8"
 486 units/Bundle
 .22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Il Campo Brushed
 Joint Spacing - 3 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

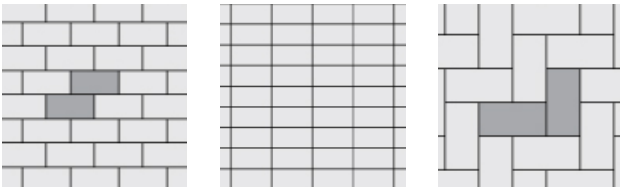

DARK CHARCOAL



GRANITE



LIGHT GREY

	4 x 8	8 x 16
Bundle Type	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	70 MM	70 MM

SQFT PER	Bundle	94.40	82.67
	Layer	11.80	10.33
	Section	-	-
	Stone	0.22	0.86

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	1.50	0.76
	Section	-	-
	Layer	17.72	7.87
	Bundle	141.73	62.99

SAILOR LNFT PER	SqFt	3.00	1.52
	Section	-	-
	Layer	35.43	15.75
	Bundle	283.46	125.98

UNITS PER	SqFt	4.58	1.16
	Section	-	-
	Bundle	432.00	96.00

LBS PER	Layer	377	343
	Section	-	-
	Bundle	3,019	2,747

COLORS	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	SO	SO
Granite	SR n/a SRI n/a		SO
Light Grey	SR .22 SRI 22		SO

Single Units



4 x 8
 100 x 200 x 70mm
 3⁷/₈ x 7⁷/₈ x 2³/₄"
 432 Units/Bundle
 .22 SqFt/Stone



8 x 16
 200 x 400 x 70mm
 7⁷/₈ x 15³/₄ x 2³/₄"
 96 Units/Bundle
 .86 SqFt/Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Smooth
 Joint Spacing - 4 mm



TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

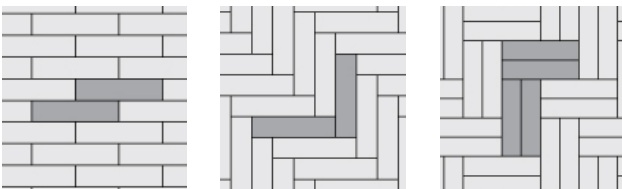

DARK CHARCOAL



GRANITE BLEND



SABLE BLEND



COCOA BROWN

	SMOOTH
Bundle Type	SINGLE
Plant Produced	NEW YORK
Thickness (mm)	70 MM

SQFT PER	Bundle	86.80
	Layer	10.85
	Section	-
	Stone	0.16

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.27
	Section	-
	Layer	14.17
	Bundle	113.39

SAILOR LNFT PER	SqFt	5.08
	Section	-
	Layer	56.69
	Bundle	453.54

UNITS PER	SqFt	6.45
	Section	-
	Bundle	576.00

LBS PER	Layer	357
	Section	-
	Bundle	2,859

COLORS	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Granite Blend	SR n/a SRI n/a	✓
Sable Blend	SR n/a SRI n/a	✓
Cocoa Brown	SR n/a SRI n/a	✓

Single Unit



STANDARD
 60 x 240 x 60mm
 2 3/8 x 9 1/2 x 2 3/8"
 576 Units/Bundle
 .16 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.

Natural Stone - Sandstone Slabs



BRUSHED FINISH	12 x 24	18 x 24	24 x 24	24 x 36
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	22 MM	22 MM	22 MM	22 MM

SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17

LBS PER	Unit	24	36	48	72
	Bundle	2,149	2,221	1,910	2,149

COLORS	Reflectance	Stock	Stock	Stock	Stock
Autumn Harvest (Riven)	SR n/a SRI n/a	✓	✓	✓	✓
Golden Sand (Brushed)	SR n/a SRI n/a	✓	✓	✓	✓
Ivory Sand (Brushed)	SR n/a SRI n/a	✓	✓	✓	✓
Stone Cliff Grey (Riven)	SR n/a SRI n/a	✓	✓	✓	✓

APPLICATIONS




APPEARANCE

Edge Detail - Zero
 Surface Texture - Brushed / Riven
 Joint Spacing - 0 mm

TECHNICAL INFORMATION

Visit Unilock.com for more information.

LAYING PATTERNS

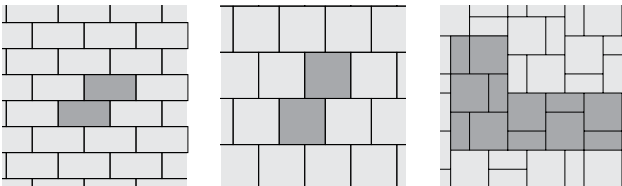

AUTUMN HARVEST



GOLDEN SAND



IVORY SAND



STONE CLIFF GREY

Single Units				
	12 x 24	18 x 24	24 x 24	24 x 36
	300 x 600 x 22mm	450 x 600 x 22mm	600 x 600 x 22mm	600 x 900 x 22mm
	11 7/8 x 23 5/8 x 7/8"	17 3/4 x 23 5/8 x 7/8"	23 5/8 x 23 5/8 x 7/8"	23 5/8 x 35 1/2 x 7/8"
	2.0 Sq.Ft./Stone	3.0 Sq.Ft./Stone	4.0 Sq.Ft./Stone	6.0 Sq.Ft./Stone

Notes: This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

Natural Stone - Sandstone Coping



APPLICATIONS



		48 x 12 FULLNOSE COPING	48 x 12 ROCK FACED COPING	48 x 16 ROCK FACED COPING	72 x 12 FULLNOSE COPING	72 x 12 ROCK FACED COPING	72 x 16 ROCK FACED COPING
Bundle Type		SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)		50 MM	50 MM	50 MM	50 MM	50 MM	50 MM

UNITS PER	Crate	20.00	20.00	20.00	12.00	12.00	10.00
	SqFt	-	-	-	-	-	-

LBS PER	Unit	106	101	113	159	159	209
	Bundle	2,116	2,028	2,258	1,905	1,905	2,094


COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Autumn Harvest	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓
Golden Sand	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓
Ivory Sand	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓



AUTUMN HARVEST



GOLDEN SAND




IVORY SAND




STONE CLIFF GREY


Coping




4' FULLNOSE COPING
1,200 x 50 x 300mm
47 1/4 x 2 x 11 7/8"




6' FULLNOSE COPING
1,800 x 50 x 300mm
70 7/8 x 2 x 11 7/8"




4' ROCK FACE COPING
1,200 x 50 x 300mm
47 1/4 x 2 x 11 7/8"



6' ROCKFACE COPING
1,800 x 50 x 300mm
70 7/8 x 2 x 11 7/8"



4' ROCK FACE COPING
1,200 x 50 x 400mm
47 1/4 x 2 x 15 3/4"



6' ROCKFACE COPING
1,800 x 50 x 400mm
70 7/8 x 2 x 15 3/4"

Natural Stone - Sandstone Steps & Pillar Caps



	24 x 24 ROCK FACED PILLAR CAP	29 x 29 ROCK FACED PILLAR CAP	48 x 16 ROCK FACED STEP	72 x 16 ROCK FACED STEP
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	64 MM	64 MM	150 MM	150 MM

FCFT PER	Crate	-	-	32.00	32.00
-----------------	-------	---	---	-------	-------

LNFT PER	Crate	-	-	24.00	24.00
	Unit	-	-	4.00	6.00

UNITS PER	Crate	14.00	12.00	6.00	4.00
------------------	-------	-------	-------	------	------

LBS PER	Unit	137	209	421	628
	Bundle	1,914	2,513	2,526	2,513

COLORS	Reflectance	Stock	Stock	Stock	Stock
Autumn Harvest	SR n/a SRI n/a	✓	✓	✓	✓
Golden Sand	SR n/a SRI n/a	✓	✓	✓	✓
Ivory Sand	SR n/a SRI n/a	✓	✓	✓	✓
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	✓	✓

APPLICATIONS



APPEARANCE

Edge Detail - Zero

Surface Texture - Brushed / Riven

Joint Spacing - 0 mm

TECHNICAL INFORMATION

Visit Unilock.com for more information.



AUTUMN HARVEST







GOLDEN SAND



IVORY SAND



STONE CLIFF GREY

Steps			Pillar Caps		
	48 x 16 STEP 1,200 x 150 x 400mm 47 1/4 x 5 7/8 x 15 3/4"	72 x 16 STEP 1,830 x 150 x 400mm 72 x 5 7/8 x 15 3/4"		PILLAR CAP 600 x 600 x 64mm 23 5/8 x 23 5/8 x 2 5/8"	PILLAR CAP 725 x 725 x 64mm 28 5/8 x 28 5/8 x 2 5/8"

Notes: This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

Natural Stone - Limestone Slabs



	12 x 24	18 x 24	24 x 24	24 x 36
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	22 MM	22 MM	22 MM	22 MM

SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17

LBS PER	Unit	24	36	48	72
	Bundle	2,149	2,221	1,910	2,149

COLORS	Reflectance	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓	✓
Hearthstone	SR n/a SRI n/a	✓	✓	✓	✓
Winter Mist	SR n/a SRI n/a	✓	✓	✓	✓

APPLICATIONS




APPEARANCE

Edge Detail - Zero
 Surface Texture - Riven
 Joint Spacing - 0 mm
 Void - 0 %

TECHNICAL INFORMATION

Visit Unilock.com for more information.

LAYING PATTERNS

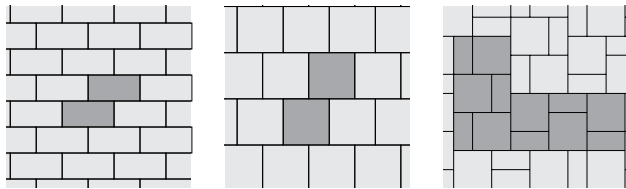

BLACK RIVER



HEARTHSTONE



WINTER MIST

Single Units	12 x 24	18 x 24	24 x 24	24 x 36
	300 x 600 x 22mm 11 7/8 x 23 5/8 x 7/8"	450 x 600 x 22mm 17 3/4 x 23 5/8 x 7/8"	600 x 600 x 22mm 23 5/8 x 23 5/8 x 7/8"	600 x 900 x 22mm 23 5/8 x 35 1/2 x 7/8"
	2.0 Sq.Ft./Stone	3.0 Sq.Ft./Stone	4.0 Sq.Ft./Stone	6.0 Sq.Ft./Stone

Notes: Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone. All measurement are nominal. Product is not intended for vehicular applications.

Natural Stone - Limestone Steps, Coping & Pillar Caps



APPLICATIONS



BLACK RIVER



HEARTHSTONE



WINTER MIST

	48 x 12 ROCKFACED COPING	48 x 16 ROCK FACED COPING	72 x 12 ROCK FACED COPING	72 x 16 ROCK FACED COPING	48 x 12 FULLNOSE COPING	72 x 12 FULLNOSE COPING
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	50 MM	50 MM	50 MM	50 MM	50 MM	50 MM

UNITS PER	Crate	20.00	16.00	12.00	10.00	20.00	12.00
	SqFt	-	-	-	-	-	-

LBS PER	Unit	106	141	159	209	159	159
	Bundle	2,116	2,258	1,905	2,094	3,175	1,905

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓

	24 x 24 ROCK FACED PILLAR CAP	28 x 28 ROCK FACED PILLAR CAP	48 x 16 ROCK FACED STEP	72 x 16 ROCK FACED STEP
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	64 MM	64 MM	150 MM	150 MM

FCFT PER	Crate	-	-	-	-
----------	-------	---	---	---	---

LNFT PER	Crate	-	-	24.00	24.00
	Unit	-	-	4.00	6.00

UNITS PER	Crate	14.00	12.00	6.00	4.00
-----------	-------	-------	-------	------	------

LBS PER	Unit	137	186	421	628
	Bundle	1,914	2,606	2,526	2,513

COLORS	Reflectance	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓	✓
Hearthstone	SR n/a SRI n/a	✓	✓		
Winter Mist	SR n/a SRI n/a	✓	✓		

48" & 72" Steps		48 x 16 STEP 1,200 x 150 x 400mm 47 1/4 x 5 7/8 x 15 3/4"		72 x 16 STEP 1,800 x 150 x 400mm 70 7/8 x 5 7/8 x 15 3/4"
	Pillar Caps		24 x 24 PILLAR CAP 600 x 600 x 64mm 23 5/8 x 23 5/8 x 2 5/8"	
Coping			48 x 12 ROCK FACE 1,200 x 300 x 50mm 47 1/4 x 11 7/8 x 2"	
		48 x 16 ROCK FACE 400 x 1,200 x 50mm 47 1/4 x 15 3/4 x 2"		72 x 16 ROCK FACE 1,800 x 400 x 50mm 47 1/4 x 15 3/4 x 2"
		48 x 12 FULLNOSE 300 x 1,200 x 50mm 11 7/8 x 47 1/4 x 2"		72 x 12 FULLNOSE 1,800 x 300 x 50mm 70 7/8 x 11 7/8 x 2"

Notes: Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealers for natural stone. All measurements are nominal. Product is not intended for vehicular applications.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Textured
 Void - n/a

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through


ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1


LAYING PATTERNS



NordicCobble_A



NordicCobble_Fan



NordicCobble_Circle

	STANDARD
Bundle Type	SINGLE
Plant Produced	ONTARIO
Thickness (mm)	60 MM

SQFT PER	Bundle	58.95
	Layer	9.83
	Section	-
	Stone	0.05

PER BUNDLE	Layers	6.00
	Sections	-

SOLDIER LNFT PER	SqFt	3.39
	Section	-
	Layer	33.31
	Bundle	199.84

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


UNITS PER	SqFt	10.99
	Layer	108.00
	Bundle	648.00

LBS PER	Layer	270
	Section	-
	Bundle	1,618


COLORS	Reflectance	Stock
Granite Fusion	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Opal Blend	SR n/a SRI n/a	✓



GRANITE FUSION



DARK CHARCOAL



OPAL BLEND

Single Unit



STANDARD
 89.9 x 94 x 60mm
 3 5/8 x 3 3/4 x 2 3/8"
 864 units/Bundle
 .05 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 8 mm

TECHNOLOGIES

CLASSIC
 Budget-friendly traditional product mix


ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

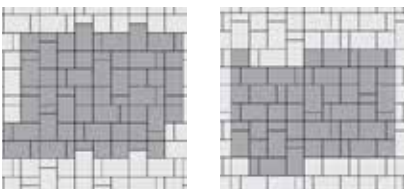

		SMOOTH CLASSIC / ENDURACOLOR
	Bundle Type	SINGLE
	Plant Produced	UXB/NY
	Thickness (mm)	80 MM

SQFT PER	Bundle	67.66
	Layer	9.67
	Section	-
	Stone	0.54

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.59
	Section	-
	Layer	15.35
	Bundle	107.48

SAILOR LNFT PER	SqFt	1.59
	Section	-
	Layer	15.35
	Bundle	107.48

UNITS PER	SqFt	1.86
	Section	-
	Bundle	126.00

LBS PER	Layer	359
	Section	-
	Bundle	2,516

COLORS	Reflectance	Stock
Natural	SR n/a SRI n/a	SO
Granite	SR n/a SRI n/a	SO

Single Unit



STANDARD
 100 x 200 x 80mm
 3 7/8 x 7 7/8 x 3 1/8"
 378 units/Bundle
 .22 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Porcelain



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Stone Finish

Joint Spacing - n/a

TECHNICAL INFORMATION

Visit Unilock.com for more information.

LAYING PATTERNS



		24 x 24 PRESSED EDGE	16 x 32 PRESSED EDGE	COPING POOL PRESSED EDGE
Bundle Type		SINGLE	SINGLE	SINGLE
Thickness (mm)		20 MM	20 MM	30 MM
SQFT PER	Pallet	255.75	268.71	-
	Box	7.75	6.89	-
	Unit	3.88	3.45	-
PER PALLET	Box	33.00	39.00	38.00
	SqFt	255.75	268.71	-
	Unit	66.00	78.00	38.00
UNITS PER	Pallet	66.00	78.00	38.00
	Box	2.00	2.00	1.00
LBS PER	Unit	35	32	30
	SqFt	9	9	-
	Box	70	64	30
	Pallet	2,318	2,511	1,127

COLORS	Reflectance	Stock	Stock	Stock
Gotham Grey	SR n/a SRI n/a	✓		✓
Gotham Nero	SR n/a SRI n/a	✓		
Quartzite Dark Gray	SR n/a SRI n/a		✓	
Quartzite Sand	SR n/a SRI n/a		✓	
Travstone Beige	SR n/a SRI n/a	✓		



GOTHAM GREY



GOTHAM NERO



TRAVSTONE BEIGE



QUARTZITE DARK GRAY



QUARTZITE SAND

Single Units		DEL CONCA 24 x 24 600 x 600 x 20mm 23 5/8 x 23 5/8 x 7/8" 3.88 Sq.Ft./Stone
		DEL CONCA 16 x 32 400 x 800 x 20mm 15 3/4 x 31 1/2 x 7/8" 3.45 Sq.Ft./Stone
		DEL CONCA COPING 330 x 600 x 30mm 13 x 23 5/8 x 1 1/4"

Notes: All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.



	3 x 12	4 x 12	4 x 16	8 x 24
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	NEW YORK	NEW YORK	NEW YORK	NEW YORK
Thickness (mm)	100 MM	100 MM	100 MM	100 MM

SQFT PER	Bundle	63.94	69.76	62.00	62.00
	Layer	10.66	11.63	10.33	10.33
	Section	-	-	-	-
	Stone	0.24	0.32	0.43	1.29

PER BUNDLE	Layers	6.00	6.00	6.00	6.00
	Sections	-	-	-	-

SOLDIER LNFT PER	SqFt	1.35	1.02	0.76	0.51
	Section	-	-	-	-
	Layer	14.44	11.81	7.87	5.25
	Bundle	86.61	70.87	47.24	31.50

SAILOR LNFT PER	SqFt	4.06	3.05	3.05	1.52
	Section	-	-	-	-
	Layer	43.31	35.43	31.50	15.75
	Bundle	259.84	212.60	188.98	94.49

UNITS PER	SqFt	4.13	3.10	2.32	0.77
	Section	-	-	-	-
	Bundle	264.00	216.00	144.00	48.00

LBS PER	Layer	483	532	455	478
	Section	-	-	-	-
	Bundle	2,898	3,191	2,730	2,869

COLORS	Reflectance	Stock	Stock	Stock	Stock
Multiple Colors and Finishes	SR n/a SRI n/a	SO	SO	SO	SO

Different finishes available by Special Order.
Please contact your Territory Manager for more details.

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth & Series™ Exposed
Joint Spacing - 4 mm

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano)

Factory Sealed to provide integral stain resistance


COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERNS

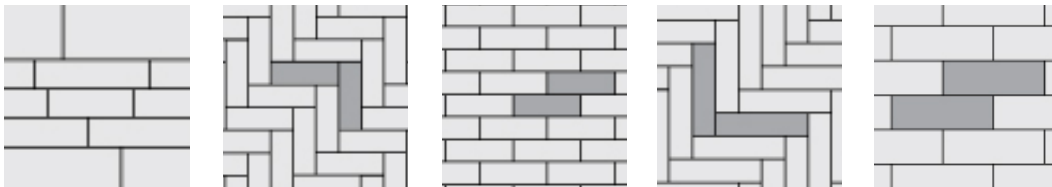

Single Units		3 x 12 100 x 300 x 100mm 3 7/8 x 11 7/8 x 3 7/8" 264 units/Bundle .24 Sq.Ft./Stone		4 x 12 100 x 300 x 100mm 3 7/8 x 11 7/8 x 3 7/8" 216 units/Bundle .32 Sq.Ft./Stone		4 x 16 100 x 400 x 100mm 3 7/8 x 15 3/4 x 3 7/8" 144 units/Bundle .43 Sq.Ft./Stone		8 x 24 200 x 600 x 100mm 7 7/8 x 23 5/8 x 3 7/8" 48 units/Bundle 1.29 Sq.Ft./Stone
--------------	---	---	---	---	---	---	---	---

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

- Edge Detail - Rounded
- Surface Texture - Smooth
- Joint Spacing - n/a
- Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color


ECOTERRA®

Reduced carbon emissions and refined surface protection


TECHNICAL INFORMATION

- Conforms to ASTM C 936
- Eligible for LEED v4.1 credits

LAYING PATTERNS



4x12 RB_A



4x12 HB_C

	4 x 12
Bundle Type	SINGLE
Plant Produced	ONTARIO
Thickness (mm)	70 MM

SQFT PER	Bundle	93.04
	Layer	11.63
	Section	23.26
	Stone	0.32

PER BUNDLE	Layers	8.00
	Sections	4.00

SOLDIER LNFT PER	SqFt	1.02
	Section	23.62
	Layer	11.81
	Bundle	94.49

SAILOR LNFT PER	SqFt	3.05
	Section	70.87
	Layer	35.43
	Bundle	283.46

UNITS PER	SqFt	3.10
	Section	36.00
	Bundle	288.00

LBS PER	Layer	393
	Section	785
	Bundle	3,140

COLORS	Reflectance	Stock
Light Opal Blend	SR n/a SRI n/a	SO
Light Steel Gray	SR n/a SRI n/a	SO



LIGHT OPAL BLEND



LIGHT STEEL GRAY

Single Unit



4 x 12
 100 x 300 x 70 mm
 3 7/8 x 11 7/8 x 2 3/4
 288 units/Bundle
 .32 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	4 x 8	8 x 24
Bundle Type	SINGLE	SINGLE
Plant Produced	UXBRIDGE	UXBRIDGE
Thickness (mm)	70 MM	70 MM

SQFT PER	Bundle	94.40	82.67
	Layer	11.80	10.33
	Section	-	-
	Stone	0.22	1.29

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	1.50	0.51
	Section	-	-
	Layer	17.72	5.25
	Bundle	141.73	41.99


SAILOR LNFT PER	SqFt	3.00	1.02
	Section	-	-
	Layer	35.43	10.50
	Bundle	283.46	83.99

UNITS PER	SqFt	4.58	0.77
	Section	-	-
	Bundle	432.00	64.00


LBS PER	Layer	334	331
	Section	-	-
	Bundle	2,669	2,647

COLORS	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	✓	
Tuscany	SR n/a SRI n/a	✓	✓

LAYING PATTERNS



Revela 4x8 HB



Revela 8x24 RB



DARK CHARCOAL



TUSCANY

Single Units



4 x 8
 100 x 200 x 70mm
 3 7/8 x 7 7/8 x 2 3/4"
 432 units/Bundle
 .22 Sq.Ft./Stone



8 x 24
 200 x 600 x 70mm
 7 7/8 x 23 5/8 x 2 3/4"
 64 units/Bundle
 1.29 Sq.Ft./Stone



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - n/a
 Void - n/a

TECHNOLOGIES

EASYSOAK™

Factory Sealed to provide integral stain resistance


ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Revela 18x24




FROST




MICA GREY



METTALIC GREY



DARK CHARCOAL



SAVANNAH

		18 x 24
Bundle Type		SINGLE
Plant Produced		UXBRIDGE
Thickness (mm)		60 MM

SQFT PER	Bundle	93.00
	Layer	11.63
	Section	11.63
	Stone	2.91

PER BUNDLE	Layers	8.00
	Sections	8.00

SOLDIER LNFT PER	SqFt	0.51
	Section	5.91
	Layer	5.91
	Bundle	47.25

SAILOR LNFT PER	SqFt	0.68
	Section	7.87
	Layer	7.87
	Bundle	62.99

UNITS PER	SqFt	0.34
	Section	4.00
	Bundle	32.00

LBS PER	Layer	319
	Section	319
	Bundle	2,552

COLORS	Reflectance	Stock
Frost	SR n/a SRI n/a	✓
Mica Grey	SR n/a SRI n/a	✓
Metallic Grey	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Savannah	SR n/a SRI n/a	✓

Single Units



18 x 24
 450 x 600 x 60mm
 17¾ x 23⅝ x 2⅜"



APPLICATIONS



APPEARANCE

Edge Detail - n/a
 Surface Texture - Textured
 Joint Spacing - 10 mm

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

EASYCLEAN™

Factory Sealed to provide integral stain resistance

REALA™

Cast from natural stone


ULTIMA™

Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

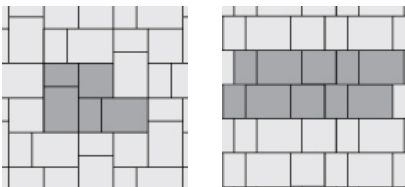

		LARGE RECTANGLE	
Bundle Type	RANDOM	SINGLE	
Plant Produced	AYR	AYR	
Thickness (mm)	60 MM	60 MM	

SQFT PER	Bundle	90.30	82.39
	Layer	11.29	10.30
	Section	-	-
	Stone	0.56	1.72

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.58
	Section	-	-
	Layer	-	5.94
	Bundle	-	47.56

SAILOR LNFT PER	SqFt	1.31	1.01
	Section	-	-
	Layer	14.78	10.39
	Bundle	118.22	83.15

UNITS PER	SqFt	1.77	0.58
	Section	-	-
	Bundle	160.00	48.00

LBS PER	Layer	309	301
	Section	-	-
	Bundle	2,472	2,411

COLORS	Reflectance	Stock	Stock
Dawn Mist	SR n/a SRI n/a	✓	✓
Pebble Taupe	SR n/a SRI n/a	✓	✓
Smoke Shale	SR n/a SRI n/a		✓



DAWN MIST



PEBBLE TAUPE



SMOKE SHALE

3 Unit Random Bundle		RECTANGLE 226 x 300 x 60mm 8 7/8 x 11 7/8 x 2 3/8" 64 Units/Bundle .75 SqFt/Stone		SQUARE 226 x 226 x 60mm 8 7/8 x 8 7/8 x 2 3/8" 32 units/Bundle .58 Sq.Ft./Stone		SMALL RECTANGLE 150 x 226 x 60mm 5 7/8 x 8 7/8 x 2 3/8" 64 units/Bundle .38 Sq.Ft./Stone		LARGE RECTANGLE 302 x 528 x 60mm 11 7/8 x 20 7/8 x 2 3/8" 48 units/Bundle 1.72 Sq.Ft./Stone
----------------------	--	--	--	--	--	---	--	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. The Large Rectangle unit is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Series Exposed
 Joint Spacing - 3 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

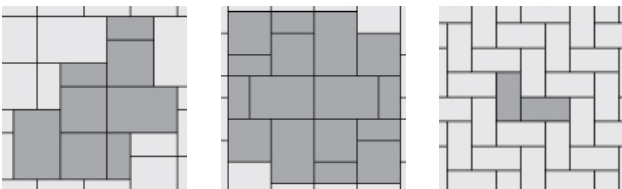

BLACK GRANITE

			4 x 8
	Bundle Type	RANDOM	SINGLE
	Plant Produced	NEW YORK	NEW YORK
	Thickness (mm)	60 MM	70 MM

SQFT PER	Bundle	94.40	94.40
	Layer	11.80	11.80
	Section	-	-
	Stone	0.22	0.22

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-





SOLDIER LNFT PER	SqFt	-	1.50
	Section	-	-
	Layer	-	17.72
	Bundle	-	141.76

SAILOR LNFT PER	SqFt	1.50	3.00
	Section	-	-
	Layer	17.72	35.43
	Bundle	141.76	283.44

UNITS PER	SqFt	3.00	4.58
	Section	-	-
	Bundle	35.43	432.00

LBS PER	Layer	377	377
	Section	-	-
	Bundle	3,019	3,019

COLORS	Reflectance	Stock	Stock
Black Granite	SR n/a SRI n/a	SO	✓

Random Bundle		LARGE RECTANGLE 360 x 540 x 60mm 14 1/4 x 21 1/4 x 2 3/8" 18 units/Bundle 2.09 Sq.Ft./Stone		SQUARE 360 x 360 x 60mm 14 1/4 x 14 1/4 x 2 3/8" 27 units/Bundle 1.40 Sq.Ft./Stone		SMALL RECTANGLE 180 x 360 x 60mm 7 x 14 1/4 x 2 3/8" 27 units/Bundle .70 Sq.Ft./Stone	Single Unit		4 x 8 100 x 200 x 70mm 3 7/8 x 7 7/8 x 2 3/4" 486 units/Bundle .22 Sq.Ft./Stone
---------------	---	--	---	---	---	--	-------------	---	--

Notes: For Special Order items - Lead time required. Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 2mm
 Void - n/a


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 1782
 Eligible for LEED v4.1 credits

LAYING PATTERNS




Skyline 24x24 SB_A



Skyline 24x24 RB_B



CHAMOIS



SILVER GREY

	24 x 24
Bundle Type	SINGLE
Plant Produced	BREWSTER
Thickness (mm)	60 MM

SQFT PER	Bundle	77.50
	Layer	8.00
	Section	-
	Stone	4.00

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	0.50
	Section	-
	Layer	4.00
	Bundle	40.00

SAILOR LNFT PER	SqFt	0.50
	Section	-
	Layer	4.00
	Bundle	40.00

UNITS PER	SqFt	0.25
	Section	-
	Bundle	20.00

LBS PER	Layer	183
	Section	-
	Bundle	1,833

COLORS	Reflectance	Stock
Chamois	SR .41 SRI 46	✓
Silver Grey	SR n/a SRI n/a	✓

Single Unit

24 x 24
 606 x 606 x 50mm
 23 7/8" x 23 7/8" x 2 3/8"
 20 units/Bundle
 4.00 Sq.Ft./Stone



PEDESTAL SYSTEM
 Contact your local Unilock Rep for more information.

Notes: **Special Order items, lead time is required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Product is not intended vehicular applications.** Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. All measurements are nominal.



APPLICATIONS




APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth
 Joint Spacing - 0 mm
 Void - n/a

TECHNOLOGIES


ENDURACOLOR™
 Refined surface and long-lasting color

EASYCLEAN™ 
 Factory Sealed to provide integral stain resistance


TECHNICAL INFORMATION

Conforms to ASTM C 1782
 Eligible for LEED v4.1

LAYING PATTERN



Soreno 16x32 RB_A



Soreno 16x32 HB_B



LIGHT GRANITE



TOSCANA BEIGE

		16 x 32
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	50 MM

SQFT PER	Bundle	64.27
	Layer	3.57
	Sections	-
	Stone	3.57

PER BUNDLE	Layers	18.00
	Sections	-

SOLDIER LNFT PER	SqFt	0.37
	Sections	-
	Layer	1.34
	Bundle	24.04

SAILOR LNFT PER	SqFt	0.75
	Sections	-
	Layer	2.67
	Bundle	48.13

UNITS PER	SqFt	0.28
	Sections	-
	Bundle	18.00

LBS PER	Layer	86
	Sections	-
	Bundle	1,550

COLORS	Reflectance	Stock
Light Granite	SR n/a SRI n/a	SO
Toscana Beige	SR n/a SRI n/a	SO

Single Units



16 x 32
 407 x 815 x 50mm
 16 x 32 x 2"
 18 units/Bundle
 3.57 Sq.Ft./Stone



PEDESTAL SYSTEM
 Contact your local Unilock Rep for more information.

Notes: Special Order items, lead time is required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 11-18 mm
 Void - 4.4%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	SMOOTH
Bundle Type	RANDOM
Plant Produced	UXBRIDGE
Thickness (mm)	70 MM

SQFT PER	Bundle	88.61
	Layer	11.08
	Section	-
	Stone	0.92

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.08
	Section	-
	Bundle	96.00

LBS PER	Layer	355
	Section	-
	Bundle	2,838




COLORS	Reflectance	Stock
Fossil	SR .22 SRI 21	✓
Steel Mountain	SR .30 SRI 31	✓

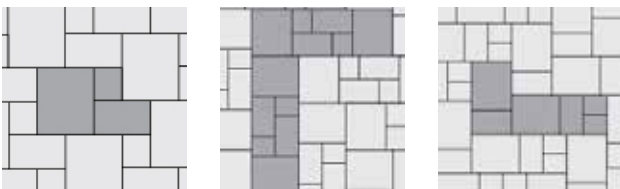LAYING PATTERNS



FOSSIL

STEEL MOUNTAIN

3 Unit Random Bundle			
	LARGE RECTANGLE	MEDIUM RECTANGLE	SMALL RECTANGLE
	350 x 420 x 70mm 13 7/8 x 16 5/8 x 2 3/4"	210 x 350 x 70mm 8 3/8 x 13 7/8 x 2 3/4"	173 x 210 x 70mm 6 7/8 x 8 3/8 x 2 3/4"
	32 Units/Bundle	32 units/Bundle	32 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
 Surface Texture - Textured
 Joint Spacing - 10 mm
 Void - 6.5%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

EASYCLEAN™ 

Factory Sealed to provide integral stain resistance

REALA™

Cast from historical brick


ULTIMA™

Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

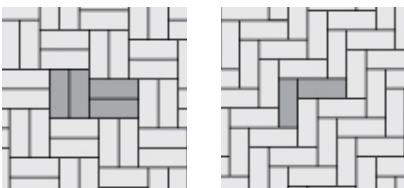

BURGUNDY RED



BURNT CLAY



OLD OAK



BASALT

	STANDARD
Bundle Type	SINGLE
Plant Produced	AYR
Thickness (mm)	70 MM

SQFT PER	Bundle	88.41
	Layer	11.05
	Section	-
	Stone	0.28

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.19
	Section	-
	Layer	13.12
	Bundle	104.99

SAILOR LNFT PER	SqFt	2.97
	Section	-
	Layer	32.81
	Bundle	262.47

UNITS PER	SqFt	3.62
	Section	-
	Bundle	320.00

LBS PER	Layer	361
	Section	-
	Bundle	2,888

COLORS	Reflectance	Stock
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓
Basalt	SR n/a SRI n/a	✓

Single Unit



STANDARD
 250 x 100 x 70mm
 9 7/8 x 3 7/8 x 2 3/4"
 300 units/Bundle
 .28 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Textured
 Joint Spacing - 3 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

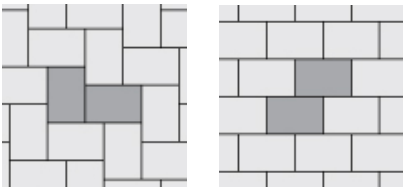

ALMOND GROVE

DARK CHARCOAL

FOSSIL

STEEL MOUNTAIN

SIERRA

		FLAGSTONE FINISH
	Bundle Type	SINGLE
	Plant Produced	UXBRIGE
	Thickness (mm)	60 MM

SQFT PER	Bundle	125.00
	Layer	12.50
	Section	-
	Stone	0.42

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.18
	Section	-
	Layer	14.76
	Bundle	147.64

SAILOR LNFT PER	SqFt	1.81
	Section	-
	Layer	22.64
	Bundle	226.38

UNITS PER	SqFt	2.40
	Section	-
	Bundle	300.00

LBS PER	Layer	350
	Section	-
	Bundle	3,500

COLORS	Reflectance	Stock
Almond Grove	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	✓
Steel Mountain	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

Single Unit



RECTANGLE
 150 x 230 x 60mm
 5 7/8" x 9 x 2 3/8"
 270 Units/Bundle
 .42 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Textured
Joint Spacing - 4mm

TECHNOLOGIES



ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYING PATTERNS



ALMOND GROVE



BROWN



DARK CHARCOAL



FOSSIL



SIERRA



SLATE



STEEL MOUNTAIN



TUSCANY



WALNUT

	FLAGSTONE ENDURACOLOR	SMALL RECTANGLE
Bundle Type	RANDOM	SINGLE
Plant Produced	UXBRIGE	UXBRIGE
Thickness (mm)	60 MM	60 MM

SQFT PER	Bundle	118.90	118.90
	Layer	11.89	11.89
	Section	-	-
	Stone	0.48	0.30

PER BUNDLE	Layers	10.00	10.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	1.30
	Section	-	-
	Layer	-	15.42
	Bundle	-	154.20

SAILOR LNFT PER	SqFt	1.78	2.59
	Section	-	-
	Layer	21.19	30.84
	Bundle	211.90	308.40

UNITS PER	SqFt	2.10	3.36
	Section	-	-
	Bundle	250.00	400.00

LBS PER	Layer	320	316
	Section	-	-
	Bundle	3,203	3,161

COLORS	Reflectance	Stock	Stock
Almond Grove	SR .25 SRI 25	✓	✓
Brown	SR n/a SRI n/a		✓
Dark Charcoal	SR n/a SRI n/a		✓
Fossil	SR .22 SRI 21	✓	✓
Steel Mountain	SR .30 SRI 31	✓	✓
Sierra	SR n/a SRI n/a	✓	✓
Slate	SR n/a SRI n/a	SO	SO
Tuscany	SR .30 SRI 32	SO	SO
Walnut	SR n/a SRI n/a	SO	SO

Random Bundle				Single Unit	
	<p>LARGE RECTANGLE 233 x 349.5 x 60mm 9 1/4 x 13 3/4 x 2 3/8" 50 units/Bundle .82 Sq.Ft./Stone</p>	<p>SQUARE 233 x 233 x 60mm 9 1/4 x 9 1/4 x 2 3/8" 60 units/Bundle .55 Sq.Ft./Stone</p>	<p>SMALL RECTANGLE 116.5 x 233 x 60mm 4 5/8 x 9 1/4 x 2 3/8" 130 units/Bundle .27 Sq.Ft./Stone</p>		<p>SMALL RECTANGLE 117.5 x 235 x 60mm 4 5/8 x 9 1/4 x 2 3/8" 400 units/Bundle .27 Sq.Ft./Stone</p>

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 7mm
 Void - 5.5%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through


ENDURACOLOR[™]

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS

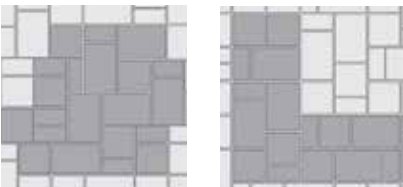

			SMALL RECTANGLE
	Bundle Type	RANDOM	SINGLE
	Plant Produced	UXBRIDGE	UXBRIDGE
	Thickness (mm)	60 MM	60 MM

SQFT PER	Bundle	116.87	116.87
	Layer	11.69	11.69
	Section	-	-
	Stone	0.56	0.56

PER BUNDLE	Layers	10.00	10.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	1.31
	Section	-	-
	Layer	-	15.29
	Bundle	-	152.89

SAILOR LNFT PER	SqFt	1.57	2.62
	Section	-	-
	Layer	18.35	30.58
	Bundle	183.46	305.77

UNITS PER	SqFt	1.80	3.42
	Section	-	-
	Bundle	210.00	400.00

LBS PER	Layer	321	321
	Section	-	-
	Bundle	3,208	3,208

COLORS	Reflectance	Stock	Stock
Almond Grove	SR n/a SRI n/a	✓	✓
Fossil	SR .22 SRI 21	✓	✓
Steel Mountain	SR .30 SRI 31	✓	✓
Slate	SR n/a SRI n/a	✓	
Dark Charcoal	SR n/a SRI n/a		✓



ALMOND GROVE




FOSSIL



STEEL MOUNTAIN



SLATE



DARK CHARCOAL

Random Bundle		LARGE RECTANGLE 233 x 349.5 x 60mm 9 1/4 x 13 3/4 x 2 3/8" 60 units/Bundle .82 Sq.Ft./Stone		SQUARE 233 x 233 x 60mm 9 1/4 x 9 1/4 x 2 3/8" 70 units/Bundle .55 Sq.Ft./Stone		SMALL RECTANGLE 116.5 x 233 x 60mm 4 5/8 x 9 1/4 x 2 3/8" 80 units/Bundle .27 Sq.Ft./Stone	Single Unit		RECTANGLE 116.5 x 233 x 60mm 4 5/8 x 9 1/4 x 2 3/8" 400 units/Bundle .29 Sq.Ft./Stone
----------------------	---	--	---	--	---	---	--------------------	---	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Series Exposed Textured
 Joint Spacing - 10mm
 Void - 5.6%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

		CURB	
	Bundle Type	SINGLE	RANDOM
	Plant Produced	NEW YORK	NEW YORK
	Thickness (mm)	180 MM	70 MM

SQFT PER	Bundle	-	97.53
	Layer	-	12.19
	Section	-	-
	Stone	-	0.32

PER BUNDLE	Layers	3.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	12.24	-
	Bundle	36.72	-


SAILOR LNFT PER	SqFt	-	2.34
	Section	-	-
	Layer	-	28.49
	Bundle	-	227.95

UNITS PER	SqFt	-	3.12
	Section	-	-
	Bundle	36.00	304.00

LBS PER	Layer	555	398
	Section	-	-
	Bundle	1,664	3,186

COLORS	Reflectance	Stock	Stock
Crystalline Basalt	SR n/a SRI n/a	✓	✓
Peppered Granite	SR .38 SRI 42	✓	✓

LAYING PATTERNS



CRYSTALLINE BASALT



PEPPERED GRANITE

Random Bundle		LARGE RECTANGLE 130 x 305 x 70mm 5 x 12 x 2 ¾"		RECTANGLE 130 x 230 x 70mm 5 x 9 x 2 ¾"		SMALL RECTANGLE 130 x 175 x 70mm 5 x 6 7/8 x 2 ¾"	Single Unit		CURB 230 x 290 x 180mm 9 x 11 ½ x 7"
		88 units/Bundle .43 Sq.Ft./Stone	88 units/Bundle .32 Sq.Ft./Stone	128 units/Bundle .25 Sq.Ft./Stone	36 units/Bundle				

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** For permeable installations, Unilock recommends using granite chips for joint filler. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

- Edge Detail - Zero
- Surface Texture - Smooth
- Joint Spacing - 2mm
- Void - 40%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

- Conforms to ASTM C1319
- Eligible for LEED v4.1 credits

	CLASSIC FINISH
Bundle Type	RANDOM
Plant Produced	NEW YORK
Thickness (mm)	80 MM

SQFT PER	Bundle	72.00
	Layer	10.29
	Section	-
	Stone	2.57

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	0.39
	Section	-
	Bundle	28.00

LBS PER	Layer	250
	Section	-
	Bundle	1,748

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	✓

LAYING PATTERNS




Turfstone Fixed Random



NATURAL

Single Unit



LARGE RECTANGLE
 400 x 600 x 80mm
 15 3/4 x 23 5/8 x 3 1/8"
 28 units/Bundle
 2.57 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Umbriano Mottled
 Joint Spacing - 7mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

EASYCLEAN™

Factory Sealed to provide integral stain resistance

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



FRENCH GREY



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

		UMBRIANO FINISH
	Bundle Type	RANDOM
	Plant Produced	NEW YORK
	Thickness (mm)	60 MM

SQFT PER	Bundle	104.60
	Layer	10.46
	Section	-
	Stone	1.31

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.82
	Section	-
	Layer	8.61
	Bundle	86.12

UNITS PER	SqFt	0.76
	Section	-
	Bundle	80.00

LBS PER	Layer	305
	Section	-
	Bundle	3,050

COLORS	Reflectance	Stock
French Grey	SR .18 SRI 17	✓
Midnight Sky	SR .17 SRI 15	SO
Summer Wheat	SR .42 SRI 48	✓
Winter Marvel	SR .35 SRI 38	✓

Random Bundle



LARGE RECTANGLE
 360 x 540 x 60mm
 14 ¼ x 21 ¼ x 2 ⅜"
 18 units/Bundle
 2.09 Sq.Ft./Stone



SQUARE
 360 x 360 x 60mm
 14 ¼ x 14 ¼ x 2 ⅜"
 27 units/Bundle
 1.40 Sq.Ft./Stone



SMALL RECTANGLE
 180 x 360 x 60mm
 7 x 14 ¼ x 2 ⅜"
 27 units/Bundle
 .70 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. This product is not intended for vehicular use. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Umbriano Mottled
 Joint Spacing - 7mm

TECHNOLOGIES

ENDURACOLOR[™]
 Refined surface and long-lasting color

EASYCLEAN[™]

Factory Sealed to provide integral stain resistance

COLORFUSION[™]

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



	8 x 16	12 x 24	16 x 16	24 x 24
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	NEW YORK	NEW YORK	NEW YORK	NEW YORK
Thickness (mm)	70 MM	70 MM	70 MM	70 MM

SQFT PER	Bundle	82.67	93.00	82.67	62.00
	Layer	10.33	11.63	10.33	7.75
	Section	-	-	-	-
	Stone	0.86	1.94	1.72	3.88

PER BUNDLE	Layers	8.00	8.00	8.00	8.00
	Sections	-	-	-	-

SOLDIER LNFT PER	SqFt	0.76	0.51	0.76	0.51
	Section	-	-	-	-
	Layer	7.87	5.91	7.87	3.94
	Bundle	62.99	47.24	62.99	31.50

SAILOR LNFT PER	SqFt	1.52	1.02	0.76	0.51
	Section	-	-	-	-
	Layer	15.75	11.81	7.87	3.94
	Bundle	125.98	94.49	62.99	31.50

UNITS PER	SqFt	1.16	0.52	0.58	0.26
	Section	-	-	-	-
	Bundle	96.00	48.00	48.00	16.00

LBS PER	Layer	331	372	331	258
	Section	-	-	-	-
	Bundle	2,646	2,978	2,646	2,055

COLORS	Reflectance	Stock	Stock	Stock	Stock
French Grey	SR .18 SRI 17	SO	SO	SO	SO
Midnight Sky	SR .17 SRI 15	SO	SO	SO	SO
Summer Wheat	SR .42 SRI 48	SO	SO	SO	SO
Winter Marvel	SR .35 SRI 38	SO	SO	SO	SO



FRENCH GREY



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

Single Units	8 x 16	12 x 24	16 x 16	24 x 24
	200 x 400 x 70mm 7 7/8 x 15 3/4 x 2 3/4" 96 units/Bundle .86 Sq.Ft./Stone	300 x 600 x 70mm 11 7/8 x 23 5/8 x 2 3/4" 48 units/Bundle 1.94 Sq.Ft./Stone	400 x 400 x 70mm 15 3/4 x 15 3/4 x 2 3/4" 48 units/Bundle 1.72 Sq.Ft./Stone	600 x 600 x 70mm 23 5/8 x 23 5/8 x 2 3/4" 16 units/Bundle 3.88 Sq.Ft./Stone

Notes: **Special Order items, lead time is required. SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.**
 All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 4mm
 Void - n/a

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



OPAL STEEL MOUNTAIN FOSSIL WALNUT TUSCANY

	18 x 24
Bundle Type	SINGLE
Plant Produced	NEW YORK
Thickness (mm)	60 MM

SQFT PER	Bundle	93.00
	Layer	11.63
	Sections	-
	Stone	2.91

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	0.51
	Sections	-
	Layer	5.91
	Bundle	47.25

SAILOR LNFT PER	SqFt	0.68
	Sections	-
	Layer	7.87
	Bundle	62.99

UNITS PER	SqFt	0.34
	Layer	4.00
	Bundle	32.00

LBS PER	Unit	80
	Layer	319.00
	Bundle	2,552

COLORS	Reflectance	Stock
Opal	SR .n/a SRI n/a	✓
Steel Mountain	SR .n/a SRI n/a	✓
Fossil	SR .n/a SRI n/a	✓
Walnut	SR .n/a SRI n/a	✓
Tuscany	SR .n/a SRI n/a	✓

Single Units

18 x 24
 450x 600 x 60mm
 17 3/4 x 23 5/8 x 2 3/8"
 32 units/Bundle
 2.91 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Textured
 Joint Spacing - 3-7mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

EASYSOFT™

Factory Sealed to provide integral stain resistance

COMFORT STEP™

Ultra-smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

		5 x 10
Bundle Type	RANDOM	SINGLE
Plant Produced	UXBRIDGE	UXBRIDGE
Thickness (mm)	70 MM	70 MM

SQFT PER	Bundle	94.19	94.19
	Layer	11.77	11.77
	Section	-	-
	Stone	0.59	0.34

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	1.24
	Section	-	-
	Layer	-	14.58
	Bundle	-	116.64

SAILOR LNFT PER	SqFt	1.24	2.48
	Section	-	-
	Layer	14.57	29.16
	Bundle	116.56	233.28

UNITS PER	SqFt	1.70	2.97
	Section	-	-
	Bundle	160.00	280.00

LBS PER	Layer	373	373
	Section	-	-
	Bundle	2,985	2,985

COLORS	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a		✓
Fossil	SR n/a SRI n/a	✓	✓
Steel Mountain	SR n/a SRI n/a	✓	✓
Walnut	SR n/a SRI n/a	✓	✓

LAYING PATTERNS



CHARCOAL



FOSSIL



STEEL MOUNTAIN



WALNUT

Random Bundle		LARGE RECTANGLE 254x 380 x 70mm 10 x 15 x 2 ¾" 32 units/Bundle 1.01 Sq.Ft./Stone		SQUARE 254 x 254 x 70mm 10 x 10 x 2 ¾" 56 units/Bundle .67 Sq.Ft./Stone		RECTANGLE 127 x 254 x 70mm 5 x 10 x 2 ¾" 72 units/Bundle .34 Sq.Ft./Stone	Single 5x10 Unit		5x10 RECTANGLE 127 x 254 x 70mm 5 x 10 x 2 ¾" 280 units/Bundle .34 Sq.Ft./Stone
---------------	---	---	---	--	---	--	------------------	---	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

SUNSET FIREPIT KITS

Located on page 88



ROUND



SQUARE



ALMOND GROVE



LIMESTONE



SIERRA

		STANDARD
	Bundle Type	SINGLE
	Plant Produced	UXBRIDGE
	Thickness (mm)	100 MM

FCFT PER	Bundle	-
	Sections	6.00
	Stone	0.33

PER BUNDLE	Layers	-
	Sections	3.00

LNFT PER	Bundle	-
	Unit	1.00

UNITS PER	SqFt	3.00
	Sections	36.00
	Bundle	108.00

LBS PER	Layer	-
	Section	1,091
	Bundle	3,274

COLORS	Reflectance	Stock
Almond Grove	SR n/a SRI n/a	✓
Limestone	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

Single Unit



STANDARD
300 x 100 x 200mm
11 7/8 x 3 7/8 x 7 7/8"
108 units/Bundle
.33 Fc.Ft./Stone

Notes: Maximum height is 24" (under optimum conditions). *Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle. All measurements are nominal. Contact Unilock for more information.



	CORNER SPLIT	XL WALL SPLIT	COPING 24"	WEDGE CAP
Bundle Type	RANDOM	SINGLE	SINGLE	SINGLE
Plant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE	UXBRIDGE
Thickness (mm)	150 MM	150 MM	75 MM	86 MM

FCFT PER	Bundle	15.00	21.33	-	64.00
	Layer	5.00	5.33	-	8.00
	Stone	0.83	0.67	1.94	0.67

PER BUNDLE	Layers	3.00	4.00	-	8.00
	Sections	-	-	2.00	-

LNFT PER	Bundle	-	-	64.00	-
	Unit	-	-	4.00	-

UNITS PER	SqFt	1.20	1.50	0.52	1.50
	Sections	-	-	-	-
	Bundle	18.00	32.00	-	96.00

LBS PER	Layer	273	605	290	318
	Sections	-	-	-	-
	Bundle	820	2,455	2,320	2,544

COLORS	Reflectance	Stock	Stock	Stock	Stock
Almond Grove	SR n/a SRI n/a	✓	✓	✓	✓
Granite	SR n/a SRI n/a	✓	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓	✓

APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Split / Standard

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits



ALMOND GROVE



GRANITE



SIERRA

Single Units		CORNER SPLIT 200 x 150 x 300mm 7 7/8 x 5 7/8 x 11 7/8" 18 units/Bundle .63 Fc.Ft./Stone		XL WALL SPLIT 400 x 150 x 300mm 15 3/4 x 5 7/8 x 11 7/8" 32 units/Bundle .67 Fc.Ft./Stone		COPING 24" 600 x 75 x 300mm 23 5/8 x 3 x 11 7/8" XX units/Bundle .94 Fc.Ft./Stone		WEDGE CAP SPLIT 248 x 86 x 330mm 9 7/8 x 3 1/2 x 13" 96 units/Bundle .67 Fc.Ft./Stone
--------------	---	--	---	--	--	--	---	--

Notes: Maximum height without setback 36" (under optimum conditions). Maximum height with setback is 42" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. Tapered units will allow for a minimum 7ft. outside radius. Wedge cap radius = 7", contains 8 Closed-end units per bundle. Closed-end not sold separately. All Concord Wall™ is layered and shipped on refundable skid. Coping is sectioned. Closed-end step tread is available. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Contact your local Unilock Representative for details. Retaining wall engineering software is also available free of charge at www.unilock.com.



	CORNER	XL TAPERED	COPING
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE
Thickness (mm)	150 MM	150 MM	75 MM

FCFT PER	Bundle	46.52	20.67	15.50
	Layer	11.63	5.17	1.94
	Stone	0.97	0.65	0.32

PER BUNDLE	Layers	4.00	4.00	8.00
	Sections	-	-	-

LNFT PER	Bundle	-	42.00	62.99
	Unit	-	1.31	1.31

UNITS PER	SqFt	1.03	1.55	3.10
	Section	-	-	-
	Bundle	48.00	32.00	48.00

LBS PER	Layer	695	627	282
	Section	-	-	-
	Bundle	2,780	2,508	2,256

COLORS	Reflectance	Stock	Stock	Stock
Almond Grove	SR.n/a SRI n/a	✓	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓	✓
Granite	SR.n/a SRI n/a	✓	✓	✓

APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:
contractor.unilock.com

APPEARANCE

Edge Detail - n/a
 Surface Texture - Smooth
 Joint Spacing - n/a
 Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
 Eligible for LEED v4.1 credits



ALMOND GROVE




SANDSTONE




GRANITE


Single Units



CORNER
 400 x 150 x 200mm
 15 3/4 x 5 7/8 x 7 7/8"
 48 units/Bundle
 .97 Fc.Ft./Stone



XL TAPERED
 400 x 150 x 300mm
 15 3/4 x 5 7/8 x 11 1/8"
 32 units/Bundle
 .65 Fc.Ft./Stone



COPING
 400 x 75 x 325mm
 15 3/4 x 3 x 12 3/4"
 48 units/Bundle
 .32 Fc.Ft./Stone

Notes: Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa wall is 3/4" every course or 1 1/2" every 2 courses. Retaining wall engineering software is also available free of charge at www.unilock.com. Walls greater than 4' in height require professional engineering. All measurements are nominal. Contact Unilock for more information.



	STANDARD	STANDARD HALF	CORNER 45°	CORNER 90°
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	300 MM	300 MM	300 MM	300 MM

FCFT PER	Bundle	6.02	3.00	7.04	7.04
	Layer	6.02	3.00	7.04	7.04
	Stone	6.02	3.00	7.04	7.04

PER BUNDLE	Layers	1.00	1.00	1.00	1.00
	Sections	-	-	-	-

LNFT PER	Bundle	6.02	3.00	-	-
	Unit	6.02	3.00	-	-

UNITS PER	SqFt	0.17	0.33	0.14	0.14
	Section	-	-	-	-
	Bundle	1.00	1.00	1.00	1.00

LBS PER	Layer	1,680	800	1,480	1,320
	Section	-	-	-	-
	Bundle	1,680	800	1,480	1,320

COLORS	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO

APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™





Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C1372
Eligible for LEED v4.1 credits



NATURAL

Single Units				
	STANDARD	STANDARD HALF	CORNER 45°	CORNER 90°
	1830 x 300 x 600mm 72 x 11 7/8 x 23 5/8"	915 x 300 x 600mm 36 x 11 7/8 x 23 5/8"	1520 x 300 x 600mm 59 7/8 x 11 7/8 x 23 5/8"	1520 x 300 x 600mm 59 7/8 x 11 7/8 x 23 5/8"
	1 unit/Bundle 6.02 Fc.Ft./Stone	1 unit/Bundle 3.00 Fc.Ft./Stone	1 unit/Bundle 7.04 Fc.Ft./Stone	1 unit/Bundle 7.04 Fc.Ft./Stone

Notes: ***Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY.** Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



	TIE-BACK	COPING HALF	COPING STANDARD	COPING CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	300 MM	300 MM	300 MM	300 MM

FCFT PER	Bundle	2.00	2.95	6.02	6.02
	Layer	2.00	2.95	6.02	6.02
	Stone	2.00	2.95	6.02	6.02

PER BUNDLE	Layers	1.00	1.00	1.00	1.00
	Sections	-	-	-	-

LNFT PER	Bundle	-	-	-	-
	Unit	-	-	-	-

UNITS PER	SqFt	0.50	0.34	0.17	0.17
	Section	-	-	-	-
	Bundle	1.00	1.00	1.00	1.00

LBS PER	Layer	1,660	780	1,560	1,560
	Section	-	-	-	-
	Bundle	1,660	780	1,560	1,560

COLORS	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO

APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix





TECHNICAL INFORMATION

Conforms to ASTM C1372

Eligible for LEED v4.1 credits



NATURAL

Single Units				
	TIE-BACK	COPING 1/2	COPING STANDARD	COPING CLOSED-END
	1830 x 300 x 600mm	915 x 300 x 600mm	1830 x 300 x 600mm	1830 x 300 x 600mm
	72 x 11 7/8 x 23 5/8"	36 x 11 7/8 x 23 5/8"	72 x 11 7/8 x 23 5/8"	72 x 11 7/8 x 23 5/8"
	1 unit/Bundle 6.02 Fc.Ft./Stone	1 unit/Bundle 2.95 Fc.Ft./Stone	1 unit/Bundle 6.02 Fc.Ft./Stone	1 unit/Bundle 6.02 Fc.Ft./Stone

Notes: *Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



	TIE-BACK	CORNER 90°	STANDARD	COPING	COPING CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	300 MM	300 MM	300 MM	300 MM	300 MM

FCFT PER	Bundle	1.17	16.67	24.10	24.10	6.02
	Layer	1.17	4.17	6.02	6.02	6.02
	Stone	1.17	4.17	6.02	6.02	6.02

PER BUNDLE	Layers	2.00	2.00	2.00	2.00	2.00
	Sections	-	-	-	-	-

LNFT PER	Bundle	-	-	24.10	24.10	24.10
	Unit	-	-	6.02	6.02	6.02

UNITS PER	SqFt	0.85	0.24	0.17	0.17	0.17
	Section	-	-	-	-	-
	Bundle	1.00	-	1.00	1.00	1.00

LBS PER	Layer	940	460	884	884	884
	Section	-	-	-	-	-
	Bundle	940	-	884	884	884

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO	SO

APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™






Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C1372
Eligible for LEED v4.1 credits



NATURAL

Single Units					
	TIE-BACK 1830 x 300 x 360mm 72 x 11 7/8 x 14 1/4" 1 unit/Bundle 1.17 Fc.Ft./Stone	CORNER 900 x 300 x 360mm 36 x 11 7/8 x 14 1/4" 1 unit/Bundle 4.17 Fc.Ft./Stone	STANDARD 1830x 300 x 360mm 72 x 11 7/8 x 14 1/4" 1 unit/Bundle 6.02 Fc.Ft./Stone	COPING 1830x 300 x 360mm 72 x 11 7/8 x 14 1/4" 1 unit/Bundle 6.02 Fc.Ft./Stone	COPING CLOSED-END 1830x 300 x 360mm 72 x 11 7/8 x 14 1/4" 1 unit/Bundle 6.02 Fc.Ft./Stone

Notes: *Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.




The enhanced Estate Wall System with 6" and 3" high units, is ideal for all residential landscape walls and vertical element construction. The front and back of each unit is rock-faced making it perfect for seat walls and the unique tapered units can be used for both straight or curved applications.


Estate Wall™ System

Units



WALL UNITS

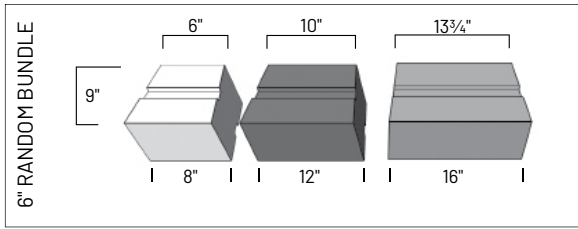

COPING

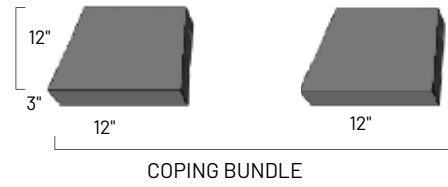


CORNER UNITS

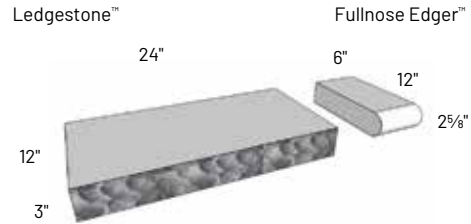

NOTE: See Product Data for packaging information.



NOTE: Different products can be used for Estate Wall coping. LedgeStone and Fullnose Edger are two of the most popular.

UNIVERSAL BASE UNIT



NOTE: Unilock Recommends using the Universal Base Units

Cross Sections

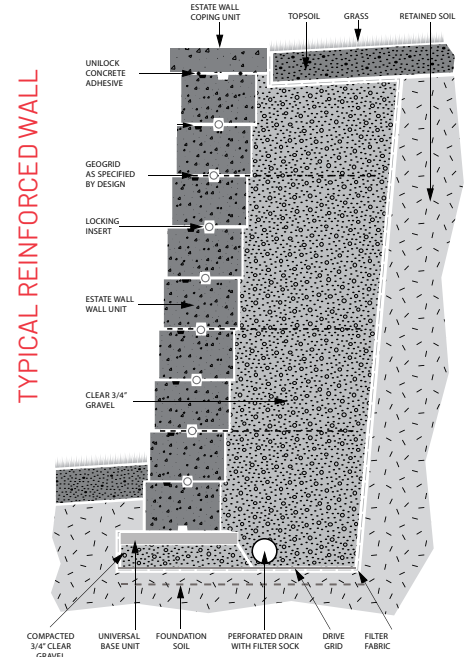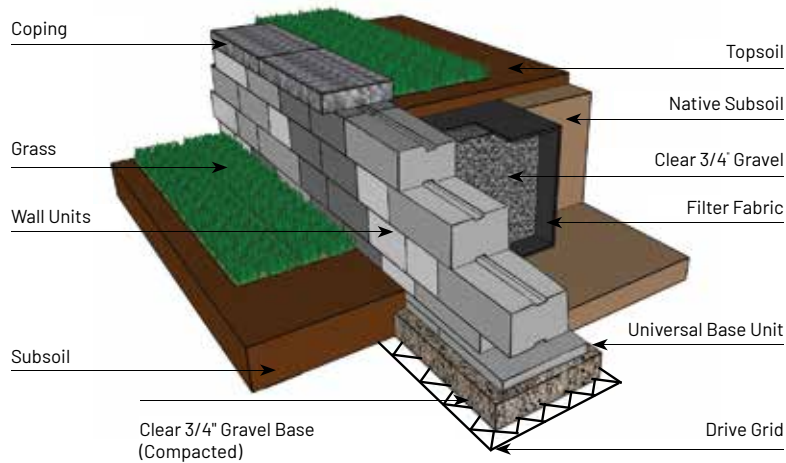


MAXIMUM HEIGHT FOR VERTICAL APPLICATION - 21"
 MAXIMUM HEIGHT FOR SETBACK APPLICATION - 33"

*Higher wall up to 6' can be achieved using geogrid reinforcement. Contact your Unilock Territory Manager.

Corners


CONVERTIBLE LARGE/CORNER UNITS



To split a large convertible unit, use a hammer and chisel to score the top and sides, then flip the unit upside down and use the chisel to break the unit. This may require a couple of hits along the groove to achieve a clean break.

Each bundle contains approximately 9 convertible units.


90° SEAT WALL CORNER

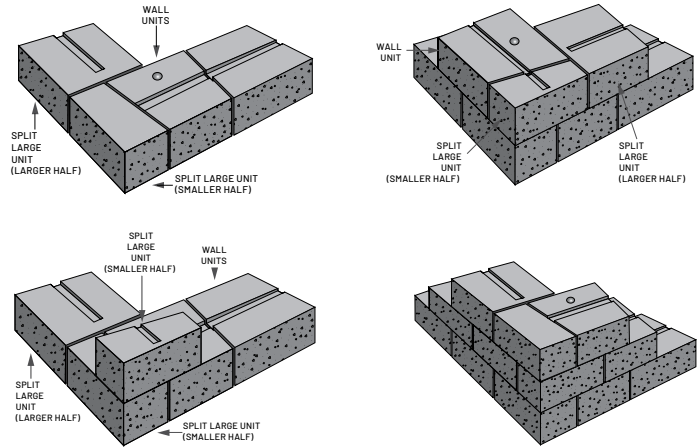


LOCKING INSERTS

Depending on the application or the wall strength required, you can construct the Estate Wall System vertically or with a setback. To assist in alignment and locking, proprietary plastic inserts are provided with each bundle. Depending on the orientation of the insert will dictate whether it goes up vertical or with a setback.



Note: It is strongly recommended that you use adhesive on all rows and for all applications to achieve maximum stability and strength.

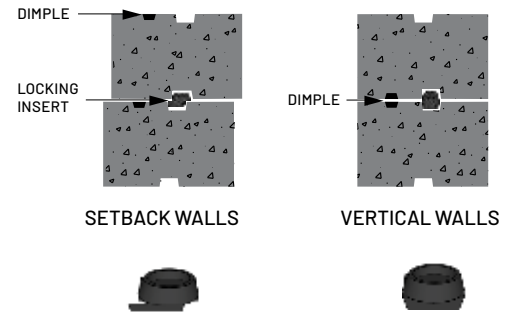

Seat Walls

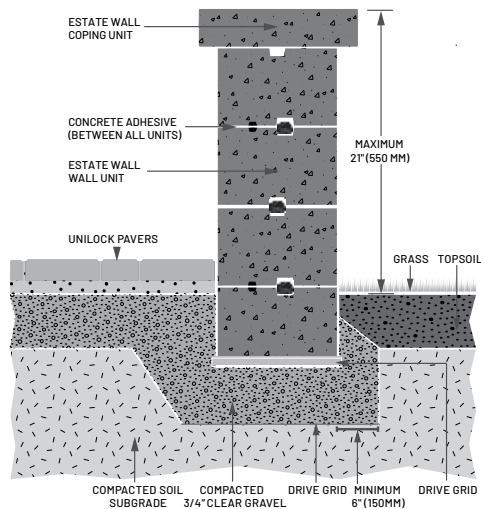


SEAT WALL TERMINATION



Alternate courses



System Patterns

RANDOM PATTERNS OPEN BACK WALL

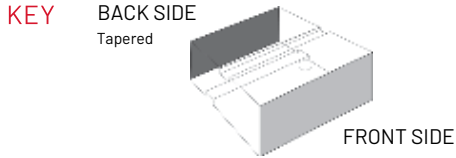

Use Universal Base Units for base

RANDOM PATTERNS SOLID WALL

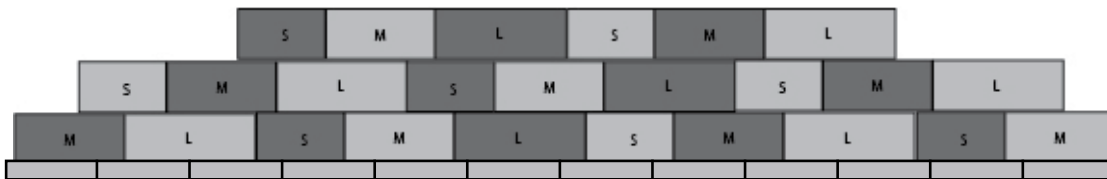


Use Universal Base Units for base

CURVED RADIUS

Radius achieved using only the tapered (wedge) units.

Radius in inches	35"	27"	35"	44"	31"	35"	40"
Unit sequence	8",12",16"	Only 8" Units	Only 12" Units	Only 16" Units	9",12",8",12"	8",16", 8"	12", 16", 12", 16"
Note:	Uses all units in bundle	These sequences will have left over units. Plan to use left overs in other parts of the project.					

Random Units



Although the three tapered unit sizes come packaged together, they can be separated to achieve various radius projects. If you construct a radius using only one size unit, the other units will be left over. Careful planning will allow you to use these units elsewhere.



	3" TAPERED SPLIT	3" CORNER SPLIT	6" TAPERED SPLIT	6" CORNER SPLIT	COPING TAPERED SPLIT
Bundle Type	RANDOM	SINGLE	RANDOM	SINGLE	RANDOM
Plant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE	UXBRIDGE	UXBRIDGE
Thickness (mm)	75 MM	75 MM	150 MM	150 MM	75 MM

FCFT PER	Bundle	24.00	16.38	24.00	16.38	14.70
	Layer	3.00	2.05	6.00	4.10	2.10
	Stone	0.25	0.26	0.50	0.51	0.23

PER BUNDLE	Layers	8.00	8.00	4.00	4.00	7.00
	Sections	-	-	-	-	-

LNFT PER	Bundle	-	-	-	-	56.87
	Unit	-	-	-	-	0.90

UNITS PER	SqFt	4.00	3.91	2.00	1.95	4.29
	Section	-	-	-	-	-
	Bundle	96.00	64.00	48.00	32.00	63.00

LBS PER	Layer	271.00	264	585	444	294
	Section	-	-	-	-	-
	Bundle	2,164	2,110	2,340	1,776	2,060

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Almond Grove	SR.n/a SRI n/a	✓	✓	✓	✓	✓
Charcoal	SR.n/a SRI n/a					✓
Granite	SR.n/a SRI n/a	✓	✓	✓	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓	✓	✓	✓

APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Split

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits



ALMOND GROVE



CHARCOAL



GRANITE



SIERRA

3" Single Unit		3" PILLAR/CORNER 318 x 75 x 229mm 12 1/2 x 3 x 9" 64 units/Bundle .26 Fc.Ft./Stone	6" Single Unit		6" PILLAR/CORNER 318 x 150 x 229mm 12 1/2 x 5 7/8 x 9" 32 units/Bundle .51 Fc.Ft./Stone	Coping Bundle		COPING TAPERED 317.5 x 304.8 x 76.2mm 12 1/2 x 12 x 3" 56 units/Bundle .26 Fc.Ft./Stone		CLOSED-END COPING UNIT 317.5 x 304.8 x 76.2mm 12 1/2 x 12 x 3" 7 units/Bundle .26 Fc.Ft./Stone		
		3" LARGE UNIT 406 x 75 x 228mm 16 x 3 x 9" 32 units/Bundle .33 Fc.Ft./Stone			3" MEDIUM UNIT 305 x 75 x 228mm 12 x 3 x 9" 32 units/Bundle .24 Fc.Ft./Stone			3" SMALL UNIT 203 x 75 x 228mm 8 x 3 x 9" 32 units/Bundle .16 Fc.Ft./Stone	6" Random Bundle		6" LARGE UNIT 406 x 150 x 228mm 16 x 5 7/8 x 9" 16 units/Bundle .66 Fc.Ft./Stone	

Notes: Random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	4 UNIT BUNDLE	PILLAR
Bundle Type	RANDOM	SINGLE
Plant Produced	UXBRIDGE	UXBRIDGE
Thickness (mm)	100 MM	100 MM

FCFT PER	Bundle	29.92	48.24
	Layer	9.97	16.08
	Stone	0.50	0.67

PER BUNDLE	Layers	3.00	3.00
	Sections	-	-

LNFT PER	Bundle	89.06	96.00
	Unit	1.48	1.33

UNITS PER	SqFt	2.01	1.49
	Section	-	-
	Bundle	60.00	72.00

LBS PER	Layer	881	936
	Section	-	-
	Bundle	2,643	2,808

COLORS	Reflectance	Stock	Stock
Almond Grove	SR.n/a SRI n/a	✓	✓
Granite Blend	SR.n/a SRI n/a	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓



ALMOND GROVE



GRANITE BLEND




SIERRA

Random Bundle	LARGE RECTANGLE	RECTANGLE	SMALL RECTANGLE	XL RECTANGLE	Single Unit	CORNER/PILLAR
	500 x 100 x 200mm 19 3/4 x 3 7/8 x 7 7/8 15 units/Bundle	400 x 100 x 200mm 15 3/4 x 3 7/8 x 7 7/8 15 units/Bundle	300 x 100 x 200mm 11 7/8 x 3 7/8 x 7 7/8 15 units/Bundle	600 x 100 x 200mm 23 5/8 x 3 7/8 x 7 7/8 15 units/Bundle		400 x 100 x 200mm 15 3/4 x 3 7/8 x 7 7/8 72 units/Bundle


Notes: Sold in full bundles only and is produced and sold on a required, refundable skid. Spacing strips are shipped with random wall bundles to create even spacing between units. LedgeStone®, Unilock Natural Stone or 6"x12" Fullnose complement as possible coping options. All measurements are nominal. Contact Unilock for more information.

Lineo™ Dimensional Stone

Shadow Box - Spacers (supplied with bundle of product)




"T" Spacers
1" x 4 3/16" x 2"

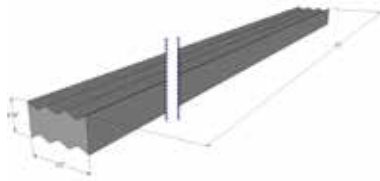

"Strip" Spacers
3/16" x 3/8" x 22"

Adhesive "mound" is placed every 4 inches apart.

Mound must be minimum 3/8" high so that the top and bottom are securely adhered.

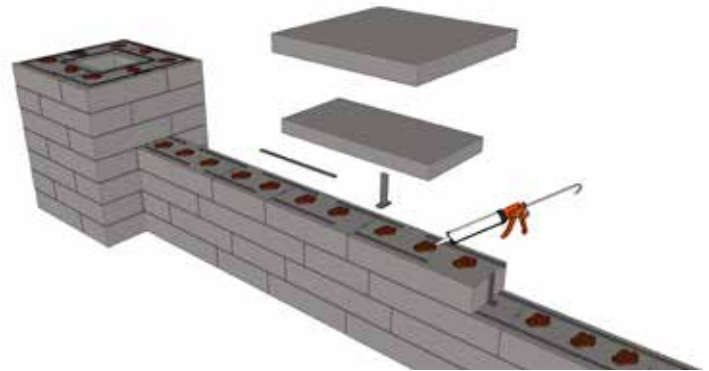

Notes:

Lineo is not a retaining wall. Lineo is a decorative landscape wall, with a typical height of 12" - 16" above grade. (Higher walls are possible when engineered by a professional engineer.)

In many cases, experienced installers are able to construct higher walls based on the actual design of the project or landscape feature. For example, designs containing 90 degree corners, box-like planters, hollow pillars and landscape features such as grill islands, can be successfully constructed to higher heights.

Disclaimer: The strength and capacity of a Lineo installation is dependent on many factors such as base material, site conditions, drainage, surcharge, design, and the quality and quantity of concrete adhesive used. Unilock cannot be responsible for installation failures. The performance of a Lineo installation rests solely on the installer or project engineer.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	STANDARD/ CORNER	COPING/ CLOSED-END
Bundle Type	2 UNIT	2 UNIT
Plant Produced	UXBRIDGE	UXBRIDGE
Thickness (mm)	90 MM	90 MM

FCFT PER	Bundle	20.93	20.93
	Layer	3.49	3.49
	Stone	0.44	0.44

PER BUNDLE	Layers	6.00	6.00
	Sections	-	-

LNFT PER	Bundle	70.87	70.87
	Unit	1.48	1.48

UNITS PER	SqFt	2.29	2.29
	Layer	8.00	8.00
	Bundle	48.00	48.00

LBS PER	Unit	52	52
	Layer	415.00	415.00
	Bundle	2,489	2,489

COLORS	Reflectance	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓
Almond Grove	SR.n/a SRI n/a	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓



GRANITE







ALMOND GROVE



SIERRA



SANDSTONE

2 Unit Bundle			2 Unit Bundle		
	<p>CORNER/CLOSE-END 450 x 260 x 90mm 17¾ x 10¼ x 3½" 24 Units/Bundle 1.26 Fc.Ft/Stone</p>	<p>STANDARD 450 x 260 x 90mm 17¾ x 10¼ x 3½" 24 Units/Bundle 1.26 Fc.Ft/Stone</p>		<p>COPING/CLOSE-END 450 x 260 x 90mm 17¾ x 10¼ x 3½" 24 Units/Bundle 1.26 Fc.Ft/Stone</p>	<p>STANDARD 450 x 260 x 90mm 17¾ x 10¼ x 3½" 24 Units/Bundle 1.26 Fc.Ft/Stone</p>

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Textured

TECHNOLOGIES

REALA™

Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	WALL	CORNER
Bundle Type	RANDOM	RANDOM
Plant Produced	AYR	AYR
Thickness (mm)	57 MM	57 MM

FCFT PER	Bundle	24.30	16.21
	Layer	3.0	4.0
	Stone	0.19	0.41

PER BUNDLE	Layers	8.00	4.00
	Sections	-	-

LNFT PER	Bundle	130.69	-
	Unit	1.02	-

UNITS PER	SqFt	5.27	2.47
	Section	-	-
	Bundle	128.00	40.00

LBS PER	Layer	252	293
	Section	-	-
	Bundle	2,015	1,173







COLORS	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓
Coastal Slate	SR n/a SRI n/a	✓	✓



BUFF



COASTAL SLATE

Corner Bundle		LONG CORNER UNIT 17½ x 9-10 x 2¼" 450 x 230-250 x 57mm		SHORT CORNER UNIT 14½ x 9-10 x 2¼" 375 x 230-250 x 57mm
	Random Bundle		STANDARD UNIT 1 200 x 230-250 x 57mm 8 x 9-10 x 2¼"	
		STANDARD UNIT 3 300 x 230-250 x 57mm 12 x 9-10 x 2¼"		STANDARD UNIT 4 425 x 230-250 x 57mm 17 x 9-10 x 2¼"

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits credits

	STANDARD/ STANDARD CORNER	COPING
Bundle Type	SINGLE	SINGLE
Plant Produced	UXBRIDGE	UXBRIDGE
Thickness (mm)	180 MM	180 MM

FCFT PER	Bundle	23.25	23.25
	Layer	7.75	7.75
	Stone	1.94	1.94

PER BUNDLE	Layers	3.00	3.00
	Sections	-	-

LNFT PER	Bundle	39.37	39.37
	Unit	3.28	3.28

UNITS PER	SqFt	0.52	0.52
	Section	-	-
	Bundle	12.00	12.00

LBS PER	Layer	1,029	1,029
	Section	-	-
	Bundle	3,086	3,086

COLORS	Reflectance	Stock	Stock
Almond Grove	SR.n/a SRI n/a	✓	✓
Granite	SR.n/a SRI n/a	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓



ALMOND GROVE



GRANITE



SANDSTONE

Single Units



STANDARD/ STANDARD CORNER

1000 x 180 x 290mm
39 3/8 x 7 x 11 1/2"
12 units/Bundle
1.94 Fc.Ft./Stone



COPING

1000 x 180 x 290mm
39 3/8 x 7 x 11 1/2"
12 units/Bundle
1.94 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



	CORNER SPLIT	333 SPLIT	500 SPLIT	925 SPLIT	COPING SPLIT	CLOSED-END COPING
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE	UXBRIDGE	UXBRIDGE	GORMLEY
Thickness (mm)	185 MM	185 MM	185 MM	185 MM	185 MM	185 MM

FCFT PER	Bundle	17.19	18.00	12.00	6.00	12.00	14.43
	Layer	5.73	6.00	4.00	2.00	4.00	4.81
	Stone	2.87	2.00	2.00	2.00	2.00	2.41

PER BUNDLE	Layer	3.00	3.00	3.00	3.00	3.00	3.00
	Sections	-	-	-	-	-	-

LNFT PER	Bundle	-	29.25	19.50	9.75	-	23.70
	Unit	-	3.25	3.25	3.25	-	3.95

UNITS PER	SqFt	0.35	0.50	0.50	0.50	0.50	0.42
	Layer	2.00	3.00	2.00	1.00	2.00	2.00
	Bundle	6.00	9.00	6.00	3.00	6.00	6.00

LBS PER	Unit	477	318	477	954	477	570
	Layer	954	954	954	954	927	1,140
	Bundle	2,862	2,862	2,862	2,862	2,780	3,420

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	SO	SO	SO	SO	SO	✓
Sierra	SR.n/a SRI n/a	SO	SO	SO	SO	SO	

APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Split

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits



GRANITE



SIERRA

Single Units						
	<p>CORNER SPLIT 925 x 185 x 500mm 36 1/2 x 7 3/8 x 19 3/4" 6 units/Bundle 2.87 Fc.Ft./Stone</p>	<p>STANDARD 333 SPLIT 1000 x 185 x 333mm 39 3/8 x 7 3/8 x 13" 9 units/Bundle 2.00 Fc.Ft./Stone</p>	<p>STANDARD 500 SPLIT 1000 x 185 x 500mm 39 3/8 x 7 3/8 x 19 3/4" 6 units/Bundle 2.00 Fc.Ft./Stone</p>	<p>STANDARD 925 SPLIT 1000 x 185 x 925mm 39 3/8 x 7 3/8 x 36 1/2" 3 units/Bundle 2.00 Fc.Ft./Stone</p>	<p>COPING SPLIT 1000 x 185 x 500mm 39 3/8 x 7 3/8 x 19 3/4" 6 units/Bundle 2.00 Fc.Ft./Stone</p>	<p>STEP CE COPING 1200 x 185 x 500mm 47 1/4 x 7 3/8 x 19 3/4" 6 units/Bundle 2.41 Fc.Ft./Stone</p>

Notes: **Special Order - Lead time is required, minimum quantities apply.** Product is sold on a required, refundable skid. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Umbriano Mottled
 Joint Spacing - 3mm

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral stain resistance

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	CHAMFERED	BULLNOSE
Bundle Type	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	60 MM	60 MM

FCFT PER	Bundle	9.30	9.30
	Layer	-	-
	Stone	0.39	0.39

PER BUNDLE	Layers	6.00	6.00
	Sections	-	-

LNFT PER	Unit	1.97	1.97
	Bundle	47.24	47.24


UNITS PER	SqFt	-	-
	Layer	4.00	4.00
	Bundle	24.00	24.00

LBS PER	Unit	63	63
	Layer	337	337
	Bundle	1,510	1,510


COLORS	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	✓	✓
Grenada White	SR .45 SRI 52	✓	✓
Midnight Sky	SR .17 SRI 15	✓	✓
Summer Wheat	SR .42 SRI 48	SO	SO
Winter Marvel	SR .35 SRI 38	SO	SO



FRENCH GREY



GRENADA WHITE



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

Single Units



CHAMFERED
 360 x 600 x 60 mm
 14 x 24 x 2 3/8
 24 units/Bundle



BULLNOSE
 360 x 600 x 60 mm
 14 x 24 x 2 3/8
 24 units/Bundle

Notes: **Special Order items, lead time is required. SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

U-Cara® Multi-Face Wall System



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth, Standard, Series Exposed, Umbriano Mottled, Pitched & Flamed

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

COLORFUSION™ (UMBRIANO)

Subtly mottled colored finish



TECHNICAL INFORMATION

Conforms to ASTM C1372

Eligible for LEED v4.1 credits



Download the U-Cara Multi-Face Wall Installation Guide.

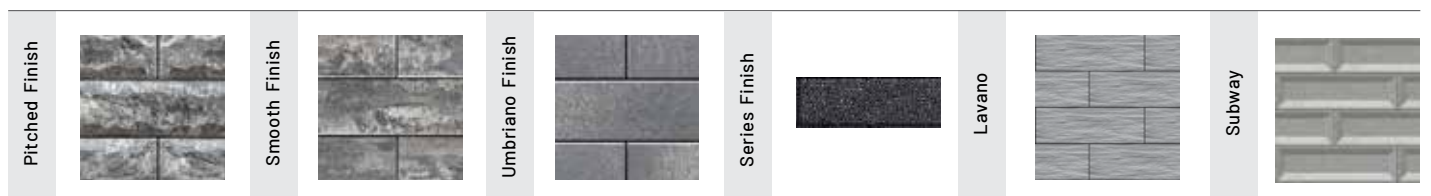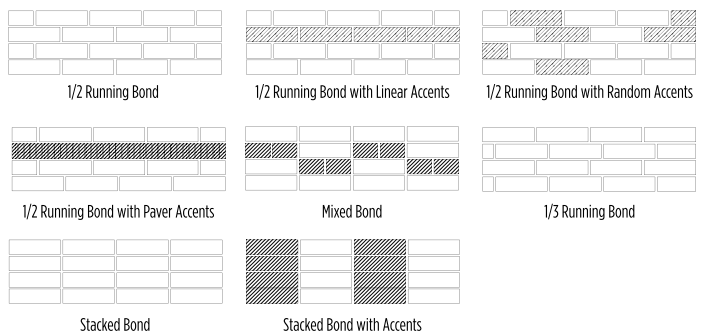

U-Cara® Multi-Face Wall System

		6" STANDARD FASCIA PANEL SMOOTH	6" CLOSED-END FASCIA PANEL SMOOTH	3" STANDARD FASCIA PANEL SERIES EXPOSED	6" STANDARD FASCIA PANEL UMBRIANO	6" CLOSED-END FASCIA PANEL UMBRIANO	6" STANDARD FASCIA PANEL PITCHED	CLOSED-END FASCIA PANEL PITCHED
Bundle Type		SINGLE	RANDOM	SINGLE	SINGLE	RANDOM	SINGLE	RANDOM
Plant Produced		NEW YORK	NEW YORK	CHICAGO	NEW YORK	NEW YORK	NEW YORK	NEW YORK
Thickness (mm)		150 MM	150 MM	71 MM	150 MM	150 MM	150 MM	150 MM
FCFT PER	Bundle	61.52	45.15	59.32	61.52	45.15	61.52	45.15
	Layer	10.25	9.03	9.89	10.25	9.03	10.25	9.03
	Stone	0.73	1.29	0.18	0.73	1.29	0.73	1.29
PER BUNDLE	Layers	6.00	5.00	6.00	6.00	5.00	6.00	5.00
	Sections	-	-	-	-	-	-	-
LNFT PER	Bundle	129.50	74.95	256.70	129.50	89.95	129.50	89.95
	Unit	1.54	2.14	0.75	1.54	2.57	1.54	2.57
UNITS PER	SqFt	1.37	0.78	5.66	1.37	0.78	1.37	0.78
	Section	-	-	-	-	-	-	-
	Bundle	84.00	35.00	336.00	84.00	35.00	84.00	35.00
LBS PER	Layer	274	207	250	291	236	291	236
	Section	-	-	-	-	-	-	-
	Bundle	1,647	1,033	1,501	1,745	1,179	1,745	1,179
COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Dark Charcoal	SR.n/a sRI n/a	✓	✓					
Fossil	SR.n/a sRI n/a	✓	✓				✓	✓
French Grey	SR.n/a sRI n/a				SO	SO		
Steel Mountain	SR.n/a sRI n/a	✓	✓				✓	✓
Summer Wheat	SR.n/a sRI n/a				SO	SO		
Onyx Black	SR.n/a sRI n/a			✓				
Opal Blend	SR.n/a sRI n/a	✓	✓					
Winter Marvel	SR.n/a sRI n/a				SO	SO		
Walnut	SR.n/a sRI n/a	✓	✓				✓	✓

Fascia Panels		6" STANDARD FASCIA PANEL 150 x 466 x 60mm 5 7/8 x 18 3/8 x 2 3/8" 84 units/Bundle .73 Fc.Ft./Stone		3" FASCIA PANEL 71 x 231 x 60mm 2 7/8 x 9 x 2 3/8" 336 units/Bundle .18 Fc.Ft./Stone
	2 Unit Corner		STANDARD FASCIA HALF PANEL 150 x 233 x 60mm 5 7/8 x 9 1/4 x 2 3/8" 35 units/Bundle 1.29 Fc.Ft./Stone	


Notes: Lead time is required, minimum quantities apply. Sold in full bundles. Produced and sold on a required refundable skids. Opal Corner Bundle Only - 54.2 Face Feet/Bundle; contact Customer Service for details.

U-Cara® Multi-Face Wall System

NEW DESIGNS COMING SOON



APPLICATIONS



CROSS SECTIONS

All Cross Sections are available on Unilock's Contractor web site under Products:
contractor.unilock.com

APPEARANCE

Edge Detail - n/a
 Surface Texture - Smooth

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1372
 Eligible for LEED v4.1 credits

	LAVANO STANDARD	SUBWAY STANDARD
Bundle Type	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN
Thickness (mm)	150 MM	150 MM

FCFT PER	Bundle	61.52	61.52
	Layer	10.25	10.25
	Section	-	-
	Stone	0.73	0.73


PER BUNDLE	Layers	6.00	6.00
	Sections	-	-

LNFT PER	Bundle	129.50	129.50
	Unit	1.54	1.54

UNITS PER	SqFt	1.37	1.37
	Section	-	-
	Bundle	84.00	84.00


LBS PER	Layer	252.00	252.00
	Section	-	-
	Bundle	1,513	1,513

COLORS	Reflectance	Stock	Stock
Granite Fusion	SR n/a SRI n/a	SO	-
Fossil	SR n/a SRI n/a	SO	-
Dark Charcoal	SR n/a SRI n/a	-	SO
Opal	SR n/a SRI n/a	-	SO
Ivory	SR n/a SRI n/a	-	SO

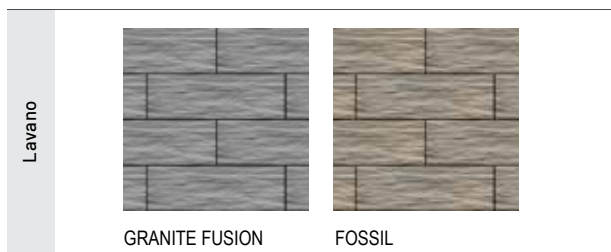

GRANITE FUSION


FOSSIL

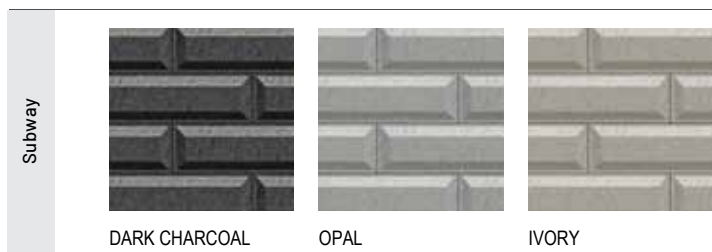

DARK CHARCOAL

OPAL

IVORY

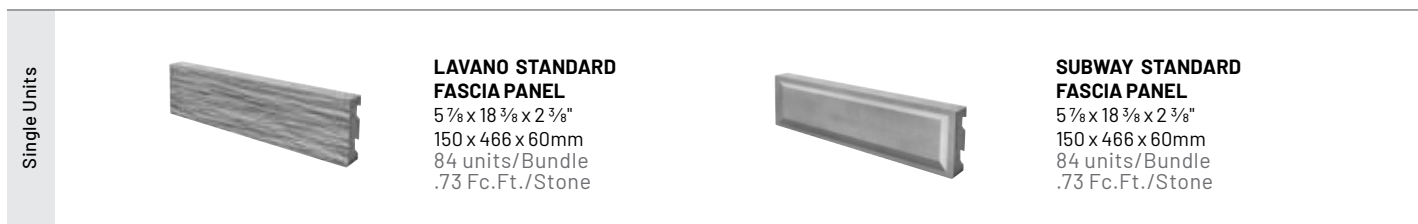

Single Units

LAVANO STANDARD FASCIA PANEL
 5 7/8 x 18 3/8 x 2 3/8"
 150 x 466 x 60mm
 84 units/Bundle
 .73 Fc.Ft./Stone

SUBWAY STANDARD FASCIA PANEL
 5 7/8 x 18 3/8 x 2 3/8"
 150 x 466 x 60mm
 84 units/Bundle
 .73 Fc.Ft./Stone

Notes: Sold in full bundles. Produced and sold on a required refundable skids. Sure Track Large Backer Units when used as corners in a pillar application, can achieve 42 FFT/bundle or .757 FFT/unit.

U-Cara® Multi-Face Wall System



APPLICATIONS



ENDURACOLOR™

Refined surface and long-lasting color

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 1262
Eligible for LEED v4.1 credits

CROSS SECTIONS


All Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth, Standard, Series™ Exposed, Umbriano® Mottled, Pitched & Flamed

U-CARA RETAINING WALL GEOGRID SECTION

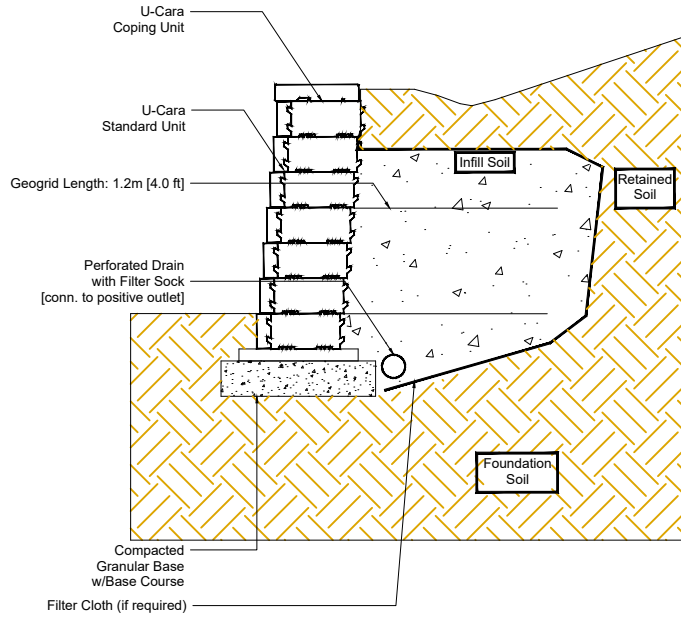


U-CARA®

CROSS SECTION

REF: Detail_U-Cara_Garden_Wall

Garden Wall - Max Height 15'

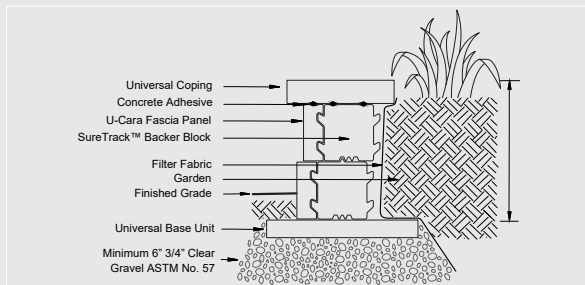


Notes: This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

U-CARA®

CROSS SECTION

REF: Detail_U-Cara_Seal_Wall

Seat Wall - Max Height 21'

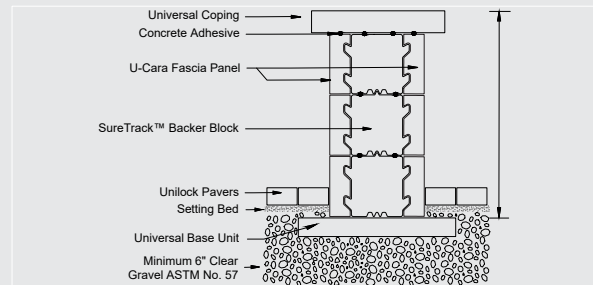

Notes: This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

U-Cara® Multi-Face Wall System

Components



SURE TRACK CORNER BACKER
175 x 150 x 294mm
6 7/8 x 5 7/8 x 11 5/8"



SURE TRACK LARGE BACKER
150 x 200 x 294mm
7 7/8 x 5 7/8 x 11 5/8"



SURE TRACK STANDARD BACKER
190 x 150 x 150mm
7 1/2 x 5 7/8 x 5 7/8"

	CORNER/ PILLAR BACKER	LARGE BACKER	STANDARD BACKER	UNIVERSAL BASE UNIT
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	UXBRIDGE	UXBRIDGE	UXBRIDGE	UXBRIDGE
Thickness (mm)	150 MM	150 MM	150 MM	55 MM

FCFT PER	Bundle	42.40	20.35	33.91	-
	Layer	10.60	6.78	11.30	-
	Stone	0.76	0.32	0.32	-

PER BUNDLE	Layers	4.00	3.00	3.00	9.00
	Sections	-	-	-	-

LNFT PER	Bundle	-	41.34	69.99	63.00
	Unit	-	0.66	0.67	1.17

UNITS PER	SqFt	1.32	3.10	3.10	-
	Section	-	-	-	-
	Bundle	56.00	63.00	105.00	54.00

LBS PER	Layer	498	878	773	278
	Section	-	-	-	-
	Bundle	1,992	2,635	2,320	2,502

Smooth Panel



FOSSIL



DARK CHARCOAL



OPAL BLEND



STEEL MOUNTAIN



WALNUT

Series 3" Panel



ONYX BLACK


Pitched Panel



FOSSIL



WALNUT



STEEL MOUNTAIN

Umbriano® Panel



FRENCH GREY



SUMMER WHEAT



WINTER MARVEL

Recommended Base Unit



UNIVERSAL BASE UNIT
14 x 19 x 2"
355 x 482 x 55mm

Extra Components



SURE TRACK CORNER INSERT
L = 2"
50mm

Notes: Product is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

U-Cara® Wall Mount System



The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.




U-CARA ALIGNMENT BAR:
39" LENGTH - SOLD IN PACKS OF 10 PIECES

U-CARA RAILS:
8' LENGTH - SOLD IN PACKS OF 10 PIECES

U-Cara® Modular System

The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Places and Pillars.

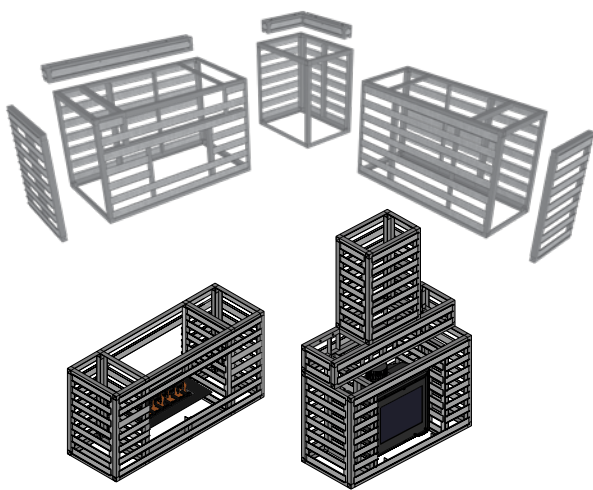


NO.	MODEL	DESCRIPTION
UCARA000001	URS	UCARA 8' RAIL (10/PACK)
UCARA000003	URS	ALIGNMENT BARS 39" (10/PACK)
UCARA000007	UL-OSK	CABINET DEPTH CHANGE KIT
RS-UCARA000009	UL-FIR	U-CARA FIREPLACE
RS-UCARA000010	UL-FIR-M	U-CARA FIREPLACE MANTLE
RS-UCARA000015	UL-HCK-CC	U-CARA HEIGHT CONVERSION CORNER CAB
RS-UCARA000016	UL-FIR-MW	U-CARA FIREPLACE MANTLE WIDE UNIT
RS-UCARA000017	UL-FIR-CH	U-CARA U-CARA FIREPLACE CHIMNEY UNIT
RS-UCARA000018	UL-FIR-CH-MW	U-CARA FIREPLACE CHIMNEY WIDE UNIT
RS-UCARA000019	UL-FIR-RTN	U-CARA FIREPLACE RETURN
RS-UCARA000020	UL-FIR-RTN-OS	U-CARA FIREPLACE RETURN OVERSIZED
UCARA001000	UL-GC	UNIVERSAL GRILL CABINET (fits 36"-42" grill)
UCARA002000	UL-BC	BASE CABINET (fits fire table or fridge)
UCARA003000	UL-CC	CORNER CABINET 27.5" x 27.5"
UCARA003001	UL-CC-OS	CORNER CABINET 27.5" x 36.5" OS
UCARA003002	UL-CC-BP	CORNER CABINET BACK PANEL
UCARA004000	UL-ECK	END CLAD KIT 27.5"
UCARA004001	UL-ECK-OS	END CLAD KIT 36.5" OS
UCARA005000	UL-BS	BACKSPLASH-GRILL/BASE UNIT 64½"
UCARA005001	UL-BS-CC	BACKSPLASH CORNER CABINET
UCARA005002	UL-BS-CC-OS	BACKSPLASH CORNER CABINET OS
UCARA006000	UL-DD	STAINLESS DOUBLE ACCESS DOORS 27"
UCARA007000	UL-PU	PILLAR UNIT (18⅝" x 18⅝")
RS-UCARA001002	UL-GC-36	UNIVERSAL GRILL CABINET (FITS 36"-42" GRILL)
RS-UCARA002001	UL-BC-36	BASE CABINET (FITS FIRE TABLE OR FRIDGE)
RS-UCARA003004	UL-CC-OS-36	CRNR CABINET 27.5X36.5 OS
RS-UCARA003005	UL-CC-36	CORNER CABINET 27.5X27.5
RS-UCARA004002	UL-ECK-36	END CLAD KIT 27.5"
RS-UCARA004003	UL-ECK-OS-36	END CLAD KIT 36.5" OS



Download the U-Cara Modular Fireplace Installation Guide.

Fireplace WOOD BURNING

This truly revolutionary U-Cara Modular Fireplace is easily constructed in one day with only a handful of basic tools. The ability to mix and match several panel color and/or textures allows you to be creative while maintaining the theme of the project overall.

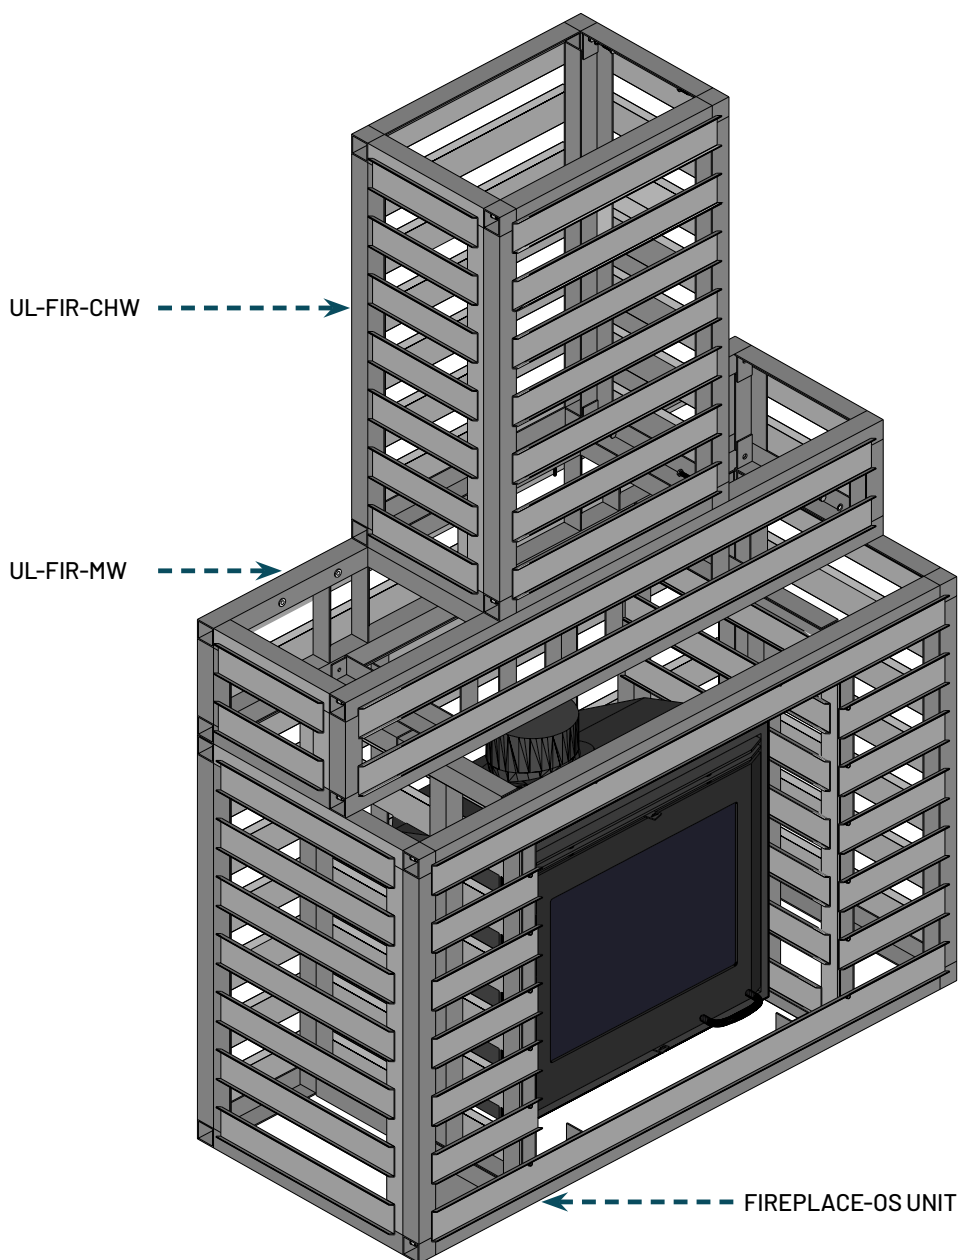

NOTE:

Complete assembly instructions can be downloaded from unilock.com

Always observe local building codes.

Fireplace GAS

Gas Fireplaces make a wonderful addition to any urban landscape especially where access is limited and/or where wood burning is prohibited.

Construct one-sided or two-sided fireplaces in a matter of hours.

NOTE:

Complete assembly instructions can be downloaded from unilock.com

Always observe local building codes.





	28 x 28 PILLAR CAP	12 x 24 COPING
Bundle Type	SINGLE	SINGLE
Plant Produced	NEW YORK	NEW YORK
Thickness (mm)	100 MM	60 MM

SQFT PER	Bundle	3.06	74.47
	Layer	0.77	12.4
	Stone	0.77	0.48

PER BUNDLE	Layers	4.00	6.00
	Sections	-	-

LNFT PER	Bundle	9.36	73.2
	Unit	2.34	2.03

UNITS PER	SqFt	1.31	0.48
	Section	-	6.00
	Bundle	4.00	36.00

LBS PER	Layer	234	341
	Section	-	-
	Bundle	935	2,044

COLORS	Reflectance	Stock	Stock
Light Grey	SR n/a SRI n/a	✓	✓
Dark Charcoal	SR n/a SRI n/a	✓	✓
Sandstone	SR n/a SRI n/a		✓

APPLICATIONS



APPEARANCE

Edge Detail - n/a
 Surface Texture - Smooth
 Joint Spacing - 3mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits



LIGHT GREY



DARK CHARCOAL



SANDSTONE

Single Unit



PILLAR CAP
 711 x 711 x 100 mm
 28 x 28 x 3 7/8"
 4 unit/Bundle
 .77 Fc.Ft./Stone



COPING
 310 x 620 x 60mm
 12 x 24 x 2 3/8"
 36 units/Bundle
 .40 Fc.Ft./Stone

Notes: Coping units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. Product is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Smooth
 Joint Spacing - 2mm

TECHNOLOGIES

CLASSIC™
 Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

		STANDARD
Bundle Type		SINGLE
Plant Produced		UXBRIDGE
Thickness (mm)		60 MM

FCFT PER	Bundle	-
	Layer	-
	Stone	-

PER BUNDLE	Layers	4.00
	Sections	-

LNFT PER	Bundle	104.00
	Unit	0.50

UNITS PER	SqFt	2.00
	Layer	52.00
	Bundle	208.00

LBS PER	Layer	14
	Section	697.66
	Bundle	2,790

COLORS	Reflectance	Stock
Almond Grove	SR. n/a SRI n/a	✓
Charcoal	SR. n/a SRI n/a	✓
Limestone	SR. n/a SRI n/a	✓
Sierra	SR. n/a SRI n/a	✓



ALMOND GROVE



CHARCOAL



LIMESTONE



SIERRA

Single Unit



FULLNOSE EDGER
 150 x 300 x 60mm
 5 7/8 x 11 7/8 x 2 3/8"

Notes: Units can be adhered to pool edge using Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

Ledgestone™ Fullnose, Coping & Closed-End Coping



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Textured

TECHNOLOGIES

REALA™
Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1776
Eligible for LEED v4.1 credits

	FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END	LARGE COPING	LARGE CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	60 MM	70 MM	70 MM	70 MM	70 MM

FCFT PER	Bundle	5.12	5.52	5.52	6.87	6.87
	Layer	-	-	-	-	-
	Stone	0.39	0.46	0.46	0.57	0.57

PER BUNDLE	Layers	-	-	-	-	-
	Sections	-	-	-	-	-

LNFT PER	Bundle	26.00	24.00	24.00	30.00	30.00
	Unit	2.00	2.00	2.00	2.50	2.50

UNITS PER	SqFt	2.54	2.18	2.18	1.75	1.75
	Section	1.00	1.00	1.00	1.00	1.00
	Bundle	13.00	12.00	12.00	12.00	12.00

LBS PER	Layer	-	-	-	-	-
	Section	167	64	66	94	93
	Bundle	667	772	796	1,128	1,116

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Buff	SR.n/a SRI n/a	✓	✓	✓	✓	✓
Grey	SR.n/a SRI n/a	✓	✓	✓	✓	✓



BUFF



GREY

Single Units	FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END COPING	LARGE COPING	LARGE CLOSED-END COPING
	610 x 305 x 60mm 24 x 12 x 2 3/8" 13 unit/Bundle .39 Fc.Ft./Stone	610 x 305 x 70mm 24 x 12 x 2 3/4" 12 unit/Bundle .46 Fc.Ft./Stone	610 x 305 x 70mm 24 x 12 x 2 3/8" 12 unit/Bundle .46 Fc.Ft./Stone	762 x 343 x 70mm 30 x 13 1/2 x 2 3/4" 12 unit/Bundle .57 Fc.Ft./Stone	762 x 343 x 70mm 30 x 13 1/2 x 2 3/4" 12 unit/Bundle .57 Fc.Ft./Stone

Notes: This product is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. All measurements are nominal. Contact Unilock for more information.

Ledgestone™ Pillar Cap



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Textured

TECHNOLOGIES

REALA™

Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1776
Eligible for LEED v4.1 credits

	24 x 24 PILLAR CAP
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	100 MM

FCFT PER	Bundle	3.28
	Layer	0.66
	Stone	0.66

PER BUNDLE	Layers	5.00
	Sections	-

LNFT PER	Bundle	10.04
	Unit	2.01

UNITS PER	SqFt	1.52
	Section	-
	Bundle	5.00

LBS PER	Layer	159
	Section	-
	Bundle	795

COLORS	Reflectance	Stock
Buff	SR.n/a SRI n/a	✓
Grey	SR.n/a SRI n/a	✓



BUFF



GREY

Single Unit



24" PILLAR CAP
610 x 610 x 100mm
24 x 24 x 3 7/8"
5 unit/Bundle
.66 Fc.Ft./Stone

Notes: This product is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™ (BASE)

Budget-friendly traditional product mix

ENDURACOLOR™ (COPING)

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	UNIVERSAL BASE CLASSIC	UNIVERSAL COPING ENDURACOLOR
Bundle Type	SINGLE	SINGLE
Plant Produced	UXBRIDGE	NEW YORK
Thickness (mm)	55 MM	70 MM

FCFT PER	Bundle	-	17.44
	Layer	-	2.18
	Stone	-	0.36

PER BUNDLE	Layers	9.00	8.00
	Sections	-	-

LNFT PER	Bundle	63.00	75.90
	Unit	1.17	1.58

UNITS PER	SqFt	-	2.75
	Section	-	-
	Bundle	54.00	48.00

LBS PER	Layer	278	358
	Section	-	-
	Bundle	2,502	2,864

COLORS	Reflectance	Stock	Stock
Natural	SR.n/a SRI n/a	✓	
Dark Charcoal	SR.n/a SRI n/a		✓
Light Grey	SR.n/a SRI n/a		✓



NATURAL



DARK CHARCOAL



LIGHT GREY

Single Units



UNIVERSAL COPING
482 x 70 x 355mm
19 x 2 ¾ x 14"
48 units/Bundle
.36 Fc.Ft./Stone



UNIVERSAL BASE
482 x 55 x 355mm
19 x 2 ¼ x 14"
54 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is shipped on a required, refundable skid. Two (2) End Coping units per Layer (1 Left & 1 Right). All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Standard
 Joint Spacing - n/a
 Void % - n/a

TECHNOLOGIES

CLASSIC™


Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372
 Eligible for LEED v4.1 credits



UNILOCK REDUCED SMOKE INSERT

SELECTED FIRE PITs AVAILABLE WITH ZENTRO TECHNOLOGY FIRE PIT INSERT

There's nothing like relaxing around a firepit to bring family and friends closer together. But with ordinary firepits, smoke always blows in someone's face - usually yours. With Unilock Reduced Smoke Inserts, stinging eyes are a thing of the past. Zentro's patent-pending technology reburns smoke before it gets anywhere near your eyes. Say hello to good times and good-bye to smoke.

	SUNSET SQUARE W / INSERT	SUNSET ROUND W / INSERT
Bundle Type	SINGLE	SINGLE
Dimension Metric	1100 x 1100 x 400mm	1300 x 1300 x 400mm
Dimension Imperial	43 3/8 x 43 3/8 x 15 3/4"	51 1/4 x 51 1/4 x 15 3/4"

DIAMETER (inch)	Outside	43	52
	Inside	29	36
	Insert	27	35

LAYER PER UNIT	4	4
UNIT PER LAYER	12	18
UNIT PER PALLET	48	72

LBS PER PALLET	1,357	1,499
----------------	-------	-------

COLORS	Reflectance	Stock	Stock
Almond Grove	SR. n/a SRI n/a	✓	✓
Limestone	SR. n/a SRI n/a	✓	✓
Sierra	SR. n/a SRI n/a	✓	✓



ALMOND GROVE



LIMESTONE



SIERRA

The following accessories are available for any fire pit kit.
 Contact your local Territory Manager for details.



ROUND FIRE SCREEN
 (works with Sunset Round only)



24" SWING AWAY GRILL



KETTLE HOOK



ACCESSORY POST WITH COLLAR

Single Unit



SUNSET SQUARE W/INSERT
 1100 x 1100 x 300mm
 43 3/8 x 43 3/8 x 15 3/4"



SUNSET ROUND W/INSERT
 1300 x 1300 x 300mm
 51 1/4 x 51 1/4 x 15 3/4"

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Standard
 Joint Spacing - n/a
 Void % - n/a

TECHNOLOGIES

CLASSIC™


Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372
 Eligible for LEED v4.1 credits



UNILOCK REDUCED SMOKE INSERT

SELECTED FIRE PITS AVAILABLE WITH ZENTRO TECHNOLOGY FIRE PIT INSERT

There's nothing like relaxing around a firepit to bring family and friends closer together. But with ordinary firepits, smoke always blows in someone's face - usually yours. With Unilock Reduced Smoke Inserts, stinging eyes are a thing of the past. Zentro's patent-pending technology reburns smoke before it gets anywhere near your eyes. Say hello to good times and good-bye to smoke.

	ROMANSTACK ROUND W / INSERT
Bundle Type	SINGLE
Dimension Metric	1525 x 1525 x 400mm
Dimension Imperial	60 x 60 x 15 3/4"
Thickness (mm)	300 MM

DIAMETER (inch)	Outside	60
	Inside	44
	Insert	43

LAYER PER UNIT	4
UNIT PER LAYER	24
UNIT PER PALLET	96

LBS PER PALLET	1,725
----------------	-------

COLORS	Reflectance	Stock
Almond Grove	SR. n/a sRI n/a	✓
Granite	SR. n/a sRI n/a	✓
Sierra	SR. n/a sRI n/a	✓



ALMOND GROVE



GRANITE



SIERRA

The following accessories are available for any fire pit kit.
 Contact your local Territory Manager for details.



ROUND FIRE SCREEN
 (works with Sunset Round only)



24" SWING AWAY GRILL



KETTLE HOOK



ACCESSORY POST WITH COLLAR

Single Unit



ROMANSTACK ROUND W/INSERT
 1525 x 1525 x 400mm
 60 x 60 x 15 3/4"

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

Notes: All measurements are nominal. Contact Unilock for more information.

Natural Stone Cleaners



UNICARE NATURAL STONE ACID CLEAN

1L and 5L

Removal of:

- Cement Staining.
- Efflorescence.
- Iron Oxide (Rust) Cement mortar.
- Grout.



UNICARE NATURAL POWER CLEAN

1L and 5L

Removal of:

- Oil & Grease.
- Food Stains.
- General Dirt & Mud.
- Sap & certain plant stains.
- Light cement contamination (on acid-sensitive surfaces).



UNICARE BIOCLEAN

1L and 5L

Removal of:

- Black spot algae.
- Green algae.
- Plant stains from leaves, wood, trees, berries & flowers.
- Organic staining from bark & compost.
- Colored stains from food spills, tea, coffee and wine.

Natural Stone Sealers



UNICARE NATURAL STONE NAT MATTE SEALER

1L and 5L

For Porous Stones

- No change of color.
- No surface coating, sheen or shine at all.
- Riven Sandstone & Smooth Sandstone.



UNICARE NATURAL STONE NATCOLOR ENHANCE SEALER

1L and 5L

Color Enhancement For Porous Stones

- No surface coating, sheen or shine.
- Breathable.
- Lasts several years.
- Easy to apply.

Cleaners



TECHNISEAL® PROFESSIONAL GRADE OIL/ GREASE REMOVER

1 Quart

An industrial strength petroleum-based product remover that lifts and absorbs embedded oil and grease stains as it dries from a liquid to a powder. Specially formulated for concrete pavers, slabs and walls, natural stone, poured or stamped concrete, etc. It works without damaging or discoloring the material and is easy to use.

Cleaners continued



TECHNISEAL® EFFLORESCENCE REMOVER

1 Gallon Box of 4 x 1 US Gallon

Specially formulated to dissolve efflorescence (whitish salt deposit) and remove ground-in dirt on paving stones and concrete, without discoloring or damaging surfaces. It cleans evenly, and enables the sealant to better penetrate the material to be treated.



TECHNISEAL ORGANIC STAIN REMOVER

700g Box of 6 x 700g 500 Units per skid

Formulated to remove moss and mildew as well as tough organic stains such as dead leaves, blood, wine and non-greasy food stains on concrete pavers, slabs and walls, natural stone, etc; requires minimum scrubbing.



TECHNISEAL SR SLURRY REMOVER FOR PAVERS AND SLABS

1 Gallon Box of 4 x 1 US Gallon

This is the most effective product available for removing cement slurry and polymeric sand haze on concrete or clay pavers and slabs. One gallon of concentrated product cleans up to 600 sq.ft. Coverage will depend on surface condition and product dilution.

Sealers



GATOR HYBRID SEAL LOW GLOSS

1 Gallon and 5.28 Gallon

This is a 100% pure high-grade acrylic used to seal concrete pavers. It penetrates deep into the concrete paver pores, therefore helps prevent the oil and dirt penetration, corrosion from de-icing salt and the effects from the UV rays.



GATOR HYBRID SEAL LOW GLOSS

1 Gallon and 5.28 Gallon

This is a 100% pure high-grade acrylic used to seal concrete pavers. It penetrates deep into the concrete paver pores, therefore helps prevent the oil and dirt penetration, corrosion from de-icing salt and the effects from the UV rays.



GATOR HYBRID SEAL HIGH GLOSS WITH COLOR ENHANCER

1 Gallon and 5.28 Gallon

This is a 100% pure high-grade acrylic used to seal concrete pavers. It penetrates deep into the concrete paver pores, therefore helps prevent the oil and dirt penetration, corrosion from de-icing salt and the effects from the UV rays.



GATOR HYBRID SEAL LOW GLOSS WITH COLOR ENHANCER

1 Gallon and 5.28 Gallon

This is a 100% pure high-grade acrylic used to seal concrete pavers. It penetrates deep into the concrete paver pores, therefore helps prevent the oil and dirt penetration, corrosion from de-icing salt and the effects from the UV rays.

Adhesives

TECHNISEAL STICKY STONE

10 oz. Caulk Tube: 20' at 1/4" Bead (Case of 12)
 28 oz. Caulk Tube: 50' at 1/4" Bead (Case of 12)
 Professional-grade vertical hardscape adhesive bonds various construction substrates beautifully and durably.



Surface Type: Natural Stone, Concrete Paver, Porcelain Tile, Wood

Coverage: Coverage power will depend on the dimensions of the application surface. eg. 5mmx5mm deep area, a single 600ml sausage will cover 50 linear feet. On an 8mmx6mm deep area, the same size will cover 40 linear feet.

TECHNISEAL STRUCTURE BOND (& GUN)

24 oz. Container: (Case of 12 / 84 boxes per pallet)
 Super-strength hardscape foam adhesive, specifically for the construction industry. Quick & easy precise application with the special "Gun II" dispenser; adjustable bead size. 3/8" bead size will yield up to 600ft.
 Clean Up: Cured foam can only be removed mechanically. Use Structure Bond Gun Cleaner to clean gun upright. Product does not have a flash point after it dries. See cleaner below.



TECHNISEAL STRUCTURE BOND™ GUN CLEANER

24 oz. Container: (Case of 12 / 84 boxes per pallet)
 Structure Bond Gun Cleaner is a powerful cleansing formula that rapidly dissolves any uncured Structure Bond adhesive residue. It is specifically designed to fit Structure Bond Gun II dispensers. Simply screw a canister onto the gun and press the trigger to cleanse the tool from uncured product. The built-in sprayer nozzle will also dissolve any spill, drip or adhesive residue.



ALLIANCE XP GATOR BLOCK ADHESIVE

RS-ADH039 10 oz; 12/case; 90 cases/skid (1080 ea)
 RS-ADH040 28 oz; 12/case; 60 cases/skid (720 ea)

- Bonds permanently in 24 hours.
- Material may be repositioned for up to 30 minutes.
- Works in temperatures above 32°F.
- 850 psi in 24 hrs (1000 psi in 7 days).



Sands

POLYBIND G2 SAND

NO DUST • HAZE FREE • NO BLOWER • ONE WATERING • RAIN SAFE IN 16 MINUTES
 Designed for paver joints up to 2".



- A unique mix of polymer binders and calibrated sand.
 - Installation almost identical to regular paver joint sand, except for the application of water. Becomes very firm when set & locks between the paver joints.
- Colors: Oxford Grey and Nevada Tan.
 Packaging: 50 lb bag / 56 bags per skid.
 Coverage: 65-85 sq.ft./ bag for narrow joints, larger joints will require more sand.

TECHNISEAL® HP NEXTGEL POLYMERIC SAND

NO DUST • NO HAZE • NO WASTE
 Designed for paver joints up to a maximum of 1 inch.



- Ideal in high-humidity environments, heavy-vehicular traffic areas & steeper terrain.
 - Fast, clean, durable and profitable installation thanks to Nextgel technology.
 - Offers great resistance to weed growth, insect invasion and erosion; fast-setting within minutes of water activation.
- Colors: Urban Grey, Granite Grey and Tan.
 Packaging: 50 lb bag / 56 bags per skid.
 Coverage: 65-85 sq.ft. coverage per bag for narrow joints, larger joints will require more sand.

TECHNISEAL PROSERIES SMARTSAND POLYMERIC SAND

Designed for paver joints up to a maximum of 1 inch.



- Benefits from the Nextgel technology for cleaner application and faster wetting.
 - A smart choice for residential driveways, patios, etc.
 - Offers great resistance to weed growth, insect invasion and erosion; fast-setting within minutes of water activation.
- Colors: Urban Grey, Granite Grey and Tan.
 Packaging: 50 lb bag / 56 bags/skid (2860lbs/skid).
 Coverage: 65-85 sq.ft. coverage per bag for narrow joints, larger joints will require more sand installation. Recommended with extra care for use with Copthorne®, Courtstone®, Richcliff®, Town Hall® & Umbriano® products. It is not suitable for use with Il Campo®, Series™ and Unigranite®. Umbriano's surface must be cleaned with a foam squeegee post installation.

POLYBIND G2 COMPLETE SAND

NO DUST • HAZE FREE • NO BLOWER • ONE WATERING • RAIN SAFE IN 16 MINUTES
 Designed for paver joints up to 2".



- Made with calibrated sand mixed with sophisticated intelligent polymers, which neutralizes haze and dust.
 - Recommended for a variety of uses including pool decks, patios, footpaths, driveways, parking spaces, pavements, etc.
- Colors: Nevada Tan & Oxford Grey.
 Packaging: 50 lb/bag Coverage: 65-85 sq.ft./bag for narrow joints / larger joints will require more sand.

Sands continued

ROMEX EASY ECOFINE SAND

Sustainable Paving Joint Mortar for Narrow Joints

- Designed for paver joints up to 1/8" (porcelain) to 2" (concrete pavers).
 - Made from 98% natural, recycled or renewable raw materials.
 - Resin film free • Weed resistant • Ant resistant
 - Highly water permeable • Frost resistant.
 - Installation almost identical to regular paver joint sand, except for the application of water. Becomes very firm when set & locks between the paver joints.
- Colors: Neutral, Stone Grey & Basalt.



GATOR AQUA ROCK

- Manufactured to meet ASTM No.9 requirements for permeable paver joint units; calibrated for the majority of permeable pavers.
 - High strength granite stone for long-term use.
 - Helps prevent erosion.
 - Reduction of stormwater runoff.
- Color: Granite Grey.
Packaging: 50 lb bag / 56 bags per skid.
Coverage: 20-25 sq.ft. per bag for a 60mm paver.



PERMA PAVER EDGING

- Designed to float and flex with the sub base and not work independently like standard edging and spikes
- Quick & easy to install, typically cutting edging install time down by 90%.
- Stays under the soil/mulch grade - invisible edging
- Combats the freeze/thaw cycles in cold weather; won't deteriorate in moist/humid conditions
- Coverage per container: yields approximately 25-30 lineal feet of edging per bucket.



Paver Spacers

X & T SLAB SPACERS

- Unilock recommends using slab spacers when installing Arcana on an open grade surface.
- "T" spacers are needed for running bond patterns; "X" spacers are needed for stack bond patterns. Please contact your sales manager for more information.

Packaging:


- 250 per bag.
- X & T bagged separately.
- X spacers 2" x 2" (RS-ACC237).
- T spacers 2" x 1" (RS-ACC236).




Edge Restraints

SNAPEDGE ONE-PIECE EDGING THAT DOES IT ALL!

- Only one part required for straight runs or curved installations.
- Built-in connector fastens one piece to the next - convenient 96" size, makes them easy to transport.
- Unique 'Snip and Flex' feature speeds installation of curves and corners without pre-planning.
- The open design allows a root system to grow through SnapEdge, further reinforcing the installation.
- Engineered to provide a strong, easy-to-install edge restraint for concrete/ clay pavers.
- Nail hole bosses are full-length cylinders. Hammer blows will not fracture or force nail heads through edging.



Typical Cross Section

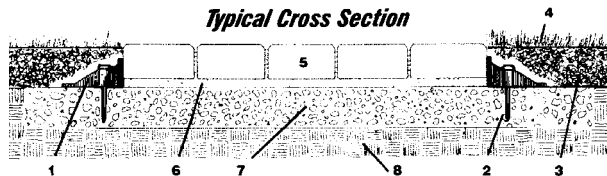

- | | | |
|-------------------|-----------------------|------------------------|
| 1. SnapEdge | 2. 10" Spiral Spike | 3. Soil |
| 4. Turf | 5. Sand Jointed Paver | 6. Sand Jetting Course |
| 7. Aggregate Base | 8. Compacted Subgrade | |

SNAPEDGE LOW PROFILE EDGE RESTRAINT

- Built-in connection fastens one piece to the next.
- Unique 'Snip and Flex' feature speeds installation of curves and corners without pre-planning.
- One piece can be used for straight or curved installations.
- Spike bosses every 4" on center. Recommended spike spacing is 1 spike every foot for driveways and 1 spike every 16" for patios and walkways.
- Open base design promotes root system development and growth right through the base further strengthening the installation.

Snip 'n Flex
One Piece System



Integral Connection



1 3/8"
Side
Wall



1 7/8"
Side
Wall



Low Profile

SnapEdge



RS-EDGE061



- 1 piece = 8 linear feet
- 1 bundle = 24 pieces
- 1 bundle = 24 pieces = 192 linear feet
- 1 pallet = 16 bundles = 3,072 linear feet

PaverSaver Uni Mat



PAVERSAVER UNI MAT

Universal Design - for use on most compactors

The PaverSaver Uni Mat is made out of a specially formulated urethane rubber. Material soft enough to protect the paver surface yet hard enough to minimally affect travel speed. The universal sizing fits most compactor plates and easily attaches and detaches from the compactor.

UniLyft™



- Install up to 700 sq. ft. per hour!
- Access tight or narrow areas.
- Eliminate the need for a forklift on site.
- Reduce labor costs.
- Reduce shoulder, hand and knee pain and injury.
- Improve your bottom line.
- Financing available.

Contact your local rep for details



Base/Drainage Systems

GATOR TILE SYSTEM

Contact Unilock for more information.



RS-ACC074-1

RS-ACC087



RS-ACC088

10oz - RS-ADH039
28oz - RS-ADH040



Beige - RS-SAND136
Black - RS-SAND139
Grey - RS-SAND137
Ivory - RS-SAND138

VISIT ALLIANCEGATOR.COM FOR MORE DETAILS AND VIDEOS.

Landscape Fabric & Grid System



GEOGRID AND FABRICS

Strata 150 - 22.22 sq. yds/roll.
 Strata 200 - 200 sq. yds/roll.
 Filter Fabric - 6.25' x 360'; 250 sq yds/roll.




LANDSCAPE SPIKES

50lb case

UNILOCK DRIVEGRID™ SYSTEM

• 120' x 13' Roll, 1,572 Square Feet/Roll, 56 lb/Roll.

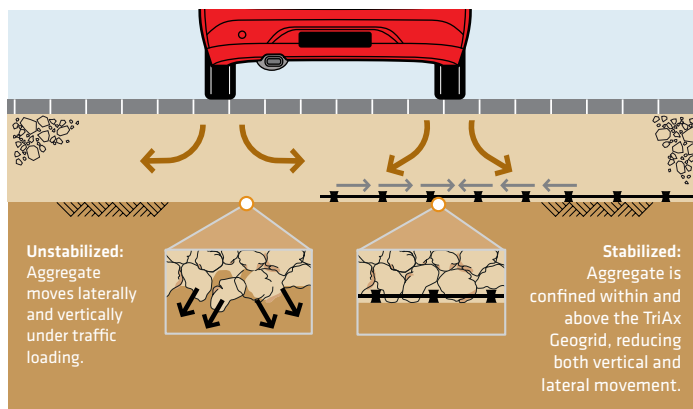

WHY DRIVEGRID SYSTEM™?

- ✓ Easy to install
- ✓ Reduces overall project cost
- ✓ Inexpensive
- ✓ Proven Tensar® TriAx® Technology



GATOR GRID 30-30

- A biaxial geogrid, provides strength, longevity, excellent stress transfer and prevents failure to the internal structure of landing areas, retaining walls and steep slopes.
- Has a high molecular weight as well as high-tenacity polyester yards which are woven in tension and finished with a PVC coating.
- Packaging & Unilock SKU (Minimum Case Purchase = MCP):
 FAB070 - 4' x 50/12 rolls/case, 60 rolls/skid * MCP*
 FAB071 SPECIAL ORDER - 6' x 50' - 40 rolls/skid.
 FAB072 - 6' x 150'/25 rolls/skid



GATOR FABRIC NON-WOVEN 4.4

- A needle punched non-woven geotextile made of polypropylene fiber, ideal for drainage, filtration and will allow water flow of 135 gallons per minutes per square foot (613 L/min/sq. m.) in paver or retaining wall applications.
- Its filament fibers are used for soil separation and drainage and combine high durability along with excellent physical and hydraulic properties.
- Non-biodegradable and resistant to most soil chemicals.
- Packaging & Unilock SKU (Minimum Case Purchase = MCP):
 FAB043 - 3' x 100 - 6 rolls/case, 24 rolls/skid SPECIAL ORDER * MCP*
 FAB044 - 4' x 100' - 6 rolls/case, 36 rolls/skid * MCP*
 FAB046 - 6' x 100' - 30 rolls/skid * MCP*
 FAB047 - 6' x 300' - 16 rolls/skid * MCP*



PRODUCT SPECIFICATIONS



DRIVECEL30 LIGHT DUTY
20 x 20 x 1.2"
500 x 500 x 30mm



DRIVECEL50 HEAVY DUTY
20 x 20 x 2"
500 x 500 x 50mm

TECHNICAL INFORMATION

Conforms to:

- DIN 38412 - Neutral for the environment, lifespan higher than 10 years
- DIN 4102 - Approval emergency access routes, fire resistance
- DIN 1072 - Approval for 20 tonne axle load, driveways, road extensions, bridges
- DIN IN ISO 124 and B125 - Approval for car parks, access roads & storage areas

Maximum Load Capacity = 1,000 tonnes / m² (filled)
 Temperature Range = -35°C to 85°C (-31°F to 185 °F)
 Tile Wall Thickness = 3 mm (for GF50, GF40 & GF30)
 Performance Design Life = >100 years

ENVIRONMENTAL INFORMATION

- Made from 100% recycled plastic
- Recyclable
- Neutral for the environment

PRODUCT DATA

Tiles & Bundling	Unit	Area Per (m ² / ft ²)		Units Per		Per Bundle		Mass Per (kg / lbs)	
	Thickness	Unit	Bundle	Layer	Bundle	Layers	Dimensions	Unit	Bundle
DriveCel30 Light Duty	1.2" (30mm)	0.250 / 2.69	80 / 861.1	4 (2x2)	320	80	1.05 x 1.05 x 2.55 m 3.44 x 3.44 x 8.37 ft	1.1 / 2.4	352 / 776.0
DriveCel50 Heavy Duty	2" (50mm)	0.250 / 2.69	48 / 516.7	4 (2x2)	192	48	1.05 x 1.05 x 2.55 m 3.44 x 3.44 x 8.37 ft	1.6 / 3.5	307.2 / 677.2

Notes: Engineering services are available for site-specific designs and drawings. For more information or for custom options, please contact your Unilock Territory Manager or call 1-800-UNILOCK.


Base Thickness Chart (General)

APPLICATION	GRAVEL BASE	BEDDING COURSE	BACKFILL WIDTH (WALLS ONLY)
PATIOS, WALKWAYS, POOL DECKS	4" - 6" (10cm-15cm)	1" (2.5cm)	
DRIVEWAYS	8" - 12" (20cm - 30cm)	1" (2.5cm)	
STEPS, PLANTERS, RAISED PATIO	6" (15cm)	0 - 1/8" (0cm - 0.3cm)	8" - 12" (20cm - 30cm)
RETAINING WALLS UNDER 18" (45cm)	6" (15cm)	0 - 1/8" (0cm - 0.3cm)	12" (30cm)
RETAINING WALLS OVER 18" (45cm)	6" (15cm)	0 - 1/8" (0cm - 0.3cm)	16" (50cm)

Soil condition - In areas with poor soil conditions, (eg., heavy clay, disturbed soils) increase the depth of the base to provide more stability. Where poor soil conditions exist it may be advisable to contact an engineer when constructing a retaining wall in excess of 24" in height.

Area = (Length) x (Width)	Metric Equivalents
Area of a Circle = 3.14 x (Radius) x (Radius)	1 inch = 2.5400 centimeters 1 centimeter = 0.3937 inch
Area of a Half Circle = 1.57 x (Radius) x (Radius)	1 foot = 0.3048 meter 1 meter = 39.3701 inches
Area of a Quarter Circle = .78 x (Radius) x (Radius)	1 yard = 0.9144 meter
Area of a Triangle = (1/2 Base) x (Height)	1 sq. foot = 929.030 sq.centimeters
Perimeter of a Circle = 6.28 x (Radius)	1 sq. meter = 1.196 sq. yards
Perimeter of a Half Circle = 3.14 x (Radius)	27 cu feet = 1 cu. yard
Perimeter of a Quarter Circle = 1.57 x (Radius)	

Typical Paver Cross Section

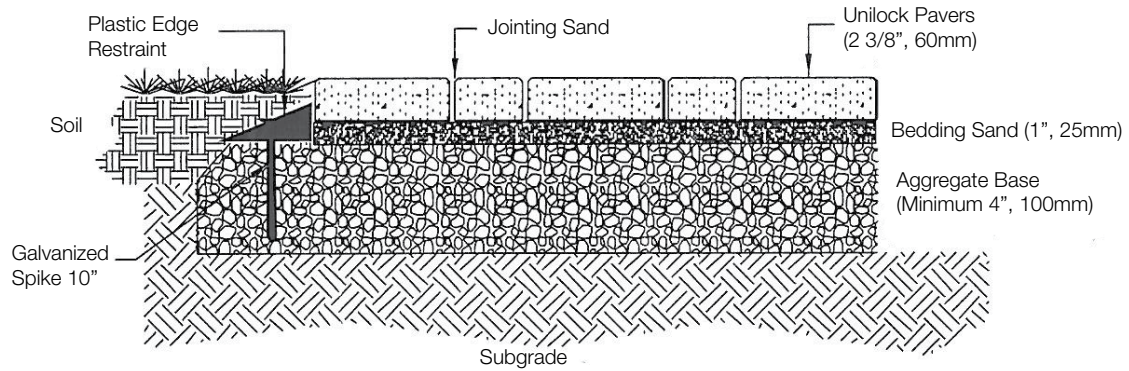

Aspect Ratio

Simply defined, the aspect ratio is the overall length of a paver divided by its height.

$$\text{LENGTH/HEIGHT} = \text{ASPECT RATIO}$$

If an insufficient aspect ratio is used, any flexing or rocking caused by movement on the surface such as pedestrian or vehicular traffic, could result in breakage of the paver units. Not only is this breakage unsightly, but it can also compromise the integrity of the segmental system.

3 : 1 or less
Heavy-Duty Vehicular

4 : 1
Light-Duty Vehicular

Over 5 : 1
Pedestrian

BEDDING MATERIALS CHART (APPROXIMATE IMPERIAL TONS)

Bedding Course												
Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0	2.3	2.5	2.8	3.0
100	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
150	0.8	1.5	2.3	3.0	3.8	4.5	5.3	6.0	6.8	7.5	8.3	9.0
200	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0
250	1.3	2.5	3.8	5.0	6.3	7.5	8.8	10.0	11.36	12.5	13.8	15.0
300	1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15.0	16.5	18.0
350	1.8	3.5	5.3	7.0	8.8	10.5	12.3	14.0	15.8	17.5	19.3	21.0
400	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.2	22.0	24.0
450	2.3	4.5	6.8	9.8	11.3	13.5	15.8	18.0	20.3	22.5	24.8	27.0
500	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0
550	2.8	5.5	8.3	11.0	13.8	16.5	19.3	22.0	24.8	27.5	30.3	33.0
600	3.0	6.0	9.0	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0
650	3.3	6.5	9.8	13.0	16.3	19.5	22.8	26.0	29.3	32.5	35.8	39.0
700	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0
750	3.8	7.5	11.36	15.0	18.8	22.5	26.3	30.0	33.8	37.5	41.3	45.0
800	4.0	8.0	12.0	16.0	20.0	24.0	28.0	32.0	36.0	40.0	44.0	48.0
850	4.3	8.5	12.8	17.0	21.3	25.5	29.8	34.0	38.3	42.5	46.8	51.0
900	4.5	9.0	13.5	18.0	22.5	27.0	31.5	36.0	40.5	45.0	49.5	54.0
950	4.8	9.5	14.3	19.0	23.8	28.5	33.3	38.0	42.8	47.5	52.3	57.0
1000	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0

BASE DEPTH CHARTS (CUBIC YARDS)

Bedding Course												
Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.5	1.7	1.9
100	0.3	0.6	0.9	1.2	1.5	1.9	2.2	2.5	2.8	3.1	3.4	3.7
150	0.5	0.9	1.4	1.9	2.3	2.8	3.2	3.7	4.2	4.6	5.1	5.6
200	0.6	1.2	1.9	2.5	3.1	3.7	4.3	4.9	5.6	6.2	6.8	7.4
250	0.8	1.5	2.3	3.1	3.9	4.6	5.4	6.2	6.9	7.7	8.5	9.3
300	0.9	1.9	2.8	3.7	4.6	5.6	6.5	7.4	8.3	9.3	10.2	11.1
350	1.1	2.2	3.2	4.3	5.4	6.5	7.6	8.6	9.7	10.8	11.9	13.0
400	1.2	2.5	3.7	4.9	6.2	7.4	8.6	9.9	11.1	12.3	13.6	14.8
450	1.4	2.8	4.2	5.6	6.9	8.3	9.7	11.1	12.5	13.9	15.3	16.7
500	1.5	3.1	4.6	6.2	7.7	9.3	10.8	12.3	13.9	15.4	17.0	18.5
550	1.7	3.4	5.1	6.8	8.5	10.2	11.9	13.6	15.3	17.0	18.7	20.4
600	1.9	3.7	5.6	7.4	9.3	11.1	13.0	14.8	16.7	18.5	20.4	22.2
650	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.1	20.1	22.1	24.1
700	2.2	4.3	6.5	8.6	10.8	13.0	15.1	17.3	19.4	21.6	23.8	25.9
750	2.3	4.6	6.9	9.3	11.6	13.9	16.2	18.5	20.8	23.1	25.5	27.8
800	2.5	4.9	7.4	9.9	12.3	14.8	17.3	19.8	22.2	24.7	27.2	29.6
850	2.6	5.2	7.9	10.5	13.1	15.7	18.4	21.0	23.6	26.2	28.9	31.5
900	2.8	5.6	8.3	11.1	13.9	16.7	19.4	22.2	25.0	27.8	30.6	33.3
950	2.9	5.9	8.8	11.7	14.7	17.6	20.5	23.5	26.4	29.3	32.3	35.2
1000	3.1	6.2	9.3	12.3	15.4	18.5	21.6	24.7	27.8	30.9	34.0	37.0

Actual volume may vary due to type of materials, moisture content, and compaction. Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

IMPORTANT NOTES

UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at Unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

TRADEMARK & LEGAL INFORMATION

Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified. Umbriano® are trademarks of Metten Stein + Design GmbH & Co KG used under license by Unilock®. Measurements throughout this portfolio are nominal. Not all products shown are available at all Unilock locations. Log on to Unilock.com for availability. Colors shown in this catalog should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area.

©2024 Hengestone Holdings, Inc.



QUALITY COMMITMENT

Unilock was the first concrete paver manufacturer in North America to offer a Lifetime Guarantee, and since then we have continued to stand behind it to ensure customers are completely satisfied with our products. With almost 2 billion stones in the ground, that's quite the commitment!

Our products are better and stronger than other brands. In fact, our internal standards of manufacturing in the USA and Canada far exceed industry standards set by ASTM (American Society for Testing and Materials) and CSA (Canadian Standards Association) and other European organizations.



LIFETIME GUARANTEE - RESIDENTIAL

Our Transferable Lifetime Guarantee warranties the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. It covers any structural failure or deterioration of the concrete unit resulting from normal use or from the reasonable application of sodium chloride (common rock salt used for de-icing). StoneMark™ products have the same warranties as Unilock paving stones and retaining walls, but cannot be warranted against damage resulting from de-icing products.

Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be

replaced without cost. Proof of purchase is required. Customers are encouraged to submit receipts to us as soon as their project is complete, using the Unilock Warranty Registration Form on our website (Unilock.com).

Purchasers need to ensure that the product they purchase is appropriate for their intended application; for example, only certain thicknesses of products are appropriate for driveways. Color matching of the replacement product and/or lost time cannot be guaranteed and labor costs related to installing replacement product is not included. Unilock reserves the right to seek a professional diagnosis and opinion to determine the exact cause of the product failure. If the failure falls within our warranty parameters, Unilock will replace the defective product.

EXCLUSIONS - Unfortunately, some things are beyond the control of Unilock, and are therefore not covered by this warranty. These include: naturally occurring efflorescence, hazing from polymeric jointing sand, scratching and chipping resulting from snow removal or construction equipment, damage caused by natural or un-natural disasters, or negligence by anyone other than Unilock. While EasyClean helps to increase a paver's resistance to staining from various substances, it does not make our products stain-proof nor does it resist every kind of stain. The Unilock warranty also does not cover deterioration or damage as a result of poor design or poor installation practices that are contrary to specifications as laid out by ICPI (Interlocking Concrete Pavement Institute) and the NCMA (National Concrete Masonry Association). For more information please visit www.icpi.org and

www.ncma.org. Additionally, please refer to the Maintenance, Color and Installation Advisories.

MAINTENANCE ADVISORY

1. Cleaning and Sealing

As with anything that is outdoors, Unilock products are subject to harsh weather, dust, acid rain, leaf stains, water stains and general wear from foot or vehicular traffic. Therefore, periodic cleaning using environmentally safe detergents designed for cleaning concrete is recommended to maintain a bright, fresh appearance.

To make subsequent cleaning easier and more effective, a concrete sealer can be applied to new or cleaned products to help prevent the penetration of substances that can cause stains.

There are many types of concrete cleaners and sealers on the market. Always read the instructions carefully before using the product to make sure that it will function as expected. Testing first, in a small unobtrusive area, is always a good idea to ensure the results are acceptable. Consult your local hardscape dealer to find the products best suited for your paver or wall installation.

2. Winter Maintenance

Snow removal by way of metal blades on plows or shovels will scratch and chip the surface of pavers, causing permanent damage. To mitigate this risk, metal snow clearing blades must always have a polyurethane or rubber cutting edge attached when plowing pavers. De-icing Salts - The use of de-icing products on paver surfaces is important for safety and to help mitigate snow accumulation. Most de-icing products will have some

Visit Unilock.com to register for your
Transferable Lifetime Guarantee.



effect on concrete, even if the product label indicates that it is safe on concrete. If you must use a de-icing product, we recommend that you use Sodium Chloride (ordinary rock salt) or Calcium Chloride (for colder climates). Always apply sparingly. The use of de-icing products on StoneMark, wet-cast pavers, slabs or coping may damage the product and therefore is not recommended. Whenever possible use a coarse sand as an anti-slip measure instead of de-icing chemicals.

COLOR ADVISORY

1. Selection

Due to the inherently variable nature of printed materials and digital monitors, Unilock cannot guarantee that products will match the color of printed or online images. Therefore, when making final product selections, decisions should be made based on actual stones which are readily available from Unilock, Authorized Contractors or Authorized Dealers. Most Unilock products are not comprised of a single color, but rather contain blended colors for a more natural appearance. This means that there will be significant color variance from stone to stone, so purchasers should view multiple units together to get a more accurate impression of the overall color. *Note:* Unilock Natural Stone variations are outside the control of Unilock. Purchasers of natural stone must be willing to accept this inherent variability.

2. Pre-installation checking

Always check the label to ensure that the Unilock product delivered to your project is the product and color ordered. If there is a discrepancy, or if the product inside the packaging doesn't appear to be correct, contact your hardscape dealer

before installing any pavers or wall units. If the product is installed, it indicates your acceptance of the products as delivered.

3. Blending

If the project requires more than one bundle of product it's always a good idea to draw product from several bundles when installing, as this ensures that any variation between bundles will be seamlessly integrated in the project. When bundles are from different production runs, random selection from multiple bundles is even more important.

4. Efflorescence

Efflorescence is a naturally occurring process that may appear as a white or light grey powder on the surface of concrete, clay or natural stone. It is temporary, and will disappear over time. However, if it is bothersome, an efflorescence cleaner can be used to remove it. There is no way to predict or prevent efflorescence. Because it does not compromise the structural integrity of the product, it is not covered by Unilock product warranties.

INSTALLATION ADVISORY

1. Construction Residue

While a certain amount of dirt on pavers and walls is inevitable during the construction phase, installers are strongly encouraged to clean as they go as construction residue can embed in the surface and become difficult to remove. The slurry produced during wet-saw cutting is particularly stubborn to clean if allowed to dry on the surface of pavers. Unilock warranties do not cover stains caused by a failure to remove construction residue.

2. Polymeric Haze

Surface hazing caused by polymeric jointing sand is not the responsibility of Unilock. Polymeric jointing sand should only be installed by an experienced and knowledgeable contractor.

Any sand that is left on the surface prior to activation will result in a haze that is very difficult and time-consuming to remove. Only the highest quality, brand name polymeric sand that is guaranteed by the manufacturer should be used.

3. Compaction Damage

Both smooth and textured paver surfaces can be scratched by compaction equipment used to 'flatten' a new paver installation. Therefore, metal plate compactors must be fitted with a polyethylene mat to protect the paver surface from becoming scratched, or a superior option is to use a rubber-roller compactor instead. Damage to product surfaces caused by failure to follow these instructions is not covered by Unilock product warranties.

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

BOSTON PRODUCT DIRECTORY

UNIT PAVERS

Product	Page	Finish	Pedestrian	Residential Vehicular	Commercial Vehicular	Environmental	For Borders & Accents
ADA Paver Premier	04	S	✓	✓	✓		
Arcana™	05	S	✓				
Artline™ Smooth	06	SM/S	✓	✓			
Artline™ Umbriano	07	SM	✓	✓			
Beacon Hill™ Flagstone	08	F	✓	80mm			
Beacon Hill™ Smooth	10	SM	✓	80mm			
Bristol Valley*	12	S	✓				
Brussels Block*	13	W	✓	✓			✓
Camelot*	14	S	✓	✓	✓		✓
Cophthorne*	16	T	✓	✓			✓
Courtstone*	17	C	✓	✓			✓
Dura-Mat™	18	S			✓	✓	
Eco-Line*	19	CU	✓	✓	✓	✓	
Eco-Optiloc™	20	S	✓	✓	✓	✓	
Eco-Priora™	21	B	✓	✓	✓	✓	
Eco-Promenade™	22	S	✓	✓	✓	✓	
Eco-Stone™	23	CU	✓	✓	✓	✓	✓
Granito™	24	S	✓	✓			
Hex™	25	S	✓	✓	80mm		
Hollandstone™	26	S	✓	✓	✓		✓
Holland Premier*	27	S	✓	✓	✓		✓
Il Campo*	28	B	✓	✓	✓		✓
Mattoni™	29	T	✓	✓			✓
Natural Stone	30-34	SM	✓				
Nordic Cobble™	35	WS	✓	✓	✓		✓
Optiloc™	36	S	✓	✓	✓		
Porcelain	37	SM	✓				
Promenade*	38	CU	✓	✓	✓		✓
Promenade* EcoTerra	39	S	✓	✓			✓
Revela*	40	S	✓				
Richcliff*	42	F	✓	✓			✓
Series™	43	WS	✓	✓	✓		✓
Skyline™	44	S	✓				
Soreno™	45	SM	✓				
Thornbury™ Smooth	46	SM	✓	✓	✓	✓	
Town Hall*	47	T	✓	✓	✓	✓	✓
Transition™	48	F	✓	✓			
Treo® Premier	49	F	✓	✓			
Treo Smooth	50	S	✓	✓	✓	✓	
Tribeca Cobble	51	W/C	✓	✓		✓	✓
Turfstone™	52	S		✓	✓	✓	
Umbriano*	53	SZ	✓				✓
Urban™	55	S	✓				
Westport™	56	F	✓	✓			✓

RETAINING WALLS

Product	Page	Finish	Gardens	Retaining Walls	Steps	Seatwalls	Pillars
Brussels Dimensional System™	57	W	✓	✓	✓	✓	✓
Concord Wall™	58	SP	✓	✓	✓		
DuraHold*	60	S		✓			
DuraHold2*	62	S		✓			
Estate Wall™	63	SP/W	✓		✓	✓	✓
Lineo™ Dimensional Stone	68	SZ	✓		✓	✓	✓
Pisa™ Edge	70	SM	✓	✓	✓	✓	✓
Rivercrest® Wall	71	S	✓	✓	✓	✓	✓
SienaEdge*	72	F		✓	✓		
SienaStone*	73	SP		✓	✓		
Umbriano* Coping	74	SM		✓	✓		✓
U-Cara*	75	Various	✓	✓		✓	✓

Finishes: B=Brushed; C=Cobblestone; D=Dimpled; DW=Dimpled and Weathered; F=Flagstone; S=Standard; SM=Smooth; SZ=Smooth Zero Bevel; SP=Split; SP/W=Split and Weathered; T=Timeworn; W=Weathered; WS=Washed. This application chart should only be used as a guide. Site conditions, base materials, pattern and frequency of use may vary the performance of various types and styles of products.

ADD 3D LANDSCAPE DESIGN TO YOUR TOOLBOX



UVISION ALLOWS YOU TO VISUALLY COMMUNICATE YOUR DESIGN IDEAS TO YOUR CLIENT IN BOTH 2D PLAN VIEW AND 3D PERSPECTIVE VIEW

Whether you're coming from the hand-drawn world, or a 2D AutoCAD background, the biggest impact you'll see from adopting this new 3D design software is in how well the client will understand the project you are selling. **Uvision 3D Landscape Creator is an easy-to-use software tool that helps bring your designs ideas to life.**



SCAN THE QR CODE FOR MORE INFORMATION OR TO DOWNLOAD A FREE 30-DAY TRIAL OF UVISION 3D LANDSCAPE CREATOR.





TRANSFORMING HARDSCAPES

UNILOCK.COM | 1-800-UNILOCK

Let's **BUILD YOUR BUSINESS TOGETHER.**

**CONTACT 1-800-UNILOCK OR VISIT UNILOCK.COM TO
CONNECT WITH YOUR LOCAL TERRITORY MANAGER**

BOSTON

(508) 278-4536

CHICAGO

(630) 892-9191

MILWAUKEE

(262) 742-3890

KANSAS

(913) 417-7985

MICHIGAN

(248) 437-7037

NEW YORK

(845) 278-6700

MID-ATLANTIC

(202) 798-2060

ONTARIO

(416) 646-9000

CINCINNATI/KY/TN

(513) 202-0219

**OHIO/WESTERN PA/
WNY&CNY**

(330) 927-4000

