2024 Product Data

C



TRANSFORMING HARDSCAPES



THE **ONE** INNOVATOR WITH GAME-CHANGING PRODUCTS

BUILD VERTICALS FASTER

When the plan calls for pillars, a grill island or any vertical feature, the U-Cara Modular System lets you create customizable features in hours – not days!

Simply build the sturdy, aluminum frame in any configuration and choose from a wide selection of fascia panels to clad it with.









TABLE OF CONTENTS - CHICAGO

PAVERS

ADA Paver 4
Anchorlock™
Arcana [™] 6
Artline [™] II Campo° 7
Artline [™] Smooth
Artline [™] Umbriano [®]
Beacon Hill [™] Flagstone
Beacon Hill [™] Smooth 12
Bristol Valley [®]
Brussels Block [®]
Copthorne®
Courtstone®
Eco-Line®
Eco-Optiloc [™]
Eco-Priora [™]
Eco-Promenade®
Promenade EcoTerra [™]
Granito [™]
Hex [™]
Hollandstone [™]
Holland Premier [™]
Mattoni [™]
Natural Stone - Limestone 30
Natural Stone - Sandstone
Nordic Cobble [™]
Optiloc°
Porcelain
Promenade [™]
Richcliff° 41
Series [™]
Skyline [™]
Soreno [™]
Town Hall [®]
Treo° Smooth 47
Tribeca Cobble [™] 48
Turfstone [™]
Umbriano [™]
Westport [™]
Westport [™] Smooth 53
Westport onloth

RETAINING WALLS

Brussels Dimensional Stone®	
DuraHold®	
Estate Wall™	
Lineo™ Dimensional Stone	57
Mackinaw™	
Olde Quarry™	
Olde Quarry [™] Smooth	60
Pisa™	61
Pisa [™] Smooth XL	
Rivercrest [®] Wall	
SienaEdge™	
SienaStone™	
U-Cara® Multiface Wall System	
U-Cara® Modular System	
U-Cara® Wall Mount System	
Architectural Coping	
Brussels Fullnose [™]	
6x12 Fullnose	
Ledgestone [™]	
Umbriano [®] Coping	
Universal U-Grip [™] Base	

FIRE FEATURES

Sunset Firepit	I
Unilock Elements	2

ACCESSORIES

Paver Cleaners and Adhesives	. 84
Paver Sealers and Sand Products	. 85
Permeable Chip Products	86
Geotextiles and Fabric Products	. 86
Gator Base System	. 87
Edging & Stainless FP Insert	88
Unilock Pedestal System	. 89

PRODUCT AND INSTALLATION INFORMATION

Sealer and Polysand Best Practices	90
Terms and Conditions of Sale	91
Laying Patterns	. 92
Freight Rates	94
Important Notes	94
Product Directory	98

APPLICATION INDEX



Heavy-duty vehicular

Light vehicular









Outdoor

kitchen





蕃川

Roof deck





1

Retaining walls under 3'



accents



wall



Pillar



Wall Coping





coping

Step treads



Zero-Edge



Chamfered Edge

Rounded Bevel





ADA Paver



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES

CLASSIC Budget-friendly traditional product mix

DRIVE FRIENDLY

Can handle vehicular loads

TECHNICAL INFORMATION

Conforms to ASTM C936 Eligible for LEED v4.1 credits

		12 x 12	
	Bundle Type	SINGLE	
	Plant Produced	CHICAGO	
	Thickness (mm)	70 MM	
	Bundle	93.04	
		93.04	
SQFT PER	Layer Sections	11.03	
	Stone	0.97	
	Stone	0.57	
PER BUNDLE	Layers	8.00	
PER BUNDLE	Sections	-	
	0-5	4.00	
	SqFt Sections	1.02	
SOLDIER LNFT PER		- 11.81	
	Layer Bundle	94.49	
Bundle 94.4			
	SqFt	1.02	
SAILOR LNFT PER	Sections	-	
SAILOR LNFT PER	Layer	11.81	
	Bundle	94.49	
	0-5	1.03	
UNITS PER	SqFt Sections	1.03	
UNITSPER	Bundle	- 96.00	
	Bullule	90.00	
	Layer	389	
LBS PER	Sections	-	
	Bundle	3,114	
COLORS	Reflectance	Stock	
Charcoal	SR n/a SRI n/a	SO	
Red	SR n/a SRI n/a	SO	



CHARCOAL

RED



STANDARD 300 x 300 x 70mm 11% x 11% x 2 ¾ 96 units/Bundle .97 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY. All measurements are nominal. Contact Unilock for more information.

Anchorlock[™]



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES

CLASSIC Budget-friendly traditional product mix

DRIVE FRIENDLY

Can handle vehicular loads

TECHNICAL INFORMATION

Conforms to ASTM C936 Eligible for LEED v4.1 credits

LAYING PATTERN



Anchorlock A

		8 % x 8 %
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	80 MM
	Bundle	86.72
	Layer	10.84
SQFT PER	Sections	-
	Stone	0.41
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	-
	Sections	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	-
	Sections	-
SAILOR LNFT PER	Layer	-
	Bundle	-
	SqFt	2.46
UNITS PER	Sections	-
	Bundle	213.36
	Layer	374
LBS PER	Sections	-
	Bundle	2,991
COLORS	Reflectance	Stock



NATURAL



STANDARD 225 x 225 x 80mm 8 % x 8 % x 3 % 213.36 units/Bundle .41 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY. 1/3 stones incorporated in each bundle; 16 pieces per bundle. The 1/3 stone is not shown. Product is optimized for mechanical installation. All measurements are nominal. Contact Unilock for more information.

Arcana™



APPLICATIONS



APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 0 mm

. . .

TECHNOLOGIES

ENDURACOLOR™ Refined surface and long-lasting color

EASYCLEAN^M

Factory sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits



AVORIO





MODENA

Single Units



12 x 24

301 x 606 x 50mm

117/8 x 237/8 x 2"

18 units/Bundle

2 Sq.Ft./Stone

CLER A	2.00	1	13-2	-
				100
	hole	14		2
/IVAN	ГО			

4 24 x 24	18 x 24	12 x 24		
E SINGLE	SINGLE	SINGLE	Bundle Type	
CHICAGO	CHICAGO	CHICAGO	Plant Produced	
M 50 MN	50 MM	50 MM	Thickness (mm)	
0 72.00	54.00	36.00	Bundle	
0 8.00	6.00	4.00	Layer	SQFT PER
-	-	-	Sections	SUFIPER
0 4.00	3.00	2.00	Stone	
9.00	9.00	9.00	Layers	
-	-	-	Sections	PER BUNDLE
0 0.50	0.50	0.49	SqFt	
-	-	-	Sections	
7 3.98	2.97	1.98	Layer	SOLDIER LNFT PER
5 35.79	26.75	17.78	Bundle	
6 0.50	0.66	0.99	SqFt	
-	-	-	Sections	
8 3.98	3.98	3.98	Layer	SAILOR LNFT PER
9 35.79	35.79	35.79	Bundle	
3 0.2	0.33	0.50	SqFt	
-	-	-	Sections	UNITS PER
0 18.00	18.00	18.00	Bundle	
4 192	144	96	Layer	
-	-	-	Sections	LBS PER
6 1,728	1,296	864	Bundle	
k Stocl	Stock	Stock	Reflectance	COLORS
/ .	1	1	SR .56 SRI 66	Avorio
/ .	1	1	SR n/a SRI 34	Corvara
/	1	1	SR .56 SRI 66	COLORS Avorio Corvara

LAYING PATTERNS

Modena

Vivanto







1

1

1

1



1

1

X & T Slab Spacers Bagged Separately (see page 86)

Arcana Random A

Arcana Random C

453 x 606 x 50mm

17 1/8 x 23 1/8 x 2"

18 units/Bundle

3 Sq.Ft./Stone

SR n/a SRI 53

SR n/a SRI 16

Arcana Random F



Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Unilock recommends installing Arcana using X & T Slab Spacers. Please see page 86. Contact Unilock for more information.

18 x 24

UNILOCK 06

ENDURACOLOR[®]

Artline[™] II Campo[®] Finish

ENDURACOLOR[®]

RANDOM

CHICAGO

70 MM

93.25

11.66

-

-

8.00

-

-

-

-

-

-

-

-

-

-

.

192.00

370

Stock

1

1

-2,963

Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Stone

Layers

SqFt

Layer

Bundle

SqFt

Layer

Bundle

SqFt

Sections

Bundle

Layer

Sections

Reflectance

SR n/a SRI n/a

SR n/a SRI n/a

Bundle

Sections

Sections

Sections

Sections

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS

Bavarian Blend

Granite Blend



APPLICATIONS

125	-	
<u>~</u>	E.	lanayque

APPEARANCE

Edge Detail - Micro Surface Texture - II Campo Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR™ Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERN



Artline Random A



BAVARIAN BLEND



GRANITE BLEND





UNIT E 187.5 x 225 x 70mm 7½ x 8% x 2¾" 32 units/Bundle .45 Sq.Ft./Stone

UNIT A

125 x 169 x 70mm

4 ½ x 6 ¾ x 2 ¾"

32 units/Bundle

.23 Sq.Ft./Stone



32 units/Bundle .35 Sq.Ft./Stone



UNIT F

.69 Sq.Ft./Stone

UNIT G 187.5 x 450 x 70mm 71/2 x 173/4 x 23/4" 16 units/Bundle .91 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.
--

7 Unit Random Bundle

Artline[™] Smooth Finish

ENDURACOLOR[®]



APPLICATIONS



APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™ Refined surface and long-lasting color

EASYCLEAN™ 🕞 Factory sealed to provide integral stain resistance

COMFORT STEP 🥖 Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	Bundle Type	RANDOM
	Plant Produced	MARENGO
	Thickness (mm)	70 MM
	Bundle	93.25
	Layer	11.66
SQFT PER	Sections	
	Stone	
	Layers	8.00
PER BUNDLE	Sections	
	SqFt	
	Sections	
SOLDIER LNFT PER	Layer	
	Bundle	
	SqFt	
SAILOR LNFT PER	Section	
SAILOR LNFT PER	Layer	
	Bundle	
	SqFt	
UNITS PER	Sections	
	Bundle	192.00
	Layer	370
LBS PER	Sections	
	Bundle	2,963
COLORS	Reflectance	Stock
Bavarian Blend	SR n/a SRI n/a	~
Fossil	SR n/a SRI 21	/

SR n/a SRI 32

.69 Sq.Ft./Stone

LAYING PATTERN



Steel Mountain

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

.45 Sq.Ft./Stone

.61 Sq.Ft./Stone

.45 Sq.Ft./Stone

.91 Sq.Ft./Stone

1

Artline[™] Umbriano[®] Finish

ENDURACOLOR



APPLICATIONS



APPEARANCE

Edge Detail - Micro Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™ Refined surface and long-lasting color

EASYCLEAN™ → Factory sealed to provide integral stain resistance

COLORFUSION™ Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	Bundle Type	RANDOM
	Plant Produced	MARENGO
	Thickness (mm)	70 MM
	Bundle	93.25
	Layer	11.66
SQFT PER	Sections	-
	Stone	-
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	-
	Sections	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	-
	Sections	-
SAILOR LNFT PER	Layer	-
	Bundle	-
	SqFt	-
UNITS PER	Sections	-
	Bundle	192.00
	Layer	373
LBS PER	Sections	-
	Bundle	2,986
COLORS	Reflectance	Stock
French Grey	SR .18 SRI 17	1
Midnight Sky	SR .17 SRI 15	1

LAYING PATTERN



Artline Random A



FRENCH GREY MIDNIGHT SKY



WINTER MARVEL

Winter Marvel



SR .35 SRI 38

UNIT A 125 x 169 x 70mm 4% x 6% x 2%" 32 units/Bundle .23 Sq.Ft./Stone

UNIT B 125 x 262.5 x 70mm 4 % x 10 % x 2 ¾" 32 units/Bundle .35 Sq.Ft./Stone

1



UNIT D 125 x 450 x 70mm 4 % x 17 ¾ x 2 ¾" 32 units/Bundle .61 Sq.Ft./Stone

UNIT E 187.5 x 225 x 70mm 7½ x 8⅔ x 2¾" 32 units/Bundle .45 Sq.Ft./Stone



UNIT G 187.5 x 450 x 70mm 7¹/₂ x 17³/₄ x 2³/₄" 16 units/Bundle .91 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Beacon Hill[™] Flagstone 60mm

ENDURACOLOR

RANDOM

MARENGO

60 MM

116.57

11.66

10.00

.

-

-

-

.

-

-

_

-

-

80.00

322

3,221

Stock

1

1

1

1

0.80

9.35

93.50

Bundle Type

Plant Produced Thickness (mm)

Bundle

Layer

Section

Stone

Layers

Sections

SqFt

Section

Layer

Bundle

SqFt

Section

Layer

Bundle

SqFt

Section

Bundle

Layer

Section Bundle

Reflectance

SR n/a SRI n/a

SR n/a SRI n/a

SR n/a SRI n/a

SR n/a SRI n/a

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS

Bavarian

Fossil

Alpine Grey

XL UNIT

SINGLE

60 MM

116.57

11.66

.

5.83

10.00

-

0.32

3.74

37.40

0.53

6.23

62.30

0.17

20.00

324

3,241

Stock

1

1

1

_

-

-

MARENGO



APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 3 mm


TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



BeaconHill Fixed

BeaconHill Fixed Random A




ALPINE GREY

Unit Random Bundle

ю

Random B

BAVARIAN







SQUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone



WALNUT

30 units/Bundle .69 Sq.Ft./Stone



XL UNIT 950 x 570 x 60mm 371/2 x 221/2 x 23/8" 20 units/Bundle 5.83 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements	
are nominal. Contact Unilock for more information	

10	'JNILOCK'

LARGE RECTANGLE

380 x 570 x 60mm 15 x 22 ¹/₂ x 2 ³/₈"

20 Units/Bundle

2.08 SqFt/Stone

1								
1								
	Be	ea	СС	n	Hi		Mι	J
	Ra	'n	dr	۱m	٦ ſ	`		





Single Unit

Beacon Hill[™] Flagstone 80mm

ENDURACOLOR

RANDOM

MARENGO 80 MM

> 81.60 11.66

> > -

-

7.00

-

-

-

-

-

-

-

-

56.00

426

2,979

Stock

1

1

1

.

0.80

9.35

65.45

Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Section

Stone

Layers

SqFt

Section

Layer

Bundle

SqFt

Section

Layer

Bundle

SqFt

Section

Bundle

Layer

Section

Bundle

Reflectance

SR n/a SRI n/a

SR n/a SRI n/a

SR n/a SRI n/a

Sections

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS Bavarian

Fossil

Walnut



APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 3 mm


TECHNOLOGIES ENDURACOLOR™


Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS





BeaconHill Fixed Random A BeaconHill Fixed Random B





BAVARIAN

FOSSIL





LARGE RECTANGLE 380 x 570 x 80mm 15 x 22 ½ x 3½" 14 Units/Bundle 2.08 SqFt/Stone



SQUARE 380 x 380 x 80mm 15 x 15 x 31%" 21 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 80mm 15 x 7½ x 3½" 21 units/Bundle .69 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Beacon Hill[™] Smooth 60mm



APPLICATIONS

APPEARANCE Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 3 mm


TECHNOLOGIES ENDURACOLOR™ Refined surface and long-lasti

EASYCLEAN™ [→] (Champagne and Opal) Factory sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



BeaconHill Fixed Random A



BeaconHill Fixed Random B



380 x 570 x 60mm 380 x 380 x 60mm 15 x 22 ¹/₂ x 2 ³/₈" 15 x 15 x 2 3/8" 30 units/Bundle 20 Units/Bundle 2.08 SqFt/Stone 1.39 Sq.Ft./Stone

380 x 190 x 60mm 15 x 7¹/₂ x 2³/₈" 30 units/Bundle .69 Sq.Ft./Stone

380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 150 Units/Bundle .78 Sq.Ft./Stone

950 x 570 x 60mm 371/2 x 221/2 x 23/8" 20 units/Bundle 5.83 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

		0000000
		Stone
		Layers
	PER BUNDLE	Sections
		SqFt
		Sections
	SOLDIER LNFT PER	Layer
		Bundle
		SqFt
	SAILOR LNFT PER	Sections
	SAILOR LIFT PER	Layer
		Bundle
ing color		SqFt

0057 050	Layer	11.66	11.66	11.66
SQFT PER	Sections	-	-	-
	Stone	-	0.78	5.83
	Layers	10.00	10.00	10.00
PER BUNDLE	Sections	-	-	-
	SqFt	-	0.80	0.32
	Sections	-	-	-
SOLDIER LNFT PER	Layer	-	9.35	3.74
	Bundle	-	93.50	37.40
	SqFt	0.80	1.60	0.53
SAILOR LNFT PER	Sections	-	-	-
SAILOR LNFT PER	Layer	9.35	18.70	6.23
	Bundle	93.50	187.01	62.30
	SqFt	-	1.29	0.17
UNITS PER	Sections	-	-	-
		80.00	150.00	20.00
	Bundle	00.00		
	Bundle	322	315	325
LBS PER			315	325
LBS PER	Layer	322	315 - 3,150	325 - 3,249
LBS PER COLORS	Layer Sections	322	-	-
	Layer Sections Bundle	322 - 3,216	- 3,150	- 3,249
COLORS	Layer Sections Bundle Reflectance	322 - 3,216 Stock	3,150 Stock	- 3,249 Stock
COLORS Bavarian	Layer Sections Bundle Reflectance SR n/a SRI n/a	322 - 3,216 Stock	- 3,150 Stock	- 3,249 Stock
COLORS Bavarian Dark Charcoal	Layer Sections Bundle Reflectance SR n/a SRI n/a SR n/a SRI n/a	322 - 3,216 Stock -	- 3,150 Stock ✓	- 3,249 Stock ✓
COLORS Bavarian Dark Charcoal Fossil	Layer Sections Bundle Reflectance SR n/a SRI n/a SR n/a SRI n/a SR .22 SRI 21	322 - 3,216 Stock - -	- 3,150 Stock / /	- 3,249 Stock - -
COLORS Bavarian Dark Charcoal Fossil Granite Fusion	Layer Sections Bundle Reflectance SR n/a SRI n/a SR n/a SRI n/a SR .22 SRI 21 SR .28 SRI 29	322 - 3,216 Stock - - -	- 3,150 Stock / /	- 3,249 Stock / - - /

XL UNIT

SINGLE

60 MM

116.57

MARENGO

SMALL RECTANGLE

SINGLE

60 MM

116.57

MARENGO

RANDOM

60 MM

116.57

MARENGO

Bundle Type

Plant Produced Thickness (mm)

Bundle

m

Beacon Hill[™] Smooth 80mm

ENDURACOLOR



APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™ Refined surface and long-lasting color

EASYCLEAN™ () (Opal Only) Factory sealed to provide integral stain resistance


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	Bundle Type	RANDON
	Plant Produced	MARENGO
	Thickness (mm)	80 MN
	Bundle	81.6
	Layer	11.6
SQFT PER	Section	
	Stone	
	Layers	7.0
PER BUNDLE	Sections	
	1	
	SqFt	
SOLDIER LNFT PER	Section	
	Layer	
	Bundle	
	SqFt	0.8
	Section	
SAILOR LNFT PER	Layer	9.3
	Bundle	65.4
	SqFt	
UNITS PER	Section	
	Bundle	56.0
	Layer	42
LBS PER	Section	
	Bundle	2,98
COLORS	Reflectance	Stoc
- COLONG		3.00

COLORS	Reflectance	Stock
Bavarian	SR .22 SRI 21	 ✓
Fossil	SR .28 SRI 29	SO
Granite Fusion	SR .28 SRI 29	<i>✓</i>
Opal Blend 던	SR .28 SRI 29	SO

LAYING PATTERNS



BeaconHill Fixed Random A



BeaconHill Fixed Random B





FOSSIL







OPAL BLEND



ю

LARGE RECTANGLE 380 x 570 x 80mm 15 x 22 ½ x 3 ⅓" 14 Units/Bundle 2.08 SqFt/Stone



BAVARIAN

SQUARE 380 x 380 x 80mm 15 x 15 x 3 ½" 21 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 80mm 15 x 7½ x 3½" 21 units/Bundle .69 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Bristol Valley[®] 60mm



APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™ Refined surface and long-lasting color

EASYCLEANTM Factory sealed to provide integral stain resistance

COMFORT STEP 🥖 Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


	Bundle	116.57	
	Layer	11.66	
SQFT PER	Section	-	
	Stone	-	
		10.00	
PER BUNDLE	Layers	10.00	
	Sections	-	
	SqFt	-	
	Section	-	
SOLDIER LNFT PER	Layer	-	
	Bundle	-	
	SqFt	0.80	
	Section		
SAILOR LNFT PER		-	
	Layer	9.35	
	Bundle	93.50	
	SqFt	-	
UNITS PER	Section	-	
	Bundle	80.00	
	Layer	330	
LBS PER	Section	-	
	Bundle	3,302	
COLORS	Reflectance	Stock	

Bundle Type

Plant Produced Thickness (mm)

COLORS	Reflectance	Stock	Stock
Bavarian	SR n/a SRI n/a	1	1
Fossil	SR n/a SRI n/a	1	1
Steel Mountain	SR n/a SRI n/a	1	1
Walnut	SR n/a SRI n/a	1	-

LAYING PATTERNS



Bristol Valley Random A Bristol Valley Random B





SOUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone









BAVARIAN

SMALL RECTANGLE

380 x 190 x 60mm

15 x 7 1/2 x 2 3/8"

30 units/Bundle

.69 Sq.Ft./Stone

FOSSIL

Single Unit

STEEL MOUNTAIN

WALNUT

XL UNIT 950 x 570 x 60mm 371/2 x 221/2 x 23/8" 20 units/Bundle

5.83 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

ENDURACOLOR

RANDOM

MARENGO

60 MM

XL UNIT

SINGLE

60 MM

116.57 11.66 . 5.83 10.00

-

0.32

3.74

37.40

0.53 -

6.23

62.30

0.17

20.00

321

. 3,210

-

MARENGO

Bristol Valley[®] 80mm

ENDURACOLOR

Bundle Type Plant Produced

Thickness (mm)

Bundle

Sections

Layer

Stone

Layers

SqFt

Sections

RANDOM

MARENGO

80 MM

81.60 11.66

-

-

-

-

-

-

-

_

-

-

56.00

418

2,925

Stock

1

S0

1

.

0.80

9.35

65.45

7.00



APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™ Refined surface and long-lasting color


EASYCLEAN™ → Factory sealed to provide integral stain resistance

COMFORT STEP Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Bristol Valley Random A Bristol Valley Random B




THEFT
LARGE RECTANGL

LARGE RECTANGLE 380 x 570 x 80mm 15 x 22 ½ x 3 ½" 14 Units/Bundle 2.08 SqFt/Stone



SQUARE 380 x 380 x 80mm 15 x 15 x 3 1/8" 21 units/Bundle 1.39 Sq.Ft./Stone

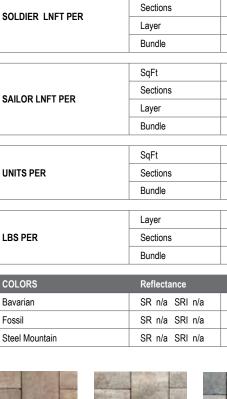



SQFT PER

PER BUNDLE





STEEL MOUNTAIN



BAVARIAN

SMALL RECTANGLE 380 x 190 x 80mm 15 x 7 ½ x 3 ½" 21 units/Bundle 69 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Brussels Block°

CLASSIC

XL

SINGLE

70 MM

95.70

9.57

31.90

0.80

10.00

3.00

0.86

27.30

8.19

81.89

1.43

45.67

13.70

137.01

1.25

40.00

120.00

311

1,037

3,112

Stock

1

1

1

1

HALF

SINGLE

70 MM

88.70

11.09

12.67

0.20

8.00

7.00

1.72

21.84

19.11

152.86

2.87

36.33

31.78

254.28

5.05

64.00

448.00

358

409

2,865

Stock

1

1

1

1

Bundle Type

Plant Produced Thickness (mm)

Bundle

Layer

Stone

Layers

SqFt

Layer

Bundle

SqFt

Layer

Bundle

SqFt

Sections

Bundle

Layer

Sections

Bundle

Reflectance

SR .28 SRI 29

SR n/a SRI 34

SR .41 SRI 46

SR n/a SRI n/a

Sections

Sections

Sections

Sections

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS

Limestone

Sandstone

River

Sierra

STANDARD

ELKHORN / CHICAGO

SINGLE

70 MM

94.91

11.86

15.82

0.40

8.00

6.00

1.44

22.70

17.03

136.22

1.73

27.30

20.47

163.78

2.53

40.00

240.00

389

518

3,110

Stock

1

1

1

1

SIERRA



APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Weathered Joint Spacing - 2 mm

TECHNOLOGIES

CLASSIC Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS





Brussels Multi-Unit

Random AD

Brussels Multi-Unit Random AC



Brussels Multi-Unit Random AE



HALF 104 x 173 x 70mm 4 x 6 ⅔ x 2 ¾ 448 units/Bundle .20 Sq.Ft./Stone



LIMESTONE

STANDARD 173 x 208 x 70mm 6% x 8¼ x 2¾" 240 units/Bundle .40 Sq.Ft./Stone

RIVER



XL 208 x 348 x 70mm 8 ¼ x 13 ¾ x 2 ¾" 120 units/Bundle .80 Sq.Ft./Stone

Notes: Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Copthorne®





APPLICATIONS



APPEARANCE Surface Texture - Textured

Joint Spacing - 3 mm

TECHNOLOGIES

ELEGANCE™ Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

REALA™ Cast from historic street pavers

ULTIMA™

Up to 4x stronger than poured-in-place concrete

EASYCLEAN^M 🕑

Factory sealed to provide integral stain resistance


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	Bundle Type	SINGLE
	Plant Produced	AYR
	Thickness (mm)	60 MM
	Bundle	89.20
	Layer	11.15
SQFT PER	Sections	-
	Stone	0.15
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	1.43
	Sections	-
SOLDIER LNFT PER	Layer	15.99
	Bundle	127.95
	SqFt	4.41
	Sections	
SAILOR LNFT PER	Layer	49.21
	Bundle	393.70
	SqFt	6.73
UNITS PER	Sections	-
	Bundle	600.00
	Layer	294
LBS PER	Sections	
	Bundle	2,349
COLORS	Reflectance	Stock
Arctic Grey	SR 49 SRI 57	1
Basalt	SR n/a SRI n/a	1
Burgundy Red	SR n/a SRI 38	1
Burnt Clay	SR n/a SRI 40	1
Old Oak	SR n/a SRI 41	1

LAYING PATTERNS









Steel Blue



SR n/a SRI n/a





1

Copthorne BW A

Copthorne RB C

ARCTIC GREY BASALT BURGUNDY RED

BURNT CLAY

OLD OAK



STANDARD 65 x 200 x 60mm 25/8 x 7 7/8 x 2 3/8" 600 Units/Bundle .15 SqFt/Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 90. Contact Unilock for more information.

Courtstone®





APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 15 mm

TECHNOLOGIES ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

REALA™ Cast from European cobblestones

ULTIMA™

Up to 4x stronger than poured-in-place concrete

EASYCLEAN™ Factory sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	Bundle Type	RANDOM
	Plant Produced	AYF
	Thickness (mm)	60 MN
	Bundle	98.3
	Layer	12.2
SQFT PER	Sections	
	Stone	
	Layers	8.0
PER BUNDLE	Sections	
	SqFt	
	Sections	
SOLDIER LNFT PER	Layer	
	Bundle	
	SqFt	2.2
SAILOR LNFT PER	Sections	
SAILOR LNFT PER	Layer	27.6
	Bundle	221.5
	SqFt	
UNITS PER	Sections	
	Bundle	384.0
	Layer	29
LBS PER	Sections	
	Bundle	2,32
COLORS	Reflectance	Stoc
Basalt	SR n/a SRI n/a	

LAYING PATTERNS



Courtstone Fixed Random A



BASALT





LARGE RECTANGLE 185 x 130 x 60mm 7⅔ x 5 x 2⅔" 64 Units/Bundle .28 SqFt/Stone



RECTANGLE 165 x 130 x 60mm 61/2 x 5 x 23/8" 64 Units/Bundle .23 SqFt/Stone



SMALL RECTANGLE 145 x 130 x 60mm 5 x 5 ¾ x 2 ¾" 64 Units/Bundle .20 SqFt/Stone



SQUARE 130 x 130 x 60mm 5 x 5 x 2 3%" 64 Units/Bundle .18 SqFt/Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 90. Contact Unilock for more information.

Eco-Line[®]

CLASSIC / ENDURACOLOR

RANDOM

55.17

11.03

-

-

-

-

-

-

-

-

-

-

-

-

160.00

513

2,564

Stock

S0

5.00

MULTI-PLANT 100 MM

Bundle Type

Plant Produced

Thickness (mm)

Bundle Layer

Sections

Stone

Layers

Sections

Sections

SqFt

Layer

Bundle

SqFt

Layer

Bundle

SqFt

Layer

Sections

Bundle

Please contact your local Sales Representative for color options.

Reflectance

SR n/a SRI n/a

Sections Bundle

Sections

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS

Custom Colors & Finishes



APPLICATIONS



APPEARANCE

Edge Detail - Micro Surface Texture - Custom (see below) Umbriano Mottled / II Campo Brushed Joint Spacing - 6.25 mm Void - 5.80%

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™ Refined surface and long-lasting color

EASYCLEAN[™] 😈 (Umbriano) Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Ecoline Fixed Random A











Mottled Finish with/ ColorFusion and EasyClean

UNIT A

357 x 84 x 100mm

20 Units/Bundle

.32 SqFt/Stone

14 x 3 3/8 x 3 7/8"

UNIT B

317 x 84 x 100mm

12 1/2 x 3 3/8 x 3 7/8"

20 Units/Bundle

.29 SgFt/Stone

Bundle

Random

Unit

ω



Thrumix Finish





SMOOTH Premier Finish





UNIT C UNIT D 277 x 84 x 100mm 237 x 84 x 100mm 10 1 x 3 x 3 x 3 % 9 3/8 x 3 3/8 x 3 7/8" 20 Units/Bundle 20 Units/Bundle

.25 SqFt/Stone

UNIT E 357 x 114 x 100mm 14 x 4 ½ x 3 %" 20 Units/Bundle .44 SqFt/Stone

UNIT F 317 x 114 x 100mm 12 1/2 x 4 1/2 x 3 7/8" 20 Units/Bundle .39 SqFt/Stone

UNIT G 277 x 114 x 100mm 10 ⁷/₈ x 4 ¹/₂ x 3 ⁷/₈" 20 Units/Bundle .34 SqFt/Stone

UNIT H 237 x 114 x 100mm 9 ³/₈ x 4 ¹/₂ x 3 ⁷/₈" 20 Units/Bundle .29 SqFt/Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SoLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Please note that weights are only estimated as custom finishes will alter bundle weight. Contact Unilock for more information.

.21 SqFt/Stone

SPECIAL ORDER PRODUCT - NON - STOCK

Eco-Optiloc[™] 《

CLASSIC / ENDURACOLOR



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer Surface Texture - Custom (see below) Umbriano Mottled / II Campo Brushed Joint Spacing - 7mm Void - 7.3%

TECHNOLOGIES PERMEABLE Can be installed to allow water to flow through

ENDURACOLOR™ Refined surface and long-lasting color

EASYCLEANTM 🕑 (Umbriano) Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



EcoOptiloc Cluster A



STANDARD 250 x 250 x 80mm 9 7/8 x 9 7/8 x 3 1/8" 168 Units/Bundle .50 SqFt/Stone

surfaces. All measurements are nominal. Please note that weights are only estimated as custom finishes will alter bundle weight. Contact Unilock for more information.

		ALL FINISHES
	Bundle Type	SINGLE
	Plant Produced	MULTI-PLANT
	Thickness (mm)	80 MM
	Bundle	84.80
	Layer	10.60
SQFT PER	Sections	
	Stone	0.50
	Layers	8.00
PER BUNDLE	Sections	
	Sections	-
	SqFt	-
	Sections	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	-
	Sections	-
SAILOR LNFT PER	Layer	-
	Bundle	-
	SqFt	1.98
UNITS PER	Sections	-
	Bundle	168.00
	Layer	358
LBS PER	Sections	-
	Bundle	2,860
COLORS	Reflectance	Stock
Custom Colors & Finishes	SR n/a SRI n/a	
Custom Colors & Finishes	or ii/a or iii/a	SC

Please contact your local Sales Representative for color options.











UMBRIAN0® Mottled Finish with/ ColorFusion and EasyClean

CLASSIC Thrumix Finish IL CAMPO® **Brushed Finish**

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured

SERIES™ **Exposed Granite Finish**

SMOOTH Premier Finish



UNILOCK 20

Eco-Priora[™] ⊘



APPLICATIONS -

APPEARANCE

Edge Detail - Micro Surface Texture - Smooth / Custom (see below) Umbriano Mottled / II Campo Brushed Joint Spacing - 7mm Void - 4.6-7.08%

TECHNOLOGIES

CLASSIC Budget-friendly traditional product mix

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™ Refined surface and long-lasting color

EASYCLEAN™ 💽 (Umbriano) Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS

See laying patterns on page 92.

		CLASSIC	ENDURACOLOR
	Bundle Type	SINGLE	SINGLE
	Plant Produced	MULTI-PLANT	MULTI-PLANT
	Thickness (mm)	80 MM	80 MM
	Bundle	75.95	75.95
	Layer	10.85	10.85
SQFT PER	Section	-	-
	Stone	0.31	0.31
	Layers	7.00	7.00
PER BUNDLE	Sections	-	-
	SqFt	1.27	1.27
	Section	-	-
SOLDIER LNFT PER	Layer	13.78	13.78
	Bundle	96.46	96.46
	SqFt	2.54	2.54
SAILOR LNFT PER	Section	-	-
SAILOR LNFT PER	Layer	27.56	27.56
	Bundle	192.91	192.91
	SqFt	3.23	3.23
UNITS PER	Section	-	-
	Bundle	245.00	245.00
	Layer	381	388
LBS PER	Section	-	-
	Bundle	2,669	2,717
COLORS	Reflectance	Stock	Stock
Granite	SR .26 SRI 27	-	1
River	SR .32 SRI 34	1	-
Sierra	SR n/a SRI n/a	1	-
Custom Colors & Finishes	SR n/a SRI n/a	SO	SO
Please contact your local	Sales Representativ	ve for color options.	











CLASSIC Thrumix Finish

Brushed Finish

SERIES™ Exposed Granite Finish

SMOOTH Premier Finish

UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean



RECTANGLE 120 x 240 x 80mm 4³⁄₄ x 9¹⁄₂ x 3 ¹⁄₈" 245 units/Bundle .31 Sq.Ft./Stone



IL CAMPO®

RECTANGLE 120 x 240 x 80mm 4³/₄ x 9¹/₂ x 3 ¹/₈" 217 units/Bundle



Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Please note that weights are only estimated as custom finishes will alter bundle weight. Contact Unilock for more information.

Herringbone Bundle

SPECIAL ORDER PRODUCT - NON - STOCK

UNILOCK 21

CLASSIC / ENDURACOLOR

Eco-Promenade[®] 🖉

CLASSIC / ENDURACOLOR

ALL FINISHES



APPLICATIONS



APPEARANCE

Edge Detail - Micro Surface Texture - Custom (see below) Umbriano Mottled / II Campo Brushed Joint Spacing - 7 mm Void - 10.12 %

TECHNOLOGIES

CLASSIC Budget-friendly traditional product mix

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™ Refined surface and long-lasting color

EASYCLEAN™ 🔂 (Umbriano) Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



EcoPromenade 3x12 RB_A





EcoPromenade 3x12_DHB_B



CLASSIC

Single Unit

Thrumix Finish



SERIES™







UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean

IL CAMPO®

Brushed Finish

STANDARD 75 x 300 x 100mm 3 x 11 7⁄8 x 3 7⁄8" 264 units/Bundle .24 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SoLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Please note that weights are only estimated as custom finishes will alter bundle weight. Contact Unilock for more information.

	Bundle Type	SINGLE
	Plant Produced	MULTI-PLANT
	Thickness (mm)	100 MM
	Bundle	63.94
	Layer	10.66
SQFT PER	Section	
	Stone	0.24
	Layers	6.00
PER BUNDLE	Sections	-
	SqFt	1.02
	Section	-
SOLDIER LNFT PER	Layer	10.83
	Bundle	64.96
	SqFt	4.06
	Section	-
SAILOR LNFT PER	Layer	43.31
	Bundle	259.84
	SqFt	4.13
UNITS PER	Section	-
	Bundle	264.00
	Layer	465
LBS PER	Section	-
	Bundle	2,789
COLORS	Reflectance	Stock
Custom Colors & Finishes	SR n/a SRI n/a	SO

UNILOCK 22

Promenade EcoTerra[™]

ENDURACOLOR[®]



APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - n/a Void - n/a

TECHNOLOGIES **ENDURACOLOR™** Refined surface and long-lasting color

ECOTERRA®

Reduced carbon emissions and refined surface protection

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		4 x 12
	Bundle Type	SINGLE
	Plant Produced	ONTARIO
	Thickness (mm)	70 MM
	Bundle	93.04
	Layer	11.63
SQFT PER	Section	-
	Stone	0.32
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	1.02
	Section	-
SOLDIER LNFT PER	Layer	11.81
	Bundle	94.49
	SqFt	3.05
	Section	-
SAILOR LNFT PER	Layer	35.43
	Bundle	283.46
	SqFt	3.10
UNITS PER	Section	-
	Bundle	288.00
	Layer	393
LBS PER	Section	-
	Bundle	3,140
COLORS	Reflectance	Stock
Light Opal Blend	SR n/a SRI n/a	J
Light Steel Gray	SR n/a SRI n/a	J

LAYING PATTERNS



4x12 RB_A







LIGHT OPAL BLEND




Single Unit

4 x 12 100 x 300 x 70 mm 37/8 x 117/8 x 23/4 288 units/Bundle .32 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Granito™

ENDURACOLOR



APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Granito Textured Joint Spacing - 7 mm Void - n/a

TECHNOLOGIES ENDURACOLOR™ Refined surface and long-lasting color

Renned surface and long-lasting col

ARTISTA™ Boldly mottled color finish

EASYCLEAN™


Factory Sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		ENDURACOLOR	HE
	Bundle Type	RANDOM	SINGL
	Plant Produced	PICKERING	PICKERIN
	Thickness (mm)	60 MM	70 M
	Bundle	94.14	73.9
	Layer	10.46	9.2
SQFT PER	Section	-	
	Stone	-	2
	Layers	9.00	8.0
PER BUNDLE	Sections	-	
	SqFt	-	
	Section	-	
SOLDIER LNFT PER	Layer	-	
	Bundle	-	
	SqFt	0.85	
	Section	-	
SAILOR LNFT PER	Layer	8.86	
	Bundle	79.72	
	SqFt	-	0.3
UNITS PER	Section	-	
	Bundle	72.00	192.0
	Layer	287	306.2
LBS PER	Section	-	
	Bundle	2,583	2,45
COLORS	Reflectance	Stock	Stoc
Sabia	SR n/a SRI n/a	1	
Scuro	SR n/a SRI n/a	1	

LAYING PATTERNS





Granito Fixed Random_A Pattern Hex_A







SABIA

SCURO



Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



ENDURACOLOR

-



APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

TECHNOLOGIES PERMEABLE Can be installed to allow water to flow through

ENDURACOLOR™ Refined surface and long-lasting color

EASYCLEAN™ 🕑 Factory sealed to provide integral stain resistance

COLORFUSION™ Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



HexPaver A



205 x 205 x 60mm 8 x 8 x 2 3/8" 240 Units/Bundle .45 SqFt/Stone

		8 x 8	8 x 8
	Bundle Type	SINGLE	SINGLE
	Plant Produced	MARENGO	MARENGO
	Thickness (mm)	60 MM	70 MM
	Bundle	108.31	73.92
	Layer	10.83	9.24
SQFT PER	Section	-	-
	Stone	0.45	0.39
	Layers	10.00	8.00
PER BUNDLE	Sections	-	-
	SqFt	-	-
	Section	-	-
SOLDIER LNFT PER	Layer	-	-
	Bundle	-	-
	SqFt	-	-
SAILOR LNFT PER	Section	-	-
SAILOR LNFT PER	Layer	-	-
	Bundle	-	-
	SqFt	2.22	2.60
UNITS PER	Layer	24	24
	Bundle	240.00	192.00
	Layer	276	306
LBS PER	Section	-	-
	Bundle	2,762	2,450
COLORS	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	1	SO



SR .17 SRI 15

SR .35 SRI 38





S0

SO

1

1

FRENCH GREY

MIDNIGHT SKY

WINTER MARVEL



Midnight Sky

Winter Marvel

200 x 200 x 70mm 7 % x 7 % x 2 ¾ 192 Units/Bundle .39 SqFt/Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Hollandstone[™] 60mm

CLASSIC

4 x 8



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm


TECHNOLOGIES

CLASSIC Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



	_		Г
_			



Hollandstone 4x8 RB_B Hollandstone 4x8 HB_C Hollandstone 4x8 BW_D





AUTUMN RED

CHARCOAL

RIVER



Charcoal

River

Sierra

SIERRA



STANDARD 100 x 200 x 60mm 3 % x 7 % x 2 %" 540 units/Bundle .22 Sq.Ft./Stone

Notes: Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nomina	al. Contact Unilock for more information.

26	JNILOCK

	Bundle Type	SINGL
	Plant Produced	CHICAG
	Thickness (mm)	60 MM
	Bundle	118.0
SQFT PER	Layer	11.8
SUFTPER	Section	19.6
	Stone	0.2
	Layers	10.0
PER BUNDLE	Sections	6.0
	SqFt	1.5
	Section	29.5
SOLDIER LNFT PER	Layer	17.7
	Bundle	177.1
	SqFt	3.0
	Section	59.0
SAILOR LNFT PER	Layer	35.4
	Bundle	354.3
	SqFt	4.5
UNITS PER	Section	90.0
	Bundle	540.0
	Layer	32
LBS PER	Section	53
	Bundle	3,22
COLORS	Reflectance	Stoc
Autumn Red	SR n/a SRI n/a	
	1	1

SR .12 SRI 9

SR .32 SRI 34

SR n/a SRI n/a

1

1

1

Hollandstone[™] 80mm

Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Section

Stone

Layers

Sections

SqFt

Section

Layer

Bundle

SqFt

Section

Layer

Bundle

SqFt

Section

Bundle

Layer

Section Bundle

Reflectance

Please contact your local Sales Representative for color options.

SR n/a SRI n/a

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS

Custom Colors & Finishes

4 x 8

SINGLE

82.60

11.80

0.22

7.00

- 1.50

-

17.71

124.00

3.00

35.43

248.03

4.58

378.00

429

3,005

Stock

SO

_

MULTI-PLANT 80 MM HERRINGBONE

SINGLE MULTI-PLANT

80 MM

82.60

11.80

-

0.22

7.00

-

-

-

-

-

-

-

-

-

4.58

378.00

423

2,963

Stock

S0



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth / Series Exposed Umbriano Mottled / II Campo Brushed Joint Spacing - 3 mm

TECHNOLOGIES

CLASSIC Budget-friendly traditional product mix

PERMEABLE Can be installed to allow water to flow through

ENDURACOLOR™ Refined surface and long-lasting color

EASYCLEAN™ 🕑 (Umbriano°) Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano°)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Hollandstone 4x8 RB_B



STANDARD 100 x 200 x 80mm 3 % x 7 % x 3 %" 378 units/Bundle .22 Sq.Ft./Stone













UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean

CLASSIC Thrumix Finish

Herringbone Bundle IL CAMPO® Brushed Finish

RECTANGLE

100 x 200 x 80mm

350 Units/Bundle

3 1/8 x 7 1/8 x 3 1/8"

SERIES™ Exposed Granite Finish

SMOOTH Sinish Premier Fin

SMOOTH Premier Finish

> **SMALL UNIT** 100 x 200 x 80mm 3 ⅔ x 3 ⅔ x 3 ⅓"

56 Units/Bundle

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Please note that weights are only estimated as custom finishes will alter bundle weight. Contact Unilock for more information.

SPECIAL ORDER PRODUCT - NON - STOCK

Holland Premier[™]

ENDURACOLOR[®]



APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 3 mm


TECHNOLOGIES


ENDURACOLOR™ Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


LAYING PATTERNS





Holland Premier 4x8 RB_B





Holland Premier 4x8 BW_D

		4 x 8
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	60 MM
	Bundle	118.00
0057 050	Layer	11.80
SQFT PER	Section	-
	Stone	0.22
	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	1.50
	Section	
SOLDIER LNFT PER	Layer	17.72
	Bundle	177.17
	SqFt	3.00
	Section	
SAILOR LNFT PER	Layer	35.43
	Bundle	354.33
	SqFt	4.58
UNITS PER	Section	-
	Bundle	540.00
	Layer	327
LBS PER	Section	
	Bundle	3,270
COLORS	Reflectance	Stock
Charleston	SR n/a SRI 36	J
		1

COLORS	Kellecialice	SIUCK
Charleston	SR n/a SRI 36	✓
Dark Charcoal	SR n/a SRI n/a	1
Granite	SR n/a SRI n/a	✓
Heritage Brown	SR n/a SRI n/a	1
lvory	SR n/a SRI n/a	1
River	SR .22 SRI 19	1
Sierra	SR n/a SRI n/a	1





100 x 200 x 60mm $3\,\%$ x $7\,\%$ x $2\,\%$ " 540 units/Bundle .22 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

ENDURACOLOR[®]

Bundle Type

Plant Produced Thickness (mm)

Bundle

Layer

Section

Stone

Layers

SqFt

Section

Layer

SqFt

Section

Layer

Bundle

SqFt

Section

Bundle

Layer

Section

Bundle

Reflectance

SR n/a SRI n/a

SR n/a SRI n/a

SR n/a SRI 29

SR n/a SRI n/a

Bundle

Sections

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS Cocoa Brown

Dark Charcoal

Granite Fusion

Sable

SMOOTH

SINGLE CHICAGO

60 MM

111.60 11.16

> -0.16

10.00

1.27

14.17

141.73

5.08

56.69

566.92

6.45

. 720.00

306

3,062

Stock

1

1

1

1

-

-

Mattoni[™]



APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR™ Refined surface and long-lasting color

ANTIQUED[™] Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS






Mattoni RB_A

Mattoni HB_C







COCOA BROWN

Single Unit

DARK CHARCOAL



Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Natural Stone - Limestone Slabs



APPLICATIONS



APPEARANCE

Edge Detail - Sawn Edge Surface Texture - Riven


TECHNICAL INFORMATION

More information is available online.

		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 MM	22 MM	22 MM	22 MM
SQFT PER	Crate	180.00	186.00	160.00	180.00
JUFIFER	Units	2.00	3.00	4.00	6.00
UNITS PER	Crate	90.00	62.00	40.00	30.00
UNITS PER	SqFt	0.50	0.33	0.25	0.17
LBS PER	Unit	24	36	48	72
	Crate	2,149	2,221	1,910	2,149
COLORS	Reflectance	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	1	1	1	1

LAYING PATTERNS





Pattern 12x24 RB A Pattern 24x24 RB B Pattern Multi-Unit C



12 x 24 300 x 600 x 22mm 11 7⁄8 x 23 5⁄8 x 7⁄8" 2.0 Sq.Ft./Stone 90 units/Crate



18 x 24 450 x 600 x 22mm 17 ³⁄₄ x 23 ⁵⁄₈ x ⁷⁄₈" 3.0 Sq.Ft./Stone 62 units/Crate



24 x 24 600 x 600 x 22mm 23 5/8 x 23 5/8 x 7/8" 4.0 Sq.Ft./Stone 40 units/Crate



24 x 36 600 x 900 x 22mm 23 5/8 x 35 1/2 x 7/8" 6.0 Sq.Ft./Stone 30 units/Crate

Notes: SOLD IN FULL CRATES ONLY. Natural Stone is available for purchase by Unilock Authorized Dealers only. Unilock offers adjustable and stackable pedestal system; please contact your Territory Manager for pricing and availability. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone. Please see important notice on page 94 regarding installation practices. Important: Natural Stone is covered under Unilock's Transferable Lifetime Guarantee. All measurement are nominal. Product is not intended for vehicular applications.

Natural Stone - Limestone Steps, Coping and Pillar Cap



		48 x 12 ROCK FACED COPING	48 x 14 ROCK FACED COPING	24 x 24 ROCK FACED PILLAR CAP	28 x 28 ROCK FACED PILLAR CAP
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 MM	50 MM	64 MM	64 MM
UNITS PER	Crate	20.00	20.00	14.00	12.00
UNITSPER	SqFt	-	-	-	-
LBS PER	Unit	106	128	186	200
LB3 PER	Crate	2,122	2,552	2,606	2,402
COLORS	Reflectance	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	1	1	1	1

APPLICATIONS

APPEARANCE Edge Detail - Rock Faced Surface Texture - Riven


TECHNICAL INFORMATION

More information is available online.



BLACK RIVER

		48 x 16 STEP
	Bundle Type	SINGLE
	Thickness (mm)	150 MM
FCFT PER	Crate	32.00
LNFT PER	Crate	24.00
UNITS PER	Crate	6.00
LBS PER	Unit	421
	Crate	2,526
COLORS		Stock
Black River		1

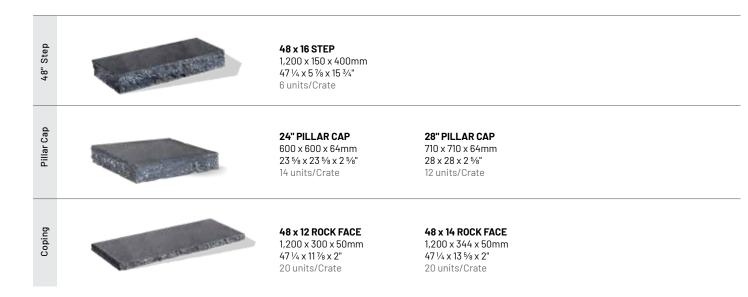

Notes: Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealers for natural stone. All measurements are nominal. Product is not intended for vehicular applications.

Natural Stone - Sandstone Slabs



APPLICATIONS



APPEARANCE

Edge Detail

Sawn Edge (Golden Sand, Greyfield and Ivory Sand) Rock Faced (Autumn Harvest and Stone Cliff Grey)


Surface Texture

Brushed (Golden Sand, Greyfield and Ivory Sand) Riven (Autumn Harvest and Stone Cliff Grey)

TECHNICAL INFORMATION

More information is available online.


LAYING PATTERNS




			-

NaturalStone 12x24 RB A

AUTUMN HARVEST



GOLDEN SAND








GREYFIELD

IVORY SAND

Stone Cliff Grey



STONE CLIFF GREY



Notes: SOLD IN FULL CRATES ONLY. This product is not intended for vehicular applications. Unilock offers adjustable pedestals. ** Product is only available to dealers. ** Please see important notice on page 94 regarding installation practices. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 MM	22 MM	22 MM	22 MM
SQFT PER	Crate	180.00	186.00	160.00	180.00
JUITEN	Units	2.00	3.00	4.00	6.00
UNITS PER	Crate	90.00	62.00	40.00	30.00
UNITSPER	SqFt	0.50	0.33	0.25	0.17
LBS PER	Unit	24	36	48	72
LDS FER	Crate	2,149	2,221	1,910	2,149
COLORS	Reflectance	Stock	Stock	Stock	Stock
Autumn Harvest	SR n/a SRI n/a	1	1	1	1
Golden Sand	SR n/a SRI n/a	1	1	1	1
Greyfield	SR n/a SRI n/a	1	1	1	1
Ivory Sand	SR n/a SRI n/a	1	1	1	1

1

SR n/a SRI n/a

32 **UNILOCK**

1

1

1

Natural Stone - Sandstone Steps, Coping and Pillar Cap



APPLICATIONS



APPEARANCE Edge Detail - Rock Faced

Surface Texture Brushed (Golden Sand, Greyfield and Ivory Sand) Riven (Stone Cliff Grey)

TECHNICAL INFORMATION

More information is available online.

		UNITS PER		Crate Unit Crate	6.00 421 2,526	
			COLORS			Stock
		48 x 12 4' FULLNOSE	48 x 12 4' ROCK FACED	48 x 14 4' ROCK FACED	24 x 24	SO 28 x 28
	Bundle Type	COPING SINGLE	COPING	COPING	PILLAR CAP SINGLE	PILLAR CAP SINGLE
	Thickness (mm)	50 MM	50 MM	50 MM	65 MM	65 MM
UNITS PER	Crate SqFt	20.00	20.00	20.00	14.00	12.00
LBS PER	Unit	106	106	128	186	200
LDJFLK	Crate	2,116	2,122	2,552	2,606	2,402
COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Golden Sand	SR n/a SRI n/a	1	1	-	SO	S 0
Greyfield	SR n/a SRI n/a	1	1	-	-	-
Ivory Sand	SR n/a SRI n/a	1	1	-	1	SO
Stone Cliff Grey	SR n/a SRI n/a	1	1	1	1	1

Pillar Caps

FCFT PER

LNFT PER





GREYFIELD





STONE CLIFF GREY



24 x 24 PILLAR CAP 600 x 600 x 65mm 23 5/8 x 23 5/8 x 2 5/8" 14 units/Crate



48 x 16 STEP

SINGLE 150 MM

32.00

24.00

Bundle Type

Thickness (mm)

Crate

Crate

28 x 28 PILLAR CAP 725 x 725 x 65mm 28 5/8 x 28 5/8 x 2 5/8" 12 units/Crate



ENDURACOLOR

Nordic Cobble[™] 《



APPLICATIONS



APPEARANCE Edge Detail - Zero

Surface Texture - Textured

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through


ENDURACOLOR™ Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS





NordicCobble_Circle

NordicCobble_A





DARK CHARCOAL

GRANITE FUSION



STANDARD 89.9 x 94 x 60mm 3 5% x 3 34 x 2 3%" 1,080 units/Bundle .09 Sq.Ft./Stone

OPAL

		PREMIER
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	60 MM
	Bundle	98.25
SQFT PER	Layer	9.83
	Section	-
	Stone	0.09
	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	3.39
SOLDIER LNFT PER	Section	
	Layer	33.31
	Bundle	333.07
	SqFt	-
	Section	
SAILOR LNFT PER	Layer	-
	Bundle	-
	SqFt	10.99
UNITS PER	Section	
	Bundle	1,080
	Layer	230.00
LBS PER	Section	
	Bundle	2,300
COLORS	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	1

COLORS	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Opal	SR n/a SRI n/a	✓

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Optiloc[®]

CLASSIC / ENDURACOLOR

Bundle Type Plant Produced ALL FINISHES SINGLE

MULTI-PLANT



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer Surface Texture - Custom (see below) Umbriano Mottled / II Campo Brushed Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™ Refined surface and long-lasting color


EASYCLEAN™ () (Umbriano) Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano) Subtly mottled color finish

TECHNICAL INFORMATION Conforms to ASTM C 936

Eligible for LEED v4.1 credits


LAYING PATTERNS



Optiloc A



Optiloc B

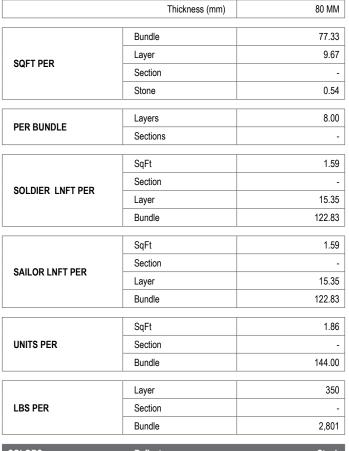

COLORS Reflectance Stock Custom Colors & Finishes SR n/a SO

Please contact your local Sales Representative for color options.











CLASSIC Thrumix Finish IL CAMPO® Brushed Finish SERIES™ Exposed Granite Finish

SMOOTH ish Premier Finish UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean



STANDARD 260 x 260 x 80mm 10 ¼ x 10 ¼ x 3 ½" 144 units/Bundle .54 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Please note that weights are only estimated as custom finishes will alter bundle weight. Contact Unilock for more information.

Porcelain





APPLICATIONS

1. 1. 1. 1



APPEARANCE

Surface Texture - Stone Finish

TECHNICAL INFORMATION

More information is available online.

LAYING PATTERNS





Porcelain 24x24 RB_A





CHAMONIX BIANCO



Single Units



GOTHAM GREY



NEW ENGLAND IVORY NEW ENGLAND COLD GRAY



3.88 Sq.Ft./Stone

64 Units/Crate

200

DEL CONCA COPING 330 x 600 x 30mm 13 x 23 % x 1¼" 38 Units/Crate

Notes: SOLD IN FULL CRATES ONLY. Porcelain tile is available for purchase by Unilock Authorized Dealers only. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact
Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.

		DEL CONCA SQUARE PRESSED EDGE	DEL CONCA COPING
	Bundle Type	SINGLE	SINGLE
	Thickness (mm)	20 MM	30 MM
	Orata	040.00	
	Crate	248.00	-
SQFT PER	Box	7.75	-
	Unit	3.88	-
	Box	32.00	38.00
PER CRATE	SqFt	248.00	-
	Unit	64.00	38.00
	Crate	64.00	38.00
UNITS PER	Box	2.00	1.00
	Unit	36	30
LBS PER	SqFt	9	-
LBOTER	Box	72	30
	Crate	2,288	1,127
COLORS	Reflectance	Stock	Stock
Chamonix Bianco	SR n/a SRI n/a	1	-
Chamonix Grey	SR n/a SRI n/a	1	-
Gotham Grey	SR n/a SRI n/a	<i>✓</i>	1
Gotham Nero	SR n/a SRI n/a	1	-

SR n/a SRI n/a

SR n/a SRI n/a

SR n/a SRI n/a

SR n/a SRI n/a



New England White

New England Ivory

Travstone Beige

New England Cold Gray

GOTHAM NERO



1

1

1

1

-

-

-

1

Porcelain



APPLICATIONS

1 4 4 4



APPEARANCE

Surface Texture - Woodgrain Finish (DelConca) & Stone Finish

TECHNICAL INFORMATION

More information is available online.

LAYING PATTERNS





Porcelain 16x32 RB_C

Porcelain 16x32 HB_D



COSMIC GREY

COLD GRAY



DOVE GREY NEW ENGLAND WHITE NEW ENGLAND IVORY TRAVERTINE



QUARTZITE NEW ENGLAND DARK GRAY

QUARTZITE SAND



DEL CONCA RECTANGLE 400 x 800 x 20mm 15 ¾ x 31 ½ x ⅔" 3.45 Sq.Ft./Stone 48 Units/Crate



UNILOCK RECTANGLE 400 x 800 x 20mm 15 ¾ x 31 ½ x ⅔" 3.44 Sq.Ft./Stone 54 Units/Crate

Notes: SOLD IN FULL CRATES ONLY. Porcelain tile is available for purchase by Unilock Authorized Dealers only. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.

Stocked at Marengo only (Transferable to Tonganoxie on request)	

SQFT PER	Box	6.89	6.89
JUFIFER			
	Unit	3.45	3.44
	6	04.00	07.00
	Box	24.00	27.00
PER PALLET	SqFt	165.36	186.00
	Unit	48.00	54.00
UNITS PER	Pallet	48.00	54.00
	Box	2.00	2.00
	Unit	32	32
LBS PER	SqFt	9	9
	Box	64	64
	Pallet	1,538	1,726
COLORS	Reflectance	Stock	Stock
Cosmic Grey	SR n/a SRI n/a	-	1
Dove Grey Travertine	SR n/a SRI n/a	-	1
New England White	SR n/a SRI n/a	1	-
New England Ivory	SR n/a SRI n/a	1	-
New England Cold Gray	SR n/a SRI n/a	1	-
Quartzite Dark Gray	SR n/a SRI n/a	1	-
Quartzite Sand	SR n/a SRI n/a	1	

Bundle Type

Thickness (mm)

Pallet

DEL CONCA RECTANGLE PRESSED EDGE

SINGLE

20 MM

165.36

A DELCONCA USA

UNILOCK RECTANGLE PRESSED EDGE

SINGLE

20 MM

186.00

Porcelain Modular Bundle





APPLICATIONS



APPEARANCE

Surface Texture - Stone Finish

TECHNICAL INFORMATION

More information is available online.

LAYING PATTERNS



Porcelain Fixed Random_G



Porcelain Fixed Random_H

		DEL CONCA MODULAR BUNDLE
	Bundle Type	RANDOM
	Thickness (mm)	20 MM
	Pallet	434.00
SQFT PER	Box	-
	Unit	-
PER PALLET	Box	-
	SqFt	-
	Unit	-
	Pallet	192
UNITS PER	Box	-
	Unit	-
LBS PER	SqFt	-
LDSFER	Box	-
	Pallet	3,973
COLORS	Reflectance	Stock
Travstone Beige	SR n/a SRI n/a	



TRAVSTONE BEIGE



12 x 12 300 x 300 x 20mm 11 % x 11 % x %" 64 units/62 Sq.Ft.



12 x 24 300 x 600 x 20mm 11 % x 23 % x % 64 units/124 Sq.Ft.



24 x 24 600 x 600 x 20mm 23 5% x 23 5% x 7%" 64 units/248 Sq.Ft.

Notes: SOLD IN FULL CRATES ONLY. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.

Promenade[™] 70mm & 150mm





APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Custom (see below) Umbriano Mottled / II Campo Brushed Joint Spacing - 4 mm

TECHNOLOGIES **ENDURACOLOR™** Refined surface and long-lasting color

EASYCLEAN™ 😯 (Umbriano) Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano) Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		6 x 24	6 x 2
	Bundle Type	SINGLE	SINGL
	Plant Produced	MULTI-PLANT	MULTI-PLAN
	Thickness (mm)	70 MM	150 M
	Bundle	93.00	46.
0057 050	Layer	11.62	11.
SQFT PER	Section	-	
	Stone	0.97	0.
	Layers	8.00	4.
PER BUNDLE	Sections	-	
	SqFt	0.51	0.
	Section	-	
SOLDIER LNFT PER	Layer	-	5.
	Bundle	47.24	23.
	SqFt	2.03	2.
SAILOR LNFT PER	Section	-	
SAILOR LNFT PER	Layer	23.63	23.
	Bundle	-	94.
	SqFt	1.03	1.
UNITS PER	Section	-	
	Bundle	96.00	48.
	Layer	372	7
LBS PER	Section	-	
	Bundle	2,978	3,1
COLORS	Reflectance	Stock	Sto
Custom Colors & Finishes	SR n/a SRI n/a	SO	5

LAYING PATTERN



Promenade Multi-Unit Random G





IL CAMPO® Brushed Finish





SMOOTH

Premier Finish



CLASSIC Thrumix Finish

SERIES™ Exposed Granite Finish

UMBRIANO[®] Mottled Finish with/ ColorFusion and EasyClean



6 x 24 150 x 600 x 70mm 5 1/8 x 23 5/8 x 2 3/4" 72 units/Bundle 1.29 Sq.Ft./Stone



6 x 24 150 x 600 x 150mm 5 7/8 x 23 5/8 x 5 7/8" 48 units/Bundle .97 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Please note that weights are only estimated as custom finishes will alter bundle weight. Contact Unilock for more information.

CLASSIC / ENDURACOLOR

4 x 16

SINGLE

8 x 24

SINGLE

4 x 12

SINGLE

Promenade[™] 100mm



APPLICATIONS

APPEARANCE

Edge Detail - Rounded Surface Texture - Multi-Finish Available Joint Spacing - 4 mm

TECHNOLOGIES CLASSIC

Budget-friendly traditional product mix


ENDURACOLOR™ Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS





Promenade 4x12 RB_H

Promenade 4x16 HB_C



CLASSIC Thrumix Finish IL CAMPO® Brushed Finish





SMOOTH Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean



3 x 12 75 x 300 x 100mm 3 x 11 7/8 x 3 7/8" 264 units/Bundle .24 Sq.Ft./Stone



100 x 300 x 100mm 3 1/8 x 11 1/8 x 3 1/8" 180 units/Bundle .32 Sq.Ft./Stone



4 x 16 100 x 400 x 100mm 3 1/8 x 15 3/4 x 3 7/8" 120 units/Bundle .43 Sq.Ft./Stone



8 x 24 200 x 600 x 100mm 7 1/8 x 23 5/8 x 3 7/8" 40 units/Bundle 1.29 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SoLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Please note that weights are only estimated as custom finishes will alter bundle weight. Contact Unilock for more information.

	Plant Produced	MULTI-PLANT	MULTI-PLANT	MULTI-PLANT	MULTI-PLANT
	Thickness (mm)	100 MM	100 MM	100 MM	100 MM
	Bundle	63.94	58.13	51.67	51.67
SQFT PER	Layer	10.66	11.63	10.33	10.33
JULI LEK	Section	-	-	-	-
	Stone	0.24	0.32	0.43	1.29
	Layers	6.00	5.00	5.00	5.00
PER BUNDLE	Sections	-	-	-	-
	SqFt	1.35	1.02	0.76	0.51
SOLDIER	Section	-	-	-	-
LNFT PER	Layer	14.44	11.81	7.87	5.25
	Bundle	86.61	59.06	39.37	26.25
	SqFt	4.06	3.05	3.05	1.52
SAILOR	Section	-	-	-	-
LNFT PER	Layer	43.31	35.43	31.50	15.75
	Bundle	259.84	177.17	157.48	78.74
	SqFt	4.13	3.10	2.32	0.77
UNITS PER	Section	-	-	-	-
	Bundle	264.00	180.00	120.00	40.00
	Layer	465	532	469	483
LBS PER	Section	-	-	-	-
	Bundle	2,789	2,659	2,345	2,414
COLORS	Reflectance	Stock	Stock	Stock	Stock
Custom Colors & Finishes	SR n/a SRI n/a	SO	SO	SO	SO
-					

3 x 12

SINGLE

Bundle Type Diseat Desidence of

Please contact your local Sales Representative for color options.

Richcliff°





APPLICATIONS



APPEARANCE

Surface Texture - Textured Joint Spacing - 10 mm

TECHNOLOGIES ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

EASYCLEAN™ 🕞

Factory sealed to provide integral stain resistance

REALA™

Cast from natural stone

ULTIMA™

Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS





Random B

Richcliff Fixed Random A



Richcliff LargeRec HB_H

			LARGE RECTANGLE
	Bundle Type	RANDOM	SINGLE
	Plant Produced		AYR
	Thickness (mm)	60 MM	60 MM
	Bundle	90.30	82.39
		90.30	10.30
SQFT PER	Layer	11.29	10.50
	Stone	-	1.72
	Stone	-	1.72
	Layers	8.00	8.00
PER BUNDLE	Sections	-	-
	SqFt	-	0.58
SOLDIER LNFT PER	Section	-	
	Layer	-	5.94
	Bundle	-	47.56
	SqFt	1.31	1.01
	Section	-	-
SAILOR LNFT PER	Layer	14.78	10.39
	Bundle	118.22	83.15
	SqFt	-	0.58
UNITS PER	Section	-	-
	Bundle	160.00	48.00
	Layer	309	301
LBS PER	Section	509	501
	Bundle	2,472	2,411
	Duilule	2,472	2,411
COLORS	Reflectance	Stock	Stock
Dawn Mist	SR n/a SRI n/a	1	1
Pebble Taupe	SR n/a SRI n/a	1	1
		i	



SR n/a SRI n/a





1

SMOKE SHALE

1



Smoke Shale

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Series[™] 60mm

ENDURACOLOR



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer Surface Texture - Series Exposed Joint Spacing - 3 mm


TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Series_4x8_HB_G

Series_4x8_RB_F





GOLDEN TAN

ONYX BLACK



4 x 8 100 x 200 x 60mm 3 % x 7 % x 2 3⁄8" 540 units/Bundle .22 Sq.Ft./Stone

		4 x 8
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	60 MM
	Bundle	117.90
	Layer	11.79
SQFT PER	Section	19.67
	Stone	0.22
	Layers	10.00
PER BUNDLE	Sections	6.00
	SqFt	1.50
	Section	29.53
SOLDIER LNFT PER	Layer	17.72
	Bundle	177.17
	SqFt	3.0'
	Section	59.00
SAILOR LNFT PER	Layer	35.43
	Bundle	354.33
	SqFt	4.58
UNITS PER	Section	90.00
	Bundle	540.00
	Layer	306
LBS PER	Section	51'
	Bundle	3,065
COLORS	Reflectance	Stocl
Golden Tan	SR n/a SRI n/a	

SR n/a SRI n/a

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

Onyx Black

1

ENDURACOLOR

4 x 12

1

1

Series[™] 80mm



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer Surface Texture - Series Exposed Joint Spacing - 3 mm

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


LAYING PATTERNS



Series 4x12_RB_L

Series4x12_HB_M





Series 4x12_DHB_N

ARCTIC GREY

NORDIC STAR





Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 an Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

es. Please refer to the Sealer Best Practices on p	age 90 and
UNILOCK	43

	Bundle Type	SINGLI
	Plant Produced	CHICAGO
	Thickness (mm)	80 MM
	Bundle	93.04
	Layer	11.6
SQFT PER	Section	
	Stone	0.3
	Layers	8.0
PER BUNDLE	Sections	
	SqFt	1.0
	Section	
SOLDIER LNFT PER	Layer	11.8
	Bundle	94.4
	SqFt	3.0
	Section	
SAILOR LNFT PER	Layer	35.4
	Bundle	283.4
	SqFt	3.1
UNITS PER	Section	
	Bundle	288.0
	Layer	42
LBS PER	Section	
	Bundle	3,40
COLORS	Reflectance	Stoc

 Arctic Grey
 SR n/a
 SRI n/a

 Nordic Star
 SR n/a
 SRI n/a

Skyline[™]

ENDURACOLOR[®]

24 x 24 SINGLE

50 MM

1

MARENGO



APPLICATIONS



1. 1. 1. 1

APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 2 mm


TECHNOLOGIES **ENDURACOLOR™**

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits

LAYING PATTERNS



Skyline 24x24_SB_A

Skyline 24x24_RB_B





CHAMOIS

SILVER GREY



24 x 24 606 x 606 x 50mm 23 ⁷/₈ x 23 ⁷/₈ x 2"



SR n/a SRI n/a

PEDESTAL SYSTEM Contact your local Unilock Rep for more information.

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and
availability. All measurements are nominal.

Silver Grey

	20 units/Bundle 4.00 Sq.Ft./Stone	
Y and is produced and sold o nominal.	n a required, refundable skid. <mark>This</mark>	product is not intende

	Bundle	80.00
SQFT PER	Layer	8.00
	Section	-
	Stone	4.00
	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	0.50
SOLDIER LNFT PER	Section	-
SOLDIER LINFT PER	Layer	4.00
	Bundle	40.00
	SqFt	0.50
		0.50
SAILOR LNFT PER	Section	-
	Layer	4.00
	Bundle	40.00
	SqFt	0.25
UNITS PER	Section	-
	Bundle	20.00
	Layer	183
LBS PER	Section	
LDOTEN	Bundle	1,833
		1,000
COLORS	Reflectance	Stock
Chamois	SR. 41 SRI 46	1

Bundle Type Plant Produced

Thickness (mm)

Soreno™



APPLICATIONS



APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 0 mm

1 4 4 4

TECHNOLOGIES

ENDURACOLOR™ Refined surface and long-lasting color

EASYCLEAN™ Factory sealed to provide integral stain resistance

COMFORT STEP™ Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits

LAYING PATTERNS



Soreno 16x32 RB_A



16 x 32 407 x 815 x 50mm 16 x 32 x 2" 18 units/Bundle 3.57 Sq.Ft./Stone



LIGHT GRANITE

PEDESTAL SYSTEM Contact your local Unilock Rep for more information.

TOSCANA BEIGE

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



16 x 32

SINGLE

50 MM

64.27

3.57

3.57

18.00

0.37

1.34

24.04

0.75

2.67

48.13

0.28

18.00

1,549

Stock

1

1

-

86

-

CHICAGO

Bundle Type

Plant Produced

Thickness (mm)

Bundle Layer

Section

Stone

Layers

SqFt

Layer

Bundle

SqFt

Layer

Bundle

SqFt

Section

Bundle

Layer

Section

Bundle

Reflectance

SR n/a SRI 50

SR n/a SRI 77

SR n/a SRI n/a

Section

Section

Sections

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS

Light Granite

Toscana Beige

Dark Charcoal

SHOT BLAST

SINGLE

50 MM

64.27

3.57

3.57

18.00

0.38

1.34

24.12

0.75

2.67

48.06

0.28

18.00

86

1,549

Stock

-

-

1

.

-

-

CHICAGO

Town Hall[®] 🖉





APPLICATIONS



APPEARANCE

Edge Detail - n/a Surface Texture - Textured Joint Spacing - 10 mm Void - 6.5%

TECHNOLOGIES

PERMEABLE Can be installed to allow water to flow through

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

EASYCLEAN™ 🕞

Factory sealed to provide integral stain resistance

REALA™ Cast from historical brick


ULTIMA™

Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS




Town Hall 4x10 DHB_B Town Hall 4x10 HB_B



STANDARD 250 x 100 x 70mm 9 7/8 x 3 7/8 x 2 3/4" 320 units/Bundle .28 Sq.Ft./Stone

		STANDAR
	Bundle Type	SINGL
	Plant Produced	AY
	Thickness (mm)	70 MI
	Bundle	88.4
SQFT PER	Layer	11.0
JUFIFER	Section	
	Stone	0.2
	Layers	8.0
PER BUNDLE	Sections	
	SqFt	1.1
SOLDIER LNFT PER	Section	
SOLDIER LNFT PER	Layer	13.1
	Bundle	104.9
	SqFt	2.9
SAILOR LNFT PER	Section	
SAILOR LINFT PER	Layer	32.8
	Bundle	262.4
	SqFt	3.6
UNITS PER	Section	
	Bundle	320.0
	Layer	36
LBS PER	Section	
	Bundle	2,88
COLORS	Reflectance	Stor
Basalt	SR n/a SRI n/a	
Burgundy Red	SR n/a SRI n/a	
Burnt Clay	SR n/a SRI n/a	
Old Oak	SR n/a SRI n/a	



BURGUNDY RED

BURNT CLAY

OLD OAK

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Treo[®] Smooth 《

ENDURACOLOR



APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 7mm Void - 5.5%

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through


ENDURACOLOR™ Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		SMOOT
	Bundle Type	RANDO
	Plant Produced	CHICAG
	Thickness (mm)	60 M
	Bundle	108.9
	Layer	10.9
SQFT PER	Section	
	Stone	
	Layers	10.0
PER BUNDLE	Sections	
	SqFt	
	Section	
SOLDIER LNFT PER	Layer	
	Bundle	
	SqFt	1.3
	Section	
SAILOR LNFT PER	Layer	14.7
	Bundle	147.6
	SqFt	
UNITS PER	Section	
	Bundle	210.0
	Layer	29
LBS PER	Section	
	Bundle	2,94
COLORS	Reflectance	Stor
Granite	SR n/a SRI n/a	
River	SR n/a SRI n/a	
Sierra	SR n/a SRI n/a	

LAYING PATTERNS



Treo Fixed Random_R Treo Fixed Random_S



LARGE RECTANGLE 225 x 337.5 x 60mm 8 1/8 x 13 3/8 x 2 3/8" 60 units/Bundle .82 Sq.Ft./Stone



GRANITE

SQUARE 225 x 225 x 60mm 8 7/8 x 8 7/8 x 2 3/8" 70 units/Bundle .55 Sq.Ft./Stone

RIVER

Tuscany



SR n/a SRI n/a





1

TUSCANY

SMALL RECTANGLE 112.5 x 225 x 60mm 4 1/2 x 8 7/8 x 2 3/8" 80 units/Bundle .27 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

Tribeca Cobble[™] 《∕

ENDURACOLOR



APPLICATIONS



APPEARANCE

Edge Detail - Micro Surface Texture - Series Exposed Textured Joint Spacing - 10mm Void - 5.6%

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™ Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		SERIES EXPOSED TEXTURED
	Bundle Type	RANDOM
	Plant Produced	CHICAGC
	Thickness (mm)	70 MM
	Bundle	97.53
SQFT PER	Layer	12.19
SQFIPER	Section	
	Stone	-
	Layers	8.00
PER BUNDLE	Sections	
	SqFt	
	Section	
SOLDIER LNFT PER	Layer	
	Bundle	
	SqFt	2.34
	Section	
SAILOR LNFT PER	Layer	28.49
	Bundle	227.95
	SqFt	
UNITS PER	Section	
	Bundle	304.00
	Layer	378
LBS PER	Section	
	Bundle	3,022
COLORS	Reflectance	Stock
Cobalt Grey	SR n/a SRI n/a	
Peppered Granite	SR .38 SRI 42	

LAYING PATTERNS



Tribeca Cobble Fixed Random_A







PEPPERED GRANITE



LARGE RECTANGLE 130 x 305 x 70mm 5 x 12 x 2 ¾" 88 units/Bundle .43 Sq.Ft./Stone



RECTANGLE 130 x 230 x 70mm 5 x 9 x 2 ¾" 88 units/Bundle .32 Sq.Ft./Stone

C

SMALL RECTANGLE 130 x 175 x 70mm 5 x 6 % x 2 ¾" 128 units/Bundle .25 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. For permeable installations, Unilock recommends using granite chips for joint filler. For traditional applications, please refer to the Polymeric Sand Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

Turfstone[™] 《

CLASSIC



APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 2mm Void - 40%

TECHNOLOGIES PERMEABLE Can be installed to allow water to flow through


CLASSIC Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		SMOOTH
	Bundle Type	SINGLE
	Plant Produced	CHICAGO/ ELKHORN
	Thickness (mm)	80 MM
	Bundle	80.00
	Layer	10.00
SQFT PER	Section	-
	Stone	2.50
	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	-
	Section	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	-
	Section	-
SAILOR LNFT PER	Layer	-
	Bundle	-
	SqFt	0.40
UNITS PER	Section	-
	Bundle	32.00
	Layer	249
LBS PER	Section	-
	Bundle	1,995
COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	SO
	0.1.00 01102	

LAYING PATTERNS



Turfstone A



NATURAL



LARGE RECTANGLE 400 x 600 x 80mm 15 ¾ x 23 ‰ x 3 ‰" 32 units/Bundle 2.50 Sq.Ft./Stone

Notes: Special Order - lead time is required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

Umbriano[®] 60mm & 70mm



APPLICATIONS *8x16 unit only

APPEARANCE Edge Detail - Rounded

Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

TECHNOLOGIES **ENDURACOLOR™** Refined surface and long-lasting color


EASYCLEANTM 🕑 Factory sealed to provide integral stain resistance

COLORFUSION™ Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS













Umbriano Fixed Random_A

Random Bundle

FRENCH GREY

SQUARE

15 x 15 x 2 3/8"

30 units/Bundle

1.554 Sq.Ft./Stone

380 x 380 x 60mm

LARGE RECTANGLE

380 x 570 x 60mm

15 x 22 ¹/₂ x 2 ³/₈"

20 units/Bundle

2.331 Sq.Ft./Stone

GRENADA WHITE MIDNIGHT SKY SUMMER WHEAT WINTER MARVEL



Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Only the 8x16 is approved for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

7 ½ x 15 x 2 ¾"

30 units/Bundle

.77 Sq.Ft./Stone

XL

RANDOM

Bundle Type

	Plant Produced	MARENGO	MARENGO	MARENGO	GEORGETOWN
	Thickness (mm)	60 MM	60 MM	60 MM	70 MM
	Bundle	116.57	116.57	118.00	82.67
0057 050	Layer	11.66	11.66	11.80	10.33
SQFT PER	Section	-	-	-	-
	Stone	-	5.83	0.22	0.86
	Layers	10.00	10.00	10.00	8.00
PER BUNDLE	Sections	-	-	-	-
	SqFt	-	0.32	1.50	0.76
SOLDIER	Section	-	-	-	-
LNFT PER	Layer	-	3.74	17.72	7.87
	Bundle	-	37.40	159.45	62.99
	SqFt	0.80	0.53	3.00	1.52
SAILOR	Section	-	-	-	-
LNFT PER	Layer	9.35	6.23	35.43	15.75
	Bundle	93.50	62.30	318.90	125.98
	SqFt	-	0.17	4.58	1.16
UNITS PER	Section	-	-	-	-
	Bundle	80.00	20.00	540.00	96.00
	Layer	320	320	320	331
LBS PER	Section	-	-	-	-
	Bundle	3,199	3,199	3,201	2,647
COLORS	Reflectance	Stock	Stock	Stock	Stock
French Grey	SR .18 SRI 17	1	1	-	SO
Grenada White	SR n/a SRI n/a	1	1	-	-
Midnight Sky	SR .17 SRI 15	1	-	1	SO
Summer Wheat	SR .42 SRI 48	1	1	-	SO
Winter Marvel	SR .35 SRI 38	1	-	-	SO

ENDURACOLOR[®]

SINGLE

4 x 8

SINGLE

8 x 16

SINGLE

Umbriano[®] 80mm







APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

TECHNOLOGIES PERMEABLE Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (€) Factory sealed to provide integral stain resistance


COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION


Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



_		
T		
	-	

Umbriano 4x12 HB_1





4 x 12 SINGLE **Bundle Type** MARENGO Plant Produced 80 MM Thickness (mm) Bundle 93.04 11.63 Layer SQFT PER Section . Stone 0.32 Layers 8.00 PER BUNDLE Sections -SqFt 1.02 Section -SOLDIER LNFT PER 11.81 Layer Bundle 94.49 3.05 SqFt Section SAILOR LNFT PER 35.43 Layer Bundle 283.46 SqFt 3.10 UNITS PER Section _ 288.00 Bundle 426 Laver LBS PER Section -Bundle 3,404 Stock COLORS Reflectance SR .18 SRI 17 1 French Grey SR .17 SRI 15 1 Midnight Sky Winter Marvel SR .35 SRI 38 1





WINTER MARVEL

FRENCH GREY

MIDNIGHT SKY

SHI SKY

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

Westport[™]



APPLICATIONS



APPEARANCE Edge Detail - Zero

Surface Texture - Textured Joint Spacing - 3 mm

TECHNOLOGIES

CLASSIC Budget-friendly traditional product mix

CLASSIC COAT


Factory-sealed to protect surface texture and color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

			RECTANGLE
	Bundle Type	RANDOM	SINGLE
	Plant Produced	ELKHORN	ELKHORM
	Thickness (mm)	70 MM	70 MN
	Bundle	94.19	94.19
	Layer	11.77	11.7
SQFT PER	Section	-	
	Stone	-	0.3
	Layers	8.00	8.0
PER BUNDLE	Sections	-	0.0
	SqFt	-	0.7
SOLDIER LNFT PER	Section	-	
	Layer	-	8.3
	Bundle	-	66.6
	SqFt	1.24	1.4
	Section	-	
SAILOR LNFT PER	Layer	14.57	16.6
	Bundle	116.56	133.3
	SqFt	-	2.9
UNITS PER	Section	-	
	Bundle	160.00	280.0
	Layer	372	36
LBS PER	Section	-	
	Bundle	2,976	2,88
COLORS	Reflectance	Stock	Stoc
Charcoal	SR n/a SRI n/a	-	
Granite	SR n/a SRI n/a	<i>✓</i>	
River	SR n/a SRI n/a	<i>✓</i>	
Sierra	SR n/a SRI n/a	1	

LAYING PATTERNS



Westport Fixed

Random_A

Westport Fixed

Random_B

1.01 Sq.Ft./Stone





SQUARE 254 x 254 x 70mm 10 x 10 x 2 ¾" 56 units/Bundle .67 Sq.Ft./Stone

CHARCOAL



RECTANGLE

5 x 10 x 2 ¾"

127x 254 x 70mm

72 units/Bundle

.34 Sq.Ft./Stone





GRANITE

Single Unit

SIERRA

RECTANGLE 127x 254 x 70mm 5 x 10 x 2 ¾" 280 units/Bundle .34 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

Westport[™] Smooth



APPLICATIONS



APPEARANCE Edge Detail - Zero Surface Texture - Smooth

Joint Spacing - 3 mm

TECHNOLOGIES

CLASSIC Budget-friendly traditional product mix

CLASSIC COAT

Factory-sealed to protect surface texture and color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

			5 x 10
	Bundle Type	RANDOM	SINGLE
	Plant Produced	ELKHORN	ELKHORN
	Thickness (mm)	70 MM	70 MN
	Bundle	94.19	94.19
	Layer	11.77	11.77
SQFT PER	Section	-	
	Stone	0.59	0.34
	Layers	8.00	8.00
PER BUNDLE	Sections	-	
	SqFt	-	0.7
	Section	-	
SOLDIER LNFT PER	Layer	-	8.33
	Bundle	-	66.6
SAILOR LNFT PER	SqFt	1.24	1.42
	Section	-	
	Layer	14.57	16.6
	Bundle	116.56	133.3
	SqFt	1.70	2.9
UNITS PER	Section	-	
	Bundle	160.00	280.0
	Layer	372	36
LBS PER	Section	-	
	Bundle	2,976	2,88
COLORS	Reflectance	Stock	Stoc
Charcoal	SR n/a SRI n/a	-	
Granite	SR n/a SRI n/a	1	
River	SR n/a SRI n/a	1	
Sierra	SR n/a SRI n/a	1	

LAYING PATTERNS



Westport Fixed

Random_A

Random_B





LARGE RECTANGLE 254x 380 x 70mm 10 x 15 x 2 ¾" 32 units/Bundle 1.01 Sq.Ft./Stone



CHARCOAL

254 x 254 x 70mm 10 x 10 x 2 ¾" 56 units/Bundle .67 Sq.Ft./Stone



127x 254 x 70mm 72 units/Bundle .34 Sq.Ft./Stone

RIVER

Single Unit

SIERRA

5 x 10 127x 254 x 70mm 5 x 10 x 2 ¾" 280 units/Bundle .34 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

Brussels Dimensional Stone®



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™ Budget-friendly traditional product mix

ANTIQUED™ Distressed, timeworn finish

TECHNICAL INFORMATION Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

SUNSET FIREPIT KITS

Located on page 80



ROUND



SQUARE



TAPERED 229 x 100 x 200mm 9 x 3 % x 7 %" 144 units/Bundle .25 Fc.Ft./Stone



STANDARD 300 x 100 x 200mm 11% x 3% x 7%" 96 units/Bundle .33 Fc.Ft./Stone

Notes: SMALL TAPERED UNITS ARE SOLD IN FULL BUNDLES ONLY. Maximum height is 24" (under optimum conditions). "Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle. Ledgestone", Brussels Block® XL or 6" x 12" Fullnose complement as a possible coping unit. All measurements are nominal. Contact Unilock for more information.

	Plant Produced	MULTI-PLANT	MULTI-PLANT
	Thickness (mm)	100 MM	100 MM
	Bundle	36.00	32.00
FCFT PER	Layer	6.00	5.33
	Stone	0.25	0.33
	Layers	6.00	6.00
PER BUNDLE	Sections	0.00	4.00
	Sections	-	4.00
	Bundle	108.00	96.00
LNFT PER	Unit	0.75	1.00
	SqFt	4.00	3.00
UNITS PER	Section	-	24.00
	Bundle	144.00	96.00
	Lover	488	491
	Layer	400	
LBS PER	Section	-	736
	Bundle	2,930	2,944
COLORS	Reflectance	Stock	Stock
Granite	SR.n/a SRI n/a	1	-
Limestone	SR.n/a SRI n/a	-	1
Sandstone	SR.n/a SRI n/a	1	1
Sierra	SR.n/a SRI n/a	1	1

Bundle Type









GRANITE

LIMESTONE

١E

SANDSTONE

SIERRA

STANDARD

SINGLE

TAPERED

SINGLE

Dura Hold[®]

CLASSIC



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE Surface Texture - Smooth

CLASSIC
Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits



NATURAL



TIE-BACK 1830 x 300 x 600mm 72 x 11 % x 23 %" 1 unit/Bundle 2.00 Fc.Ft./Stone



1/2 COPING 915 x 300 x 600mm 36 x 11 % x 23 5%" 1 unit/Bundle 3.00 Fc.Ft./Stone



CORNER 45° 1520 x 300 x 600mm 59 % x 11 % x 23 %" 1 unit/Bundle 7.04 Fc.Ft./Stone

Notes: "Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone[®] Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

		TIE-BACK	1/2 COPING	CORNER 45°
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	GORMLEY	GORMLEY	GORMLEY
	Thickness (mm)	300 MM	300 MM	300 MM
	Bundle	2.00	3.00	7.04
FCFT PER	Layer	2.00	3.00	7.04
	Stone	2.00	3.00	7.04
	Layers	1.00	1.00	1.00
PER BUNDLE	Sections	-	-	
	Bundle	-	3.00	-
LNFT PER	Unit	-	3.00	
	SqFt	0.50	0.33	0.14
UNITS PER	Sections	-	-	
	Bundle	1.00	1.00	1.00
	Layer	1,660	800	1,480
LBS PER	Sections	-	-	
	Bundle	1,660	800	1,480
COLORS	Reflectance	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SC

Estate Wall[™]



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE Surface Texture - Split

TECHNOLOGIES

CLASSIC™ Budget-friendly traditional product mix

ANTIQUED™ Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

			CORNER	COPING TAPEREI
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	75 MM
	Bundle	31.25	20.83	18.7
FCFT PER	Layer	6.25	4.17	2.3
	Stone	-	0.52	0.2
	Layers	5.00	5.00	8.0
PER BUNDLE	Sections	4.00	4.00	3.0
	Bundle	62.30	41.60	66.0
LNFT PER	Unit	1.04	1.04	0.9
	SqFt	-	1.92	3.8
UNITS PER	Section	15.00	10.00	24.0
	Bundle	60.00	40.00	72.0
	Layer	608	453	29
LBS PER	Section	760	566	79
	Bundle	3,040	2,264	2,39
COLORS	Reflectance	Stock	Stock	Stoc
Granite	SR.n/a SRI n/a	1	1	
River	SR.n/a SRI n/a	1	1	,
Sandstone	SR.n/a SRI n/a	1	1	
Sierra	SR.n/a SRI n/a	1	1	



GRANITE

MEDIUM TAPERED

320 x 150 x 230mm

12 ⁵/₈ x 5 ⁷/₈ x 9"

20 units/Bundle

.52 Fc.Ft./Stone



Single Units

RIVER



SANDSTONE

CORNER

320 x 150 x 230mm

12 5/8 x 5 7/8 x 9"

40 units/Bundle

.52 Sq.Ft./Stone



SIERRA



COPING TAPERED 320 x 75 x 300mm 12 5% x3 x 11 7%" 72 units/Bundle .26 Sq.Ft./Stone

Notes: 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. Quarry tubing is only added to orders if requested. Ledgestone[™], Olde Quarry[™] coping, Brussels Block[®] XL, Brussels Fullnose[™] or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

SMALL TAPERED

9 7/8 x 5 7/8 x 9"

20 units/Bundle

.42 Fc.Ft./Stone

250 x 150 x 230mm

56

LARGE TAPERED

20 units/Bundle

.63 Fc.Ft./Stone

15 x 5 7⁄8 x 9"

380 x 150 x 230mm

Lineo[™] Dimensional Stone



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE


Surface Texture - Smooth

TECHNOLOGIES **CLASSIC™**


Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits



Lineo spacers are used to provide shadow effect during installation and are provded with your Lineo product. 1 Package = 144 Spacers / 68 T's



XL RECTANGLE 600 x 100 x 200mm 23 5/8 x 3 7/8 x 7 7/8 18 units/Bundle .33 Fc.Ft./Stone





400 x 100 x 200mm 15 34 x 3 7/8 x 7 7/8 15 units/Bundle .55 Fc.Ft./Stone



Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer Stone

Layers

Sections

Bundle

Unit

SqFt

Section

Bundle

Layer

Section

Bundle

Reflectance

SR.n/a SRI n/a

SR.n/a SRI n/a

SR.n/a SRI n/a

SR.n/a SRI n/a

FCFT PER

PER BUNDLE

LNFT PER

UNITS PER

LBS PER

COLORS

Granite

Graphite

River

Sierra

SMALL RECTANGLE 300 x 100 x 200mm 11 7/8 x 3 7/8 x 7 7/8 15 units/Bundle .44 Fc.Ft./Stone

PILLAR UNIT

Single Unit

300 x 100 x 200mm $11\,\%\,x\,3\,\%\,x\,7\,\%$ 90 units/Bundle .33 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced on a required, refundable skid. Lineo spacers are shipped with random wall bundles to create even spacing between units. Ledgestone¹⁴, Unilock Natural Stone or 6¹⁷ x 12⁴ Fullnose complement as possible coping options. All measurements are nominal. Contact Unilock for more information.

Random Bundle

PILLAR UNIT SINGLE

CHICAGO

100 MM

29.97

9.99

0.33

3.00

3.00

-

_

3.00

30.00

90.00

890

890

2,670

Stock

1

1

1

1

RANDOM

CHICAGO

100 MM

31.91

10.64

3.00

94.46

1.50

-

-

63.00

948

2,845

Stock

1

1

1

1

-

-

-

Mackinaw[™]

STONEMARK

CORNER / PILLAR

SINCLE

WALL



APPLICATIONS



CROSS SECTIONS

1110

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

10

APPEARANCE

Edge Detail - n/a Surface Texture - Split

TECHNOLOGIES

REALA™ Cast from natural stone wall

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits





COASTAL SLATE

Random Bundle

BUFF



685 (609) x 102 x 229mm 5 units/Bundle .71 Fc.Ft./Stone



MEDIUM WEDGE 18.97(15.98) x 4 x 9" 482 (406) x 102 x 229mm 10 Units/ Bundle .48 Fc.Ft./Stone

SMALL WEDGE 10.98(8.0) x 4 x 9" 279 (203) x 102 x 229mm 10 Units/ Bundle .26 Fc.Ft./Stone

Corner / Pillar Bundle



CORNER/PILLAR UNIT 14.96 (13.46) x 4 x 9" 380 (342) x 102 x 229mm 20 Units/ Bundle .647 Fc.Ft./Stone (10 rights + 10 lefts per bundle)

Notes: Sold in full bundles only and is produced and sold on a required, refundable skid. While coping is optional with Mackinaw wall, if you are looking for coping, Ledgestone" or Unilock Natural Stone complement it well. All measurements are nominal. Contact Unilock for more information.

58	UNILOCK

	Bundle Type	RANDOM	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	102 MM	102 MM
	Bundle	11.07	12.95
FCFT PER			2.59
FULLER	Layer	2.214	2.59
	Stone	-	-
	Layers	5.00	5.00
PER BUNDLE	Sections	-	-
LNFT PER	Bundle	33.00	-
	Unit	-	-
	SqFt		-
UNITS PER	Section	-	-
	Bundle	25.00	20.00
	Layer	242.31	173.4
LBS PER	Section	-	-
	Bundle	1,211.05	867.01
COLORS	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓	1
Coastal Slate	SR n/a SRI n/a	1	1

Dundle Tune

Olde Quarry[™]



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE Surface Texture - Standard

TECHNOLOGIES

CLASSIC™ Budget-friendly traditional product mix

ANTIQUED™ Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits



GRANITE

Random Bundle

RIVER





15" LARGE TAPERED **12" MEDIUM TAPERED** 380 x 114 x 230mm 305 x 114 x 230mm 15 x 4 ½ x 9" 30 units/Bundle

12 x 4 ½ x 9" 30 units/Bundle .38 Fc.Ft./Stone



Sierra



9" SMALL TAPERED 230 x 114 x 230mm 9 x 4 ½ x 9" 30 units/Bundle .28 Fc.Ft./Stone

Single Units

CORNER 300 x 114 x 230mm 11 7⁄8 x 4 1⁄2 x 9" 80 units/Bundle .39 Fc.Ft./Stone

1

1

COPING TAPERED 305 x 75 x 305mm 12 x 3 x 12" 96 units/Bundle .25 Fc.Ft./Stone

Notes: Structural retaining walls greater than 2' high require professional engineering. Quarry Coping sold and produced on a returnable, refundable pallet. Quarry tubing is added to orders when requested. Tubing may be used to set back walls. Ledgestone ¹⁰ ,
Olde Quarry ^m Coping, Brussels Block' XL, Brussels Fullnose" or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

.47 Fc.Ft./Stone

59

		WALL	CORNER	COPING
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	WISCONSIN	CHICAGO	CHICAGO
	Thickness (mm)	114 MM	114 MM	75 MM
	× 7			
	Bundle	33.75	30.89	24.00
FCFT PER	Layer	5.63	6.18	3.00
	Stone	-	-	-
PER BUNDLE	Layers	6.00	5.00	8.00
TERBONDEE	Sections	5.00	4.00	4.00
LNFT PER	Bundle	90.00	82.40	96.00
	Unit	-	-	-
	0-54		2.59	4.00
	SqFt	-		
UNITS PER	Section	18.00	20.00	24.00
	Bundle	90.00	80.00	96.00
		504	000	000
	Layer	521	630	380
LBS PER	Section	625	788	760
	Bundle	3,125	3,150	3,039
	Deflectore	04-1-	0	04-1-
COLORS	Reflectance	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	1	1	1
River	SR.n/a SRI n/a	1	1	1
Sandstone	SR.n/a SRI n/a	1	1	1

1

SR.n/a SRI n/a

Quarry[™] Smooth

CLASSIC



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE Surface Texture - Standard


TECHNOLOGIES

CLASSIC™ Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		WALL	CORNE
	Bundle Type	RANDOM	SINGL
	Plant Produced	WISCONSIN	WISCONSI
	Thickness (mm)	114 MM	114 MI
	Bundle	33.75	18.2
FCFT PER	Layer	5.63	6.0
	Stone	-	0.3
	Layers	6.00	3.0
PER BUNDLE	Sections	-	
	Bundle	-	18.2
LNFT PER	Unit	-	0.3
	SqFt	-	2.6
	Section	-	
UNITS PER	Layer	15.00	16.0
	Bundle	90.00	48.0
	Layer	498	64
LBS PER	Section	-	
	Bundle	2,988	1,92
COLORS	Reflectance	Stock	Stor
Charcoal	SR.n/a SRI n/a	1	
Sandstone	SR.n/a SRI n/a	1	
Natural	SR.n/a SRI n/a	1	

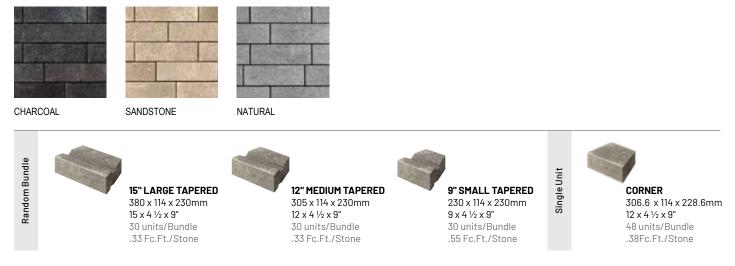

Notes: SOLD IN FULL BUNDLES ONLY. Corner and wall bundles are produced and sold on a required, refundable skid. Structural retaining walls greater than 2' high require professional engineering. Connector units provided with every bundle upon request. Use plastic connectors on set-back walls. Quarry tubing is added to orders when requested. Tubing may be used to set back walls. Ledgestone^M, Olde Quarry^M Coping, Brussels Block[®] XL, Brussels Fullnose[®] or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

Pisa[™]



APPLICATIONS

1 II. 10 M. II.

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a Surface Texture - Split

TECHNOLOGIES

CLASSIC™ Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CORNER	XL UNIT	COPING
	Bundle Type	DOUBLE	SINGLE	DOUBLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	75 MM
	Bundle	30.01	26.66	20.34
FCFT PER	Layer	10.00	5.33	2.91
	Stone	1.67	1.50	0.48
PER BUNDLE	Layers	3.00	5.00	7.00
PER BUNDLE	Sections	6.00	-	2.00
LNFT PER	Bundle	-	53.34	82.95
LNFIPER	Unit	-	1.33	1.97
	SqFt	0.60	-	2.06
UNITS PER	Section	3.00	-	21.00
	Bundle	18.00	40.00	42.00
	Layer	547	618	411
LBS PER	Section	274	-	1,437
	Bundle	1,641	3,091	2,875
COLORS	Reflectance	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	1	1	J
Nevada	SR.n/a SRI n/a	1	1	1
Sierra	SR.n/a SRI n/a	1	1	/



GRANITE

NEVADA



CORNER 200 x 150 x 300mm 7% x 5 % x 11 %" 18 Double units/Bundle 36 Single units/Bundle 1.67 Fc.Ft./Double Unit

SIERRA



XL TAPERED UNIT 400 x 150 x 300mm 15 ¾x 5 ⅔ x 11 ‰" 32 Single units/Bundle .67 Fc.Ft./Stone



COPING 300 x 75 x 300mm 11 % x 3 x 11 %" 42 Double units/Bundle .48 Fc.Ft./Stone

Notes: XL UNITS ARE SOLD IN FULL BUNDLES ONLY. Corner and XL Units are produced and sold on a required, refundable skid. Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa wall is $\frac{3}{2}$ " every course or 1½" every 2 courses. Retaining wall engineering software is also available free of charge at www.unilock.com. Walls greater than 4' in height require professional engineering. Coping bundles are Double units, packaged with 16 closed end pieces per bundle. (8 Left & 8 Right). 12" Closed End Coping pieces are not sold separately. All measurements are nominal. Contact Unilock for more information.

Stocked at Aurora, Elkhorn & Tonganoxie

CLASSIC

Pisa[™] Smooth XL



APPLICATIONS . (state 100

APPEARANCE Edge Detail - n/a Surface Texture - Smooth


CROSS SECTIONS Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

TECHNOLOGIES CLASSIC™ Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		XL CORNER	XL TAPERED	COPING & CLOSED-END / COPING
	Bundle Type	SINGLE	SINGLE	BUNDLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	75 MM
	Bundle	58.15	25.84	15.50
FCFT PER	Layer	11.63	5.17	1.94
	Stone	0.97	0.65	0.32
	Layers	5.00	5.00	8.00
PER BUNDLE	Sections	-	-	3.00
	Bundle	-	-	62.99
LNFT PER	Unit	-	-	1.3
	SqFt	1.03	1.55	3.10
UNITS PER	Section	-	-	16.00
	Bundle	60.00	40.00	48.0
	Layer	719	627	28
LBS PER	Section	-	-	76
	Bundle	3,593	3,135	2,28
COLORS	Reflectance	Stock	Stock	Stoc
Fieldstone	SR n/a SRI n/a	✓	1	v
Granite	SR n/a SRI n/a	✓	1	v
Midnight Charcoal	SR n/a SRI n/a	✓	1	v
Natural Grey	SR n/a SRI n/a	-	-	v
Sandstone	SR n/a SRI n/a	-	-	

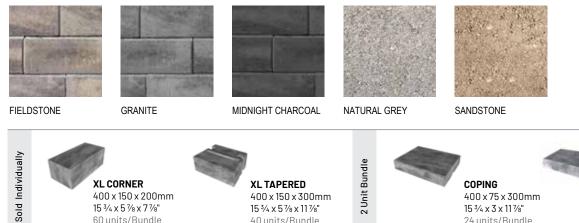

400 x 150 x 300mm

15 ³⁄₄ x 5 ⁷⁄₈ x 11 ⁷⁄₈"

40 units/Bundle

0.65 Fc.Ft./Stone

400 x 75 x 300mm 15 ³⁄₄ x 3 x 11 ⁷⁄₈" 24 units/Bundle 0.32 Fc.Ft./Stone

CLOSED-END / COPING 400 x 75 x 300mm 15 ³⁄₄ x 3 x 11 ⁷⁄₈" 24 units/Bundle 0.32 Fc.Ft./Stone

Notes: XL CORNER AND TAPERED UNITS ARE SOLD IN FULL BUNDLES ONLY AND PRODUCED ON A REQUIRED, REFUNDABLE SKID. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

400 x 150 x 200mm

15 ³⁄₄ x 5 ⁷⁄₈ x 7 ⁷⁄₈"

60 units/Bundle

0.97 Fc.Ft./Stone

Rivercrest[®] Wall

STONEMARK



APPLICATIONS



APPEARANCE Edge Detail - Zero Surface Texture - Textured

TECHNOLOGIES REALA™ Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		WALL	CORNER
	Bundle Type	RANDOM	RANDOM
	Plant Produced	AYR	AYF
	Thickness (mm)	57 MM	57 MN
	Bundle	24.30	16.2
FCFT PER	Layer	3.04	4.0
	Stone	-	
	Layers	8.00	4.0
PER BUNDLE	Sections	-	
	Bundle	130.69	
LNFT PER	Unit	-	
	SqFt	-	2.4
UNITS PER	Section	-	
	Bundle	128.00	40.0
	Layer	249	29
LBS PER	Section	-	
	Bundle	1,990	1,173
COLORS	Reflectance	Stock	Stoc
Buff	SR n/a SRI n/a	1	·
Coastal Slate	SR n/a SRI n/a	1	





BUFF

Corner Bundle

Random Bundle

COASTAL SLATE

LONG CORNER UNIT 17½ x 9-10 x 2¼" 450 x 230-250 x 57mm 20 units/Bundle

SHORT CORNER UNIT 14½ x 9-10 x 2¼" 375 x 230-250 x 57mm 20 units/Bundle



STANDARD UNIT 1 8 x 9-10 x 2¼" 200 x 230-250 x 57mm 32 units/Bundle **STANDARD UNIT 2** 12 x 9-10 x 21/4" 300 x 230-250 x 57mm 32 units/Bundle **STANDARD UNIT 3** 12 x 9-10 x 2¼" 300 x 230-250 x 57mm 32 units/Bundle



STANDARD UNIT 4 17 x 9-10 x 21⁄4" 425 x 230-250 x 57mm 32 units/Bundle

Notes: RIVERCREST UNITS ARE SOLD IN FULL BUNDLES ONLY AND PRODUCED ON A REQUIRED, REFUNDABLE SKID. All measurements are nominal. Contact Unilock for more information.

SienaEdge[™]

CLASSIC



APPLICATIONS

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™ Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		STANDARD	COPING
	Bundle Type	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	180 MM	180 MM
	Bundle	20.88	20.88
FCFT PER	Layer	6.96	6.96
	Stone	1.74	1.74
PER BUNDLE	Layers	3.00	3.00
FERBONDEL	Sections	-	-
	Bundle	35.43	35.43
LNFT PER	Unit	2.45	2.45
	SqFt	0.57	0.57
UNITS PER	Section	-	
	Bundle	12.00	12.00
	Layer	898	901
LBS PER	Section	-	
	Bundle	2,695	2,702
COLORS	Reflectance	Stock	Stock
Fieldstone	SR n/a SRI n/a	1	v
Granite	SR n/a SRI n/a	1	v
Midnight Charcoal	SR n/a SRI n/a	1	~





GRANITE

FIELDSTONE

MIDNIGHT CHARCOAL



COPING 900 x 180 x 290mm **35** ½ x 7 x 11 ½" 12 units/Bundle 1.94 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

SienaStone™



APPLICATIONS



APPEARANCE

Edge Detail - n/a Surface Texture - Split

CROSS SECTIONS


Cross Sections are available on Unilock's Contractor web site under Products: **contractor.unilock.com**

TECHNOLOGIES

CLASSIC™ Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

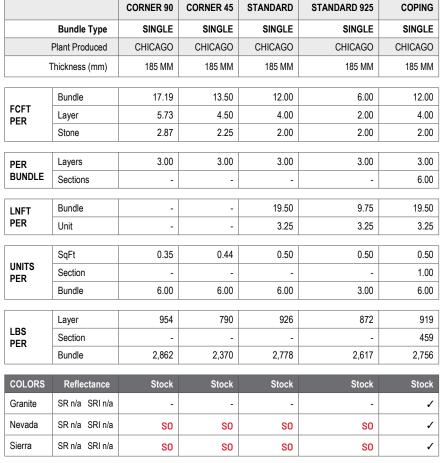



GRANITE

Single Units





CORNER 90° 925 x 185 x 500mm 36 ½ x 7 ¾ x 19 ¾" 6 units/Bundle 2.87 Fc.Ft./Stone



SIERRA

CORNER 45° 925 x 185 x 500mm 36 ½ x 7 ¾ x 19 ¾" 6 units/Bundle 2.25 Fc.Ft./Stone



STANDARD 1000 x 185 x 500mm 39 ¾ x 7 ¾ x 19 ¾" 6 units/Bundle 2.00 Fc.Ft./Stone



STANDARD 925 1000 x 185 x 925mm 39 % x 7 % x 36 ½" 3 units/Bundle 2.00 Fc.Ft./Stone



CLASSIC

COPING 1000 x 185 x 500mm 39 3⁄8 x 7 3⁄8 x 19 3⁄4" 6 units/Bundle 2.00 Fc.Ft./Stone

Notes: For Special Order units - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is sold on a required, refundable skid. Coping units can be sold individually to construct stepss. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

SienaStone[™] Smooth Step

CLASSIC



APPLICATIONS

100

APPEARANCE Edge Detail - n/a Surface Texture - Standard

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

TECHNOLOGIES

CLASSIC™ Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits



DUSK



48" STEP 1200 x 180 x 500mm 47 ¼ x 7 x 19 ¾" 6 units/Bundle 2.33 Fc.Ft./Stone

NOLES. SULV IN FULL BUNDLES UNLT drig is sold of a required, refundable skid. All friedsurements are normalia, contact unifock for more information.	Notes: SOLD IN FULL BUNDLES ONLY and is sold on a required	ed. refundable skid. All measurements are nominal. Contact Unilock for more information.
--	--	--

		48" STEP
	Bundle Type	SINGLE
	Plant Produced	GORMLEY
	Thickness (mm)	180 MM
	Bundle	13.95
FCFT PER	Layer	4.65
	Stone	2.33
	Layers	3.00
PER BUNDLE	Sections	-
	Bundle	24.00
LNFT PER	Unit	4.00
	SqFt	0.43
UNITS PER	Section	-
	Bundle	6.00
	Layer	1,081
LBS PER	Section	-
	Bundle	3,242
COLORS	Reflectance	Stock
Dusk	SR.n/a SRI n/a	/

U-Cara[®] Multi-Face Wall System



APPLICATIONS



APPEARANCE Edge Detail - n/a Surface Texture - Multiple (see below)

TECHNOLOGIES

ENDURACOLOR™ Refined surface and long-lasting color


COLORFUSION™ (UMBRIANO®) Subtly mottled colored finish

TECHNICAL INFORMATION Conforms to ASTM C 1372 Eligible for LEED v4.1 credits




Download the U-Cara Modular Fireplace Installation Guide.



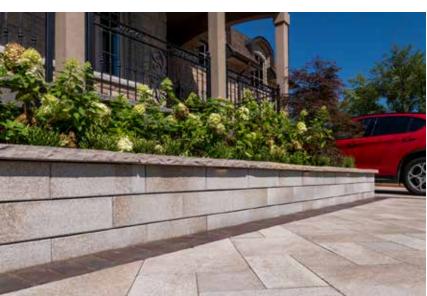







1/2 Running Bond with Paver Accents

1/2 Running Bond with	Random Accents

Stacked Bond

1	Mixed Bond

1/2 Running Bond with Linear Accents

I/Z KUTITIITY DU	Iuoni Accents

1/3 Running Bond

Umbriano Finish **Pitched Finish** Smooth Finish Series Finish Subway Lavano

U-Cara® Multi-Face Wall System

	Fascia Panels	STANDARD SMOOTH	CLOSED-END SMOOTH	STANDARD UMBRIANO	CLOSED-END UMBRIANO	3" SERIES	STANDARD PITCHED	CLOSED-END PITCHED
	Bundle Type	SINGLE	MULTI	SINGLE	MULTI	SINGLE	SINGLE	MULTI
	Plant Produced	CHICAGO	CHICAGO	GEORGETOWN	GEORGETOWN	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	150 MM	150 MM	71 MM	150 MM	150 MM
	Bundle	61.52	54.18	61.52	54.18	59.32	61.52	54.18
FCFT PER	Crate	-	-	-	-	-	-	-
FUFTFER	Sections	10.25	9.03	10.25	9.03	9.89	10.25	9.03
	Stone	0.73	1.29	0.73	1.29	0.18	0.73	1.29
	Layers	6.00	6.00	6.00	6.00	6.00	6.00	6.00
PER BUNDLE	Sections	-	-	-	-	-	-	-
	Bundle	129.50	104.86	129.50	107.94	-	129.50	107.94
LNFT PER	Unit	1.54	2.50	1.54	2.57	-	1.54	2.57
	SqFt	1.37	0.78	1.37	0.78	5.66	1.37	0.78
	Sections	-	-	-	-	-	-	-
UNITS PER	Crate	-	-	-	-	-	-	-
	Bundle	84.00	42.00	84.00	42.00	336.00	84.00	42.00
	Layer	275	207	344	207	250	317	236
	Sections	-	-	-	-	-	-	-
LBS PER	Crate	-	-	-	-	-	-	-
	Bundle	1,648	1,241	2,067	1,240	1,501	1,904	1,416
COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Bavarian	n/a	1	1	-	-	-	1	1
Champagne	n/a	1	1	-	-	-	-	-
Dark Charcoal	n/a	1	1	-	-	-	-	-
Fossil	n/a	-	-	-	-	-	1	1
French Grey	n/a	-	-	1	1	-	-	-
Granite Fusion	n/a	1	1	-	-	-	1	1
Onyx Black	n/a	-	-	-	-	1	-	-
Opal Blend	n/a	1	1	-	-	-	-	-
Summer Wheat	n/a	-	-	1	1	-	-	-

FASCIA PANELS STYLES



1.29 Fc.Ft./Stone 24 Rights & 18 Lefts

42 units/Bundle 1.29 Fc.Ft./Stone FASCIA PANELS FINISHES






42 units/Bundle 1.29 Fc.Ft./Stone 24 Rights & 18 Lefts

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

U-Cara® Multi-Face Wall System



APPLICATIONS



CROSS SECTIONS

All Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a Surface Texture - Smooth (Subway) Textured (Lavano)

TECHNOLOGIES

ENDURACOLOR™ Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		LAVANO STANDARD	SUBWAY STANDARD	CLOSED END
Bundle Type		SINGLE	SINGLE	BUNDLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	150 MM
	Bundle	61.52	61.52	54.18
FCFT PER	Layer	10.25	10.25	9.03
	Stone	0.73	0.73	1.29
	Lovera	6.00	6.00	6.00
PER BUNDLE	Layers Sections	-	-	
LNFT PER	Bundle	129.50	129.50	104.86
	Unit	1.54	1.54	2.50
	SqFt	1.37	1.37	0.78
UNITS PER	Section	-	-	-
	Bundle	84.00	84.00	42.00
	Layer	275.00	285.00	207.00
LBS PER	Section	-	-	-
	Bundle	1,648	1,709	1,240
COLORS	Reflectance	Stock	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	Otock	Olock	Olock

COLORS	Reflectance	Stock	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	-	1	1
Fossil	SR n/a SRI n/a	1	-	1
Granite Fusion	SR n/a SRI n/a	1	-	1
lvory	SR n/a SRI n/a	-	1	1
Opal	SR n/a SRI n/a	-	1	1





GRANITE FUSION FOSSIL



DARK CHARCOAL OPAL **IVORY**



LAVANO STANDARD FASCIA PANEL 5 1/8 x 18 3/8 x 2 3/8" 150 x 466 x 60mm 84 units/Bundle .73 Fc.Ft./Stone

Lavano



Bundle

Closed-End





Single Unit

SUBWAY STANDARD FASCIA PANEL 5 1/8 x 18 3/8 x 2 3/8" 150 x 466 x 60mm 84 units/Bundle .73 Fc.Ft./Stone



SUBWAY HALF FASCIA PANEL 5⁷/₈ x 9¹/₄ x 2³/₈" 150 x 233 x 60mm



SUBWAY CLOSED-END **FASCIA PANEL** 5⁷/₈ x 20 ⁷/₈ x 2 ³/₈" 150 x 530 x 60mm

U-Cara° Multi-Face Wall System



APPLICATIONS



ENDURACOLOR™ Refined surface and long-lasting color

TECHNICAL INFORMATION

COLORFUSION™ (UMBRIANO) Subtly mottled colored finish

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits


CROSS SECTIONS

All Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com


APPEARANCE

Edge Detail - n/a Surface Texture - Smooth, Standard, Series Exposed, Umbriano[®] Mottled, Pitched & Flamed

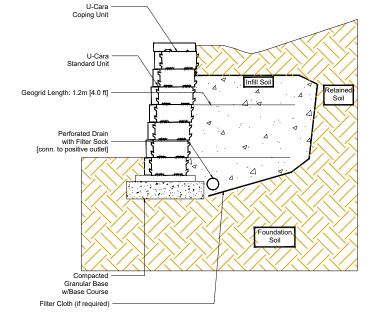

REF:Detail U-Cara Seat Wal

U-CARA RETAINING WALL GEOGRID SECTION

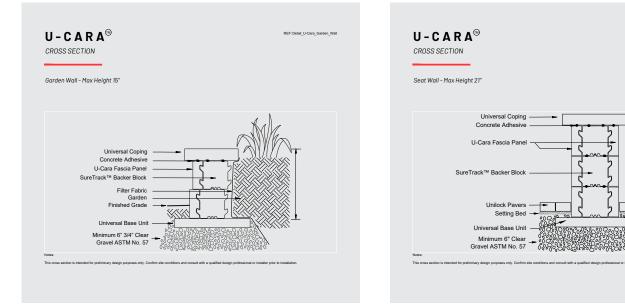

U-Cara° Multi-Face Wall System



CORNER BACKER 5 ⅔ x 6 ⅔ x 11 ⅔ 150 x 175 x 294mm 56 units/Bundle




LARGE BACKER 5 % x 7 % x 11 5%" 150 x 200 x 294mm 63 units/Bundle



STANDARD BACKER 5 % x 7 % x 5 % 150 x 200 x 150mm 105 units/Bundle

		LARGE/CORNER/ PILLAR BACKER	LARGE BACKER	STANDARD BACKER		
	Bundle Type		SINGLE	SINGLE		
	Plant Produced	CHICAGO	CHICAGO	CHICAGO		
	Thickness (mm)	150 MM	150 MM	150 MM		
	Bundle	15.82	20.35	33.91		
FCFT PER	Layer	3.96	6.78	11.30		
	Stone	0.28	0.32	0.32		
PER BUNDLE	Layers	4.00	3.00	3.00		
FERBONDEL	Sections	-	-	-		
	1					
LNFT PER	Bundle	-	41.34	69.99		
	Unit	-	0.66	0.67		
	SqFt	3.54	3.10	3.10		
UNITS PER	Sections	-	-	-		
	Bundle	56.00	63.00	105.00		
	Layer	521	922	819		
LBS PER	Sections	-	-	-		
	Bundle	2,085	2,766	2,458		

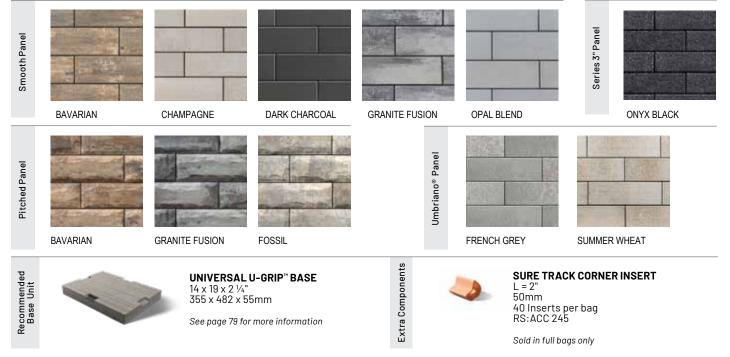


Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

U-Cara[®] Modular System

The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Places and Pillars.








NO.	MODEL	DESCRIPTION
UCARA000001	URS	UCARA 8' RAIL (10/PACK)
UCARA000003	URS	ALIGNMENT BARS 39"(10/PACK)
UCARA000005	UL-HCK	HEIGHT CONVERSION KIT
UCARA000006	UL-HCK-OS	HEIGHT CONVERSION KIT OVERSIZED
UCARA000007	UL-OSK	CABINET DEPTH CHANGE KIT
RS-UCARA000009	UL-FIR	U-CARA FIREPLACE
RS-UCARA000010	UL-FIR-M	U-CARA FIREPLACE MANTLE
RS-UCARA000014	UL-HCK-CC-OS	HEIGHT CONVERSION CORNER CABINET OVERSIZED
RS-UCARA000015	UL-HCK-CC	U-CARA HEIGHT CONVERSION CORNER CAB
RS-UCARA000016	UL-FIR-MW	U-CARA FIREPLACE MANTLE WIDE UNIT
RS-UCARA000017	UL-FIR-CH	U-CARA U-CARA FIREPLACE CHIMNEY UNIT
RS-UCARA000018	UL-FIR-CH-MW	U-CARA FIREPLACE CHIMNEY WIDE UNIT
RS-UCARA000019	UL-FIR-RTN	U-CARA FIREPLACE RETURN
RS-UCARA000020	UL-FIR-RTN-OS	U-CARA FIREPLACE RETURN OVERSIZED
UCARA001000	UL-GC	UNIVERSAL GRILL CABINET (fits 36-42" grill)
UCARA002000	UL-BC	BASE CABINET (fits fire table or fridge)
UCARA003000	UL-CC	CORNER CABINET 27.5" x 27.5"
UCARA003001	UL-CC-OS	CORNER CABINET 27.5" x 36.5" OS
UCARA003002	UL-CC-BP	CORNER CABINET BACK PANEL
UCARA004000	UL-ECK	END CLAD KIT 27.5"
UCARA004001	UL-ECK-OS	END CLAD KIT 36.5" OS
UCARA005000	UL-BS	BACKSPLASH-GRILL/BASE UNIT 641/2"
UCARA005001	UL-BS-CC	BACKSPLASH CORNER CABINET
UCARA005002	UL-BS-CC-OS	BACKSPLASH CORNER CABINET OS
UCARA006000	UL-DD	STAINLESS DOUBLE ACCESS DOORS 27"
UCARA007000	UL-PU	PILLAR UNIT (183%" x 183%")
RS-UCARA001002	UL-GC-36	UNIVERSAL GRILL CABINET (FITS 36"-42" GRILL)
RS-UCARA002001	UL-BC-36	BASE CABINET (FITS FIRE TABLE OR FRIDGE)
RS-UCARA003004	UL-CC-0S-36	CRNR CABINET 27.5X36.5 OS
RS-UCARA003005	UL-CC-36	CORNER CABINET 27.5X27.5
RS-UCARA004002	UL-ECK-36	END CLAD KIT 27.5"
RS-UCARA004003	UL-ECK-OS-36	END CLAD KIT 36.5" OS





U-Cara® Wall Mount System



U-CARA ALIGNMENT BAR RS-UCARA000002 39" LENGTH - SOLD IN PACKS OF 10 PIECES

U-CARA RAILS RS-UCARA000001 8' LENGTH - SOLD IN PACKS OF 10 PIECES The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.





Architectural Coping & Pillar Cap



APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Exposed Joint Spacing - n/a

TECHNOLOGIES

ENDURACOLOR™ Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		COPING	PILLAR CAP 28'
Bundle Type		SINGLE	SINGLE
	Plant Produced		
	Thickness (mm)	60 MM	76 MN
	Bundle	-	
SQFT PER	Unit	-	
	Bundle	-	
FCFT PER	Layer	-	
	Unit	-	
	Bundle	42.00	
LNFT PER	Unit	2.00	
	Bundle	21.00	6.0
UNITS PER	SqFt	-	
	Unit	68	18
LBS PER	Bundle	1,428	1,09
COLORS	Reflectance	Stock	Stoc
Buff	SR n/a SRI n/a	 ✓ 	
Charcoal	SR n/a SRI n/a	1	U



BUFF



Single Unit

COPING 609 x 60mm x 355mm 24 x 2 ³/₈ x 14" 21 units/Bundle



PILLAR CAP 711 x 76mm x 711mm 28 x 3 x 28" 6 units/Bundle

Note: this unit is tapered at the top

ENDURACOLOR

Notes: SOLD IN FULL PALLETS ONLY and is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

Brussels Fullnose[™]

CLASSIC



APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Weathered Joint Spacing - 2mm

TECHNOLOGIES

CLASSIC™ Budget-friendly traditional product mix

ANTIQUED™ Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		BRUSSELS FULLNOS
	Bundle Type	SINGL
	Plant Produced	CHICAGO
	Thickness (mm)	60 MI
	Bundle	
FCFT PER	Layer	
	Stone	
	Layers	10.0
PER BUNDLE	Sections	4.0
	Bundle	120.0
LNFT PER	Unit	0.5
	SqFt	
UNITS PER	Section	60.0
	Bundle	240.0
	Layer	31
LBS PER	Section	79
	Bundle	3,16
COLORS	Reflectance	Stoc
Midnight Charcoal	SR12 SRI 9	
Sandstone	SR41 SRI 46	
Sierra	SR. n/a SRI n/a	





MIDNIGHT CHARCOAL

SANDSTONE







Notes: Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

6 x 12 Fullnose

CLASSIC



APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 2mm

TECHNOLOGIES

CLASSIC™ Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		6 x 12
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	60 MM
	Bundle	-
FCFT PER	Layer	-
	Stone	-
	Layers	4.00
PER BUNDLE	Sections	-
	Bundle	104.00
LNFT PER	Unit	0.50
	SqFt	-
UNITS PER	Section	-
	Bundle	208.00
	Layer	698
LBS PER	Section	-
	Bundle	2,791
COLORS	Reflectance	Stock
Midnight Charcoal	SR. n/a SRI n/a	
Sandstone	SR. n/a SRI n/a	1
Sierra	SR. n/a SRI n/a	1





MIDNIGHT CHARCOAL

SANDSTONE





Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

Ledgestone[™] Fullnose, Coping & Closed-End Coping



APPLICATIONS



APPEARANCE Edge Detail - n/a Surface Texture - Textured

TECHNOLOGIES

REALA[™] Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1776 Eligible for LEED v4.1 credits

		FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END	LARGE COPING	LARGE CLOSED-END
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	60 MM	70 MM	70 MM	70 MM	70 MM
[
	Bundle	5.12	5.52	5.52	6.87	6.87
FCFT PER	Layer	0.39	1.38	1.38	1.72	1.72
	Stone	0.39	0.46	0.46	0.57	0.57
	1					
PER	Layers	13.00	4.00	4.00	4.00	4.00
BUNDLE	Sections	-	-	-	-	-
	Bundle	26.00	24.00	24.00	30.00	30.00
LNFT PER	Unit	20.00	24.00	24.00	2.50	2.50
. =	Unit	2.00	2.00	2.00	2.00	2.50
	SqFt	2.54	2.18	2.18	1.75	1.75
UNITS PER	Section	-	-	-	-	-
	Bundle	13.00	12.00	12.00	12.00	12.00
	1					
LBS	Layer	56	193	199	282	279
PER	Section	-	-	-	-	-
	Bundle	723	772	796	1,128	1,116
COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Buff	n/a	1	/	1	/	1
Grey	n/a	1	/			





BUFF

Single Units



FULLNOSE COPING 610 x 305 x 60mm 24 x 12 x 2 3/8" 13 units/Bundle .39 Fc.Ft./Stone



STANDARD CLOSED-END COPING 610 x 305 x 70mm 24 x 12 x 2 ¾"

12 units/Bundle

.46 Fc.Ft./Stone



LARGE COPING 762 x 343 x 70mm 30 x 13 ½ x 2 ¾" 12 units/Bundle .57 Fc.Ft./Stone



LARGE CLOSED-END COPING 762 x 343 x 70mm 30 x 13 ½ x 2 ¾" 12 units/Bundle .57 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. All measurements are nominal. Contact Unilock for more information.

Ledgestone[™] Pillar Caps, Steps & Fire Pit Coping



APPLICATIONS

- I M

APPEARANCE

Edge Detail - n/a Surface Texture - Textured


TECHNOLOGIES

REALA[™] Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1776 Eligible for LEED v4.1 credits

		30" STEP TREAD	48" STEP	72" STEP	24" PILLAR CAP	29" PILLAR CAP	21 1/2" Fire Pit Coping
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
F	lant Produced	CHICAGO	MULTI-PLANT	MULTI-PLANT	CHICAGO	CHICAGO	CHICAGO
TI	nickness (mm)	70 MM	150 MM	150 MM	100 MM	100 MM	65 MN
	Bundle	6.87	5.91	8.86	3.28	_	
FCFT PER	Layer	1.72	1.97	2.95	0.20		
TOTTER	Stone	0.57	1.97	2.95	0.66	-	
PER	Layers	4.00	3.00	3.00	5.00	5.00	6.00
BUNDLE	Sections	-	-	-	-	-	
LNFT PER	Bundle	30.00	12.00	18.00	10.04	-	
LNFIPER	Unit	2.50	4.00	6.00	2.01	-	
	SqFt	1.75	0.51	0.34	1.52	-	
UNITS PER	Section	-	-	-	-	-	
	Bundle	12.00	3.00	3.00	5.00	5.00	24.0
	Layer	262	556	813	159	206	33
LBS PER	Section	-	-	-	-	-	
	Bundle	1,049	1,669	2,439	795	1,030	1,68
COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stoc
Buff	n/a	1	1	1	1	✓	v
Grey	n/a	1	1	1	1	1	v

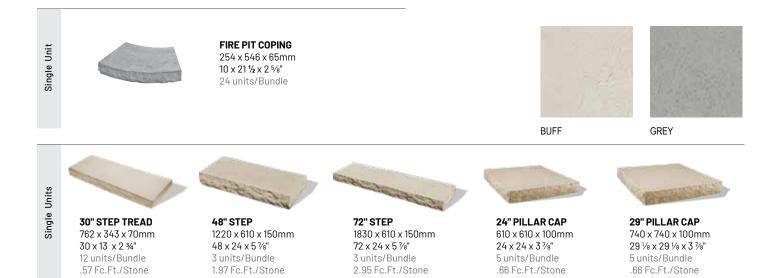

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. All measurements are nominal. Contact Unilock for more information.

Umbriano[®] Coping



APPLICATIONS



APPEARANCE

Edge Detail - Chamfered or Rounded Surface Texture - Umbriano Mottled Joint Spacing - 3mm

TECHNOLOGIES

ENDURACOLOR™ Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral stain resistance

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits



FRENCH GREY

MIDNIGHT SKY



SUMMER WHEAT









COPING FULLNOSE 360 x 600 x 60mm 14 x 24 x 2 3/8" 40 units/Bundle

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

ENDURACOLOR[®]

COPING

SINGLE

60 MM

-

-

-

-

10.00

1.97

78.74

-

-

40.00

252

2,517

Stock

1

1

1

1

.

FULLNOSE

MULTI-PLANT

COPING

SINGLE

60 MM

-

-

-

-

1.97

78.74

-

-

40.00

252

2,517

Stock

1

1

1

1

_

10.00

CHAMFERED

MULTI-PLANT

Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Stone

Layers

Unit

Bundle

SaFt

Section

Bundle

Layer

Section

Bundle

Reflectance

SR. .17 SRI 15

SR. .17 SRI 15

SR. .42 SRI 48

SR. .17 SRI 15

Sections

FCFT PER

PER BUNDLE

LNFT PER

UNITS PER

LBS PER

COLORS

French Grey

Midnight Sky

Summer Wheat

Winter Marvel

'JNILOCK'	79

WINTER MARVEL

Universal U-Grip[™] Base

CLASSIC



APPLICATIONS

201 ded 🛲 🚺

APPEARANCE

Edge Detail - n/a Surface Texture - Standard / Smooth

TECHNOLOGIES

CLASSIC™ Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

	Dundle Tune	SINGLE
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	55 MM
	Bundle	-
FCFT PER	Layer	-
	Stone	-
	Layers	9.00
PER BUNDLE	Sections	-
	Bundle	85.50
LNFT PER	Unit	1.58
	Unit	1.30
	SqFt	-
UNITS PER	Section	-
	Bundle	54.00
	Layer	280
LBS PER	Section	-
	Bundle	2,524
COLORS	Reflectance	Stock
Natural	SR.n/a SRI n/a	1



NATURAL



UNIVERSAL U-GRIP BASE 482 x 55 x 355mm 19 x 2 ¼ x 14" 54 units/Bundle

Notes: SOLD IN FULL BUNDLES ONLY and is shipped on a required, refundable skid. Coping bundle includes 2 End units per Layer (1 Left & 1 Right). All measurements are nominal. Contact Unilock for more information.

Sunset Fire Pit Kit



APPLICATIONS

CÔ T

APPEARANCE

Edge Detail - Zero Surface Texture - Standard Joint Spacing - n/a Void % - n/a

TECHNOLOGIES

CLASSIC™ Budget-friendly traditional product mix

ANTIQUED™ Distressed, timeworn finish

TECHNICAL INFORMATION Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

		SQUARE W/GRILL	SQUARE UNIT	ROUND W/GRILL	ROUND UNIT
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	300 MM	300 MM	300 MM	300 MM
	Outside	56.00	56.00	52.00	52.00
DIAMETER (inch)	Inside	40.00	40.00	36.00	36.00
(inch)	Insert	38.00	38.00	34.00	34.00
LAYER PER UNIT		3.00	3.00	3.00	3.00
UNIT PER LAYE	R	16.00	16.00	18.00	18.00
UNIT PER PALLI	ET	48.00	48.00	54.00	54.00
LBS PER PALLE	т	1,545	1,525	1,145	1,125
COLORS	Reflectance	Stock	Stock	Stock	Stock
Granite	SR. n/a SRI n/a	-	-	1	1
Sandstone	SR. n/a SRI n/a	1	1	1	1
Sierra	SR n/a SRI n/a	1	1	1	1

SUNSET FIRE PIT KIT	Square	Round
Granite	-	RS-CON082
Granite w/Grill	-	RS-CON083
Sandstone	RS-CON037	RS-CON031
Sandstone w/ Grill	RS-CON040	RS-CON034
Sierra	RS-CON036	RS-CON030
Sierra w/ Grill	RS-CON039	RS-CON033





GRANITE

Single Unit

SANDSTONE

SIERRA



SUNSET SQUARE W/GRILL

1400 x 1400 x 300mm

55 x 55 x 11 7⁄8"



SUNSET ROUND UNIT 1300 x 1300 x 300mm 51 ¼ x 51 ¼ x 11 %"



CLASSIC

SUNSET SQUARE UNIT 1400 x 1400 x 300mm 55 x 55 x 11 %"

Notes: All measurements are nominal. Contact Unilock for more information.

1300 x 1300 x 300mm

51 ½ x 51 ¼ x 11 %"

SUNSET ROUND W/GRILL

Unilock Elements

Tuscany Collection



TUSCANY FIREPLACE Sandstone with Copthorne[®] (3 Color Blend)

ELEMENT PRODUCT CODES

Tuscany Collection	Sandstone	Sierra
Fireplace Top	RS-ELE074-1	RS-ELE095-2
Fireplace Bottom Wood box Set	RS-ELE088-1 RS-ELE028-1	RS-ELE096-2 RS-ELE027-1
Arched Hearth	RS-ELE016-1	RS-ELE017-1



TUSCANY FIREPLACE Sierra with Copthorne® (3 Color Blend)

WEIGHTS

Tuscany Collection

Fireplace Top – 2925 lbs Fireplace Bottom – 4225 lbs Wood Boxes – 4005 lbs Arched Hearth – 1170 lbs

Barcelona Collection



BARCELONA FIREPLACE Sierra with Umbriano[®] (Summer Wheat)

ELEMENT PRODUCT CODES

WEIGHTS:

Barcelona Collection

Fireplace RS-Wood box Set RS-Arched Hearth RS-


SierraFiRS-ELE214FiRS-ELE213WRS-ELE212Ar

Barcelona Collection


Fireplace Top – 2725 lbs Fireplace Bottom – 4170 lbs Wood Boxes – 4200 lbs Arched Hearth – 1200 lbs

Unilock Elements

TYPICAL CROSS SECTION FOR CONCRETE PAD INSTALLATION

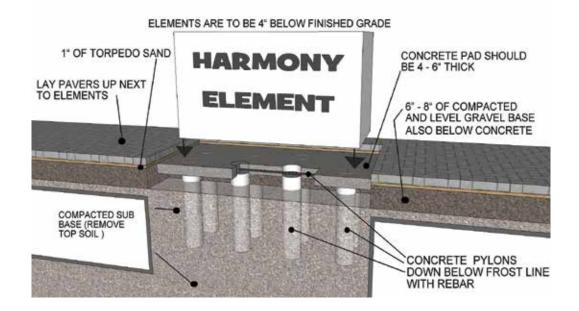

TUSCANY & BARCELONA FIREPLACE

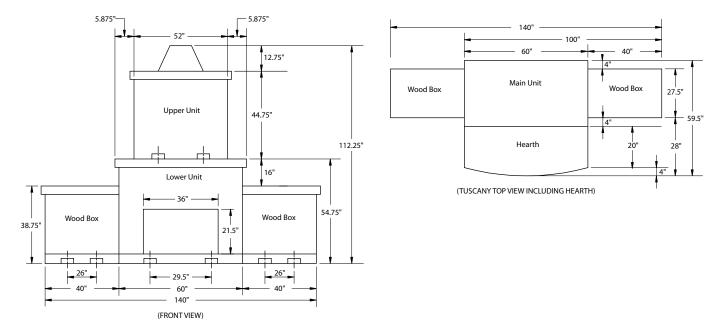

GUARANTEE

The standard Unilock guarantee applies to the units used to construct Unilock Elements. (See Unilock literature for details.) Third party grills and fireboxes carry their respective manufacturer's warranty, and may change without notice.

Note: Unilock reserves the right to change model designs, accessories and colors without notice. Unilock will not be responsible for improper use or handling that results in property damage. Some models may not be exactly as shown. Fireplaces come complete with UL-approved stainless steel fireboxes. Check local building codes and regulations prior to ordering and installing Unilock Elements.

Cleaning Products



PROFESSIONAL GRADE OIL & GREASE REMOVER

- RS-CLN001 1 guart; 6/case; 100 cases/skid (600 ea)
- · Removes penetrated petroleum-based stains.
- · Clean-dries from a liquid to a powder.



PAINT, TAR & RUBBER REMOVER

RS-CLN007 1 quart; 6/case; 120 cases/skid (720 ea)

- Effectively dissolves paint, tar, rubber or chewing gum.
- Water-rinsable stones, concrete, and masonry.



PAVER RESTORER

RS-CLN044 1 gallon; 4/case; 36 cases/skid (144 ea)

- Eco-friendly cleaner removes slurry and polymeric haze.
- · Cleans up to 200 sg. ft./gallon.



SUREBOND SURECLEAN

RS-CLN014 1 Gallon; 4/case; 36 cases/skid (27 cases/truckload - HAZMAT) RS-CLN063 5 Gallon (SPECIAL ORDER) 36 ea./skid (25 ea./truckload - HAZMAT)

- · Environmentally friendly, non-acid, super concentrated cleaner.
- · Dislodges dirt, grime, tire scuffing and environmental soiling.
- Cleans up to 250 sq. ft./gallon.
- 1,000 lbs. HAZMAT weight restriction applies with this product.



SUREBOND EFFLO OFF

RS-CLN0621 gallon; 4/case; 36 cases/skid (27 cases/truckload - HAZMAT)

RS-CLN067 5 gallons (SPECIAL ORDER) (25 ea/truckload - HAZMAT)

- Heavy-duty, non-acid concentrated cleaner.
- Designed for the removal of efflorescence, mineral and salt deposits.
- · Cleans up to 200 sg. ft./gallon.
- 1,000 lbs. HAZMAT weight restriction applies with this product.



SUREBOND STAIN & RUST BUSTER

RS-CLN065 1 guart; 12/case; 36 cases/skid (432 ea)

- Concentrated, evnironmentally friendly spot cleaner.
- · Cleans stains such as moss, mildew, leaf, rust and nongreasy food stains.
- S.R.B. is concentrated; requires dilution prior to use.



SUREBOND SURE STRIP

RS-CLN031 1 gallon; 4/case; 36 cases/skid (144 ea) RS-CLN032 5 gallons; 36/skid (SPECIAL ORDER)

- · Strips away a variety of sealers and coatings.
- · Fast-acting, works in minutes.
- Ready to use, no dilution needed.
- Coverage is about 250 Sq. Ft./gallon.

Adhesive Products

•

•

•

1200 psi. •

• 900 psi.

SUREBOND SB-10 ADHESIVE

• Fast set-up, quick curing.

RS-ADH009-1 10 oz; 12/case; 140 cases/skid (1680 ea)

RS-ADH015-1 28 oz; 12/case; 60 cases/skid (720 ea)

Can be applied to wet, damp & frozen block.

Temeratures ranging from 0 - 100°F.

* SPECIAL ORDER - FULL CASES ONLY *

Temeratures ranging from 10 - 100°F.

ALLIANCE XP GATOR BLOCK ADHESIVE RS-ADH039 10 oz; 12/case; 90 cases/skid (1080 ea) RS-ADH040 28 oz; 12/case; 60 cases/skid (720 ea)

RS-ADH050 10 oz tube: 12/case: 140 cases/skid RS-ADH051 28 oz tube; 12/case; 60 cases/skid

• Superior durability including heavy vehicular traffic.

Material may be repositioned for up to 30 minutes.

SUREBOND SB-15 ADHESIVE

• Rapid set, 70% faster set time.

• Bonds permanently in 24 hours.


















TECHNISEAL STRUCTURE BOND™ GUN CLEANER

• Works best in temperatures between 0- 120°F.

TECHNISEAL STRUCTURE BOND[™] GUN II

• Yields up to 600 In.ft. with a 3/8" bead.

RS-T00L378 1 dispenser gun; 12/case

Perfect for hard-to-reach applications.

RS-CLN093 24 oz/canister; 12 canisters/case

• Rapidly dissolves any uncured Structure Bond adhesive residue.

TECHNISEAL STICKY STONE

RS-ADH055 20.3 oz sausage; 15 sausages/case; 66 cases/skid

- Professional-grade vertical hardscape adhesive.
- Perfect for outdoor kitchens, fire pits & columns, etc.
- Holds up to 15 lbs.
- Coverage: 1/4" x 1/4" deep area, each sausage will cover 50 linft.
- Recommended to place 1/2" bead every 3". •
- Applies mess-free and easily with gun applicator.

STICKY STONE GUN

RS-TOOL557 1 dispenser gun kit; 10 kits/case

- Heavy-duty dispenser gun specially designed for Stickystone.
- Each gun kit includes: 6 nozzles, 2 extra pistons & steel hook pull.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

UNILOCK 84



























Sealing Products

BACK TO BLACK SEALER

- RS-SEAL238 1 guart; 3 guarts/case • Quickly revives and enhances faded, dark limestone.
- Provides stain & water-resistant surface.
- 1 Liter covers up to 400 sqft with one coat depending on
- surface porosity. LIMITED STOCK AVAILABLE



SUREBOND 8700 WET LOOK JOINT SAND STABILIZER WITH FUNGICIDE RS-SEAL151 1 gallon; 4/case; 36 cases/skid (27 cases)

RS-SEAL152 5 gallons; 36 ea/skid (22 ea.)

RS-SEAL176 55 gallons; 4 drums/skid | SPECIAL ORDER (1-55 Gal Drum - HAZMAT Limit per TL)

- · Seals & enhances surface while hardening jointing sand. Deeply enhances surface with stain-resistant semi-gloss finish.
- · Formulated with antifungal to stop growth of mold, fungi and moss.
- Rain safe in 90 minutes; approx. coverage 80-120 sq.ft.
- 1,000 lbs. HAZMAT weight restriction applies with this product.



SUREBOND 4000 INVISIBLE PENETRATING RS-SEAL 0331 gallon | RS-SEAL 0345 gallon

- Surface Penetrating
- Long Lasting & Durable
- Water repelant and salt blocker
- Non-Hazardous and VOC/EPA Compliant



SUREBOND 1300 JOINT SAND STABILIZING SEALER RS-SEAL037-2 1 gallon; 4/case; 36 cases/skid (144 ea) RS-SEAL036 5 gallon; 36 ea./skid

RS-SEAL038 55 gallons; 4 drums/skid (SPECIAL ORDER)

- Stabilizes joints, reduces sand washout, weeds & insects.
- Locks in with a clean, natural look & matte finish.
- Formulated with antifungal to protect film from mold, moss & algae.
- Approximate coverage 80 120 sq.ft.



TECHNISEAL® WL4 PROSERIES WET LOOK WATER REPELLANT

RS-SEAL001 1 gallon; 4/case; 45 cases/skid; (22 cases/truckload - HAZMAT) RS-SEAL073 5 gallons; 48 ea/skid;

- · Solvent-based sealer to enhance pavers with wet-look, high-gloss finish.
- · Reduces oil & dirt penetration, makes cleaning easier. Approximate coverage is 150 sg.ft./gallon (750 sg.ft./5
- gallons).
- 1,000 lbs HAZMAT weight restrictions applies with this product.

Sand Products



SEK JOINTING SAND

RS-SAND001-1 - Tan | RS-SAND140 - Grey | RS-SAND186 - Black | RS-SAND148 - Platinum 50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Recommended for joints up to 3/4".
- Angular jointing sand, washed, screened & kiln-dried.
- Coverage: 50=75 Sq. Ft./bag with standard 1/4" joints.

Sand Products continued



SEK POLYSWEEP SAND

RS-SAND045 - Tan | RS-SAND046 - Grey | RS-SAND184 - Black | RS-SAND147 - Platinum | RS-SAND232 - Pearl 50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Recommended for joints up to 3/4".
- Haze Free Guaranteed Advanced Clear Set Technology.
- Coverage 50-75 Sg.Ft./bag with standard 1/4" joints.

SEK POLYSWEEP SAND X-TREME WIDE JOINT

• Haze Free Guaranteed - Advanced Clear Set Technology.

• Coverage 50-75 Sq.Ft./bag with standard 1/4" joints.

RS-SAND111 - Tan | RS-SAND117 - Grev;

50 lb/bag • 56 bags/skid (2860 lbs/skid)

RS-SAND185 - Black | RS-SAND149 - Platinum





TECHNISEAL SMARTSAND

• Formulated for joints 1/8" up to 4".

RS-SAND168 - Prairie Grey | RS-SAND169 - Prairie Tan 50 lb/bag • 56 bags/skid (2860 lbs/skid) Approx. 100-150sq.ft/gallon coverage

- Haze -free, fast-setting polymeric sand.
- Recommended for joints from 1/16" up to 1".
- Minimum Joint Depth is 1.5".
- Coverage: 60-120 Sq.Ft./bag for narrow joints.



TECHNISEAL HP NEXTGEL

ALLIANCE GATOR SUPER SAND

• Advanced haze-free polymeric sand.

• Rain safe 1 hour after water activation.

50lb bag / 56 bags per skid

RS-SAND130 - Prairie Grey | RS-SAND131 - Prairie Tan 50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Dust & haze-free, fast-setting polymeric sand.
- · Formulated for heavy-sloped, heavy traffic, high humidity and pool decks.
- For joints from 1/16" to 4", ideal for joints up to 1".
- Coverage: 60-120 Sq.Ft./bag for narrow joints.

RS-SAND078 - Beige | RS-SAND080 - Slate Grey





ALLIANCE SUPER SAND G2 RS-SAND156 - Beige | RS-SAND157 - Slate Grey 50 lb/bag 56 bags/skid

• Intelligent polymeric sand to neutralize haze and dust.

• Formulated for pavers, slabs & wet cast pavers up to 1".

• Coverage: 65-85 Sg.Ft./bag with joints 1/8" to 3/8".

- Formulated for joints up to 4" for traditional and up to 2" for overlay applications.
- Rapid Set Technology Rain safe 16 minutes after water activation.
- Coverage: 65-85 Sq.Ft./bag with joints 1/8" to 3/8".

ALLIANCE MAXX G2

RS-SAND158 - Beige | RS-SAND159 - Slate Grey | RS-SAND160 - Black Diamond | RS-SAND161 - Ivory Packaging: • 50 lb/bag • 56 bags/skid

- Intelligent polymeric sand to neutralize haze and dust.
- Formulated for joints up to 4" for traditional applications & up to 2" for overlay applications.
- Rapid Set Technology Rain safe 16minutes after water activation.
- Coverage: 65-85 Sg.Ft./bag with joints 1/8" to 3/8".

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.









Sand Products continued



ALLIANCE EUROSTONE

- RS-SAND095 Slate Grey

 Polymeric sand designed for drainage and
- non-drainage base systems.
- Formulated for joints up to 1.5".
- Works above 32ºF.
- Coverage 65-85 Sq.Ft./bag with joints 1/8" to 3/8*.



ALLIANCE GATOR DUST

RS-SAND072 - Beige | RS-SAND073 - Grey 50 lb/bag • 56 bags/skid

- Polymeric stone dust.
- Formulated for joints from 1/2" to 6".
- Ideal with Gator Base application.
- Coverage: 20-39 Sq.Ft./bag with joints 1" to 2".



ALLIANCE GATOR NITRO SAND

RS-SAND196 - Beige | SAND197 - Grey | SAND198 - Black SAND236 - Silver (LSA)

40 lb bucket •48 buckets/skid

- Ready to use permeable jointing material.
- Can be installed in wet or dry weather.
- Formulated for joints from 1/2" to 2".
- Ideal for concrete & wetcast pavers, Natural Stone & Porcelain Tile.
- Coverage: 10-84 Sq.Ft./bucket depending on joint width.

Permeable Chip Products



ALLIANCE GATOR AQUA ROCK RS-AGG032 - 50lb./bag • 56 bags/skid

RS-AGG033 2200 lb./Super Sack

- Meets ASTM No. 9 requirement for permeable joint units.
- High-strength granite ideal for bedding course & jointing material.
- Coverage: 20-25 Sq.Ft./bag|880-1100 Sq.Ft./ Super Sack.



SEK PERM CHIPS

50lb./bag • 56 bags/skid


RS-AGG035 - Eclipse Black | RS-AGG040 - Stormy Grey RS-AGG037 - Saturn Tan (SPECIAL ORDER/FULL SKID ONLY)

2500 lb Super Sack:

RS-AGG036 - Eclipse Black | RS-AGG039 - Saturn Tan RS-AGG041 - Stormy Grey

- High-strength crushed and washed granite meets ASTM No. 9 Stone Specifications for permeable joint filler
- Ideal for permeable paving stone installations, both as a bedding course and as a joint filler
- Coverage: 30-35Sq.Ft./bag|1500-1750 Sq.Ft./Super Sack

Geotextile & Fabric Products



STRATAGRID - SGU60 RS-FAB101

- Geogrid reinforcement for soil and aggregates
- Engineered to be mechanically & chemically durable in
- harsh construction and agressive soil environments Roll Dimensions: 6.25' wide x 288' length (200 Square
- Yards)
- 85 lbs/roll

Geotextiles and Fabric Products



UNILOCK DRIVEGRID[™] SYSTEM RS-FAB075

- 120' x 12.5' Roll 1,500 Sq. Ft.
- 56 lbs per roll.
- Sold in full rolls only.





GEOTEXTILE FABRIC RS-FAB001

- 6 oz. Non-woven multipurpose geotextile fabric.
- Sold in full roll quantities only.
- Roll Dimensions: 15' wide x 300' length (4500 Sq.Ft.)
- 225 lbs/roll.



ALLIANCE GATOR GRID 30-30 RS-FAB070 - 4x50'; 15 rolls/case; 4 cases (60 rolls/skid) (FULL CASES ONLY)

RS-FAB072 - 6'x150'; 30 rolls/skid Biaxial geogrid, with high molecular weight weight and hightenacity poolyester yarns

High-tenacity polyester yarns woven in tension and finished with PVC cotaing



GATOR FABRIC GF4.4 RS-FAB044 - 4'x100'; 6 rolls/case; 4 cases (24 rolls)/skid (FULL CASES ONLY)

- RS-FAB047 6'x300; 16 rolls/skid
- Needle punched non-woven geotextile made of polypropylene fibers
- Non-biodegradable and resistant to most soil chemicals.

Miscellaneous Items

WALL DRAIN PRO

RS-ACC086 - Black | RS-ACC123 - Grey | RS-ACC122 - Tan 12 units/case; 63 cases/skid (full cases only)

- Simpler, aesthetically pleasing improved water drainage product
- Drain height can be easily modified to use with any block height under 8"



X & T SLAB SPACERS

RS-ACC237 - X Spacers; 2" x 2"; 250 pcs./bag RS-ACC236 - T Spacers; 2" x 1"; 250pcs./bag

- Unilock recommends using slab spacers when installing Arcana on an open grade surface
- "T" spacers are needed for running bond patterns; "X" spacers for stack bond patters. Please contact your sales manager for more information
- X & T bagged separately






GA RS

Gator Base System




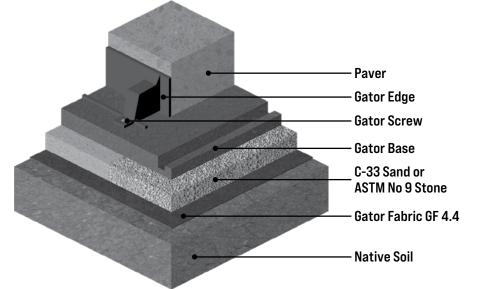

STEP 1 • EXCAVATION FOR THE GATOR BASE INSTALLATION

The total depth required will be determined by adding the thickness of the sand or chip setting bed (3/4'' [19 mm]), GATOR BASE (3/4'' [19 mm]), and thickness of the paver, slab, stone, or porcelain tile. Excavation depth is approximately 4'' for a 2 3/8'' [60 mm] concrete paver. Excavate 6'' (15 cm) wider than the perimeter of the paved surface or 12'' wider (30 cm) when building a seating wall or fire pit.

Gator Tile System

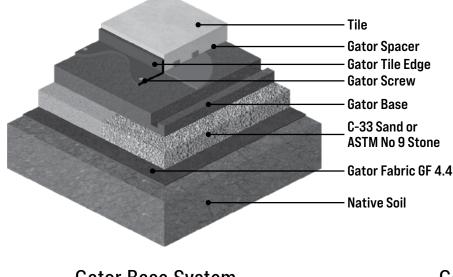

STEP 3 • ADD GATOR FABRIC GF4.4 AND INSTALL SETTING BED

Cover the bottom and sides of the excavated area with Gator Fabric GF4.4. Spread an even layer of sand (ASTM C33 Concrete Sand) or chip (ASTM No. 9 Stone) in a 3/4" [19 mm] thick layer over the Gator Fabric GF4.4. No compaction is needed for the chip stone. However, the sand-setting bed should be compacted using a hand tamper or vibrating plate. It will help to moisten the sand before compaction. The surface should be smooth, the finished paver surface will mirror the grade set in this step.

STEP 4 • INSTALL THE GATOR BASE

Cover the area with the GATOR BASE panels, 6" (15 cm) wider than the finished paver edge or 12" (30 cm) for a seating wall or fire pit. Lay the GATOR BASE units in an alternating (staggered) pattern - if the Gator Faces line up, the interlocking edges will align perfectly. Gator Base can easily be cut to size using a utility knife.

STEP 5 • INSTALL PAVERS, BLOCKS AND GATOR EDGE

Place the pavers or blocks directly on the GATOR BASE. Adding a 1/2" (13 mm) of bedding sand onto the surface of the GATOR BASE is also an accepted method for non-uniform thickness stone. Install the Gator Edge on the GATOR BASE, firmly against the pavers or blocks. Use a Gator Base Screw every second edging hole to maximize the lateral support provided by the Gator Edge.

STEP 6 • APPLY GATOR MAXX G2 TO PAVER JOINTS

FOLLOW STEPS 1 TO 4 OF GATOR BASE SYSTEM

STEP 5 • INSTALL GATOR SPACER, GATOR XP GLUE AND TILE

The installation of porcelain tile directly on top of the Gator Base using the GATOR SPACER to provide uniform spacing and unparalleled stability. The GATOR SPACER has been designed to provide the right support, load transfer and a monolithic surface binding all units together with the help of the Gator XP Glue on every quadrants of the Gator Spacer.

STEP 6 • INSTALL GATOR TILE EDGE

Install the Gator Tile Edge on the GATOR BASE, firmly against the tiles. Use a Gator Base Screw every second edging hole to maximize the lateral support provided by the Gator Tile Edge.

STEP 7 • APPLY GATOR NITRO TO TILE JOINTS



STEP 2 • LEVELING AND COMPACTING OF THE SOIL

The bottom of the excavated area should be uniform and

smooth (+/- 3/8" [10 mm] in 10') and slope in the same

direction as the finished paver surface Compact the soil

using a vibrating plate or hand tamper in confined areas.


Edging Products


SEK SNAPEDGE

RS-EDGE001 - 8' (96") piece; 24 pcs./bundle; 28 bundles (672 pcs)/skid RS-EDGE017 - Low Profile;6' 8" (80") piece; 24 pcs./bundle; 28 bundles (672 pcs.)/skid

- One-piece edging system that handles both straight & curved installations.
- Unique and quick snip 'n flex feature.
- Open base design allows root and grass system to grow through.
- Standard Sidewall: 1 ⁷/₈ | Low Profile Sidewall: 1 ³/₈
- Skid Dimensions: 98"L x 48"W x 50"H 210 lbs./skid

RS-EDGE001









SPIKES

RS-EDGE014 - 10" Round Spike; About

- 150 spikes/case; 48 cases/skid · Premium heavy-duty landscape

SEK PERMEDGE

- RS-EDGE033 8' (96") piece; 64 pcs./skid
- Permeable, spikeless edge restraint that includes attached geogrid.
- One-piece edging system that handles both straight and curved installations. Approximate Coverage: 25-30 Ln.Ft./
- bucket



PERMAEDGE PAVER EDGING

RS-EDGE074 - 5 Gallon bucket; 77 lb./bucket

- Quick & easy to use cuts install time by 75%.
- The perfect combination of strength, flexibility and permeability.
- Mix 1 gallon of water to each 5 gallon bucket of PermaEdge.
- Approximate Coverage: 25-30 Ln.Ft./bucket



PERMAEDGE PAVER EDGING

RS-EDGE081 - 50 lb. bag; 56 Bags/Pallet

- Quick & easy to use cuts install time by 75%.
- The perfect combination of strength, flexibility and permeability.
- Mix 2/3 gallon of water per bag.

RS-EDGE075 - 50lb bag; 56 bags/skid

• Paver restraint in a a bag - Just Add Water.

Permeable & Open Base- 13 Ln.Ft./bag

Fiber-reinforced concrete edge restraint. Simple to install - No spikes needed.

SEK EDGECRETE

Approximate Coverage: 16' - 18' Ln.Ft. on Dense Base, 12' - 16' Lin. Ft on Open Graded Base.

Approximate coverage: - Std. Base - 17 Ln.Ft./bag;

Edging Products continued



Gator Edge Products are easy to use and quick to install. Offers great lateral support and makes definition easier for alleys, driveways or sidewalks.

- They are made with 100% polypropylene or polyethylene for strength and flexibility.
- Rigid Edging can be transformed to Flex with a simple cut.



ALLIANCE GATOR XTREME EDGE

- RS-EDGE076 50 lb bag / 56 bags per skid. · The ultimate fiber-reinforced structural edging solution for any hardscape project.
- · Can be used for any traditional, open-graded, permeable, Gator Base or overlay application using concrete pavers or slabs, natural and wet cast
- stones. • Offers permanent continuous lateral support.
- Approximate Coverage: 20-25 sqft. per bag.

Stainless Steel Fireplace Insert

STAINLESS STEEL FIREPLACE INSERT


36" Unit - RS-FIR033; Order with RS-FIR041 (18" Flue Pipe), RS-FIR042 (36" Flue Pipe) & RS-FIR036-1 (Termination Cap)


42" Unit - FS-FIR034; (LIMITED AVAILABILITY); Order with RS-FIR042 (36" Flue Pipe) & RS-FIR036-1 (Termination Cap)


- Outdoor, Wood-burning Fireplace.
- · Insert comes with refractory panels, mesh spark screen and solid steel log grate.
- 254 lbs./Full Kit



	36	42
4	29"	36"
В	11-3/4"	11-3/4"
С	41"	48"
D	21"	24"
E	35"	42"
F	37"	41"
G	21"	22-1/2"











EDGECRETE





Unilock Pedestal System

TECHNICAL SPECIFICATIONS

Material	Recycled Polypropylene
Height Range	11/16" - 37-3/8" (17mm to 950mm)
Ultimate Compressive Strength ¹	P Series - 20 kN (4,496 lbs)*
	T Series - 10 kN (2,360 lbs)*
	M Series - 15 kN (3,372 lbs)*
Slope correction	0% to 8% @ 1% increment
Base Diameter	P Series - 6.81" (173 mm)
	T Series - 6.96" (177 mm)
	M Series - 8.26" (210 mm)
Spacer Tab Height	7/16" (11mm)
Spacer Tab Thickness	%" (3mm) [gap between pavers]
Biological / Chemical	Unaffected by molds and algae
Resistance	Good resistance to alkali and bitumen


MAX PEDESTAL ASSEMBLY



1Detailed values for individual heights are given in the technical specification

UNILOCK PEDESTAL HEIGHT CHART

T Series are discontinued. Limited quantities available while supplies last. Contact Unilock for more information.

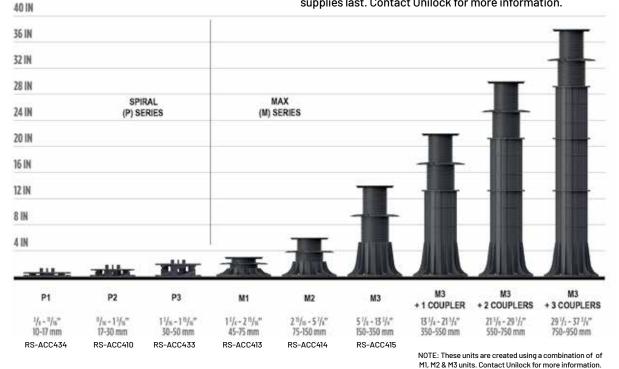

ACCESSORIES

 Indicates compatible with Series", ordered separately. Indicates not compatible with Series. 	Moveable Gap Spacer Tabs 1/8" (3MM)	Self-leveling Head 6% MAX	Rubber Shim //6"(1.5MM) 146 mm 146 mm 146 mm 146 mm RS-ACC421	Height Coupler 7%" (200MM) 200 mm 00 85 mm RS-ACC416	Slope Corrector 5%"(16MM) 220 mm 220 mm RS-ACC418	Drill Driver	Regulation Key RS-ACC419	Wall Edge Clip 1/32" (0.7MM) SPECIAL ORDER RS-ACC450
SPIRAL (P) SERIES	Gap Spacers Included	✓	✓	_	-	_	_	✓
MAX (M) SERIES *	Gap Spacers Included	✓	✓	\checkmark	✓	\checkmark	\checkmark	✓

Sealer Best Practices

- The paver surface should be **clean** and free from oil, dirt, dust and any loose material. This ensures a uniform result and allows the sealer to better penetrate the surface.
- The pavers should be free of any visible efflorescence.
- If pavers have been sealed before, make sure to reseal with compatible product.
- Surface must be dry (48 hours without precipitation) and warm to the touch (morning).
- Joint sand must also be dry.
- Make sure lawn sprinklers are shut off.
- Best air temperature is between **50 degrees to 80 degrees** with no rain forecasted for the next 24 hours.
- It is best to apply product under constant weather conditions and use the same application method from start to finish.
- The paver joints should be completely filled with dry correctly-graded joint sand. The top level should not exceed the bottom of the chamfer or **1/8**" **below** the surface on the non-beveled or tumbled paver surface.
- Always test the product on a small hidden area to ensure the results will meet your expectations.
- Always show homeowners samples to ensure expectations.

At this point read all sealer instructions and determine the best sealer for your desired goal. Do you want to retain the original look, enhance the color, or stabilize the sand joint?

- Read application information as each sealer can be applied differently.
- Make sure you have the correct equipment based on type of sealer. Solvent based sealers need solvent resistant sprayers, watering cans or paint trays. Water base sealers can be generally applied using plastic equipment. Example: solvent based sealers come in metal containers and water based sealers come in plastic containers.
- Care should be taken that no excess sealer material is pooled on the surface during application always back roll. When using solvent based sealers make sure roller is solvent resistant or for all paints. Foam rollers work best and are less likely to pull sand from the joints.
- Stabilizing sealers are generally sprayed or flood coated with a watering can, then back rolled.
- Acrylic non-stabilizing sealers can be sprayed, then back rolled or rolled on using a metal paint tray.
- Send your most experienced worker to do sealing projects.

Polysand Best Practices

- Ensure that paver surface has **proper drainage runoff** (Min 1" over 8'). Finished paver height should always be higher than grade to allow proper surface drainage.
- **Do not set pavers in limestone screenings.** This product holds moisture and does not meet the gradation, drainage qualities or strength of coarse concrete sand.
- Make sure pavers are clean of all construction dust. Residual construction dust will haze pavers!
- Compact pavers into setting bed to create proper interlock.
- Read and review all polysand manufacturers methods of application. (Read Directions)
- Don't rush polysand installation.
- Paver area must be completely dry.
- Lay bags of polysand over paver area. Stage bags in areas of coverage. Example: one bag for 60 square feet.
- Do not over sweep sand. Sweep sand back and forth within coverage area to fill paver joints.
- Compact sand into joints. This is a must in achieving proper density of the sand joint (repeat 3 times). Compaction is critical to assuring sand strength.
- Do not fill sand above the chamfer of paver. Sand should sit 1/8" below bottom of chamfer.
- Use a fine-bristle broom to **remove any excess sand from the paver surface**.
- Use a **leaf blower** remove any sand or binder residue.
- Review all watering directions (each manufacturer has different watering instructions.) This is VERY IMPORTANT!
- Always start watering at the **bottom of the slope**.
- Always start watering in **controlled areas** per manufacturers recommendations. Example: complete watering in 200 sq. ft. area then move on to the next 200 sq. ft. and repeat.
- During final watering of poly sand, **clean surface by removing excess water** with leaf blower or squeegee depending on paver surface texture. This will remove any leftover binder residue or sand.
- Final thoughts Always be aware of the weather when installing poly sand. (Temperature and setting time ratings differ between products.)
- Refer to all manufacturers websites for installation videos.

Terms and Conditions of Sale

STANDARD TERMS

1. All orders are accepted subject to prevailing state or other taxes, and subject to applicable skid charges and the cost of freight applying at the time of shipment. Confirm prices at time of order as they are subject to change.

2. The acceptance by the seller of an order shall constitute a binding contract of purchase and sale, in accordance with the terms set out in this agreement.

3. These terms and conditions, together with the purchase order, form the complete contract, and there are no representations, warranties, or conditions expressed or implied, affecting this contract, other than as contained herein.

4. All sales are made in accordance with the seller's samples, which the purchaser has seen and approved. No guarantee of exact color shades is made.

5. Use of any delivered materials by or on behalf of the purchaser shall be deemed to constitute acceptance of the materials by the purchaser.

6. Excessive defective material picked up or delivered to the purchaser will be replaced free of charge if a claim is made within five days. Free replacement will be the extent of the seller's warranty. Any such claim will not constitute a reason for delaying payment. All other claims must be submitted within 30 days of purchase.

7. Unsuitable or unsatisfactory materials must be available for inspection by the seller to entitle the purchaser to any adjustment or credit. Skid returns will be posted to account next business day.

8. No materials may be returned for credit except with the written consent of the seller, whether such materials were ordered in excess of the purchaser's requirement, by mistake, or otherwise. Where the seller agrees to accept the return of goods, these goods are subject to freight charges and a restocking charge of 20% of their value. All goods must be returned in their original packaging. ACCESSORIES, SECTIONS AND OPENED MATERIAL ARE NONRETURNABLE FOR ANY REASON.

9. Seller does not accept responsibility for delays in deliveries due to fire, flood, strikes, or any other condition or contingencies beyond its control.

10. The purchaser is responsible for installation of the materials on the job site, and the seller has no responsibility in this regard.

11. All approved credit accounts are payable within thirty days of invoice. After 30 days, interest will be charged at 1.5%* per month (A.P.R.19.65%*), Calculated monthly on the balance owing at the beginning of the period. If purchaser defaults in the payment of any portion of amounts due on this account, the entire remaining unpaid balance shall, at the option of the seller, immediately become due and payable with collection costs incurred.

12. Skid deposits are non-refundable with 2 or more broken top boards or one main stringer board. If you have skids loaded onto your vehicle or receive a delivery with skids in this condition, you must have the Unilock representative (loader or truck driver) note the quantity on the shipping document paperwork. The responsibility of the return of empty skids for credit rests with the purchaser. There will be a net usage fee for all skids accepted for return. Skids picked up by Unilock in conjunction with a delivery by a Unilock truck will not be credited until returned to Unilock and sorted and verified by Unilock. Normal delivery charges will apply to requested skid pick-ups which do not coincide with a Unilock delivery to the site.

13. A sectioning charge of \$30.00 is applied to all items where bundles are split.

GENERAL TERMS

1. All prices are F.O.B. Aurora, IL, Marengo, IL or Elkhorn, WI. Please contact Unilock for all freight rates.

2. All C.O.D. orders must be paid by certified check, cash, or prior approved check. Cashier's checks are encouraged over cash due to COVID-19.

3. Contact Unilock for shipping schedules, rates, and conditions, and any fuel surcharges.

4. Configurations may vary from time to time due to mold design changes.

5. Delays incurred on delivery in excess of one hour will be billed to the purchaser at \$80.00 per hour or fraction thereof. Similarly, delays incurred on partial delivery (1-7 bundles) in excess of one half hour will be billed to the purchaser at the same rate.

6. There is a mandatory \$26.00 skid deposit charge for the Standard Four Way Shipping Skids (SKID3842HERM, SKID2640HD & SKID), which are refundable when returned in good condition (a \$2.00 usage fee will be charged). All skid returns will be credited and posted to account the next business day.

7. There is a mandatory \$30 skid deposit charge for the following Wetcast Product Skids (SKIDPREM 1,2,3,4 & 5), which are refundable when returned in good condition (a \$2.00 usage fee will be charged). All skid returns will be credited and posted to account the next business day.

8. There is a mandatory \$34 skid deposit charge for all Canadian/Elegance Skids & Four Way 48" Solid Top Skids (SKIDLTD & SKIDSOLID48), which are refundable when returned in good condition (a \$2.00 usage fee will be charged). All skid returns will be credited and posted to account the next business day.

CUSTOM ORDERS


1. Custom Orders refer to nonstandard-inventoried items. Deposits of up to 100% of the order value (minimum of 20%) will be required. Minimum quantities apply on custom orders. Custom orders may be subject to a [500] sq.ft. over-run charge. Purchase orders as well as a signed special order release form will be required for custom material. Custom Orders will not be accepted for return.

2. All custom produced product must be shipped within 30 days of production. After 30 days all custom produced material will be subject to a storage fee of \$5.00 per pallet per month. Please contact your Territory Manager for more information.

CONFIRM ALL PRICES AS THEY ARE SUBJECT TO CHANGE

Laying Patterns

ARTLINE™




Artline A - 100% Random

BEACON HILL™ FLAGSTONE & BRISTOL VALLEY®




Beacon Hill Flagstone/Bristol Valley A - 40% Lg Rectangle, 40% Square, 20% Sm Rectangle




Beacon Hill Flagstone/Bristol Valley B - 40% Lg Rectangle, 40% Square 20% Sm Rectangle

BEACON HILL FLAGSTONE, **BRISTOL VALLEY & UMBRIANO® XL**




Beacon Hill Flagstone/Bristol Valley XL C - 67% Random Bundle, 33% XL

ECO-PRIORA™




Eco-Priora E - 100% Rectangle


BRUSSELS BLOCK®




Brussels P - 67% Standard, 33% Half




Brussels 0 - 67% Standard, 33% Half



Brussels X - 57% XL, 29% Standard, 14% Half






Brussels Z - 67% XL, 20% Standard, 13% Half




Brussels AF - 40% XL, 40% Standard, 20% Half

COPTHORNE®



Copthorne A - 100% Standard




Copthorne B - 100% Standard


COURTSTONE®

Courtstone A - 16% Square, 18% Sm Rectangle, 19% Rectangle, 22% Lg Rectangle, 25% XL Rect.

HOLLANDSTONE[™] & **HOLLAND PREMIER™**



Hollandstone D - 100% 4"x8"



Hollandstone C - 100% 4"x8"


NATURAL STONE



Natural Stone C - 67% 24" x 24", 33% 12" x 24"



Natural Stone D - 57% 12" x 24", 43% 18" x 24"




Natural Stone F - 34% 24" x 36", 24% 24" x 24", 18% 18" x 24", 24% 12" x 24"

TRIBECA COBBLE™



Tribeca Cobble - 100% Random Bundle


WESTPORT[™]




Westport Random - 34% Large Rectangle, 40% Square, 26% Rectangle

Laying Patterns

ECO-PROMENADE®




EcoPromenade 3x12 RB A - Running Bond




EcoPromenade 3x12 DHB B-Double Herringbone

NORDIC COBBLE™



NordicCobble A - 11% Nordic Cobble 89% 12 x 24" Paver




NordicCobble Fan




NordicCobble_Circle

SORENO™




Soreno 16x32 RB A-Running Bond

UMBRIANO® RANDOM




Umbriano Random A - 40% Large Rect., 40% Square, 20% Small Rect.



Umbriano Random B - 40% Large Rect., 40% Square, 20% Small Rect.

TRE0®




Treo R - 45% Large Rectangle, 35% Square, 20% Small Rectangle

		HT	
	┤┖	H	
		+	


Treo S - 45% Large Rectangle, 35% Square, 20% Small Rectangle

UMBRIANO®, BEACON HILL FLAGSTONE & BRISTOL VALLEY XL




Beacon Hill Flagstone/Bristol Valley XL G - 50% Random Bundle, 50% XL

RICHCLIFF®



Richcliff A - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"




Richcliff B - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"


			⊢			
-						
	 				_	

Richcliff C - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"

Richcliff D - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"




Richcliff E - 44.6% Random Bundle, 55.4% Large Rectangle




Richcliff F - 44.6% Random Bundle, 55.4% Large Rectangle


ARCANA™




Arcana A - 44% 24" x 24", 33% 18" x 24", 23% 12" x 24",



Arcana C - 36% 24" x 24", 27% 18" x 24", 37% 12" x 24"



Arcana F - 67% 24" x 24", 33% 12" x 24",




Series 4x8 HB G-Herringbone



Series 4x8 RB F-Running Bond

TOWN HALL®



Town Hall 4x10 DHB_B - Double Herringbone

2024 Freight Rates

Rates are based on a 0-50 mile radius from Aurora, IL, Marengo, IL & Elkhorn, WI facilities. Please contact the shipping department for all truckload rates and any questions concerning delivery. Approximately 14 bundles or 43,000 pounds per truckload. Delays incurred on delivery in excess of one hour will be billed to the purchaser at \$80 per hour or a fraction thereof. Partial load deliveries in excess of one-half hour will be billed to the purchaser at the same rate. **Fuel surcharge will be added to each order per guide below:**

Bundles	Boom	Princeton	Cost of Fuel	Flat Surcharge	At Least	Less Than	Fuel Surcharge
1-7	\$420.00	\$495.00	\$2.30 to \$2.79	\$27.00	\$2.30	\$2.79	5%
8-14	\$570.00	\$675.00	\$2.80 to \$3.29	\$42.00	\$2.80	\$3.29	10%
			\$3.30 to \$3.79	\$51.00	\$3.30	\$3.79	15%
			\$3.80 to \$4.29	\$64.00	\$3.80	\$4.29	20%
			\$4.30 to \$4.79	\$78 .00	\$4.30	\$4.79	25%
			\$4.80 to \$5.29	\$93.00	\$4.80	\$5.29	30%
			\$5.30 to \$5.79	\$106.00	\$5.30	\$5.79	35%

Fuel Surcharge for 0-50 miles only

Fuel Surcharge for deliveries over 50 miles

NOTE: Rates are based on current economic conditions and are subject to fuel surcharges, which will be based on the U.S. National Average Midwest rate of diesel fuel, calculated weekly. When the average price of fuel rises (or drops), the surcharge will take effect the following Monday. These rates can be located at www.eia.gov/petroleum/gasdiesel/.

IMPORTANT NOTES

SPECIAL ORDER PRODUCTS

Products listed as "Special Order" are not currently inventoried and may require additional lead times for manufacturing (or transfer from other Unilock locations). Prior to bidding or quoting projects, confirm Special Order unit pricing and minimum quantity requirements. A signed "Special Order Release Form" must be submitted prior to manufacturing and all material must begin shipping within 30 days of manufacturing date. Any Special Order products remaining at Unilock after 30 days will be subjected to a storage fee of \$5.00 per pallet per month. (Maximum storage is 3 months.) All quantities listed on the Special Order Release Form must ship and be paid in full. Please contact your Territory Manager for more information.

SPECIAL SAND GUIDANCE

EXTRA CARE must be exercised when using Polymeric Sand on the following products:

Arcana Courtstone® Copthorne® II Campo® Richcliff® Series™ Town Hall® Tribeca Cobble Umbriano™

Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Polymeric Jointing Sand have a natural tendency to adhere to the surface and therefore extra diligence must be taken to pre-clean the surface prior to "wetting the sand in" and squeegee off the surface post application. Failure to do so will result in a "whitish haze" on the surface that is difficult to remove.

IMPORTANT COMPACTION NOTICE: Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric sand can then be swept into the joints. Always use a compactor with a protective membrane attached to the bottom of the plate.

Polymeric Jointing Sand, cleaners and sealers, must always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.

NOTICE: Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of polymeric sand, sealers or cleaners. Please refer to each individual manufacturer for full instructions prior to install.

NATURAL STONE INSTALLATION GUIDELINES

A slurry coat, sometimes called a bond or milk sealer coat, is brushed on to the back of each natural stone unit prior to installation in order to limit moisture penetration, prevent staining and aid adhesion.

OPTIMAL COLOR BLENDING INSTALLATION

Blending colors from multiple (3+) bundles is ideal for the optimal color installaton. DO NOT LAY PALLET TO PALLET!

94 **UNILOCK**

IMPORTANT NOTES continued

UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee^{*} on the structural integrity of our paving stones, slabs and retaining wall units to the original purchaser of the product for residential use. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.

Excessive defective material (over the industry accepted normal of 2% for non-tumbled unit pavers) delivered to the purchaser will be replaced free of charge if a written claim is made within 5 days of delivery from the manufacturer. Such claims will not constitute reason for delaying payment. All goods shall be deemed accepted if completely installed. Inspect concrete products prior to opening bundle packaging to ensure that shape and color are as ordered. Unsatisfactory material must be available for inspection by Unilock to entitle the purchaser to any adjustment or credit. Inspect all concrete units during installation and set aside any which are chipped or cracked to use for any cut pieces required. The color of concrete products may vary significantly between production lots. Always install concrete units from several bundles simultaneously to ensure proper distribution of color. Prior to final compaction, inspect installed pavers for good color distribution. Relocate certain pavers, if necessary, to achieve desired color blend.

*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at unilock.com and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at Unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

TRADEMARK & LEGAL INFORMATION

Umbriano^{*} is a trademark of Metten Stein + Design GmbH & Co KG used under license by Unilock. Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area. Not all products shown are available at all Unilock locations. Log on to www.unilock.com for availability. Measurements throughout this portfolio are nominal.

©2024 Hengestone Holdings, Inc.

UNILOCK® QUALITY COMMITMENT

Unilock was the first concrete paver manufacturer in North America to offer a Lifetime Guarantee, and since then we have continued to stand behind it to ensure customers are completely satisfied with our products. With almost 2 billion stones in the ground, that's quite the commitment!

Our products are better and stronger than other brands. In fact, our internal standards of manufacturing in the USA and Canada far exceed industry standards set by ASTM (American Society for Testing and Materials) and CSA (Canadian Standards Association) and other European organizations.



LIFETIME GUARANTEE - RESIDENTIAL

Our Transferable Lifetime Guarantee warranties the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. It covers any structural failure or deterioration of the concrete unit resulting from normal use or from the reasonable application of sodium chloride (common rock salt used for de-icing). StoneMark[™] products have the same warranties as Unilock paving stones and retaining walls, but cannot be warranted against damage resulting from de-icing products. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Proof of purchase is required. Customers are encouraged to submit receipts to us as soon as their project is complete, using the Unilock Warranty Registration Form on our website (Unilock.com).

Purchasers need to ensure that the product they purchase is appropriate for their intended application; for example, only certain thicknesses of products are appropriate for driveways. Color matching of the replacement product and/or lost time cannot be guaranteed and labor costs related to installing replacement product is not included. Unilock reserves the right to seek a professional diagnosis and opinion to determine the exact cause of the product failure. If the failure falls within our warranty parameters, Unilock will replace the defective product.

EXCLUSIONS - Unfortunately, some things are beyond the control of Unilock, and are therefore not covered by this warranty. These include: naturally occurring efflorescence, hazing from polymeric jointing sand, scratching and chipping resulting from snow removal or construction equipment, damage caused by natural or un-natural disasters, or negligence by anyone other than Unilock. While EasyClean helps to increase a paver's resistance to staining from various substances, it does not make our products stain-proof nor does it resist every kind of stain. The Unilock warranty also does not cover deterioration or damage as a result of

poor design or poor installation practices that are contrary to specifications as laid out by ICPI (Interlocking Concrete Pavement Institute) and the NCMA (National Concrete Masonry Association). For more information please visit www. icpi.org and www.ncma.org. Additionally, please refer to the Maintenance, Color and Installation Advisories.

MAINTENANCE ADVISORY

1. Cleaning and Sealing

As with anything that is outdoors, Unilock products are subject to harsh weather, dust, acid rain, leaf stains, water stains and general wear from foot or vehicular traffic. Therefore, periodic cleaning using environmentally safe detergents designed for cleaning concrete is recommended to maintain a bright, fresh appearance.

To make subsequent cleaning easier and more effective, a concrete sealer can be applied to new or cleaned products to help prevent the penetration of substances that can cause stains.

There are many types of concrete cleaners and sealers on the market. Always read the instructions carefully before using the product to make sure that it will function as expected. Testing first, in a small unobtrusive area, is always a good idea to ensure the results are acceptable. Consult your local hardscape dealer to find the products best suited for your paver or wall installation.



Visit Unilock.com to register for your Transferable Lifetime Guarantee.

2. Winter Maintenance

Snow removal by way of metal blades on plows or shovels will scratch and chip the surface of pavers, causing permanent damage. To mitigate this risk, metal snow clearing blades must always have a polyurethane or rubber cutting edge attached when plowing pavers.

De-icing Salts - The use of de-icing products on paver surfaces is important for safety and to help mitigate snow accumulation. Most de-icing products will have some effect on concrete, even if the product label indicates that it is safe on concrete. If you must use a de-icing product, we recommend that you use Sodium Chloride (ordinary rock salt) or Calcium Chloride (for colder climates). Always apply sparingly. The use of de-icing products on StoneMark, wet-cast pavers, slabs or coping may damage the product and therefore is not recommended. Whenever possible use a coarse sand as an anti-slip measure instead of de-icing chemicals.

COLOR ADVISORY

1. Selection

Due to the inherently variable nature of printed materials and digital monitors, Unilock cannot guarantee that products will match the color of printed or online images. Therefore, when making final product selections, decisions should be made based on actual stones which are readily available from Unilock, Authorized Contractors or Authorized Dealers. Most Unilock products are not comprised of a single color, but rather contain blended colors for a more natural appearance. This means that there will be significant color variance from stone to stone, so purchasers should view multiple units together to get a more accurate impression of the overall color. Note: Unilock Natural Stone variations are outside the control of Unilock. Purchasers of natural stone must be willing to accept this inherent variability.

2. Pre-installation checking

Always check the label to ensure that the Unilock product delivered to your project is the product and color ordered. If there is a discrepancy, or if the product inside the packaging doesn't appear to be correct, contact your hardscape dealer before installing any pavers or wall units. If the product is installed, it indicates your acceptance of the products as delivered.

3. Blending

If the project requires more than one bundle of product it's always a good idea to draw product from several bundles when installing, as this ensures that any variation between bundles will be seamlessly integrated in the project. When bundles are from different production runs, random selection from multiple bundles is even more important.

4. Efflorescence

Efflorescence is a naturally occurring process that may appear as a white or light grey powder on the surface of concrete, clay or natural stone. It is temporary, and will disappear over time. However, if it is bothersome, an efflorescence cleaner can be used to remove it. There is no way to predict or prevent efflorescence. Because it does not compromise the structural integrity of the product, it is not covered by Unilock product warranties.

INSTALLATION ADVISORY

1. Construction Residue

While a certain amount of dirt on pavers and walls is inevitable during the construction phase, installers are strongly encouraged to clean as they go as construction residue can embed in the surface and become difficult to remove. The slurry produced during wet-saw cutting is particularly stubborn to clean if allowed to dry on the surface of pavers. Unilock warranties do not cover stains caused by a failure to remove construction residue.

2. Polymeric Haze

Surface hazing caused by polymeric jointing sand is not the responsibility of Unilock. Polymeric jointing sand should only be installed by an experienced and knowledgeable contractor. Any sand that is left on the surface prior to activation will result in a haze that is very difficult and time-consuming to remove. Only the highest quality, brand name polymeric sand that is guaranteed by the manufacturer should be used.

3. Compaction Damage

Both smooth and textured paver surfaces can be scratched by compaction equipment used to 'flatten' a new paver installation. Therefore, metal plate compactors must be fitted with a polyethylene mat to protect the paver surface from becoming scratched, or a superior option is to use a rubber-roller compactor instead. Damage to product surfaces caused by failure to follow these instructions is not covered by Unilock product warranties.

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

CHICAGO PRODUCT DIRECTORY

UNIT PAVERS

Product	Page	Finish	Pedestrian	Residential Vehicular	Commercial Vehicular	Environmental	For Borders & Accents
ADA Paver	4	S	v				
Anchorlock™	5	S	~		~		
Arcana™	6	SM	~				
Artline™	7	М	~	~			
Beacon Hill™ Flagstone	10	F	~				
Beacon Hill™ Smooth	12	SM	~				
Bristol Valley®	14	F	v				
Brussels Block®	16	W	~	~			~
Copthorne®	17	Т	v	~			~
Courtstone®	18	С	~	~			~
Eco-Line®	19	М	~	~	~	~	~
Eco-Optiloc™	20	М	~	~	~	~	
Eco-Priora [™]	21	М	~	~	~	~	
Eco-Promenade®	22	М	~	~	~	~	
Promenade [™] EcoTerra	23	SM	~	~			
Granito™	24	S	~	~	~		
Hex™	25	S	~	~		~	
Hollandstone™	26	S	~	~	~		~
Holland Premier ™	28	S	~	~			~
Mattoni™	29	SM	~	~			~
Natural Stone	30	SM	~				
Nordic Cobble™	34	WS	~	~	~	~	~
Optiloc°	35	м	~	~	~		
Porcelain	36	SM	~				
Promenade®	39	М	,	~	~		~
Richcliff [®]	41	Т	~	~			~
Series™	42	WS	~	~	~		~
Skyline™	44	S	~				
Soreno™	45	SM	,				
Town Hall [®]	46	Т	~	~	~	~	~
Treo [®] Smooth	47	SM	~	~		~	~
Tribeca Cobble	48	WS	~	~	~	~	~
Turfstone™	49	S		~	~	~	
Umbriano™	50	SZ	~	~	~	✓	~
Westport™	52	T	~	~			

RETAINING WALLS

Product	Page	Finish	Gardens	Retaining Walls	Steps	Seatwalls	Pillars
Brussels Dimensional Stone [®]	54	w	~		~	~	`
DuraHold®	55	SM		~	~	~	
Estate Wall™	56	SP/W	~	~	~	~	~
Lineo [™] Dimensional Stone	57	SM	~		~	~	~
Mackinaw™	58	SP	~	~		~	
Olde Quarry™	59	W	~	~	v	~	~
Olde Quarry™ Smooth	60	SM	~	~	v	~	~
Pisa™	61	SP	~	~	~	~	~
Pisa [™] Smooth XL	62	SM	~	~	v	~	~
Rivercrest®	63	S	~	~	v	~	~
SienaEdge™	64	SM	~	~	~	~	
SienaStone®	65	SP		~	~		
U-Cara°	67	М	~	~	v	~	~

Finishes: B=Brushed; C=Cobblestone; D=Dimpled; DW=Dimpled and Weathered; F=Flagstone; S=Standard; SM=Smooth; SZ=Smooth Zero Bevel; SP=Split; SP/W=Split and Weathered; T=Timeworn; W=Weathered; WS=Washed. This application chart should only be used as a guide. Site conditions, base materials, pattern and frequency of use may vary the performance of various types and styles of products.

98 **UNILOCK**

ADD 3D LANDSCAPE DESIGN TO YOUR TOOLBOX



UVISION ALLOWS YOU TO VISUALLY COMMUNICATE YOUR DESIGN IDEAS TO YOUR CLIENT IN BOTH 2D PLAN VIEW AND 3D PERSPECTIVE VIEW

3D LANDSCAPE CREATO

Whether you're coming from the hand-drawn world, or a 2D AutoCAD background, the biggest impact you'll see from adopting this new 3D design software is in how well the client will understand the project you are selling. **Uvision 3D Landscape Creator is an easy-to-use software tool that helps bring your designs ideas to life.**



SCAN THE QR CODE FOR MORE INFORMATION OR TO DOWNLOAD A FREE 30-DAY TRAIL OF UVISION 3D LANDSCAPE CREATOR.



UNILOCK.COM | 1-800-UNILOCK



Let's **BUILD YOUR BUSINESS TOGETHER.**

CONTACT 1-800-UNILOCK OR VISIT UNILOCK.COM TO CONNECT WITH YOUR LOCAL TERRITORY MANAGER

BOSTON (508) 278-4536 MID-ATLANTIC

CHICAGO (630) 892-9191

MILWAUKEE (262)742-3890

KANSAS (913) 417-7985

MICHIGAN (248) 437-7037

NEW YORK (845)278-6700 (202)798-2060 ONTARIO

(416)646-9000 CINCINNATI/KY/TN (513)202-0219

OHIO/WESTERN PA/ WNY&CNY (330)927-4000