


2026 PRODUCT DATA



TRANSFORMING
HARDSCAPES

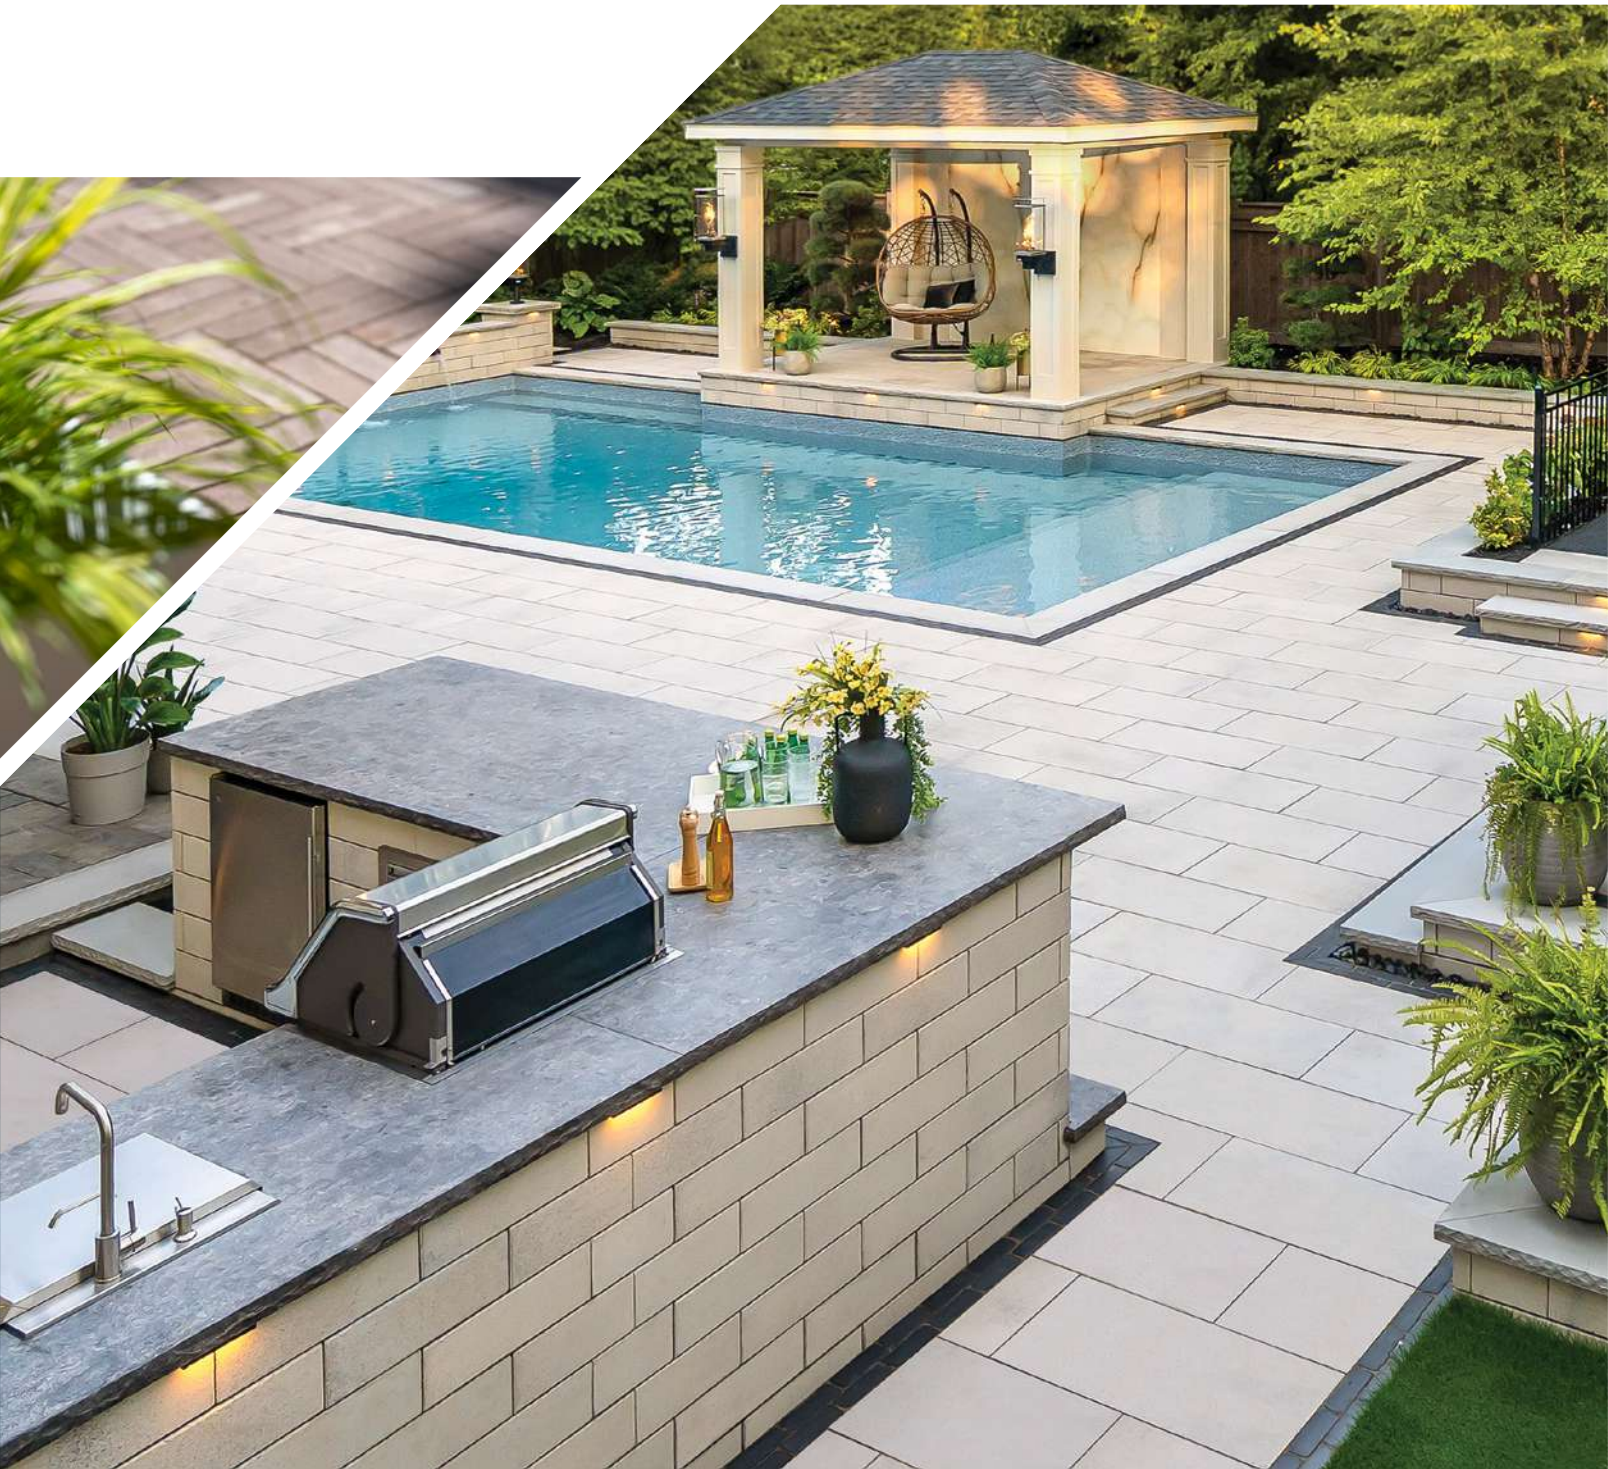

VIEW

AR LANDSCAPE VISUALIZER

Exclusive to **UNILOCK**

IMPRESS CLIENTS ON THE SPOT

Simply pan the yard using Uview™ and bring your vision to life in real time with pavers, walls, and vertical elements to get homeowners excited about the possibilities.



**DOWNLOAD
NOW**

PART OF A COMPLETE TOOL-KIT

 LEVEL™

 VISION™
3D LANDSCAPE CREATOR

***SPEED-CALC*™**
PAVER AND WALL CALCULATOR

PAVERS

- | | | |
|-------------------------------------|-----------------------------------|----------------------------|
| 04 Arcana™ | 20 Eco-Optiloc™ | 38 Promenade™ |
| 05 Artline™ Smooth Finish | 21 Eco-Piora® | 39 Promenade™ 4x12" |
| 06 Artline™ Umbriano® Finish | 22 Eco-Promenade® Ecoterra | 40 Richcliff® |
| 07 Beacon Hill™ Flagstone | 23 Eco-Promenade® Series™ | 41 Series™ |
| 08 Beacon Hill™ | 24 Eco-Promenade® | 42 Soreno™ |
| 09 Beacon Hill™ | 25 Hex™ | 43 Thornbury™ |
| 11 Boulevard™ | 26 Holland Premier™ | 44 Town Hall® |
| 12 Bristol Valley® | 27 Hollandstone™ | 45 Treo™ Flagstone |
| 13 Brussels Block® | 28 Il Campo® | 46 Treo™ Smooth |
| 15 Camelot™ | 29 Mattoni™ | 47 Tribeca Cobble™ |
| 16 Cophthorne® | 30 Natural Stone | 48 Turfstone™ |
| 17 Courtstone® | 35 Nordic Cobble™ | 49 Umbriano® |
| 18 Eco-Hex™ | 36 Optiloc® | 55 Westport™ |
| 19 Eco-Line® | 37 24 x 24 Premier | |

WALLS

- | | | |
|---------------------------------------|---|--|
| 56 Brussels Dimensional Stone® | 63 Pisa™ & PisaXL | 70 U-Cara® Multi-Face Wall System |
| 57 DuraHold® | 64 Pisa™ XL Smooth | 72 U-Cara® Fascia Panels |
| 58 DuraHold® Coping | 65 Quarry™ Smooth | 74 U-Cara® Backer |
| 59 DuraHold 2® | 66 Rivercrest® Wall | 75 U-Cara® Modular System |
| 60 Estate Wall™ | 67 Rivercrest® Pillar and Fire Pit kit | 76 U-Cara® Wall Mount System |
| 61 Lineo™ Dimensional Stone | 68 SienaEdge™ | |
| 62 Olde Quarry™ | 69 SienaStone™ | |

COPING, STEPS, PILLAR CAPS AND FIRE FEATURES

- 77** Brussels Fullnose™ & Double Fullnose™
- 78** Endura™ Coping
- 79** Ledgestone™
- 81** SienaStone™ Steps
- 82** Umbriano® Coping
- 83** Sunset Fire Pit Kit
- 84** Unilock Elements

ACCESSORIES

- 85** SkyView™
- 86** Natural Stone Cleaners & Sealers
- 86** Sealers
- 87** Sands
- 88** X & T Slab Spacers
- 88** Edging Products
- 89** Adhesives
- 89** Geotextiles and Fabric Products
- 90** Tools & Accessories
- 90** Base/Drainage Systems
- 91** Turf products
- 92** Accessory Quick Reference Guide
- 94** Polysand Best Practices
- 95** Sealer Best Practices
- 96** Important Notes
- 97** Unilock Finishes

DESCRIPTION OF PAVER EDGE DETAILS



Zero-Edge



Chamfered Edge



Rounded Bevel



Micro Bevel



APPLICATIONS

Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth
 Joint Spacing - 0 mm

TECHNICAL INFORMATION

Conforms to ASTM C1782
 Eligible for LEED v4.1 credits

// Perfect for roof decks and other raised floor applications.

Ask us about our Skyview™ pedestal system.
 See page 85 for more information.

		12 x 24	18 x 24	24 x 24
Bundle Type		SINGLE	SINGLE	SINGLE
Plant Produced		CHICAGO	CHICAGO	CHICAGO
Thickness (mm)		50 mm	50 mm	50 mm

SQFT PER	Stone	2.00	3.00	4.00
	Bundle	36.00	54.00	72.00

SOLDIER LNFT PER	SqFt	0.99	0.99	0.99
	Bundle	35.55	53.50	71.57

SAILOR LNFT PER	SqFt	1.99	1.33	0.99
	Bundle	71.57	71.57	71.57

UNITS PER	SqFt	0.50	0.33	0.25
	Bundle	18.00	18.00	18.00

LBS PER	Unit	48	72	96
	Bundle	864	1,296	1,728


Colors	Reflectance	Stock	Stock	Stock
Avorio	SR .56 SRI 66	✓	✓	✓
Corvara	SR .32 SRI 34	✓	✓	✓
Ferrano	SR n/a SRI n/a	✓	✓	✓
Modena	SR .46 SRI 53	✓	✓	✓
Vivanto	SR .18 SRI 16	✓	✓	✓

SLAB SPACERS




X & T Slab Spacers
 Bagged & Sold Separately.

LAYING PATTERNS



Random A



Random C

SINGLE UNITS



12 x 24
 301 x 606 x 50mm
 11 7/8 x 23 7/8 x 2"
 18 Units/Bundle
 2 Sq.Ft./Stone



18 x 24
 453 x 606 x 50mm
 17 7/8 x 23 7/8 x 2"
 18 Units/Bundle
 3 Sq.Ft./Stone




24 x 24
 606 x 606 x 50mm
 23 7/8 x 23 7/8 x 2"
 18 Units/Bundle
 4 Sq.Ft./Stone




AVORIO



CORVARA



FERRANO



MODENA



VIVANTO

Notes: Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. **Product is not intended for vehicular applications.** All measurements are nominal. Unilock recommends to install Arcana using T and X Slab spacers. Please contact your Territory Manager for more information.



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Micro

Surface Texture - Smooth

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

LEED Eligible EPD's & HPD's available

Bundle Type	RANDOM
Plant Produced	RITTMAN
Thickness (mm)	70mm

SQFT PER	Stone	-
	Layer	11.66
	Bundle	93.25

PER BUNDLE	Layers	8.00
------------	--------	------

SOLDIER LNFT PER	SqFt	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	-
	Layer	24.00
	Bundle	192.00


LBS PER	Unit	-
	Layer	363.91
	Bundle	2,911

Colors	Reflectance	Stock
Fossil	SR .22 SRI 21	✓
Granite Fusion	SR .30 SRI 32	✓

LAYER CONFIGURATION




LAYING PATTERNS



Artline Random

7 UNIT RANDOM BUNDLE

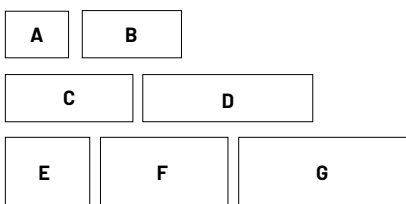

UNIT A

125 x 169 x 70mm
4 7/8 x 6 3/4 x 2 3/4"
32 Units/Bundle
.23 Sq.Ft./Stone

UNIT B

125 x 262.5 x 70mm
4 7/8 x 10 3/8 x 2 3/4"
32 Units/Bundle
.35 Sq.Ft./Stone

UNIT C

125 x 337.5 x 70mm
4 7/8 x 13 3/8 x 2 3/4"
32 Units/Bundle
.45 Sq.Ft./Stone

UNIT D

125 x 450 x 70mm
4 7/8 x 17 3/4 x 2 3/4"
32 Units/Bundle
.61 Sq.Ft./Stone

UNIT E

187.5 x 225 x 70mm
7 1/2 x 8 7/8 x 2 3/4"
32 Units/Bundle
.45 Sq.Ft./Stone

UNIT F

187.5 x 337.5 x 70mm
7 1/2 x 13 3/8 x 2 3/4"
16 Units/Bundle
.69 Sq.Ft./Stone

UNIT G

187.5 x 450 x 70mm
7 1/2 x 17 3/4 x 2 3/4"
16 Units/Bundle
.91 Sq.Ft./Stone



FOSSIL



GRANITE FUSION

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Micro

Surface Texture - Umbriano Mottled

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	70mm

SQFT PER	Stone	-
	Layer	11.66
	Bundle	93.25

PER BUNDLE	Layers	8.00
------------	--------	------

SOLDIER LNFT PER	SqFt	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	-
	Layer	24.00
	Bundle	192.00


LBS PER	Unit	-
	Layer	24.00
	Bundle	2,963

Colors	Reflectance	Stock
French Grey	SR .18 SRI 17	✓
Midnight Sky	SR .17 SRI 15	✓
Winter Marvel	SR .35 SRI 38	✓

LAYER CONFIGURATION




LAYING PATTERNS



Artline Random A

7 UNIT RANDOM BUNDLE

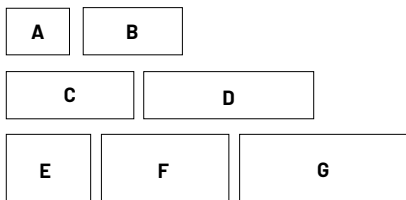

UNIT A
125 x 169 x 80mm
4 7/8 x 6 3/4 x 3 1/8"
32 Units/Bundle
.23 Sq.Ft./Stone

UNIT B
125 x 262.5 x 80mm
4 7/8 x 10 3/8 x 3 1/8"
32 Units/Bundle
.35 Sq.Ft./Stone

UNIT C
125 x 337.5 x 80mm
4 7/8 x 13 3/8 x 3 1/8"
32 Units/Bundle
.45 Sq.Ft./Stone

UNIT D
125 x 450 x 80mm
4 7/8 x 17 3/4 x 3 1/8"
32 Units/Bundle
.61 Sq.Ft./Stone

UNIT E
187.5 x 225 x 80mm
7 1/2 x 8 7/8 x 3 1/8"
32 Units/Bundle
.45 Sq.Ft./Stone

UNIT F
187.5 x 337.5 x 80mm
7 1/2 x 13 3/8 x 3 1/8"
16 Units/Bundle
.58 Sq.Ft./Stone

UNIT G
187.5 x 450 x 80mm
7 1/2 x 17 3/4 x 3 1/8"
16 Units/Bundle
.91 Sq.Ft./Stone



FRENCH GREY



MIDNIGHT SKY



WINTER MARVEL

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Rounded

Surface Texture - Textured

Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	Bundle Type	RANDOM	RANDOM
	Plant Produced	OHIO	OHIO
	Thickness (mm)	60 mm	80 mm

SQFT PER	Stone	-	-
	Layer	11.66	10.46
	Bundle	116.57	81.59

PER BUNDLE	Layers	10.00	7.00
------------	--------	-------	------

SOLDIER LNFT PER	SqFt	-	-
	Layer	-	-
	Bundle	-	-


SAILOR LNFT PER	SqFt	0.80	0.85
	Layer	9.35	8.86
	Bundle	93.50	62.00

UNITS PER	SqFt	-	-
	Layer	8.00	8.86
	Bundle	80.00	56.00


LBS PER	Unit	-	-
	Layer	319.93	362
	Bundle	3,199	2,986

Colors	Reflectance	Stock	Stock
Bavarian	SR n/a SRI n/a	✓	SO
Birch	SR n/a SRI n/a	✓	SO
Granite Fusion	SR .30 SRI 32	✓	SO
River Blend	SR n/a SRI n/a	✓	SO
Sierra	SR n/a SRI n/a	✓	SO
Walnut	SR n/a SRI n/a	✓	SO

LAYER CONFIGURATION




LAYING PATTERNS

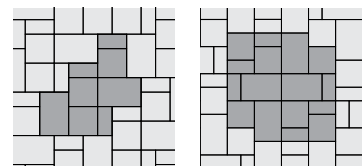

BHFxed Random A

BH Fixed Random B

3 UNIT RANDOM BUNDLE

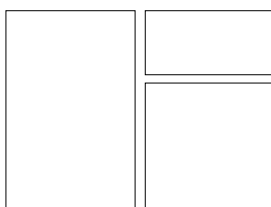

LARGE RECTANGLE

380 x 570 x 60mm
15 x 22 1/2 x 2 3/8"
20 Units/Bundle

SQUARE

380 x 380 x 60mm
15 x 15 x 2 3/8"
30 Units/Bundle

SMALL RECTANGLE

380 x 190 x 60mm
15 x 7 1/2 x 2 3/8"
30 Units/Bundle

LARGE RECTANGLE

380 x 570 x 80mm
15 x 22 1/2 x 2 3/8"
14 Units/Bundle

SQUARE

380 x 380 x 80mm
15 x 15 x 2 3/8"
21 Units/Bundle

SMALL RECTANGLE


380 x 190 x 80mm
15 x 7 1/2 x 2 3/8"
21 Units/Bundle



BAVARIAN




BIRCH




GRANITE FUSION



RIVER BLEND



SIERRA



WALNUT

Notes: Minimum quantities apply for Special Order (SO) products. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth

Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

		SLAB	SMALL RECTANGLE
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	OHIO	HARRISON	OHIO
Thickness (mm)	60 mm	60 mm	60 mm

SQFT PER	Stone	-	5.83	0.78
	Layer	11.66	11.66	11.66
	Bundle	116.57	116.57	116.57

PER BUNDLE	Layers	10.00	10.00	10.00
------------	--------	-------	-------	-------




SOLDIER LNFT PER	SqFt	-	0.32	0.80
	Layer	-	3.74	9.35
	Bundle	-	37.40	93.50

SAILOR LNFT PER	SqFt	0.80	0.53	1.60
	Layer	9.35	6.23	18.70
	Bundle	93.50	62.30	187.01

UNITS PER	SqFt	-	0.17	1.29
	Layer	-	2.00	15.00
	Bundle	80.00	20.00	150.00


LBS PER	Unit	-	160	21
	Layer	320	319.93	319.93
	Bundle	3,199	3,199	3,199

Colors	Reflectance	Stock	Stock	Stock
Bavarian	SR n/a SRI n/a	✓	✓	-
Fossil	SR .22 SRI 21	✓	✓	-
Granite Fusion	SR .28 SRI 29	✓	✓	-
Sierra	SR n/a SRI n/a	✓	✓	-
River Blend	SR n/a SRI n/a	✓	✓	-
Dark Charcoal	SR n/a SRI n/a	-	-	✓

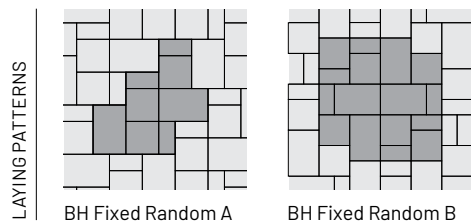

SLAB
900 x 570 x 60mm
37 1/2 x 22 1/2 x 2 3/8"
20 Units/Bundle
5.83 Sq.Ft./Stone

SMALL RECTANGLE
380 x 190 x 60mm
15 x 7 1/2 x 2 3/8"
150 Units/Bundle
.78 Sq.Ft./Stone



LARGE RECTANGLE
380 x 570 x 60mm
15 x 22 1/2 x 2 3/8"
20 Units/Bundle

SQUARE
380 x 380 x 60mm
15 x 15 x 2 3/8"
30 Units/Bundle

SMALL RECTANGLE
380 x 190 x 60mm
15 x 7 1/2 x 2 3/8"
30 Units/Bundle



BAVARIAN



FOSSIL



GRANITE FUSION



SIERRA



RIVER BLEND



DARK CHARCOAL

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Rounded



Surface Texture - Smooth

Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

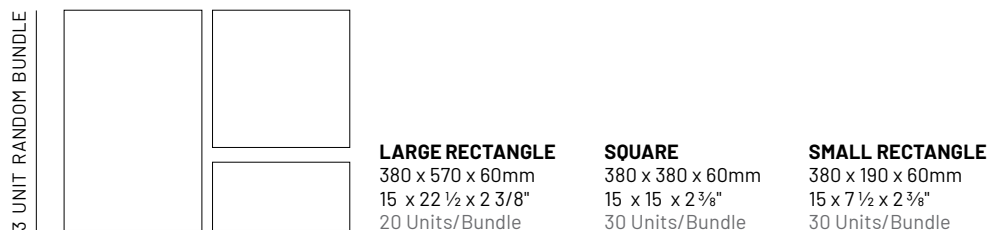

		SLAB
Bundle Type	RANDOM	SINGLE
Plant Produced	HARRISON	HARRISON
Thickness (mm)	60 mm	60 mm

SQFT PER	Stone	-	5.83
	Layer	11.66	11.66
	Bundle	116.57	116.57





PER BUNDLE	Layers	10.00	10.00
------------	--------	-------	-------

SOLDIER LNFT PER	SqFt	-	0.32
	Layer	-	3.74
	Bundle	-	37.40

SAILOR LNFT PER	SqFt	0.80	0.53
	Layer	9.35	6.23
	Bundle	93.50	62.30


UNITS PER	SqFt	-	0.17
	Layer	-	2.00
	Bundle	80.00	20.00

LBS PER	Unit	-	160
	Layer	320	319.93
	Bundle	3,199	3,199

Colors	Reflectance	Stock	Stock
Biscotti 	SR n/a SRI n/a	✓	✓
Fossil 	SR .22 SRI 21	✓	✓
Granite Fusion 	SR .28 SRI 29	✓	✓
Platinum 	SR n/a SRI n/a	✓	✓



BISCOTTI



FOSSIL



GRANITE FUSION



PLATINUM

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth

Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type		RANDOM
Plant Produced		OHIO
Thickness (mm)		80 mm

SQFT PER	Stone	-
	Layer	11.66
	Bundle	81.59

PER BUNDLE	Layers	7.00
------------	--------	------




SOLDIER LNFT PER	SqFt	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Layer	9.35
	Bundle	65.45

UNITS PER	SqFt	-
	Layer	8
	Bundle	56.00

LBS PER	Unit	-
	Layer	324
	Bundle	2,272

Colors	Reflectance	Stock
Fossil	SR n/a SRI n/a	SO
Granite Fusion	SR n/a SRI n/a	SO

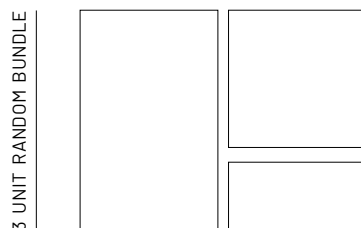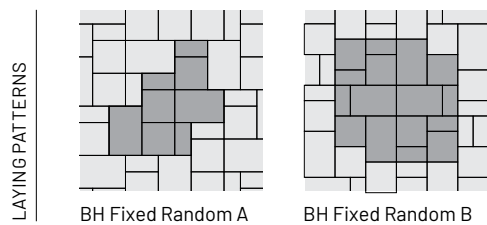

LARGE RECTANGLE
380 x 570 x 80mm
15 x 22 1/2 x 3 1/8"
14 Units/Bundle

SQUARE
380 x 380 x 80mm
15 x 15 x 3 1/8"
21 Units/Bundle

SMALL RECTANGLE
380 x 190 x 80mm
15 x 7 1/2 x 3 1/8"
21 Units/Bundle



FOSSIL



GRANITE FUSION

Notes: Special Order (SO). Minimum quantities apply. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Zero

Surface Texture - Smooth

Joint Spacing - 3 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936


Eligible for LEED v4.1 credits

		While Supplies Last	New for Spring 2026
Bundle Type		RANDOM	RANDOM
Plant Produced		HARRISON	HARRISON
Thickness (mm)		70 mm	70 mm
SQFT PER	Stone	-	-
	Layer	11.63	11.62
	Bundle	93.00	116.25
PER BUNDLE	Layers	8.00	10
SOLDIER LNFT PER	SqFt	-	-
	Layer	-	-
	Bundle	-	-
SAILOR LNFT PER	SqFt	1.03	1.03
	Layer	12.00	12.00
	Bundle	96.04	120
UNITS PER	SqFt	-	-
	Layer	8.00	8.00
	Bundle	64.00	80.00
LBS PER	Unit	-	-
	Layer	372.25	372.00
	Bundle	2,978	3,722
Colors	Reflectance	Stock	Stock
Granite Fusion	SR .28 SRI 29	✓	✓
River	SR n/a SRI n/a	✓	✓

LAYING PATTERNS



Boulevard Fixed Random B



GRANITE FUSION



RIVER

3 UNIT RANDOM BUNDLE



While Supplies Last

LARGE RECTANGLE

610 x 305 x 70mm
24 x 12 x 2 3/4"
24 Units/Bundle
2.00 SqFt/Stone

MEDIUM RECTANGLE

457 x 305 x 70mm
18 x 12 x 2 3/4"
16 Units/Bundle
1.50 Sq.Ft./Stone

SQUARE

305 x 305 x 70mm
12 x 12 x 2 3/4"
24 Units/Bundle
1.00 Sq.Ft./Stone

New for Spring 2026

LARGE RECTANGLE

610 x 305 x 70mm
24 x 12 x 2 3/4"
30 Units/Bundle
2.00 SqFt/Stone

MEDIUM RECTANGLE

457 x 305 x 70mm
18 x 12 x 2 3/4"
20 Units/Bundle
1.50 Sq.Ft./Stone

SQUARE

305 x 305 x 70mm
12 x 12 x 2 3/4"
30 Units/Bundle
1.00 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Zero

Surface Texture - Textured

Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

			XL
Bundle Type	RANDOM		SINGLE
Plant Produced	HARRISON		HARRISON
Thickness (mm)	60 mm		60 mm

SQFT PER	Stone	-	5.83
	Layer	11.66	11.66
	Bundle	116.57	116.57

PER BUNDLE	Layers	10.00	10.00
------------	--------	-------	-------

SOLDIER LNFT PER	SqFt	-	0.32
	Layer	-	3.74
	Bundle	-	37.40


SAILOR LNFT PER	SqFt	0.80	0.53
	Layer	9.35	6.23
	Bundle	93.50	62.30

UNITS PER	SqFt	-	0.17
	Layer	8.00	2.00
	Bundle	80.00	20.00


LBS PER	Unit	-	160
	Layer	330.20	319.93
	Bundle	3,302	3,199

Colors	Reflectance	Stock	Stock
Biscotti	SR n/a SRI n/a	✓	✓
Bavarian	SR n/a SRI n/a	✓	✓
Fossil	SR .22 SRI 21	✓	✓
Steel Mountain	SR n/a SRI n/a	✓	✓

LAYER CONFIGURATION



LAYING PATTERNS

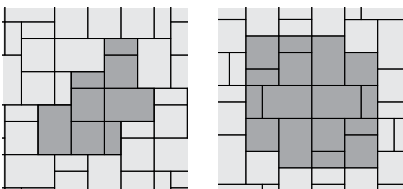


BV Fixed Random A

BV Fixed Random B



BAVARIAN



BISCOTTI
NEW




FOSSIL



STEEL MOUNTAIN

3 UNIT RANDOM BUNDLE




LARGE RECTANGLE
380 x 570 x 60mm
15 x 22 1/2 x 2 3/8"
20 Units/Bundle
2.08 SqFt./Stone

SQUARE
380 x 380 x 60mm
15 x 15 x 2 3/8"
30 Units/Bundle
1.39 Sq.Ft./Stone

SMALL RECTANGLE
380 x 190 x 60mm
15 x 7 1/2 x 2 3/8"
30 Units/Bundle
.69 Sq.Ft./Stone

SINGLE UNIT



XL UNIT
950 x 570 x 60mm
37 1/2 x 22 1/2 x 2 3/8"
20 Units/Bundle
5.83 Sq.Ft./Stone

Notes: This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Brussels Block® Rittman



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Zero

Surface Texture - Weathered

Joint Spacing - 2 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	HALF	STANDARD	XL
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	RITTMAN	RITTMAN	RITTMAN
Thickness (mm)	70 mm	70 mm	70 mm

SQFT PER	Stone	0.20	0.40	0.80
	Layer	11.09	11.08	9.57
	Section	12.67	7.00	25.52
	Bundle	88.70	88.60	76.56

PER BUNDLE	Layers	8.00	8.00	8.00
	Sections	7.00	-	3.00






SOLDIER LNFT PER	SqFt	1.72	1.44	0.86
	Layer	19.11	15.98	8.19
	Section	21.84	-	21.84
	Bundle	152.86	127.87	65.51

SAILOR LNFT PER	SqFt	2.87	1.73	1.43
	Layer	31.78	19.11	13.70
	Section	36.33	-	36.54
	Bundle	254.28	152.86	109.61

UNITS PER	SqFt	5.05	2.53	1.25
	Layer	56.00	28.00	9.00
	Section	64.00	32.00	24.00
	Bundle	448.00	224.00	72.00

LBS PER	Unit	6	12	35
	Section	393	384	843
	Layer	344	344	316
	Bundle	2,752	2,749	2,528

Colors	Reflectance	Stock	Stock	Stock
Limestone	SR .28 SRI 29	✓	✓	✓
Sandstone	SR .41 SRI 46	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓

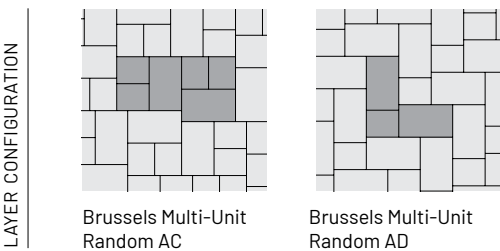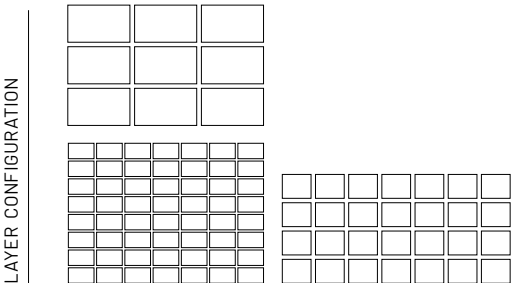

LIMESTONE



SANDSTONE



SIERRA

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Brussels Block® Harrison



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Zero

Surface Texture - Weathered

Joint Spacing - 2mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	HALF	STANDARD	XL
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	HARRISON	HARRISON	HARRISON
Thickness (mm)	70 mm	70 mm	70 mm

SQFT PER	Stone	-	0.40	-
	Layer	11.37	11.08	9.56
	Section	16.24	15.82	31.88
	Bundle	113.69	110.75	95.64

PER BUNDLE	Layers	10.00	10.00	10.00
	Sections	7.00	7.00	3.00




SOLDIER LNFT PER	SqFt	1.72	1.44	0.86
	Layer	19.11	15.98	8.19
	Section	27.30	22.83	27.30
	Bundle	191.10	159.84	81.90

SAILOR LNFT PER	SqFt	2.87	1.73	1.43
	Layer	31.78	19.11	13.70
	Section	45.40	27.30	45.66
	Bundle	317.80	191.08	137.00

UNITS PER	SqFt	5.05	2.53	1.25
	Layer	56.00	28.00	9.00
	Section	392.00	40.00	30.00
	Bundle	560.00	280.00	90.00

LBS PER	Unit	6	12	33
	Section	504	491	978
	Layer	352.67	343.65	293.43
	Bundle	3,527	3,436	2,934

Colors	Reflectance	Stock	Stock	Stock
Limestone	SR .28 SRI 29	✓	✓	✓
Sandstone	SR .41 SRI 46	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓
River	SR .28 SRI 29	✓	✓	✓

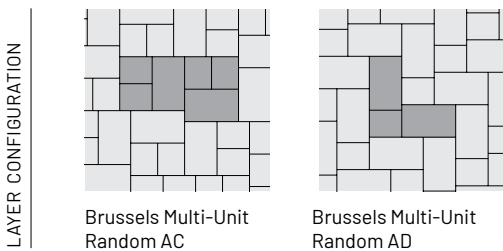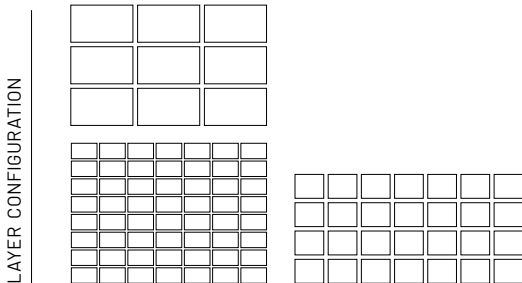

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular,

APPEARANCE

Edge Detail - Chamfer

Surface Texture - Smooth

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	SQUARE	RECTANGLE	SQUARE	RECTANGLE
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	RITTMAN	RITTMAN	HARRISON	HARRISON
Thickness (mm)	60 mm	60 mm	60 mm	60 mm

SQFT PER	Stone	0.28	0.41	0.28	0.41
	Layer	11.55	12.37	11.55	12.37
	Section	13.20	19.79	-	-
	Bundle	92.40	98.96	115.50	123.7

PER BUNDLE	Layers	8.00	8.00	10.00	10.00
	Sections	7.00	5.00	-	-


SOLDIER LNFT PER	SqFt	1.79	1.19	1.79	1.19
	Layer	20.67	14.76	20.66	14.76
	Section	23.62	23.62	-	-
	Bundle	165.35	118.11	206.69	147.64

SAILOR LNFT PER	SqFt	1.79	1.79	1.79	1.19
	Layer	20.67	22.15	20.66	22.14
	Section	23.62	35.43	-	-
	Bundle	165.35	177.17	206.69	221.45

UNITS PER	SqFt	3.64	2.43	3.64	2.43
	Layer	42.00	30.00	-	-
	Section	48.00	48.00	-	-
	Bundle	336.00	240.00	420.00	300.00


LBS PER	Unit	8	12	-	-
	Section	371	560	-	-
	Layer	324	350	325	350
	Bundle	2,598	2,800	3,250	3,500

LAYER CONFIGURATION

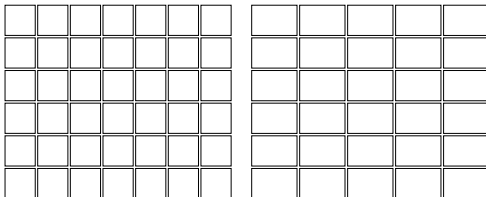

Colors	Reflectance	Stock	Stock	Stock	Stock
Granite	SR .26 SRI 27	✓	✓	✓	✓
River	SR .32 SRI 34	✓	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓	✓

LAYING PATTERNS

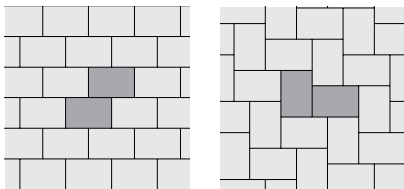

Camelot 6x9
Random RB

Camelot 6x9 HB


SINGLE UNIT
RITTMAN



SQUARE
159.8 x 159.8 x 60mm
6 3/8 x 6 3/8 x 2 3/8"
336 Units/Bundle
.28 Sq.Ft./Stone

RECTANGLE
160 x 240 x 60mm
6 3/8 x 9 1/2 x 2 3/8"
240 Units/Bundle
.41 Sq.Ft./Stone

SINGLE UNIT
HARRISON




SQUARE
159.8 x 159.8 x 60mm
6 3/8 x 6 3/8 x 2 3/8"
420 Units/Bundle
.28 Sq.Ft./Stone

RECTANGLE
160 x 240 x 60mm
6 3/8 x 9 1/2 x 2 3/8"
300 Units/Bundle
.41 Sq.Ft./Stone



GRANITE



RIVER



SIERRA

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Rounded

Surface Texture - Textured

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type		SINGLE
Plant Produced		AYR
Thickness (mm)		60 mm

SQFT PER	Stone	0.15
	Layer	11.15
	Bundle	89.20

PER BUNDLE	Layers	8.00
------------	--------	------


SOLDIER LNFT PER	SqFt	1.43
	Layer	15.99
	Bundle	127.95

SAILOR LNFT PER	SqFt	4.41
	Layer	49.21
	Bundle	393.70

UNITS PER	SqFt	6.73
	Layer	75.00
	Bundle	600.00

LBS PER	Unit	4
	Layer	294
	Bundle	2,349

Colors	Reflectance	Stock
Arctic Grey	SR .49 SRI 57	✓
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR .35 SRI 38	✓
Burnt Clay	SR .36 SRI 40	✓
Old Oak	SR .37 SRI 41	✓
Steel Blue	SR n/a SRI n/a	✓

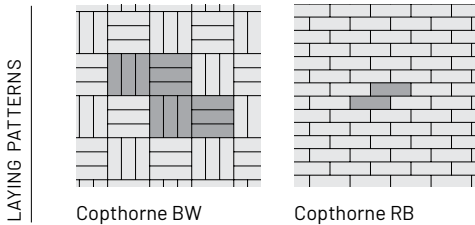

SINGLE UNIT

	STANDARD 65 x 200 x 60mm 2 5/8 x 7 7/8 x 2 3/8" 600 Units/Bundle .15 SqFt/Stone
--	--

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 94. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Zero

Surface Texture - Textured

Joint Spacing - 15 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	AYR
Thickness (mm)	60 mm

SQFT PER	Stone	-
	Layer	12.29
	Bundle	98.30

PER BUNDLE	Layers	8.00
------------	--------	------



SOLDIER LNFT PER	SqFt	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	2.25
	Layer	27.69
	Bundle	221.52

UNITS PER	SqFt	-
	Layer	48.00
	Bundle	384.00

LBS PER	Unit	-
	Layer	291
	Bundle	2,326

Colors	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Belgian Blue	SR n/a SRI n/a	✓
Dawn Mist	SR .37 SRI 41	✓
Pebble Taupe	SR .38 SRI 42	✓



XL RECTANGLE
215 x 130 x 60mm
8 3/8 x 5 1/8 x 2 3/8"
128 Units/Bundle
.30 SqFt/Stone

LARGE RECTANGLE
185 x 130 x 60mm
7 1/4 x 5 1/8 x 2 3/8"
64 Units/Bundle
.28 SqFt/Stone

RECTANGLE
165 x 130 x 60mm
6 1/2 x 5 1/8 x 2 3/8"
64 Units/Bundle
.23 SqFt/Stone

SQUARE
130 x 130 x 60mm
5 1/8 x 5 1/8 x 2 3/8"
64 Units/Bundle
.18 SqFt/Stone

SMALL RECTANGLE
145 x 130 x 60mm
5 3/4 x 5 1/8 x 2 3/8"
64 Units/Bundle
.20 SqFt/Stone





APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty, Permeable

APPEARANCE

Edge Detail Umbriano- Zero
Joint Spacing - 10 mm
Void - 4.20%


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1


		8 x 8
Bundle Type		SINGLE
Plant Produced		MARENGO
Thickness (mm)		60 mm
SQFT PER	Stone	0.45
	Layer	10.83
	Bundle	108.31
PER BUNDLE	Layers	10.00
SOLDIER LNFT PER	SqFt	-
	Layer	-
	Bundle	-
SAILOR LNFT PER	SqFt	-
	Layer	-
	Bundle	-
UNITS PER	SqFt	2.22
	Layer	24.00
	Bundle	240.00
LBS PER	Unit	12
	Layer	276
	Bundle	2,762

Colors	Reflectance	Stock
French Grey	SR .18 SRI 17	✓
Midnight Sky	SR .17 SRI 15	✓
Winter Marvel	SR .35 SRI 38	✓

LAYER CONFIGURATION




LAYING PATTERNS




Hex Paver A

SINGLE UNIT



8 x 8
205 x 205 x 60mm
7 7/8 x 7 7/8 x 2 3/8"
240 Units/Bundle
.45 SqFt/Stone



FRENCH GREY



MIDNIGHT SKY



WINTER MARVEL

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Heavy-duty, Permeable

APPEARANCE

Edge Detail - Micro
Surface Texture - Smooth
Joint Spacing - 7 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits


		SMOOTH ENDURA
Bundle Type		SINGLE
Plant Produced		OHIO
Thickness (mm)		100 mm
SQFT PER	Stone	-
	Layer	11.03
	Bundle	66.20
PER BUNDLE	Layers	6.00
SOLDIER LNFT PER	SqFt	-
	Layer	-
	Bundle	-
SAILOR LNFT PER	SqFt	-
	Layer	-
	Bundle	-
UNITS PER	SqFt	-
	Layer	-
	Bundle	192.00
LBS PER	Unit	-
	Layer	504
	Bundle	3,025

Colors	Reflectance	Stock
All Colors & Finishes	SR n/a SRI n/a	SO

LAYER CONFIGURATION




LAYING PATTERNS



Ecoline Fixed
Random A

8 UNIT RANDOM BUNDLE



UNIT A
357 x 84 x 100mm
14 x 3 3/8 x 3 7/8"
24 Units/Bundle
.32 SqFt/Stone

UNIT B
317 x 84 x 100mm
12 1/2 x 3 3/8 x 3 7/8"
24 Units/Bundle
.29 SqFt/Stone

UNIT C
277 x 84 x 100mm
10 7/8 x 3 3/8 x 3 7/8"
24 Units/Bundle
.25 SqFt/Stone

UNIT D
237 x 84 x 100mm
9 3/8 x 3 3/8 x 3 7/8"
24 Units/Bundle
.21 SqFt/Stone

UNIT E
357 x 114 x 100mm
14 x 4 1/2 x 3 7/8"
24 Units/Bundle
.44 SqFt/Stone

UNIT F
317 x 114 x 100mm
12 1/2 x 4 1/2 x 3 7/8"
24 Units/Bundle
.39 SqFt/Stone

UNIT G
277 x 114 x 100mm
10 7/8 x 4 1/2 x 3 7/8"
24 Units/Bundle
.34 SqFt/Stone

UNIT H
237 x 114 x 100mm
9 3/8 x 4 1/2 x 3 7/8"
24 Units/Bundle
.29 SqFt/Stone

Notes: Special Order (SO). Minimum quantities apply. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Heavy-duty, Permeable


APPEARANCE

Edge Detail - Chamfer
Surface Texture - Smooth
Joint Spacing - 7 mm
Void - 7.30%


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYER CONFIGURATION

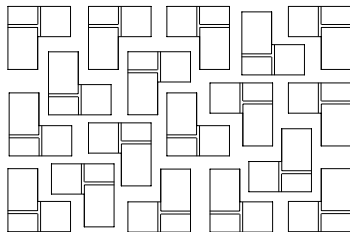


LAYING PATTERNS



EcoOptiloc Cluster A

SINGLE UNITS



STANDARD
250 x 250 x 80mm
9 7/8 x 9 7/8 x 3 1/8"
168 Units/Bundle
.50 Sq.Ft./Stone

		STANDARD
	Bundle Type	SINGLE
	Plant Produced	OHIO
	Thickness (mm)	80 mm

SQFT PER	Stone	0.50
	Layer	10.60
	Bundle	84.80

PER BUNDLE	Layers	8.00
------------	--------	------


SOLDIER LNFT PER	SqFt	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.98
	Layer	21.00
	Bundle	168.00

LBS PER	Unit	17
	Layer	353.92
	Bundle	2,831

Colors	Reflectance	Stock
Charcoal	SR .12 SRI 9	✓
Natural	SR .30 SRI 32	✓
River	SR .32 SRI 34	✓



CHARCOAL



NATURAL



RIVER

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Heavy Duty

APPEARANCE

Edge Detail - Micro

Surface Texture - Smooth

Joint Spacing - 7 mm

Void - 4.6-7.08%

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	5 x 10	5 x 10
Bundle Type	SINGLE	SINGLE
Plant Produced	RITTMAN	HARRISON
Thickness (mm)	80 mm	80 mm

SQFT PER	Stone	0.31	0.31
	Layer	10.85	10.85
	Bundle	75.95	86.80

PER BUNDLE	Layers	7.00	8.00
------------	--------	------	------



SOLDIER LNFT PER	SqFt	1.27	1.27
	Layer	13.78	13.78
	Bundle	96.46	110.24

SAILOR LNFT PER	SqFt	2.25	2.25
	Layer	24.41	24.41
	Bundle	170.87	195.28

UNITS PER	SqFt	3.23	3.23
	Layer	39.00	39.00
	Bundle	273.00	312.00

LBS PER	Unit	-	11
	Layer	381	373.50
	Bundle	2,614	2,988

Colors	Reflectance	Stock	Stock
River	SR .32 SRI 34	✓	✓
All others Colors & Finishes	SR n/a SRI n/a	SO	SO

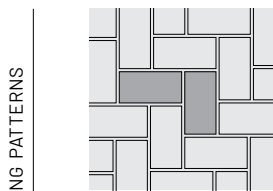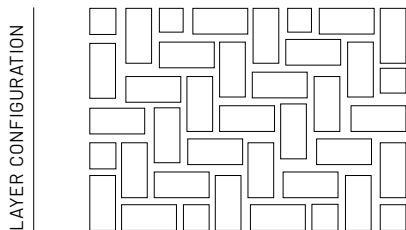

EcoPriora 5x10 HB



RIVER

SINGLE UNIT
RITTMAN

120 x 240 x 80mm
4 3/4" x 9 1/2" x 3 1/8"
5x10 - 217 Units/Bundle
5x5 - 56 Units/Bundle
.31 SqFt/Stone

SINGLE UNIT
HARRISON

120 x 240 x 80mm
4 3/4" x 9 1/2" x 3 1/8"
5x10 - 248 Units/Bundle
5x5 - 64 Units/Bundle
.31 SqFt/Stone

Notes: SOLD IN FULL BUNDLES ONLY. Lead time is required for Special Order (SO) products. Minimum quantities apply. *Each layer includes 8 5x5 units used for Herringbone patterns or edger units. **Important:** A urethane rubber paver mat must be used to prevent scuffing. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded
 Surface Texture - Shot Blasted
 Joint Spacing - 7 mm
 Void - 8.6%

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	4 x 12
Bundle Type	SINGLE
Plant Produced	ONTARIO
Thickness (mm)	80 mm

SQFT PER	Stone	0.32
	Layer	11.63
	Bundle	81.38

PER BUNDLE	Layers	7.00
------------	--------	------

SOLDIER LNFT PER	SqFt	1.02
	Layer	11.81
	Bundle	82.68

SAILOR LNFT PER	SqFt	3.05
	Layer	35.43
	Bundle	248.03

UNITS PER	SqFt	3.10
	Layer	36.00
	Bundle	252.00



LBS PER	Unit	12
	Layer	425
	Bundle	2,978

Colors	Reflectance	Stock
Light Opal Blend	SR n/a SRI n/a	SO
Light Steel Grey	SR n/a SRI n/a	SO



LIGHT OPAL BLEND

LIGHT STEEL GREY

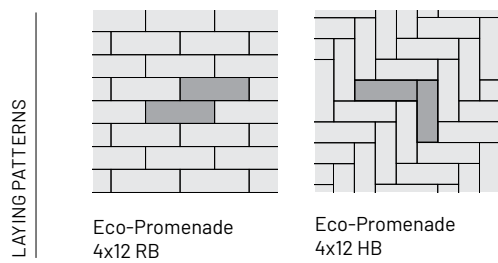

Important: Lead time is required for Special Order (SO) products. Minimum quantities apply. A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Heavy-duty, Permeable

APPEARANCE

Edge Detail - Micro
Surface Texture - Series Exposed
Joint Spacing - 7 mm
Void - 10.12%

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	4 x 12
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	80 mm

SQFT PER	Stone	0.32
	Layer	11.63
	Bundle	93.04

PER BUNDLE	Layers	8.00
------------	--------	------

SOLDIER LNFT PER	SqFt	1.02
	Layer	11.81
	Bundle	94.49


SAILOR LNFT PER	SqFt	3.05
	Layer	35.43
	Bundle	283.46

UNITS PER	SqFt	3.10
	Layer	36.00
	Bundle	288.00


LBS PER	Unit	12
	Layer	426
	Bundle	3,338

Colors	Reflectance	Stock
Arctic Grey	SR n/a SRI n/a	✓
Nordic Star	SR n/a SRI n/a	✓


LAYER CONFIGURATION



LAYING PATTERN



EcoPromenade
4x12 HB




EcoPromenade
4x12 RB


SINGLE UNIT



4 x 12 PERMEABLE
100 x 300 x 80mm
3 7/8 x 11 7/8 x 3 1/8"
288 Units/Bundle
0.32 Sq.Ft./Stone



ARCTIC GREY



NORDIC STAR

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Heavy-duty, Permeable

APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth/Multi
Joint Spacing - 7 mm
Void - 10.12%

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	3 x 12 PERMEABLE SMOOTH	3 x 12 PERMEABLE SERIES	4 x 12 SERIES	6 x 24 SMOOTH
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO	OHIO
Thickness (mm)	100 mm	100 mm	80 mm	70 mm

SQFT PER	Stone	0.24	0.24	0.32	0.97
	Layer	10.66	10.66	11.63	11.63
	Bundle	63.96	63.96	93.04	93.00

PER BUNDLE	Layers	6.00	6.00	8.00	8.00
------------	--------	------	------	------	------



SOLDIER LNFT PER	SqFt	1.02	1.02	1.02	0.51
	Layer	10.83	10.83	11.81	5.91
	Bundle	64.96	64.96	94.49	47.25

SAILOR LNFT PER	SqFt	4.06	4.06	3.05	2.03
	Layer	43.31	43.31	35.43	23.62
	Bundle	259.84	259.84	283.46	188.98

UNITS PER	SqFt	4.13	4.13	3.10	1.03
	Layer	44.00	44.00	36.00	12.00
	Bundle	264.00	264.00	288.00	96.00

LBS PER	Unit	11	11	12	31
	Layer	496	496	425.56	372.25
	Bundle	2,977	2,977	3,404	2,978

Colors	Reflectance	Stock	Stock	Stock	Stock
All Finishes/Colors	SR n/a SRI n/a	SO	SO	SO	SO

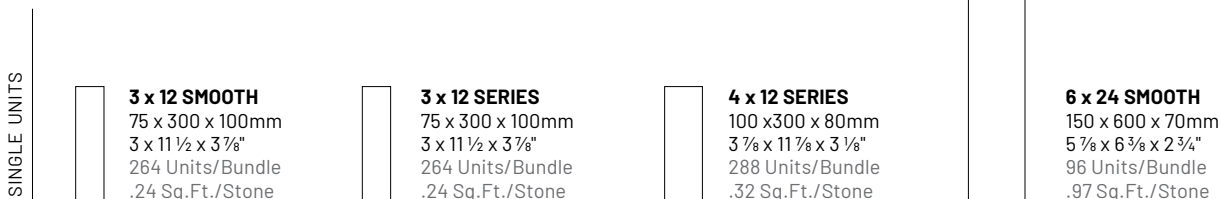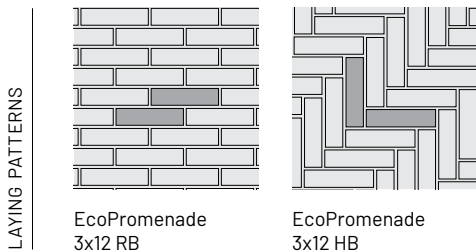

Important: Lead time is required for Special Order (SO) products. Minimum quantities apply. A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty

APPEARANCE

Edge Detail - Micro
Surface Texture - Smooth/Exposed
Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

		SMOOTH	UMBRIANO
	Bundle Type	SINGLE	SINGLE
	Plant Produced	OHIO	GEORGETOWN
	Thickness (mm)	70 mm	70 mm

SQFT PER	Stone	0.39	0.39
	Layer	9.24	9.24
	Bundle	73.92	73.92

PER BUNDLE	Layers	8.00	8.00
-------------------	--------	------	------

SOLDIER LNFT PER	SqFt	-	-
	Layer	-	-
	Bundle	-	-


SAILOR LNFT PER	SqFt	-	-
	Layer	-	-
	Bundle	-	-

UNITS PER	SqFt	2.60	2.60
	Layer	24.00	24.00
	Bundle	192.00	192.00


LBS PER	Unit	13	13
	Layer	306.21	306.21
	Bundle	2,450	2,450

Colors	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	✓	-
Granite Fusion	SR .28 SRI 29	✓	-
French Grey	SR .18 SRI 17	-	✓
Grenada White	SR n/a SRI n/a	-	✓
Winter Marvel	SR .35 SRI 38	-	✓
Summer Wheat	SR .42 SRI 48	-	✓

LAYER CONFIGURATION




LAYING PATTERNS




Hex Paver A


SINGLE UNIT



8 x 8
200 x 200 x 70mm
7 7/8 x 7 7/8 x 2 3/4"
192 Units/Bundle
.39 SqFt/Stone



FRENCH GREY




WINTER MARVEL




SUMMER WHEAT



WINTER MARVEL



DARK CHARCOAL



GRANITE FUSION

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Borders and accents

APPEARANCE

Edge Detail - Chamfer

Surface Texture - Smooth

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	4 x 8	4 x 8
Bundle Type	SINGLE	SINGLE
Plant Produced	RITTMAN	HARRISON
Thickness (mm)	60 mm	60 mm

SQFT PER	Stone	0.22	0.22
	Layer	11.80	11.80
	Section	17.70	-
	Bundle	106.20	118

PER BUNDLE	Layers	9.00	10.00
	Sections	6.00	-

SOLDIER LNFT PER	SqFt	1.50	1.50
	Layer	17.72	17.71
	Section	26.57	-
	Bundle	159.45	177.17


SAILOR LNFT PER	SqFt	3.00	3.00
	Layer	35.43	35.43
	Section	53.15	-
	Bundle	318.90	354.33

UNITS PER	SqFt	4.58	4.58
	Layer	54.00	-
	Section	81.00	-
	Bundle	486.00	540.00


LBS PER	Unit	6	-
	Section	460	-
	Layer	306.50	306.50
	Bundle	2,759	3,070

Colors	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	✓	✓
Fossil	SR .22 SRI 21	✓	✓
Granite Fusion	SR .28 SRI 29	✓	✓
Mocha	SR n/a SRI n/a	✓	✓


LAYER CONFIGURATION




LAYING PATTERNS



HollandPremier 4x8 RB



HollandPremier 4x8 HB



HollandPremier 4x8 BW

SINGLE UNIT

RITTMAN



4 x 8
100 x 200 x 60mm
3 7/8 x 7 7/8 x 2 3/8"
486 Units/Bundle
.22 Sq.Ft./Stone

SINGLE UNIT

HARRISON




4 x 8
100 x 200 x 60mm
3 7/8 x 7 7/8 x 2 3/8"
540 Units/Bundle
.22 Sq.Ft./Stone



DARK CHARCOAL



FOSSIL



GRANITE FUSION



MOCHA

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Hollandstone™



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Chamfer

Surface Texture - Smooth

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	4 x 8	4 x 8
Bundle Type	SINGLE	SINGLE
Plant Produced	RITTMAN	HARRISON
Thickness (mm)	60 mm	60 mm

SQFT PER	Stone	0.22	0.22
	Layer	11.80	11.80
	Section	17.70	-
	Bundle	106.20	118.00

PER BUNDLE	Layers	9.00	10.00
	Sections	6.00	-

SOLDIER LNFT PER	SqFt	1.50	1.50
	Layer	17.72	17.72
	Section	26.57	-
	Bundle	159.45	117.7


SAILOR LNFT PER	SqFt	3.00	3.00
	Layer	35.43	35.43
	Section	53.15	-
	Bundle	318.90	354.33

UNITS PER	SqFt	4.58	4.58
	Layer	54.00	-
	Section	81.00	-
	Bundle	486.00	540.00


LBS PER	Unit	6	-
	Section	478	-
	Layer	318.67	319.00
	Bundle	3,186	3,190

Colors	Reflectance	Stock	Stock
Charcoal	SR .12 SRI 9	✓	✓
River	SR .32 SRI 34	✓	✓
Rustic Red	SR n/a SRI n/a	✓	✓
Sierra	SR n/a SRI n/a	✓	✓


LAYER CONFIGURATION




LAYING PATTERNS



Hollandstone 4x8 HB



Hollandstone 4x8 RB



Hollandstone 4x8 BW

SINGLE UNIT

RITTMAN




4 x 8
100 x 200 x 60mm
3 7/8 x 7 7/8 x 2 3/8"
486 Units/Bundle
.22 Sq.Ft./Stone

SINGLE UNIT

HARRISON



4 x 8
100 x 200 x 60mm
3 7/8 x 7 7/8 x 2 3/8"
540 Units/Bundle
.22 Sq.Ft./Stone



CHARCOAL



RIVER



RUSTIC RED



SIERRA

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Micro

Surface Texture - Il Campo® Brushed

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	4 x 8
Bundle Type	SINGLE
Plant Produced	RITTMAN
Thickness (mm)	60 mm

SQFT PER	Stone	0.22
	Layer	11.80
	Section	17.70
	Bundle	106.20

PER BUNDLE	Layers	9.00
	Sections	6.00

SOLDIER LNFT PER	SqFt	1.50
	Layer	17.72
	Section	26.57
	Bundle	159.45

SAILOR LNFT PER	SqFt	3.00
	Layer	35.43
	Section	53.15
	Bundle	318.90

UNITS PER	SqFt	4.58
	Layer	54.00
	Section	81.00
	Bundle	486.00


LBS PER	Unit	6
	Section	461
	Layer	307.00
	Bundle	2,763

Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓




DARK CHARCOAL


LAYING PATTERNS



Il Campo 8x16 HB



Il Campo 4x8 RB



Il Campo 4x8 SB

SINGLE UNIT



4 x 8

100 x 200 x 60mm

3 7/8 x 7 7/8 x 2 3/8"

486 Units/Bundle

.22 SqFt/Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Zero

Surface Texture - Smooth

Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	STANDARD
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	60 mm

SQFT PER	Stone	0.16
	Layer	11.16
	Bundle	111.60

PER BUNDLE	Layers	10.00
------------	--------	-------

SOLDIER LNFT PER	SqFt	1.27
	Layer	14.17
	Bundle	141.73


SAILOR LNFT PER	SqFt	5.08
	Layer	56.69
	Bundle	566.93

UNITS PER	SqFt	6.45
	Layer	72.00
	Bundle	720.00


LBS PER	Unit	4
	Layer	306.29
	Bundle	3,063

Colors	Reflectance	Stock
Cocoa Brown	SR .34 SRI 37	✓
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR .28 SRI 29	✓
Sable Blend	SR .38 SRI 42	✓


LAYER CONFIGURATION




LAYING PATTERNS



Mattoni DHB



Mattoni HB



Mattoni RB

SINGLE UNIT



STANDARD

60 x 240 x 60mm

2 3/8 x 9 1/2 x 2 3/8"

720 Units/Bundle

.16 SqFt/Stone




COCOA BROWN



SABLE BLEND



DARK CHARCOAL



GRANITE FUSION

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Natural Stone Slabs



APPLICATIONS

Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Sawn

Surface Texture - Brushed / Riven

Joint Spacing - 10 mm

TECHNICAL INFORMATION

Visit Unilock.com for more information.

SANDSTONE		12 x 24	18 x 24	24 x 24	24 x 36
Bundle Type		SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)		22 mm	22 mm	22 mm	22 mm

SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17

LBS PER	Unit	24	36	48	72
	Crate	2,033	2,136	1,836	2,072

Colors	Reflectance	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	✓	✓	✓	✓
Greyfield	SR .32 SRI 35	✓	✓	✓	✓
Stone Cliff Grey	SR .27 SRI 28	✓	✓	✓	✓



LIMESTONE		12 x 24	18 x 24	24 x 24	24 x 36
Bundle Type		SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)		22 mm	22 mm	22 mm	22 mm

SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17

LBS PER	Unit	24	36	48	72
	Crate	2,033	2,136	1,836	2,072

Colors	Reflectance	Stock	Stock	Stock	Stock
Black River	SR .08 SRI 4	✓	✓	✓	✓
Hearthstone	SR .20 SRI 20	✓	✓	✓	✓

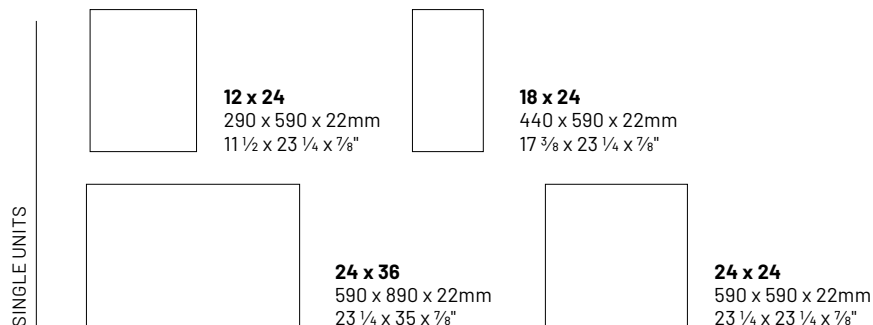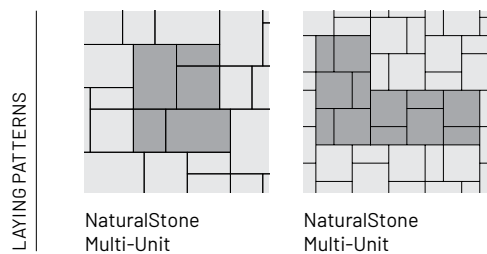

Notes: This product is not intended for vehicular applications.. All measurements are nominal. Contact Unilock for more information.

Natural Stone Random Bundle



APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Sawn


Surface Texture - Natural Finish

Joint Spacing - 10 mm

TECHNICAL INFORMATION


Visit Unilock.com for more information.

LAYING PATTERNS



NaturalStone
Fixed RB

4 UNIT RANDOM



24 x 24
590 x 590 x 38mm
23 1/4 x 23 1/4 x 1 1/2"

18 x 24
440 x 590 x 38mm
17 3/8 x 23 1/4 x 1 1/2"

24 x 36
590 x 890 x 38mm
23 1/4 x 35 x 1 1/2"


12 x 24
290 x 590 x 38mm
11 1/2 x 23 1/4 x 1 1/2"

SANDSTONE		4 PC BUNDLE
Bundle Type		RANDOM
Thickness (mm)		38 mm
SQFT PER	Crate	120.00
	Units	-
UNITS PER	Crate	32.00
	SqFt	-
LBS PER	Unit	73
	Bundle	2,515
Colors	Reflectance	Stock
Stone Cliff Grey	SR .27 SRI 28	✓

LIMESTONE		4 PC BUNDLE
Bundle Type		RANDOM
Thickness (mm)		38 mm
SQFT PER	Crate	120.00
	Units	-
UNITS PER	Crate	32
	SqFt	-
LBS PER	Unit	73
	Bundle	2,315
Colors	Reflectance	Stock
Hearthstone	SR n/a SRI n/a	✓



STONE CLIFF GREY



HEARTHSTONE

Notes: This project pack must be installed with a 10 mm joint space between stones. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

Natural Stone Coping



APPLICATIONS

Wall Coping, Pool Coping, Steps Treads



CASCADE



GREYFIELD



STONE CLIFF GREY



BLACK RIVER

SANDSTONE		48 x 12 FULLNOSE COPING	48 x 12 STRAIGHT EDGE COPING	48 x 12 ROCKFACE COPING	48 x 14 FULLNOSE COPING	48 x 14 STRAIGHT COPING	48 x 14 ROCKFACE COPING
Bundle Type		SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)		50 mm	50 mm	50 mm	50 mm	50 mm	50 mm

UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00	16.00
	SqFt	4.00	4.00	4.00	4.67	4.67	4.67

LBS PER	Unit	101	97	106	117	117	113
	Crate	2,028	1,927	2,116	2,560	2,247	2,258



Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓
Greyfield	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓

LIMESTONE		48 x 12 FULLNOSE COPING	48 x 12 STRAIGHT EDGE COPING	48 x 12 ROCKFACE COPING	48 x 14 FULLNOSE COPING	48 x 14 STRAIGHT COPING	48 X 14 ROCKFACE COPING
Bundle Type		SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)		50 mm	50 mm	50 mm	50 mm	50 mm	50 mm

UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00	20.00
	SqFt	4.00	4.00	4.00	4.67	4.67	4.67

LBS PER	Unit	112	112	112	130	130	130
	Crate	2,222	2,222	2,222	2,593	2,593	2,593

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓

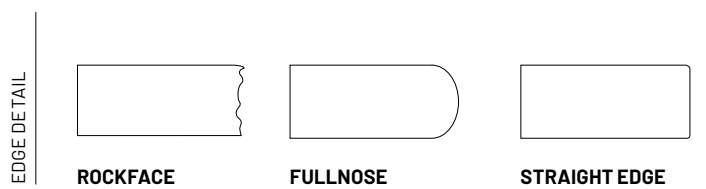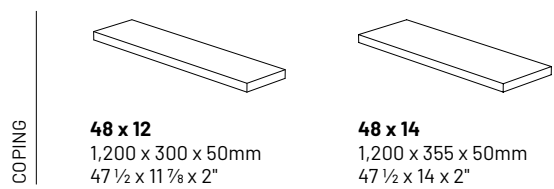

Notes: This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

Natural Stone Coping



APPLICATIONS

Wall Coping, Pool Coping, Steps Treads



CASCADE



GREYFIELD



STONE CLIFF GREY



BLACK RIVER

SANDSTONE		28 x 14 FULLNOSE CORNER / COPING	28 x 14 STRAIGHT CORNER / COPING	24 x 12 FULLNOSE CORNER / COPING	24 x 12 STRAIGHT CORNER / COPING	24 x 24 INSERT COPING
Bundle Type		SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)		50 mm	50 mm	50 mm	50 mm	50 mm

UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00
	SqFt	4.67	4.67	3.0	3.0	4.67

LBS PER	Unit	113	113	91	91	106
	Crate	2,249	2,249	1,808	1,808	2,120

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	✓	✓	✓	✓	✓
Greyfield	SR n/a SRI n/a	✓	✓	-	-	-
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	-	-	-

LIMESTONE		28 x 14 FULLNOSE CORNER / COPING	28 x 14 STRAIGHT CORNER / COPING	24 x 12 FULLNOSE CORNER / COPING	24 x 12 STRAIGHT CORNER / COPING	24 x 24 INSERT COPING
Bundle Type		SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)		50 mm	50 mm	50 mm	50 mm	50 mm


UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00
	SqFt	4.08	4.08	3.0	3.0	4.0

LBS PER	Unit	117	117	84	84	90
	Crate	2,237	2,237	1,676	1,676	1,800

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	-	-	-

INSERT COPING


Insert coping is ideal for those retractable pool covers. Allowing easy access while keeping a continuous look and feel.




24 x 24
600 x 600 x 50mm
24 x 24 x 2"

CORNER COPING

Corner coping provides seamless 90° corners for pool, walls and so much more.



24 x 12
600 x 300 x 50mm
23 5/8 x 11 7/8 x 2"



28 x 14
710 x 355 x 50mm
28 x 14 x 2"

EDGE DETAIL



STRAIGHT EDGE



FULLNOSE

Notes: This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

Natural Stone Steps & Pillar Caps



APPLICATIONS

Steps, Pillar

TECHNICAL INFORMATION

Visit Unilock.com for more information.

SANDSTONE		24 X 24 PILLAR CAP	28 X 28 PILLAR CAP	48 X 16 STEP
Bundle Type		SINGLE	SINGLE	SINGLE
Thickness (mm)		64 mm	64 mm	150 mm
LNFT PER	Crate	28.00	28.00	24.00
	Unit	2.33	2.33	4.00
UNITS PER	Crate	14.00	12.00	6.00
LBS PER	Unit	143	199	421
	Crate	1,991	2,385	2,526
Colors	Reflectance	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	✓	✓	✓
Greyfield	SR n/a SRI n/a	✓	✓	✓
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	✓

LIMESTONE		24 x 24 PILLAR CAP	28 x 28 PILLAR CAP	48 x 16 STEP
Bundle Type		SINGLE	SINGLE	SINGLE
Thickness (mm)		64 mm	64 mm	150 mm
LNFT PER	Crate	28.00	28.00	24.00
	Unit	2.33	2.33	4.00
UNITS PER	Crate	14.00	12.00	6.00
LBS PER	Unit	143	207	421
	Crate	1,995	2,480	2,526
Colors	Reflectance	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓



CASCADE



GREYFIELD




STONE CLIFF GREY




BLACK RIVER

PILLAR CAPS




24 x 24
600 x 600 x 64mm
23 5/8 x 23 5/8 x 2 5/8"



28 x 28
710 x 710 x 64mm
28 x 28 x 2 5/8"

STEPS



48 x 16
1,200 x 400 x 150mm
47 1/4 x 15 3/4 x 5 7/8"

EDGE DETAIL



STRAIGHT EDGE



ROCKFACE

Notes: This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Heavy-duty, Permeable

APPEARANCE


Surface Texture - Zero
Void - 8.6%

TECHNICAL INFORMATION


Conforms to ASTM C 936
Eligible for LEED v4.1 credits

		STANDARD
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	60 mm
SQFT PER	Stone	0.09
	Layer	9.83
	Bundle	98.25
PER BUNDLE	Layers	10.00
SOLDIER LNFT PER	SqFt	3.39
	Layer	33.31
	Bundle	333.07
SAILOR LNFT PER	SqFt	-
	Layer	-
	Bundle	-
UNITS PER	SqFt	10.99
	Layer	108.00
	Bundle	1,080.00
LBS PER	Unit	2
	Layer	230
	Bundle	2,301

Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Opal Blend	SR n/a SRI n/a	✓



DARK CHARCOAL




GRANITE FUSION




OPAL BLEND


LAYER CONFIGURATION




LAYING PATTERNS



NordicCobble_Fan



NordicCobble_Circle



NordicCobble_A

SINGLE UNITS



STANDARD

89.9 x 94 x 60mm
3 3/8 x 3 3/4 x 2 3/8"
1,080 Units/Bundle
.09 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Optiloc®



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty

APPEARANCE

Edge Detail - Chamfer

Surface Texture - Smooth

Joint Spacing - 8 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	SINGLE
Plant Produced	OHIO
Thickness (mm)	80 mm

SQFT PER	Stone	0.54
	Layer	9.67
	Bundle	77.33

PER BUNDLE	Layers	8.00
------------	--------	------

SOLDIER LNFT PER	SqFt	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.86
	Layer	18.00
	Bundle	144.00


LBS PER	Unit	19
	Layer	350
	Bundle	2,801

Colors	Reflectance	Stock
All Colors & Finishes	SR n/a SRI n/a	SO


LAYER CONFIGURATION

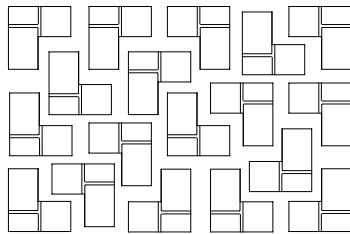

LAYING PATTERNS




Optiloc A



Optiloc B

SINGLE UNIT



STANDARD
 100 x 200 x 80mm
 3 7/8 x 7 7/8 x 3 1/8"
 144 Units/Bundle
 .54 Sq.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

24 x 24 Premier



APPLICATIONS

Pedestrian, Roof Deck

APPEARANCE

Surface Texture - Woodgrain & Stone Finish

TECHNICAL INFORMATION

Visit Unilock.com for more information.

	24 x 24
Bundle Type	SINGLE
Plant Produced	HARRISON
Thickness (mm)	50 mm

SQFT PER	Stone	3.88
	Layer	8.00
	Bundle	80.00

PER BUNDLE	Layers	10.00
------------	--------	-------

SOLDIER LNFT PER	SqFt	0.50
	Layer	4.00
	Bundle	40.00

SAILOR LNFT PER	SqFt	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	0.25
	Layer	-
	Bundle	20.00

LBS PER	Unit	-
	Layer	183
	Bundle	1,839

Colors	Reflectance	Stock
Chamois	SR .41 SRI 46	✓
Dark Charcoal	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	✓
Granite	SR n/a SRI n/a	✓
Sterling	SR n/a SRI n/a	✓
Silver Grey	SR n/a SRI n/a	✓
Sandy Beige	SR n/a SRI n/a	✓



CHAMOIS



SANDY BEIGE



FOSSIL



STERLING



SILVER GREY




GRANITE



DARK CHARCOAL

SINGLE UNITS



604.8 x 604.8 x 50mm
 24 x 24 x 2"
 20 Units/Bundle
 3.88 Sq.Ft./Stone

Notes: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



	4 x 16 SMOOTH	8 x 24 SMOOTH	8 x 24 SERIES	8 x 24 IL CAMPO	8 x 24 UMBRIANO
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	AYR	AYR	GEORGETOWN	GEORGETOWN	GEORGETOWN
Thickness (mm)	100 mm	100 mm	100 mm	100 mm	70 mm

SQFT PER	Stone	0.43	1.29	1.29	1.29	1.29
	Layer	10.33	10.33	10.33	10.33	10.33
	Bundle	51.67	51.67	51.67	51.67	82.67





PER BUNDLE	Layers	5.00	5.00	5.00	5.00	8.00
------------	--------	------	------	------	------	------

SOLDIER LNFT PER	SqFt	0.76	0.51	0.51	0.51	0.51
	Layer	7.87	5.25	5.25	5.25	5.25
	Bundle	39.37	26.25	26.25	26.25	41.99

SAILOR LNFT PER	SqFt	3.05	1.52	1.52	1.52	1.02
	Layer	31.50	15.75	15.75	15.75	10.50
	Bundle	157.48	78.74	78.74	78.74	83.99

UNITS PER	SqFt	2.32	0.77	0.77	0.77	0.77
	Layer	24.00	8.00	8.00	8.00	8.00
	Bundle	120.00	40.00	40.00	40.00	64.00

LBS PER	Unit	20	60	60	60	41
	Layer	488.00	478.20	478.20	478.20	330.88
	Bundle	2,440	2,391	2,391	2,391	2,647

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Black Granite	SR n/a SRI n/a	-	-	✓	-	-
Dark Charcoal	SR n/a SRI n/a	-	-	-	✓	-
Granite Fussion	SR n/a SRI n/a	-	-	-	✓	-
Light Grey	SR n/a SRI n/a	-	-	-	✓	-
Opal Blend	SR .24 SRI 24	-	✓	-	-	-
Steel Grey	SR n/a SRI n/a	✓	-	-	-	-
French Grey 	SR .18 SRI 17	-	-	-	-	✓
Midnight Sky 	SR .17 SRI 15	-	-	-	-	✓
Summer Wheat 	SR .42 SRI 48	-	-	-	-	✓
Winter Marvel 	SR .35 SRI 38	-	-	-	-	✓

APPLICATIONS


Pedestrian, Light Vehicular,
Roadway Street, Heavy-duty

APPEARANCE


Edge Detail - Rounded
Surface Texture - Multi-Surface
Textures Available
Joint Spacing - 4 mm / 7mm (Umbriano)

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits



Promenade 4x12 RB




Promenade 4x16 HB

LAYING PATTERNS

SINGLE UNITS



**4 x 16
SMOOTH**
100 x 400 x 100mm
3 1/8" x 15 3/4" x 3 7/8"
120 Units/Bundle
.43 Sq.Ft./Stone



**8 x 24
SMOOTH**
200 x 600 x 100mm
7 7/8" x 23 5/8" x 3 7/8"
40 Units/Bundle
1.29 Sq.Ft./Stone

**8 x 24
SERIES EXPOSED**
200 x 600 x 100mm
7 7/8" x 23 5/8" x 3 7/8"
40 Units/Bundle
1.29 Sq.Ft./Stone

**8 x 24
IL CAMPO BRUSHED**
200 x 600 x 100mm
7 7/8" x 23 5/8" x 3 7/8"
40 Units/Bundle
1.29 Sq.Ft./Stone

**8 x 24
UMBRIANO**
200 x 600 x 70mm
7 7/8" x 23 5/8" x 2 3/4"
64 Units/Bundle
1.29 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty

APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth
Joint Spacing - 4 mm / 7mm (Umbriano)

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	SMOOTH	UMBRIANO
Bundle Type	SINGLE	SINGLE
Plant Produced	OHIO	MARENGO
Thickness (mm)	80 mm	80 mm

SQFT PER	Stone	0.32	0.32
	Layer	11.63	11.63
	Bundle	81.41	93.04




PER BUNDLE	Layers	7.00	8.00
------------	--------	------	------

SOLDIER LNFT PER	SqFt	1.02	1.02
	Layer	11.81	11.81
	Bundle	82.68	94.49


SAILOR LNFT PER	SqFt	3.05	3.05
	Layer	35.43	35.43
	Bundle	248.03	283.46

UNITS PER	SqFt	3.10	3.10
	Layer	36.00	-
	Bundle	252.00	288.00


LBS PER	Unit	12	-
	Layer	425.38	426
	Bundle	2,978	3,404

Colors	Reflectance	Stock	Stock
Opal Blend	SR n/a SRI n/a	✓	-
Dark Charcoal	SR n/a SRI n/a	✓	-
Medium Grey	SR n/a SRI n/a	✓	-
French Grey 	SR .17 SRI 15	-	✓
Midnight Sky 	SR .17 SRI 15	-	✓
Winter Marvel 	SR .17 SRI 15	-	✓

LAYING PATTERNS



Promenade 4x16HB



Promenade 4x12 RB

SINGLE UNITS

80 mm



4 x 12 SMOOTH
100 x 300 x 80mm
3 7/8 x 11 7/8 x 3 1/8"
252 Units/Bundle
.32 Sq.Ft./Stone

4 x 12 UMBRIANO*
100 x 300 x 80mm
3 7/8 x 11 7/8 x 3 1/8"
288 Units/Bundle
.32 Sq.Ft./Stone

Notes: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded

Surface Texture - Textured

Joint Spacing - 10 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

			LARGE RECTANGLE
	Bundle Type	RANDOM	SINGLE
	Plant Produced	AYR	AYR
	Thickness (mm)	60 mm	60 mm

SQFT PER	Stone	-	1.72
	Layer	11.29	10.30
	Bundle	90.30	82.39

PER BUNDLE	Layers	8.00	8.00
------------	--------	------	------

SOLDIER LNFT PER	SqFt	-	0.58
	Layer	-	5.94
	Bundle	-	47.56


SAILOR LNFT PER	SqFt	1.31	1.01
	Layer	14.78	10.39
	Bundle	118.22	83.15

UNITS PER	SqFt	-	0.58
	Layer	20.00	6.00
	Bundle	160.00	48.00


LBS PER	Unit	-	50
	Layer	309.00	301.34
	Bundle	2,472	2,411

Colors	Reflectance	Stock	Stock
Dawn Mist	SR .37 SRI 41	✓	✓
Pebble Taupe	SR .38 SRI 42	✓	✓
Smoke Shale	SR n/a SRI n/a	✓	✓


LAYER CONFIGURATION



LAYING PATTERNS




Richcliff Fixed Random A



Richcliff LargeRec. HB

3 UNIT RANDOM BUNDLE



RECTANGLE
226 x 300 x 60mm
8 7/8 x 11 7/8 x 2 3/8"
64 Units/Bundle
.75 SqFt./Stone

SQUARE
226 x 226 x 60mm
8 7/8 x 8 7/8 x 2 3/8"
32 Units/Bundle
.58 Sq.Ft./Stone

SMALL RECTANGLE
150 x 226 x 60mm
5 7/8 x 8 7/8 x 2 3/8"
64 Units/Bundle
.38 Sq.Ft./Stone

SINGLE UNIT




LARGE RECTANGLE
302 x 528 x 60mm
11 7/8 x 20 7/8 x 2 3/8"
48 Units/Bundle
1.72 Sq.Ft./Stone



DAWN MIST



PEBBLE TAUPE



PEBBLE TAUPE
DAWN MIST
Blended on Site



SMOKE SHALE

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Border/Accents

APPEARANCE

Edge Detail - Chamfer
Surface Texture - Series Exposed
Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

		4 x 8	4 x 12 PERMEABLE
	Bundle Type	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	60 mm	80 mm

SQFT PER	Stone	0.22	0.32
	Layer	11.79	11.63
	Bundle	117.90	93.04



PER BUNDLE	Layers	10.00	8.00
------------	--------	-------	------

SOLDIER LNFT PER	SqFt	1.50	1.02
	Layer	17.72	11.81
	Bundle	177.17	94.49

SAILOR LNFT PER	SqFt	3.01	3.05
	Layer	35.43	35.43
	Bundle	354.33	283.46


UNITS PER	SqFt	4.58	3.10
	Layer	54.00	-
	Bundle	540.00	288.00

LBS PER	Unit	6	-
	Layer	328.31	426
	Bundle	3,283	3,404


Colors	Reflectance	Stock	Stock
Onyx Black	SR n/a SRI n/a	✓	-
Arctic Grey 	SR n/a SRI n/a	-	✓
Nordic Star 	SR n/a SRI n/a	-	✓



ONYX BLACK




ARCTIC GREY




NORDIC STAR

LAYING PATTERNS




Series 4x8 HB



Series 4x8 RB

SINGLE UNITS

4 x 8
100 x 200 x 60mm
3 7/8 x 7 7/8 x 2 3/8"
540 Units/Bundle
.22 Sq.Ft./Stone

4 x 12 PERMEABLE 
100 x 300 x 80mm
3 7/8 x 11 7/8 x 3 1/8"
288 Units/Bundle
.32 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Micro

Surface Texture - Thermal/Flamed and Shot Blast

TECHNICAL INFORMATION

Conforms to ASTM C 1782

Eligible for LEED v4.1

// Perfect for roof decks and other raised floor applications.

Ask us about our Skyview™ pedestal system. See page 85 for more information.

	16 x 32	SHOT BLAST
Bundle Type	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	50 mm	50 mm

SQFT PER	Stone	3.57	3.57
	Layer	3.57	3.57
	Bundle	64.27	64.27

PER BUNDLE	Layers	18.00	18.00
------------	--------	-------	-------

SOLDIER LNFT PER	SqFt	0.37	0.38
	Layer	1.34	1.34
	Bundle	24.04	24.12


SAILOR LNFT PER	SqFt	0.75	0.75
	Layer	2.67	2.67
	Bundle	48.13	48.06

UNITS PER	SqFt	0.28	0.28
	Layer	1.00	1.00
	Bundle	18.00	18.00


LBS PER	Unit	86	86
	Layer	86	86
	Bundle	1,595	1,595

Colors	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	-	✓
Light Granite	SR 0.44 SRI 50	✓	-
Toscana Beige	SR 0.64 SRI 77	✓	-

LAYING PATTERNS



Soreno 16x32 RB



Soreno 16x32 HB


SINGLE UNITS



16 x 32
407 x 815 x 50mm
16 x 32 x 2"
18 Units/Bundle
3.57 Sq.Ft./Stone



DARK CHARCOAL



LIGHT GRANITE



TOSCANA BEIGE

Notes: This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



Bundle Type	RANDOM
Plant Produced	RITTMAN
Thickness (mm)	70 mm

SQFT PER	Stone	-
	Layer	11.08
	Bundle	88.61

PER BUNDLE	Layers	8.00
------------	--------	------

SOLDIER LNFT PER	SqFt	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	-
	Layer	12.00
	Bundle	96.00

LBS PER	Unit	-
	Layer	329.75
	Bundle	2,638

Colors	Reflectance	Stock
Fossil	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

APPLICATIONS



Pedestrian, Light Vehicular, Permeable

APPEARANCE



Edge Detail - Zero
 Surface Texture - Textured
 Joint Spacing - 11-18 mm
 Void - 4.40%

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

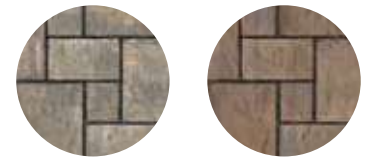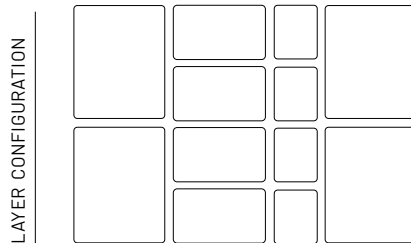

FOSSIL SIERRA

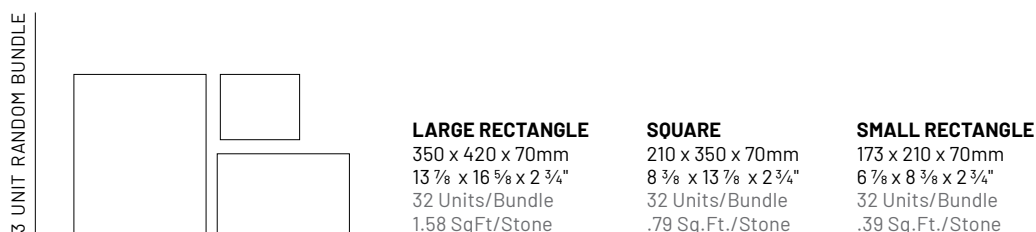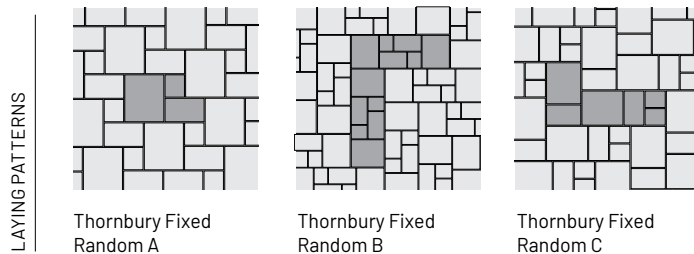

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Border/Accents, Permeable

APPEARANCE

Edge Detail - Rounded
Surface Texture - Textured
Joint Spacing - 10 mm
Void - 6.5%

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	4 x 10
Bundle Type	SINGLE
Plant Produced	AYR
Thickness (mm)	70 mm

SQFT PER	Stone	0.28
	Layer	11.05
	Bundle	88.41

PER BUNDLE	Layers	8.00
------------	--------	------

SOLDIER LNFT PER	SqFt	1.19
	Layer	13.12
	Bundle	104.99


SAILOR LNFT PER	SqFt	2.97
	Layer	32.81
	Bundle	262.47

UNITS PER	SqFt	3.62
	Layer	40.00
	Bundle	320.00


LBS PER	Unit	9
	Layer	361.00
	Bundle	2,888

Colors	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR .35 SRI 38	✓
Burnt Clay	SR .36 SRI 40	✓
Old Oak	SR .37 SRI 41	✓

LAYING PATTERNS



TownHall 4x10 DHB



TownHall 4x10 HB

SINGLE UNIT



4 x 10
100 x 250 x 70mm
3 7/8 x 9 7/8 x 2 3/4"
320 Units/Bundle
.28 Sq.Ft./Stone



BASALT



BURGUNDY RED



BURNT CLAY



OLD OAK



3 COLOR BLEND
Blended on Site

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 94. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Permeable

APPEARANCE

Edge Detail - Rounded
 Surface Texture - Textured
 Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

Bundle Type	RANDOM	RANDOM
Plant Produced	RITTMAN	HARRISON
Thickness (mm)	60 mm	60 mm

SQFT PER	Stone	-	-
	Layer	10.90	10.90
	Bundle	98.09	108.98

PER BUNDLE	Layers	9.00	10.00
------------	--------	------	-------

SOLDIER LNFT PER	SqFt	-	-
	Layer	-	-
	Bundle	-	-


SAILOR LNFT PER	SqFt	1.79	1.79
	Layer	19.56	19.56
	Bundle	176.06	176.06

UNITS PER	SqFt	-	-
	Layer	25.00	25.00
	Bundle	225.00	250.00


LBS PER	Unit	-	-
	Layer	285.00	285.00
	Bundle	2,565	2,846

Colors	Reflectance	Stock	Stock
Fossil	SR n/a SRI n/a	✓	✓
Granite Fusion	SR n/a SRI n/a	✓	✓


LAYER CONFIGURATION



LAYING PATTERNS



Treo Fixed Random C



Treo Fixed Random S




GRANITE FUSION



SIERRA

RANDOM BUNDLE

RITTMAN

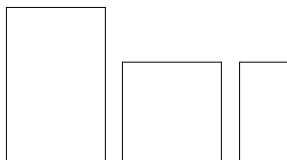

LARGE RECTANGLE

225 x 337.5 x 60mm
 8 7/8 x 13 3/8 x 2 3/8"
 45 Units/Bundle
 .82 Sq.Ft./Stone

SQUARE


225 x 225 x 60mm
 8 7/8 x 8 7/8 x 2 3/8"
 45 Units/Bundle
 .55 Sq.Ft./Stone

SMALL RECTANGLE

112.5 x 225 x 60mm
 4 1/2 x 8 7/8 x 2 3/8"
 135 Units/Bundle
 .27 Sq.Ft./Stone

RANDOM BUNDLE

HARRISON



LARGE RECTANGLE

225 x 337.5 x 60mm
 8 7/8 x 13 3/8 x 2 3/8"
 50 Units/Bundle
 .82 Sq.Ft./Stone

SQUARE

225 x 225 x 60mm
 8 7/8 x 8 7/8 x 2 3/8"
 50 Units/Bundle
 .55 Sq.Ft./Stone

SMALL RECTANGLE

112.5 x 225 x 60mm
 4 1/2 x 8 7/8 x 2 3/8"
 150 Units/Bundle
 .27 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Permeable

APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth

Joint Spacing - 4 mm

Void - 5.5%

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM	EASY CLEAN
Plant Produced	OHIO	HARRISON
Thickness (mm)	60 mm	60 mm

SQFT PER	Stone	-	-
	Layer	11.68	11.68
	Bundle	116.87	116.87



PER BUNDLE	Layers	10.00	10.00
------------	--------	-------	-------

SOLDIER LNFT PER	SqFt	-	-
	Layer	-	-
	Bundle	-	-

SAILOR LNFT PER	SqFt	1.35	1.35
	Layer	14.76	14.76
	Bundle	147.64	147.64


UNITS PER	SqFt	-	-
	Layer	21.00	21.00
	Bundle	210.00	210.00

LBS PER	Unit	-	-
	Layer	320.79	320.79
	Bundle	3,208	3,208

Colors	Reflectance	Stock	Stock
Bavarian	SR n/a SRI n/a	✓	-
Fossil	SR .22 SRI 21	✓	-
Granite Fusion	SR .28 SRI 29	✓	-
Fossil 	SR .22 SRI 21	-	✓
Granite Fusion 	SR .28 SRI 29	-	✓



BAVARIAN




FOSSIL




GRANITE FUSION

LAYER CONFIGURATION




LAYING PATTERNS



TreoSmooth Fixed
Random_R

RANDOM BUNDLE



LARGE RECTANGLE

225 x 337.5 x 60mm
8 7/8 x 13 3/8 x 2 3/8"
60 Units/Bundle
.82 Sq.Ft./Stone

SQUARE

225 x 225 x 60mm
8 7/8 x 8 7/8 x 2 3/8"
70 Units/Bundle
.55 Sq.Ft./Stone

SMALL RECTANGLE

112.5 x 225 x 60mm
4 1/2 x 8 7/8 x 2 3/8"
80 Units/Bundle
.27 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Permeable

APPEARANCE

Edge Detail - Micro

Surface Texture - Series Exposed Textured

Joint Spacing - 10mm

Void - 5.6%

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	CHICAGO
Thickness (mm)	70 mm

SQFT PER	Stone	-
	Layer	12.19
	Bundle	97.53

PER BUNDLE	Layers	8.00
------------	--------	------

SOLDIER LNFT PER	SqFt	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	2.34
	Layer	28.49
	Bundle	227.95

UNITS PER	SqFt	-
	Layer	38.00
	Bundle	304.00


LBS PER	Unit	-
	Layer	378
	Bundle	3,022

Colors	Reflectance	Stock
Cobalt Grey	SR n/a SRI n/a	✓
Peppered Granite	SR .38 SRI 42	✓

LAYER CONFIGURATION




LAYING PATTERNS



TribecaCobble Fixed Random

RANDOM BUNDLE



LARGE RECTANGLE

130 x 305 x 70mm
5 x 12 x 2 3/4"
88 Units/Bundle
.43 Sq.Ft./Stone

RECTANGLE

130 x 230 x 70mm
5 x 9 x 2 3/4"
88 Units/Bundle
.32 Sq.Ft./Stone

SMALL RECTANGLE

130 x 175 x 70mm
5 x 6 7/8 x 2 3/4"
128 Units/Bundle
.25 Sq.Ft./Stone



COBALT GREY



PEPPERED GRANITE

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. For permeable installations, Unilock recommends using granite chips for joint filler. For traditional applications, please refer to the Polymeric Sand Best Practices on page 94. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Permeable,
Roadway Street

APPEARANCE


Edge Detail - Zero
Surface Texture - Smooth
Joint Spacing - 2mm

TECHNICAL INFORMATION


Conforms to ASTM C1319
Eligible for LEED v4.1 credits

		SMOOTH
	Bundle Type	SINGLE
	Plant Produced	MICHIGAN
	Thickness (mm)	80 mm
SQFT PER	Stone	2.50
	Layer	10.00
	Bundle	80.00
PER BUNDLE	Layers	8.00
SOLDIER LNFT PER	SqFt	-
	Layer	-
	Bundle	-
SAILOR LNFT PER	SqFt	-
	Layer	-
	Bundle	-
UNITS PER	SqFt	0.40
	Layer	-
	Bundle	32.00
LBS PER	Unit	-
	Layer	247
	Bundle	1,975
Colors		Reflectance
Natural		SR .30 SRI 32
		Stock
		✓

LAYER CONFIGURATION




LAYING PATTERNS



Turfstone A

SINGLE UNIT



STANDARD
400 x 600 x 80mm
15 3/4 x 23 5/8 x 3 1/8"
32 Units/Bundle
2.50 Sq.Ft./Stone



NATURAL

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Zero

Surface Texture - Umbriano Mottled






Joint Spacing - 7mm

TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits


		SMALL RECTANGLE	
Bundle Type		RANDOM	SINGLE
Plant Produced		GEORGETOWN	GEORGETOWN
Thickness (mm)		60 mm	60 mm
SQFT PER	Stone	-	0.70
	Layer	10.46	10.46
	Bundle	94.14	94.16
PER BUNDLE	Layers	9.00	9.00
SOLDIER LNFT PER	SqFt	-	0.85
	Layer	-	8.86
	Bundle	-	79.72
SAILOR LNFT PER	SqFt	-	1.69
	Layer	8.86	17.72
	Bundle	79.72	159.45
UNITS PER	SqFt	-	1.43
	Layer	8.00	15.00
	Bundle	72.00	135.00
LBS PER	Unit	-	19
	Layer	287	286
	Bundle	2,584	2,573

Colors	Reflectance	Stock	Stock
French Grey 	SR .18 SRI 17	✓	-
Grenada White 	SR .45 SRI 52	✓	-
Summer Wheat 	SR .42 SRI 48	✓	-
Winter Marvel 	SR .35 SRI 38	✓	-
Midnight Sky 	SR .17 SRI 15	-	✓


LAYER CONFIGURATION



LAYING PATTERNS




Umbriano Fixed Random A



Umbriano Fixed Random B

RANDOM BUNDLE



LARGE RECTANGLE
350 x 546 x 60mm
13 7/8 x 21 1/2 x 2 3/8"
18 Units/Bundle
1.965 Sq.Ft./Stone

SQUARE
360 x 360 x 60mm
14 1/4 x 14 1/4 x 2 3/8"
27 Units/Bundle
1.431 Sq.Ft./Stone

SMALL RECTANGLE
180 x 360 x 60mm
7 x 14 1/4 x 2 3/8"
27 Units/Bundle
.655 Sq.Ft./Stone


SINGLE UNIT




SMALL RECTANGLE
180 x 360 x 60mm
7 x 14 x 2 3/8"
135 Units/Bundle
.70 Sq.Ft./Stone



FRENCH GREY



GRENADA WHITE



WINTER MARVEL



SUMMER WHEAT



MIDNIGHT SKY

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Zero

Surface Texture - Umbriano Mottled

Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	18 x 36
Bundle Type	SINGLE
Plant Produced	GEORGETOWN
Thickness (mm)	60 mm

SQFT PER	Stone	4.36
	Layer	8.72
	Bundle	52.31





PER BUNDLE	Layers	6.00
------------	--------	------



SOLDIER LNFT PER	SqFt	0.68
	Layer	5.91
	Bundle	35.44

SAILOR LNFT PER	SqFt	1.35
	Layer	11.81
	Bundle	70.87

UNITS PER	SqFt	0.23
	Layer	2.00
	Bundle	12.00

LBS PER	Unit	120
	Layer	239
	Bundle	1,436

Colors	Reflectance	Stock
French Grey 	SR .18 SRI 17	✓
Grenada White 	SR .45 SRI 52	✓
Summer Wheat 	SR .42 SRI 48	✓
Winter Marvel 	SR .35 SRI 38	✓

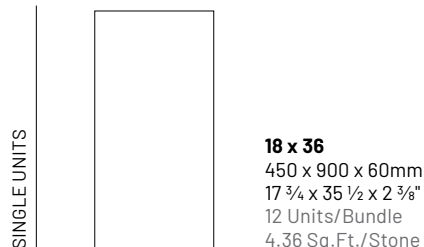

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. This product is not intended for vehicular use. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light duty vehicular*

APPEARANCE

Edge Detail - Zero

Surface Texture - Umbriano Mottled

Joint Spacing - 7mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	24 x 24	12 x 24	8 x 24	8 x 16
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	70 mm	70 mm	70 mm	70 mm

SQFT PER	Stone	3.88	1.94	1.29	0.86
	Layer	7.75	11.63	10.33	10.33
	Bundle	62.00	93.00	82.67	82.67

PER BUNDLE	Layers	8.00	8.00	8.00	8.00
------------	--------	------	------	------	------

SOLDIER LNFT PER	SqFt	0.51	0.51	0.51	0.76
	Layer	3.94	5.91	5.25	7.87
	Bundle	31.50	47.24	41.99	62.99

SAILOR LNFT PER	SqFt	0.51	1.02	1.02	1.52
	Layer	3.94	11.81	10.50	15.75
	Bundle	31.50	94.49	83.99	125.98


UNITS PER	SqFt	0.26	0.52	0.77	1.16
	Layer	2.00	6.00	8.00	12.00
	Bundle	16.00	48.00	64.00	96.00

LBS PER	Unit	129	65	41	29
	Layer	257.75	392.75	330.88	343.25
	Bundle	2,062	3,142	2,797	2,746

Colors	Reflectance	Stock	Stock	Stock	Stock
French Grey 	SR .18 SRI 17	✓	✓	✓	✓
Grenada White 	SR .45 SRI 52	✓	✓	✓	✓
Summer Wheat 	SR .42 SRI 48	✓	✓	✓	✓
Winter Marvel 	SR .35 SRI 38	✓	✓	✓	✓




FRENCH GREY





GRENADA WHITE



SUMMER WHEAT



WINTER MARVEL

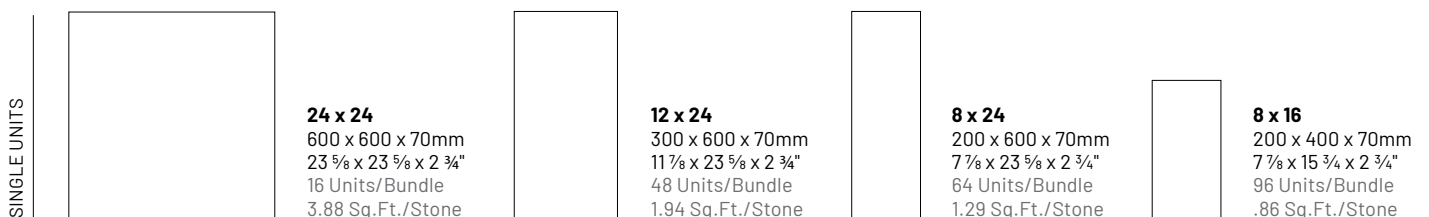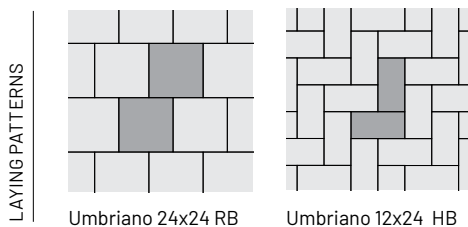

Notes: * 24x24" paver is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Zero

Surface Texture - Umbriano Mottled

Joint Spacing - 7mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	GEORGETOWN
Thickness (mm)	80 mm

SQFT PER	Stone	-
	Layer	10.46
	Bundle	73.22





PER BUNDLE	Layers	7.00
------------	--------	------




SOLDIER LNFT PER	SqFt	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.85
	Layer	8.86
	Bundle	62.01


UNITS PER	SqFt	-
	Layer	8.00
	Bundle	56.00

LBS PER	Unit	-
	Layer	382.76
	Bundle	2,679


Colors	Reflectance	Stock
French Grey 	SR .18 SRI 17	✓
Grenada White 	SR .45 SRI 52	✓
Summer Wheat 	SR .42 SRI 48	✓
Winter Marvel 	SR .35 SRI 38	✓

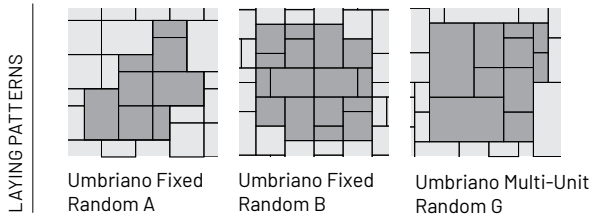


FRENCH GREY




GRENADA WHITE



SUMMER WHEAT



WINTER MARVEL



LARGE RECTANGLE
360 x 540 x 80mm
14 x 21 x 3 1/8"
14 Units/Bundle
2.09 Sq.Ft./Stone

SQUARE
360 x 360 x 80mm
14 x 14 x 3 1/8"
21 Units/Bundle
1.40 Sq.Ft./Stone

SMALL RECTANGLE
180 x 360 x 80mm
7 x 14 1/4 x 3 1/8"
21 Units/Bundle
0.70 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Zero

Surface Texture - Umbriano Mottled

Joint Spacing - 7mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	Bundle Type	36 x 36	18 x 36
	Bundle Type	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO
	Thickness (mm)	100 mm	100 mm

SQFT PER	Stone	8.72	4.36
	Layer	8.72	8.72
	Bundle	43.59	43.59





PER BUNDLE	Layers	5.00	5.00
------------	--------	------	------

SOLDIER LNFT PER	SqFt	0.34	0.34
	Layer	2.95	2.95
	Bundle	14.75	14.75


SAILOR LNFT PER	SqFt	0.34	0.68
	Layer	2.95	5.90
	Bundle	14.75	29.50

UNITS PER	SqFt	0.11	0.23
	Layer	1.00	2.00
	Bundle	5.00	10.00


LBS PER	Unit	399	199
	Layer	398.76	398.80
	Bundle	1,994	1,994

Colors	Reflectance	Stock	Stock
French Grey 	SR .18 SRI 17	SO	SO
Grenada White 	SR .45 SRI 52	SO	SO
Summer Wheat 	SR .42 SRI 48	SO	SO
Winter Marvel 	SR .35 SRI 38	SO	SO

LAYING PATTERNS




Umbriano 36 x 36 RB



Umbriano 18 x 36 RB




FRENCH GREY



GRENADA WHITE




SUMMER WHEAT



WINTER MARVEL

SINGLE UNITS



36 x 36
900 x 900 x 100mm
35 1/2 x 35 1/2 x 3 7/8"
5 Units/Bundle
8.72 Sq.Ft./Stone



18 x 36
450 x 900 x 100mm
17 3/4 x 35 1/2 x 3 7/8"
10 Units/Bundle
4.36 Sq.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 4mm

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

	18 x 36	18 x 36
Bundle Type	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	100 mm	60 mm

SQFT PER	Stone	4.36	4.36
	Layer	8.72	8.72
	Bundle	43.59	52.31



PER BUNDLE	Layers	5.00	6.00
------------	--------	------	------




SOLDIER LNFT PER	SqFt	0.68	0.68
	Layer	5.91	5.91
	Bundle	35.44	35.44

SAILOR LNFT PER	SqFt	1.35	1.35
	Layer	11.81	11.81
	Bundle	70.87	70.87

UNITS PER	SqFt	0.23	0.23
	Layer	-	2.00
	Bundle	10.00	12.00

LBS PER	Unit	-	145
	Layer	290	290
	Bundle	1,739	1,435

Colors	Reflectance	Stock	Stock
Indiana Buff	SR .n/a SRI n/a	✓	✓
Sterling	SR .n/a SRI n/a	✓	✓
Linen Buff 	SR .n/a SRI n/a	✓	✓
Linen Grey 	SR .n/a SRI n/a	✓	✓

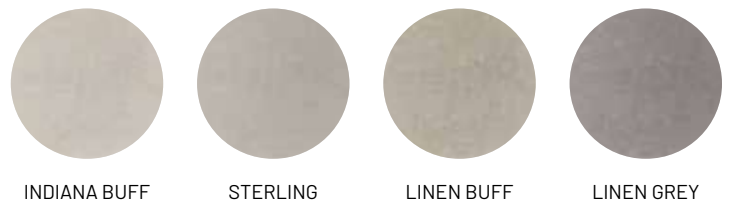

18 x 36
 450 x 900 x 60mm
 17 3/4 x 35 1/2 x 2 3/8"
 12 Units/Bundle
 4.36 Sq.Ft./Stone

18 x 36
 450 x 900 x 100mm
 17 3/4 x 35 1/2 x 4"
 10 Units/Bundle
 4.36 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Micro




Surface Texture - Textured

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

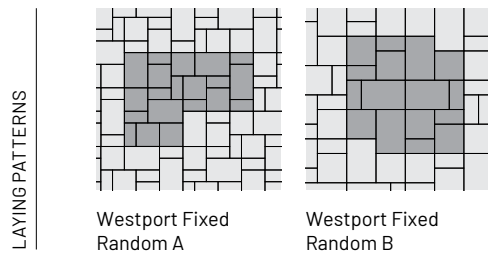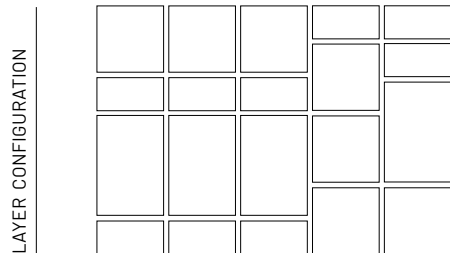

LARGE RECTANGLE
254 x 380 x 70mm
10 x 15 x 2 3/4"
32 Units/Bundle

SQUARE
254 x 254 x 70mm
10 x 10 x 2 3/4"
56 Units/Bundle

SMALL RECTANGLE
127 x 254 x 70mm
5 x 10 x 2 3/4"
72 Units/Bundle

Bundle Type	RANDOM
Plant Produced	RITTMAN
Thickness (mm)	70 mm

SQFT PER	Stone	-
	Layer	11.77
	Section	-
	Bundle	94.19

PER BUNDLE	Layers	8.00
	Sections	-


SOLDIER LNFT PER	SqFt	-
	Layer	-
	Section	-
	Bundle	-

SAILOR LNFT PER	SqFt	1.24
	Layer	14.57
	Section	-
	Bundle	116.56

UNITS PER	SqFt	-
	Layer	20.00
	Section	-
	Bundle	160.00

LBS PER	Unit	-
	Section	-
	Layer	360.50
	Bundle	2,884

Colors	Reflectance	Stock
Granite	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓



GRANITE



SIERRA

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Brussels Dimensional Stone®



APPLICATIONS

Garden Wall, Seat Wall, Outdoor Kitchen,
Fire Feature, Water Feature

CROSS SECTIONS

Cross Sections are available on Unilock's
Contractor website under Products:
contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	SMALL TAPERED	STANDARD	STANDARD
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	OHIO	RITTMAN	HARRISON
Thickness (mm)	100 mm	100 mm	100 mm

FCFT PER	Stone	0.25	0.33	0.33
	Layer	6.00	6.00	5.33
	Bundle	36.00	36.00	32.00

PER BUNDLE	Layers	6.00	6.00	6.00
	Sections	-	6.00	6.00

LNFT PER	Unit	0.75	1.00	1.00
	Bundle	108.00	108.00	96.00

UNITS PER	SqFt	4.00	3.00	3.00
	Section	-	18.00	16.00
	Layer	24.00	18.00	16.00
	Bundle	144.00	108.00	96.00

LBS PER	Units	20	29	29
	Section	-	530	471
	Layer	480	530	471
	Bundle	2,880	3,182	2,828

Colors	Reflectance	Stock	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	✓	✓	✓
Limestone	SR n/a SRI n/a	✓	✓	✓
River	SR n/a SRI n/a	✓	✓	✓
Sandstone	SR n/a SRI n/a	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓

SUNSET FIRE PIT KITS

Located on page 83



ROUND



SQUARE



RIVER



SANDSTONE



SIERRA



LIMESTONE




DARK CHARCOAL



SMALL TAPERED
229 x 200 x 100mm
9 x 7 7/8 x 3 7/8"
144 Units/Bundle
.25 Fc.Ft./Stone

SINGLE UNIT



STANDARD
300 x 200 x 100mm
11 7/8 x 7 7/8 x 3 7/8"
108 Units/Bundle
.33 Fc.Ft./Stone

SINGLE UNIT
RITTMAN



STANDARD
300 x 200 x 100mm
11 7/8 x 7 7/8 x 3 7/8"
96 Units/Bundle
.33 Fc.Ft./Stone

SINGLE UNIT
HARRISON

Notes: Small tapered units are sold in full bundles only. Maximum height is 24" (under optimum conditions). LedgeStone, Brussels XL or 6" x 12" Fullnose complement as a possible coping unit. All measurements are nominal. Contact Unilock for more information.



	TIE-BACK	STANDARD HALF	CORNER 45°	CORNER 90°
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	300 mm	300 mm	300 mm	300 mm

FCFT PER	Stone	2.00	3.00	7.04	7.04
	Layer	2.00	3.00	7.04	7.04
	Bundle	2.00	3.00	7.04	7.04

PER BUNDLE	Layers	1.00	1.00	1.00	1.00
	Sections	-	-	-	-

LNFT PER	Unit	-	3.00	-	-
	Bundle	-	3.00	-	-

UNITS PER	SqFt	0.50	0.33	0.14	0.14
	Section	-	-	-	-
	Layer	1.00	1.00	1.00	1.00
	Bundle	1.00	1.00	1.00	1.00

LBS PER	Units	1,660	800	1,480	1,320
	Section	-	-	-	-
	Layer	1,660	800	1,480	1,320
	Bundle	1,660	800	1,480	1,320

Colors	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO

APPLICATIONS

Structural Walls

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com


TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits




NATURAL


SINGLE UNITS




TIE-BACK
1830 x 600 x 300 mm
72 x 24 x 12"
1 Units/Bundle
2.00 Fc.Ft./Stone



STANDARD HALF
915 x 600 x 300mm
36 x 24 x 12"
1 Units/Bundle
3.00 Fc.Ft./Stone



CORNER 45°
1520 x 600 x 300mm
60 x 24 x 12"
1 Units/Bundle
7.04 Fc.Ft./Stone



CORNER 90°
1520 x 600 x 300mm
72 x 24 x 12"
1 Units/Bundle
7.04 Fc.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

DuraHold® Coping



APPLICATIONS

Structural Walls

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372


Eligible for LEED v4.1 credits

		STANDARD	COPING HALF	COPING STANDARD	COPING CLOSED-END
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
	Thickness (mm)	300 mm	300 mm	300 mm	300 mm
FCFT PER	Stone	6.02	2.95	6.02	6.02
	Layer	6.02	2.95	6.02	6.02
	Bundle	6.02	2.95	6.02	6.02
PER BUNDLE	Layers	1.00	1.00	1.00	1.00
LNFT PER	Unit	6.02	3.00	6.00	6.02
	Bundle	6.02	3.00	6.00	6.02
UNITS PER	SqFt	0.17	0.34	0.17	0.17
	Layer	1.00	1.00	1.00	1.00
	Bundle	1.00	1.00	1.00	1.00
LBS PER	Units	1,680	780	1,560	1,560
	Layer	1,680	780	1,560	1,560
	Bundle	1,680	780	1,560	1,560
Colors	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO




NATURAL


SINGLE UNITS




STANDARD
1830 x 600 x 300 mm
72 x 23⁵/₈ x 11⁷/₈"
1 Units/Bundle
6.02 Fc.Ft./Stone



COPING HALF
915 x 600 x 300mm
36 x 23⁵/₈ x 11⁷/₈"
1 Units/Bundle
2.95 Fc.Ft./Stone



COPING
1830 x 600 x 300mm
60 x 23⁵/₈ x 11⁷/₈"
1 Units/Bundle
6.02 Fc.Ft./Stone



CLOSED-END COPING
1830 x 600 x 300mm
72 x 23⁵/₈ x 11⁷/₈"
1 Units/Bundle
6.02 Fc.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

DuraHold 2[®]



	TIE-BACK	STANDARD	COPING	COPING CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	300 mm	300 mm	300 mm	300 mm

FCFT PER	Stone	1.17	6.02	6.02	6.02
	Layer	1.17	6.02	6.02	6.02
	Bundle	1.17	6.02	24.08	24.08

PER BUNDLE	Layers	1.00	1.00	4.00	4.00
------------	--------	------	------	------	------

LNFT PER	Unit	-	6.02	6.02	6.02
	Bundle	-	6.02	24.10	24.10

UNITS PER	SqFt	0.85	0.17	0.17	0.17
	Layer	1.00	1.00	1.00	1.00
	Bundle	1.00	1.00	4.00	4.00

LBS PER	Units	938	938	884	884
	Layer	938	938	884	884
	Bundle	938	938	3,536	3,536

Colors	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO

APPLICATIONS

Structural Walls

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's

Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION


Conforms to ASTM C1372

Eligible for LEED v4.1 credits




NATURAL

SINGLE UNITS




TIE-BACK

1830 x 360 x 300mm
72 x 14¼ x 11⅞"
1 Units/Bundle
1.17 Fc.Ft./Stone




STANDARD

1830 x 360 x 300mm
72 x 14¼ x 11⅞"
1 Units/Bundle
6.02 Fc.Ft./Stone



COPING

1830 x 360 x 300mm
72 x 14¼ x 11⅞"
4 Units/Bundle
6.02 Fc.Ft./Stone



CLOSED-END COPING

1830 x 360 x 300mm
72 x 14¼ x 11⅞"
4 Units/Bundle
6.02 Fc.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

Estate Wall™



APPLICATIONS

Pillar, Steps, Outdoor Kitchen, Fire Feature, Water Feature, Structural Walls, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Antique Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	TAPERED WALL	PILLAR/CORNER
Bundle Type	RANDOM	SINGLE
Plant Produced	OHIO	OHIO
Thickness (mm)	150 mm	150 mm

FCFT PER	Stone	-	0.52
	Layer	6.00	4.17
	Bundle	24.00	16.66

PER BUNDLE	Layers	4.00	4.00
	Sections	4.00	4.00

LNFT PER	Unit	-	1.04
	Bundle	42.56	33.28

UNITS PER	SqFt	-	1.92
	Section	12.00	8.00
	Layer	12.00	8.00
	Bundle	48.00	32.00

LBS PER	Units	-	56
	Section	574	444
	Layer	574	444
	Bundle	2,297	1,776

Colors	Reflectance	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓
River	SR n/a SRI n/a	✓	✓
Sierra	SR n/a SRI n/a	✓	✓



GRANITE




RIVER




SIERRA


RANDOM BUNDLE



LARGE TAPERED
375 x 228 x 150mm
14 7/8 x 9 x 5 7/8"
16 Units/Bundle




MEDIUM TAPERED
300 x 230 x 150mm
11 7/8 x 9 x 5 7/8"
16 Units/Bundle



SMALL TAPERED
230 x 230 x 150mm
9 x 9 x 5 7/8"
16 Units/Bundle

SINGLE UNITS



PILLAR / CORNER
320 x 230 x 150mm
12 5/8 x 9 x 5 7/8"
32 Units/Bundle
.52 Sq.Ft./Stone

Notes: 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. Ledgestone™, Brussels Block® XL, or Brussels Fullnose™ complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

Lineo™ Dimensional Stone



APPLICATIONS

Pillar, Outdoor Kitchen, Fire Feature, Water Feature, Seat Wall, Garden Wall

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

		PILLAR / CORNER
Bundle Type	RANDOM	SINGLE
Plant Produced	OHIO	OHIO
Thickness (mm)	100 mm	100 mm

FCFT PER	Stone	-	0.33
	Layer	10.00	9.00
	Bundle	30.00	27.00


PER BUNDLE	Layers	3.00	3.00
------------	--------	------	------

LNFT PER	Unit	-	-
	Bundle	89.06	-


UNITS PER	SqFt	-	3.00
	Layer	20.00	27.00
	Bundle	60.00	81.00

LBS PER	Units	-	29
	Layer	881	784
	Bundle	2,642	2,353


Colors	Reflectance	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓
Graphite	SR n/a SRI n/a	✓	✓
Fieldstone	SR n/a SRI n/a	✓	✓



GRANITE



GRAPHITE




FIELDSTONE

LINEO FIRE PIT




Fire pit Insert sold separately

RANDOM BUNDLE



XL RECTANGLE
600 x 200 x 100mm
23 5/8 x 7 7/8 x 3 7/8"
15 Units/Bundle
.66 Fc.Ft./Stone



LARGE RECTANGLE
500 x 200 x 100mm
19 3/4 x 7 7/8 x 3 7/8"
15 Units/Bundle
.55 Fc.Ft./Stone



RECTANGLE
400 x 200 x 100mm
15 3/4 x 7 7/8 x 3 7/8"
15 Units/Bundle
.44 Fc.Ft./Stone



SMALL RECTANGLE
300 x 200 x 100mm
11 7/8 x 7 7/8 x 3 7/8"
15 Units/Bundle
.33 Fc.Ft./Stone

SINGLE UNIT



PILLAR/CORNER
300 x 200 x 100mm
11 7/8 x 7 7/8 x 3 7/8"
81 Units/Bundle
.33 Sq.Ft./Stone

Notes: Spacing strips are shipped with random wall bundles to create even spacing between units. LedgeStone™, Unilock Natural Stone or 6"x12" Fullnose complement as possible coping options. All measurements are nominal. Contact Unilock for more information.

Olde Quarry™



APPLICATIONS

Pillar, Steps, Outdoor Kitchen, Fire Feature, Water Feature, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Tumbled

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	WALL	CORNER	COPING
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	HARRISON	HARRISON	HARRISON
Thickness (mm)	114 mm	114 mm	75 mm

FCFT PER	Stone	-	0.39	0.25
	Layer	5.63	6.18	3.00
	Bundle	33.75	30.89	24.00

PER BUNDLE	Layers	6.00	5.00	8.00
	Sections	5.00	4.00	4.00

LNFT PER	Unit	-	1.03	1.00
	Bundle	90.00	82.40	96.00

UNITS PER	SqFt	-	2.59	4.00
	Section	18.00	20.00	24.00
	Layer	15.00	16.00	12.00
	Bundle	90.00	80.00	96.00

LBS PER	Units	-	39	32
	Section	625	788	760
	Layer	521	630	380
	Bundle	3,125	3,150	3,039

Colors	Reflectance	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓	✓
River	SR.n/a SRI n/a	✓	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓	✓



GRANITE



RIVER




SANDSTONE




SIERRA


RANDOM BUNDLE



15" LARGE TAPERED
380 x 230 x 114mm
15 x 9 x 4 1/2"
30 Units/Bundle
.47 Fc.Ft./Stone




12" MEDIUM TAPERED
305 x 230 x 114mm
11 7/8 x 9 x 4 1/2"
30 Units/Bundle
.38 Fc.Ft./Stone




9" SMALL TAPERED
230 x 230 x 114mm
9 x 9 x 4 1/2"
30 Units/Bundle
.28 Fc.Ft./Stone

SINGLE UNITS



CORNER
300 x 230 x 114mm
11 7/8 x 9 x 4 1/2"
80 Units/Bundle
.39 Fc.Ft./Stone



COPING TAPERED
305 x 305 x 75mm
12 x 12 x 3"
96 Units/Bundle
.25 Fc.Ft./Stone

Notes: Structural retaining walls greater than 2' high require professional engineering. **Quarry tubing is added to orders when requested. Tubing may be used to set back walls.** Ledgestone™, Olde Quarry™ Coping, Brussels Block™ XL, Brussels Fullnose™ or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

Pisa™ & PisaXL



APPLICATIONS

Pillar, Steps, Structural Walls, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	STANDARD	TAPERED	CORNER	COPING	XL WALL
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	OHIO	OHIO	OHIO	OHIO	OHIO
Thickness (mm)	150 mm	150 mm	150 mm	75 mm	150 mm

FCFT PER	Stone	0.33	0.33	0.83	0.25	0.67
	Layer	6.67	6.67	5.00	3.00	5.33
	Bundle	20.00	20.00	15.00	21.00	21.33

PER BUNDLE	Layers	3.00	3.00	3.00	7.00	4.00
	Sections	2.00	2.00	3.00	2.00	-

LNFT PER	Unit	0.67	0.67	-	1.00	1.33
	Bundle	40.00	40.00	-	84.00	42.67

UNITS PER	SqFt	3.00	3.00	1.20	4.00	1.50
	Section	30.00	30.00	6.00	42.00	-
	Layer	20.00	20.00	6.00	12.00	8.00
	Bundle	60.00	60.00	18.00	84.00	32.00

LBS PER	Units	43	38	52	32	77
	Section	1,285	1,153	314	1,357	-
	Layer	857	768	314	388	617
	Bundle	2,570	2,305	943	2,714	2,467

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓	✓	✓	✓
River	SR n/a SRI n/a	✓	✓	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓	✓	✓



GRANITE




RIVER




SIERRA


SINGLE UNITS




STANDARD
300 x 200 x 150mm
11 7/8 x 7 7/8 x 5 7/8"
60 Units/Bundle
.33 Fc.Ft./Stone




TAPERED
300 x 200 x 150mm
11 7/8 x 7 7/8 x 5 7/8"
60 Units/Bundle
.33 Fc.Ft./Stone



CORNER
300 x 200 x 150mm
11 7/8 x 7 7/8 x 5 7/8"
18 Units/Bundle
.83 Fc.Ft./Stone



COPING
300 x 300 x 75mm
11 7/8 x 11 7/8 x 3"
84 Units/Bundle
.25 Fc.Ft./Stone



XL WALL
400 x 300 x 150mm
15 3/4 x 11 7/8 x 5 7/8"
32 Units/Bundle
.67 Fc.Ft./Stone

Notes: XL Wall units are single units and are sold in full bundles only. When purchased by the full bundle, 12" Coping bundle has 14 units of closed-end coping (7 left and 7 right). Closed-end 12" coping not sold separately. Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa2 wall is 3/4" every course or 1 1/2" every 2 courses. Retaining wall engineering software is also available free of charge at www.unilock.com. Walls greater than 4' in height require professional engineering. Tapered Units allow for a minimum 5' Radius. All measurements are nominal. Contact Unilock for more information.

Pisa™ XL Smooth



APPLICATIONS

Retaining Wall, Garden Wall, Seat Wall, Step, Pillar

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	CORNER	XL TAPERED	COPING
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	OHIO	OHIO	OHIO
Thickness (mm)	150 mm	150 mm	75 mm

FCFT PER	Stone	0.97	0.65	0.32
	Layer	11.63	5.17	1.94
	Bundle	46.52	20.67	15.50


PER BUNDLE	Layers	4.00	4.00	8.00
	Sections	3.00	4.00	3.00

LNFT PER	Unit	-	-	1.31
	Bundle	-	-	62.99

UNITS PER	SqFt	1.03	1.55	3.10
	Section	16.00	8.00	16.00
	Layer	12.00	8.00	6.00
	Bundle	48.00	32.00	48.00

LBS PER	Units	59	77	65
	Section	944	617	1,034
	Layer	708	617	388
	Bundle	2,831	2,467	3,101

Colors	Reflectance	Stock	Stock	Stock
Fieldstone	SR n/a SRI n/a	✓	✓	✓
Granite	SR n/a SRI n/a	✓	✓	✓
Charcoal	SR n/a SRI n/a	✓	✓	✓



GRANITE




FIELDSTONE




CHARCOAL


SINGLE UNITS



CORNER
400 x 200 x 150mm
15 3/4 x 7 7/8 x 5 7/8"
48 Units/Bundle
0.97 Fc.Ft./Stone



XL TAPERED
400 x 300 x 150mm
15 3/4 x 11 7/8 x 5 7/8"
32 Units/Bundle
0.65 Fc.Ft./Stone



COPING
400 x 325 x 75mm
15 3/4 x 11 7/8 x 3"
48 Units/Bundle
0.32 Fc.Ft./Stone

Notes: Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

Quarry™ Smooth



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	WALL	CORNER/STANDARD
Bundle Type	RANDOM	SINGLE
Plant Produced	HARRISON	HARRISON
Thickness (mm)	114 mm	114 mm

FCFT PER	Stone	-	0.38
	Layer	5.63	6.08
	Bundle	33.75	18.24

PER BUNDLE	Layers	6.00	3.00
	Sections	5.00	-

LNFT PER	Unit	-	-
	Bundle	-	-

UNITS PER	SqFt	-	2.63
	Section	18.00	-
	Layer	15.00	16.00
	Bundle	90.00	48.00

LBS PER	Units	-	40
	Section	607	-
	Layer	506	641
	Bundle	3,033	1,922

Colors	Reflectance	Stock	Stock
Charcoal	SR.n/a SRI n/a	✓	✓
Natural Grey	SR.n/a SRI n/a	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓



CHARCOAL




NATURAL GREY




SANDSTONE


RANDOM BUNDLE



15" LARGE TAPERED
380 x 230 x 114mm
15 x 9 x 4 1/2"
30 Units/Bundle
.33 Fc.Ft./Stone




12" MEDIUM TAPERED
305 x 230 x 114mm
12 x 9 x 4 1/2"
30 Units/Bundle
.33 Fc.Ft./Stone



9" SMALL TAPERED
230 x 230 x 114mm
9 x 9 x 4 1/2"
30 Units/Bundle
.55 Fc.Ft./Stone

SINGLE UNITS



CORNER/STANDARD
306.6 x 228.6 x 114mm
12 x 9 x 4 1/2"
48 Units/Bundle
.38Fc.Ft./Stone

Notes: Structural retaining walls greater than 2' high require professional engineering. **Quarry tubing is added to orders when requested. Tubing may be used to set back walls.** LedgeStone™, Olde Quarry™ Coping, Brussels Block™ XL, Brussels Fullnose™ or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.



	WALL	CORNER	JUMPER	CORNER JUMPER
Bundle Type	RANDOM	RANDOM	RANDOM	SINGLE
Plant Produced	AYR	AYR	AYR	AYR
Thickness (mm)	57 mm	57 mm	114 mm	114 mm

FCFT PER	Stone	-	0.41	0.34	0.55
	Layer	3.04	4.05	3.43	4.42
	Bundle	24.30	16.21	13.73	8.84

PER BUNDLE	Layers	8.00	4.00	4.00	2.00
------------	--------	------	------	------	------

LNFT PER	Unit	-	-	-	1.48
	Bundle	130.69	-	-	23.62

UNITS PER	SqFt	-	2.47	2.91	1.81
	Layer	16.00	10.00	10.00	8.00
	Bundle	128.00	40.00	40.00	16.00

LBS PER	Units	-	29	41	61
	Layer	252	293	408	486
	Bundle	2,015	1,173	1,631	973

Colors	Reflectance	Stock	Stock	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓	✓	✓
Coastal Slate	SR n/a SRI n/a	✓	✓	✓	✓

APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Steps, Fire Feature, Seat Wall, Garden Wall

APPEARANCE


Surface Texture - Textured

TECHNICAL INFORMATION


Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

CORNER BUNDLE



LONG CORNER UNIT
450 x 230-250 x 57mm
17 1/2 x 9-10 x 2 1/4"
20 Units/Bundle



SHORT CORNER UNIT
375 x 230-250 x 57mm
14 1/2 x 9-10 x 2 1/4"
20 Units/Bundle



BUFF




COASTAL SLATE


JUMPER RANDOM BUNDLE



JUMPER UNIT 1
200 x 230-250 x 114mm
8 x 9-10 x 4 1/2"
16 Units/Bundle




JUMPER UNIT 2 & 3
300 x 230-250 x 114mm
12 x 9-10 x 4 1/2"
12 Units/Bundle



JUMPER UNIT 4
425 x 230-250 x 114mm
17 x 9-10 x 4 1/2"
12 Units/Bundle

JUMPER CORNER UNIT




JUMPER CORNER
450 x 230-250 x 114mm
12 x 9-10 x 4 1/2"
16 Units/Bundle

RANDOM BUNDLE




STANDARD UNIT 1
200 x 230-250 x 57mm
8 x 9-10 x 2 1/4"
32 Units/Bundle



STANDARD UNIT 2
300 x 230-250 x 57mm
12 x 9-10 x 2 1/4"
32 Units/Bundle



STANDARD UNIT 3
300 x 230-250 x 57mm
12 x 9-10 x 2 1/4"
32 Units/Bundle



STANDARD UNIT 4
425 x 230-250 x 57mm
17 x 9-10 x 2 1/4"
32 Units/Bundle

Notes: All measurements are nominal. Contact Unilock for more information. Structural retaining walls greater than 2' high require professional engineering.

Rivercrest® Pillar and Fire Pit kit



APPLICATIONS

Pillar, Water Feature, Fire Feature,
Seat Wall, Garden Wall

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	PILLAR UNIT	FIRE PIT RADIUS WALL
Bundle Type	SINGLE	SINGLE
Plant Produced	AYR	AYR
Thickness (mm)	114 mm	114 mm

FCFT PER	Stone	-	-
	Layer	-	-
	Bundle	-	-

PER BUNDLE	Layers	4.00	4.00
------------	--------	------	------

LNFT PER	Unit	-	-
	Bundle	-	-

UNITS PER	SqFt	-	-
	Layer	2.00	3.00
	Bundle	8.00	12.00

LBS PER	Units	220	117
	Layer	441	351
	Bundle	1,764	1,402

Colors	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓
Coastal Slate	SR n/a SRI n/a	✓	✓




BUFF




COASTAL SLATE

PILLAR UNIT




500 x 500 x 114mm
19 3/4 x 19 3/4 x 4 1/2"
Center opening 9 x 9"




Completed Unit Shown
Pillar cap Sold Separately

FIRE PIT RADIUS WALL UNIT



1,060 x 225 x 114mm
41 3/4 x 8 7/8 x 4 1/2"
12 Units/Bundle



Fire Pit kit insert included.
4 Units per Layer

Ledgestone Fire Pit Coping
Sold Separately. See page 80

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Seat Wall, Garden Wall, Structural Wall, Steps

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	STANDARD CORNER	COPING
Bundle Type	SINGLE	SINGLE
Plant Produced	HARRISON	HARRISON
Thickness (mm)	180 mm	180 mm

FCFT PER	Stone	1.94	1.94
	Layer	7.75	7.75
	Bundle	23.25	23.25

PER BUNDLE	Layers	3.00	3.00
------------	--------	------	------

LNFT PER	Unit	3.28	3.28
	Bundle	39.37	39.37

UNITS PER	SqFt	0.52	0.52
	Layer	4.00	4.00
	Bundle	12.00	12.00

LBS PER	Units	257	257
	Layer	1,029	1,029
	Bundle	3,086	3,086

Colors	Reflectance	Stock	Stock
Fieldstone	SR n/a SRI n/a	✓	✓
Granite	SR n/a SRI n/a	✓	✓
Charcoal	SR n/a SRI n/a	✓	✓



FIELDSTONE




GRANITE




CHARCOAL

SINGLE UNITS



STANDARD/CORNER
1000 x 290 x 180mm
39 3/8 x 11 1/2 x 7"
12 Units/Bundle
1.94 Fc.Ft./Stone



COPING
1000 x 290 x 180mm
39 3/8 x 11 1/2 x 7"
12 Units/Bundle
1.94 Fc.Ft./Stone

Notes: Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Structural Wall, Garden Wall, Steps

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	STANDARD 500 SPLIT	COPING SPLIT	CORNER SPLIT 90°	STANDARD 333 SPLIT	STANDARD 925 SPLIT
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	RITTMAN	RITTMAN	RITTMAN	RITTMAN	RITTMAN
Thickness (mm)	185 mm	185 mm	185 mm	185 mm	185 mm

FCFT PER	Stone	2.00	2.00	2.87	2.00	2.00
	Layer	4.00	4.00	5.73	6.00	2.00
	Bundle	12.00	12.00	17.19	18.00	6.00

PER BUNDLE	Layers	3.00	3.00	3.00	3.00	3.00
	Sections	3.00	3.00	3.00	-	3.00

LNFT PER	Unit	3.25	3.25	-	-	3.25
	Bundle	19.50	19.50	-	-	9.75

UNITS PER	SqFt	0.50	0.50	0.35	0.50	0.50
	Section	2.00	2.00	2.00	-	1.00
	Layer	2.00	2.00	2.00	3.00	1.00
	Bundle	6.00	6.00	6.00	9.00	3.00


LBS PER	Units	439	477	417	288	942
	Section	878	954	834	-	942
	Layer	878	954	834	864	942
	Bundle	2,635	2,863	2,502	2,592	2,827

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	✓	✓	SO	SO	SO




NATURAL


SINGLE UNITS




STANDARD 500 SPLIT
1000 x 185 x 500mm
39 3/8 x 7 3/8 x 19 3/4"
6 Units/Bundle
2.00 Fc.Ft./Stone




COPING SPLIT
1000 x 185 x 500mm
39 3/8 x 7 3/8 x 19 3/4"
6 Units/Bundle
2.00 Fc.Ft./Stone




CORNER SPLIT 90°
925 x 185 x 500mm
36 1/2 x 7 3/8 x 19 3/4"
6 Units/Bundle
2.87 Fc.Ft./Stone



STANDARD 333 SPLIT
1000 x 185 x 500mm
39 3/8 x 7 3/8 x 13"
9 Units/Bundle
2.00 Fc.Ft./Stone



STANDARD 925 SPLIT
1000 x 185 x 925mm
39 3/8 x 7 3/8 x 36 1/2"
3 Units/Bundle
2.00 Fc.Ft./Stone

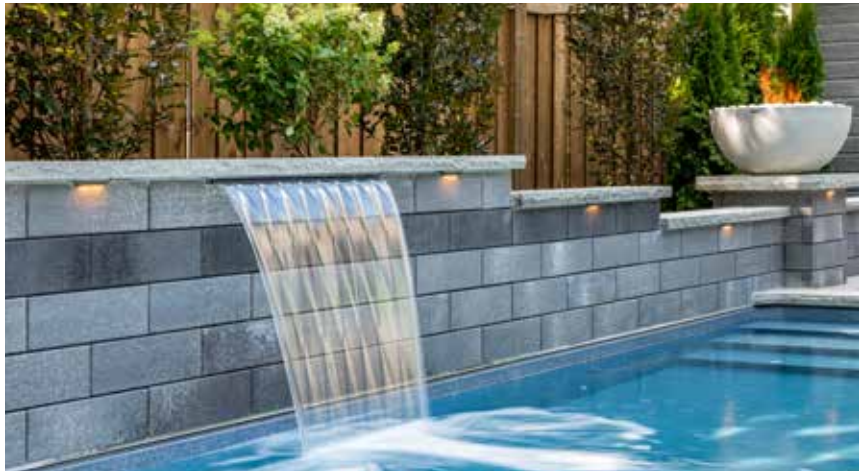

FASCIA PANELS
FINISHES



SMOOTH



PITCHED



UMBRIANO




SUBWAY



LAVANO




1/2 Running Bond




1/2 Running Bond with Linear Accents



1/2 Running Bond with Random Accents



1/2 Running Bond with Paver Accents






Mixed Bond



1/3 Running Bond



U-CARA RETAINING WALL GEOGRID SECTION

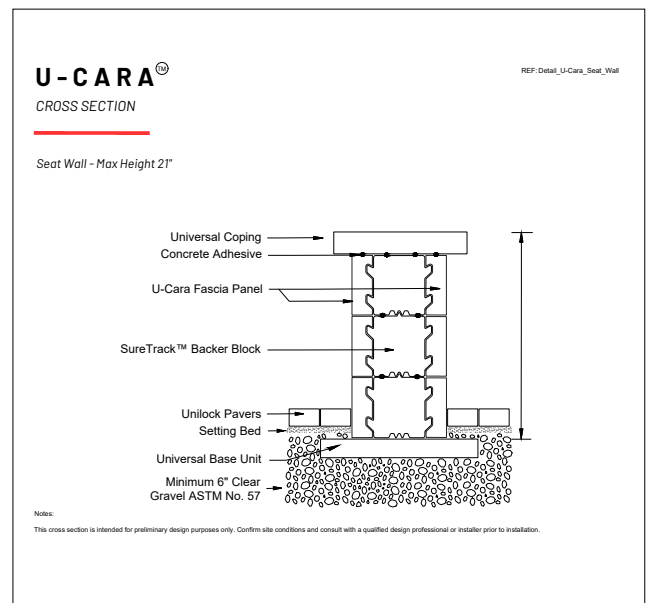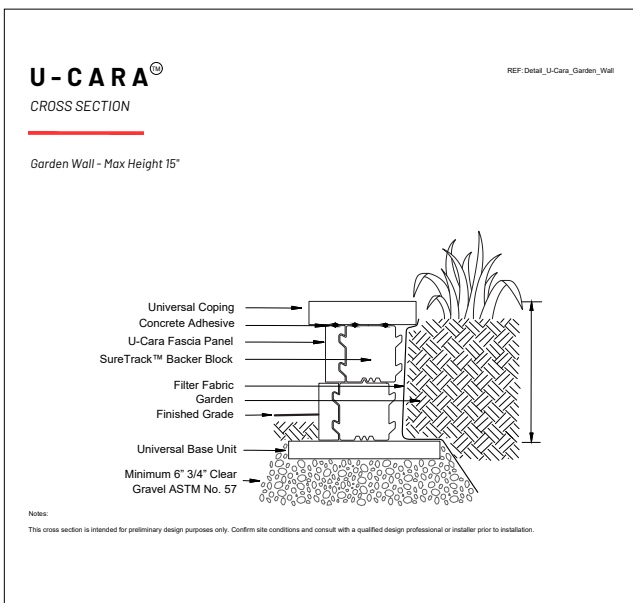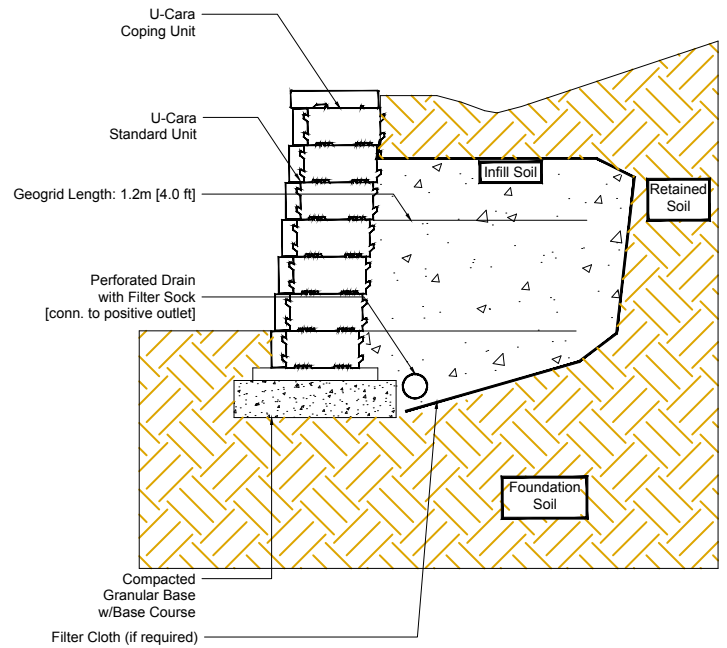

	STANDARD SMOOTH	CLOSED-END SMOOTH	STANDARD UMBRIANO	CLOSED-END UMBRIANO	STANDARD PITCHED	CLOSED-END PITCHED
Bundle Type	SINGLE	MULTI	SINGLE	SINGLE	SINGLE	MULTI
Plant Produced	MICHIGAN	MICHIGAN	ONTARIO	ONTARIO	MICHIGAN	MICHIGAN
Thickness (mm)	150 mm	150 mm	150 mm	150 mm	150 mm	150 mm

FCFT PER	Stone	0.73	1.29	0.73	1.29	0.73	1.29
	Layer	10.25	9.03	10.25	9.03	10.25	9.03
	Bundle	61.52	54.18	61.52	54.18	61.52	54.18

PER BUNDLE	Layers	6.00	6.00	6.00	6.00	6.00	6.00
------------	--------	------	------	------	------	------	------

LNFT PER	Unit	1.54	2.50	-	2.57	1.54	2.50
	Bundle	129.50	104.86	-	107.94	129.50	104.86

UNITS PER	SqFt	1.37	0.78	1.37	0.78	1.37	0.78
	Layer	14	7	14.00	7.00	14	7
	Bundle	84.00	42.00	84.00	42.00	84.00	42.00

LBS PER	Units	19.61	30	18	30	21.53	34
	Layer	274	207	252	207	301.5	236
	Bundle	1,513	1,240	1,513	1,240	1,809	1,415

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Granite Fusion	SR n/a SRI n/a	✓	✓	-	-	✓	✓
Fossil	SR n/a SRI n/a	✓	✓	-	-	✓	✓
Indiana Buff	SR n/a SRI n/a	✓	✓	-	-	-	-
Bavarian (Chicago)	SR n/a SRI n/a	✓	✓	-	-	-	-
Dark Charcoal	SR n/a SRI n/a	✓	✓	-	-	-	-
French Grey	SR n/a SRI n/a	-	-	✓	✓	-	-
Grenada White	SR n/a SRI n/a	-	-	✓	✓	-	-
Midnight Sky	SR n/a SRI n/a	-	-	✓	✓	-	-
Summer Wheat	SR n/a SRI n/a	-	-	✓	✓	-	-
Winter Marvel	SR n/a SRI n/a	-	-	✓	✓	-	-

SINGLE UNIT BUNDLE

STANDARD PANEL
 150 x 466 x 60mm
 5 7/8 x 18 3/8 x 2 3/8"
 84 Units/Bundle
 .73 Sq.Ft./Stone

2 UNIT CLOSED-END BUNDLE

STANDARD HALF PANEL
 150 x 233 x 60mm
 5 7/8 x 9 1/4 x 2 3/8"
 42 Units/Bundle
 .37 Sq.Ft./Stone

CLOSED-END PANEL
 150 x 530 x 60mm
 5 7/8 x 20 7/8 x 2 3/8"
 42 Units/Bundle
 1.29 Sq.Ft./Stone



	LAVANO STANDARD	LAVANO CLOSED END	SUBWAY STANDARD	SUBWAY CLOSED END
Bundle Type	SINGLE	BUNDLE	SINGLE	BUNDLE
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN	MICHIGAN
Thickness (mm)	150 mm	150 mm	150 mm	150 mm

FCFT PER	Stone	0.73	1.29	0.73	1.29
	Layer	10.25	9.03	10.25	9.03
	Bundle	61.52	54.18	61.52	54.18

PER BUNDLE	Layers	6.00	6.00	6.00	6.00
------------	--------	------	------	------	------

LNFT PER	Unit	1.54	2.50	1.54	2.50
	Bundle	129.50	104.86	129.50	104.86

UNITS PER	SqFt	1.37	0.78	1.37	0.78
	Layer	14	7	14	7
	Bundle	84.00	42.00	84.00	42.00

LBS PER	Units	18	30	18	30
	Layer	252	207	252	207
	Bundle	1,513	1,240	1,513	1,240

Colors	Reflectance	Stock	Stock	Stock	Stock
Granite Fusion	SR n/a SRI n/a	✓	✓	-	-
Fossil	SR n/a SRI n/a	✓	✓	-	-
Indiana Buff	SR n/a SRI n/a	✓	✓	✓	✓
Dark Charcoal	SR n/a SRI n/a	-	-	✓	✓

APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Fire Feature, Walls up to 3' in Height: Seat Wall, Garden Wall, Retaining Walls, Structural Wall


APPEARANCE

Surface Texture - Smooth, Standard, Umbriano Mottled and Pitched

TECHNICAL INFORMATION


Conforms to ASTM C1372
Eligible for LEED v4.1 credits

SINGLE UNIT BUNDLE




6" STANDARD FASCIA PANEL
150 x 466 x 60mm
5 7/8 x 18 3/8 x 2 3/8"
84 Units/Bundle
.73 Sq.Ft./Stone

2 UNIT CLOSED-END BUNDLE



STANDARD FASCIA HALF PANEL
150 x 233 x 60mm
5 7/8 x 9 1/4 x 2 3/8"
42 Units/Bundle
.37 Sq.Ft./Stone



CLOSED-END FASCIA PANEL
150 x 530 x 60mm
5 7/8 x 20 7/8 x 2 3/8"
42 Units/Bundle
1.29 Sq.Ft./Stone


SMOOTH PANELS



FOSSIL



GRANITE FUSION



INDIANA BUFF



BAVARIAN



DARK CHARCOAL


UMBRIANO® PANELS



FRENCH GREY



GRENADA WHITE



SUMMER WHEAT



WINTER MARVEL



MIDNIGHT SKY

SUBWAY PANELS




DARK CHARCOAL




INDIANA BUFF


LAVANO PANELS



GRANITE FUSION



FOSSIL



INDIANA BUFF

PITCHED PANELS



FOSSIL




GRANITE FUSION

U-Cara® Backer




		STANDARD BACKER	CORNER BACKER	LARGE BACKER	UNIVERSAL BASE
Bundle Type		SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced		OHIO	OHIO	OHIO	OHIO
Thickness (mm)		150 mm	150 mm	150 mm	55 mm
FCFT PER	Stone	0.32	0.28	0.32	-
	Layer	11.30	3.96	-	-
	Bundle	33.91	15.82	-	-
PER BUNDLE	Layers	3.00	4.00	3.00	10.00
LNFT PER	Unit	0.67	-	-	1.17
	Bundle	69.99	-	-	70.00
UNITS PER	SqFt	3.10	3.54	-	-
	Layer	35.00	14.00	21.00	6.00
	Bundle	105.00	56.00	63.00	60.00
LBS PER	Units	22	36	44.53	47
	Layer	773	498	922	282
	Bundle	2,320	1,992	2,766	2,816


COMPONENTS



STANDARD BACKER
190 x 150 x 150mm
7 1/2 x 5 7/8 x 5 7/8"
105 Units/Bundle
.32 Fc.Ft/Stone




CORNER BACKER
150 x 175 x 294mm
5 7/8 x 6 7/8 x 11 5/8"
56 Units/Bundle
.28 Fc.Ft/Stone



LARGE BACKER
150 x 200 x 294mm
5 7/8 x 7 7/8 x 11 5/8"
63 Units/Bundle
.32 Fc.Ft/Stone

RECOMMENDED
BASE UNIT



UNIVERSAL BASE
355 x 482 x 55mm
14 x 19 x 2 1/4"
60 Units/Bundle

EXTRA
COMPONENTS




**SURE TRACK
CORNER INSERT**
L = 2"
50mm

Approx. 40 Inserts per bag
(Sold in full bags only)

Notes: Sure Track Large Backer Units when used as corners in a pillar application, can achieve 42 FFT/bundle or .757 FFT/unit.

The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Places and Pillars.

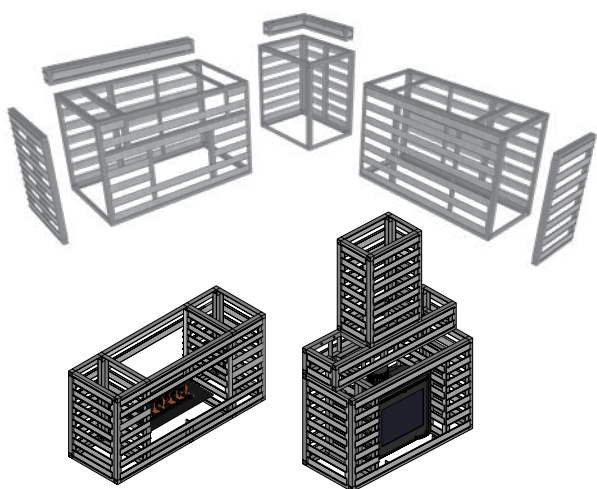

No.	MODEL	Description
UCARA000001	URS	UCARA RAIL (10/PACK)
UCARA000003	URS	ALIGNMENT BARS 39" (10/PACK)
UCARA000007	UL-OSK	CABINET DEPTH CHANGE KIT
UCARA000009	UL-FIR	U-CARA FIREPLACE
UCARA000010	UL-FIR-M	U-CARA FIREPLACE MANTLE
UCARA000016	UL-FIR-MW	U-CARA FIREPLACE MANTLE WIDE UNIT
UCARA000017	UL-FIR-CH	U-CARA FIREPLACE CHIMNEY UNIT
UCARA000018	UL-FIR-CH-MW	U-CARA FIREPLACE CHIMNEY WIDE UNIT
UCARA000019	UL-FIR-RTN	U-CARA FIREPLACE RETURN
UCARA000020	UL-FIR-RTN-OS	U-CARA FIREPLACE RETURN OVERSIZED
UCARA001000	UL-GC	UNIVERSAL GRILL CABINET (FITS 36"-42" GRILL)
UCARA002000	UL-BC	BASE CABINET (FITS FIRE TABLE OR FRIDGE)
UCARA003000	UL-CC	CORNER CABINET 27.5" X 27.5"
UCARA003001	UL-CC-OS	CORNER CABINET 27.5" X 36.5" OS
UCARA003002	UL-CC-BP	CORNER CABINET BACK PANEL
UCARA004000	UL-ECK	END CLAD KIT 27.5"
UCARA004001	UL-ECK-OS	END CLAD KIT 36.5" OS
UCARA005000	UL-BS	BACKSPLASH-GRILL/BASE UNIT 64½"
UCARA005001	UL-BS-CC	BACKSPLASH CORNER CABINET
UCARA005002	UL-BS-CC-OS	BACKSPLASH CORNER CABINET OS
UCARA006000	UL-DD	STAINLESS DOUBLE ACCESS DOORS 27"
UCARA007000	UL-PU	PILLAR UNIT (18 ¾" X 18 ¾")
UCARA001002	UL-GC-36	UNIVERSAL GRILL CABINET (FITS 36"-42" GRILL)
UCARA002001	UL-BC-36	BASE CABINET (FITS FIRE TABLE OR FRIDGE)
UCARA003004	UL-CC-OS-36	CRNR CABINET 27.5X36.5 OS
UCARA003005	UL-CC-36	CORNER CABINET 27.5X27.5
UCARA004002	UL-ECK-36	END CLAD KIT 27.5"
UCARA004003	UL-ECK-OS-36	END CLAD KIT 36.5" OS

U-Cara® Wall Mount System



The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.



U-CARA ALIGNMENT BAR:
39" LENGTH - SOLD IN PACKS OF 10 PIECES
RS-UCARA000002

U-CARA RAILS:
8' LENGTH - SOLD IN PACKS OF 10 PIECES
RS-UCARA000001



Brussels Fullnose™ & Double Fullnose™



APPLICATIONS

Pool Coping, Steps

APPEARANCE

Surface Texture - Tumbled, Smooth

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	FULLNOSE	DOUBLE FULLNOSE
Bundle Type	SINGLE	SINGLE
Plant Produced	OHIO	OHIO
Thickness (mm)	60 mm	70 mm

FCFT PER	Stone	0.49	0.49
	Layer	10.00	19.57
	Bundle	104.00	78.27


PER BUNDLE	Layers	4.00	4.00
	Sections	4.00	4.00

LNFT PER	Unit	0.5	0.50
	Bundle	104.00	78.27


UNITS PER	SqFt	0.5	0.5
	Section	52.00	40.00
	Bundle	208.00	160.00

LBS PER	Unit	-	-
	Sections	737.75	594
	Layer	737.75	594
	Bundle	2,951	2,376

Colors	Reflectance	Stock	Stock
Charcoal	SR .12 SRI 9	✓	✓
Limestone	SR .41 SRI 46	✓	✓
Sandstone	SR .41 SRI 46	✓	✓
Sierra	SR n/a SRI n/a	✓	✓



CHARCOAL



LIMESTONE




SANDSTONE




SIERRA

SINGLE UNITS



FULLNOSE

150 x 300 x 60mm
5 7/8 x 11 7/8 x 2 3/8"
208 Units/Bundle
0.49 Sq.Ft./Stone



DOUBLE FULLNOSE

150 x 300 x 70mm
5 7/8 x 11 7/8 x 2 3/4"
160 Units/Bundle
0.49 Sq.Ft./Stone



APPLICATIONS

Pillar, Water Feature, Pool Coping, Fire Feature, Wall Coping, Steps

APPEARANCE

Surface Texture - Smooth

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	Prev. Urban Coping		Prev. Beacon Hill Coping	
	CHAMFERED 36 x 19	FULLNOSE 36 x 19	CHAMFERED 24 x 14	FULLNOSE 24 x 14
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	MARENGO	MARENGO
Thickness (mm)	60 mm	60 mm	60 mm	60 mm

FCFT PER	Stone	0.58	0.58	-	-
	Layer	1.16	1.16	-	-
	Bundle	6.96	6.96	-	-

PER BUNDLE	Layers	6.00	6.00	5.00	5.00
------------	--------	------	------	------	------

LNFT PER	Unit	2.96	2.96	1.97	1.97
	Bundle	35.46	35.46	39.37	39.37

UNITS PER	SqFt	1.72	1.72	-	-
	Layer	2.00	2.00	4.00	4.00
	Bundle	12.00	12.00	20.00	20.00

LBS PER	Units	129	129	61	59
	Layer	258	258	242	235
	Bundle	1,547	1,547	1,211	1,175

Colors	Reflectance	Stock	Stock	Stock	Stock
Indiana Buff	SR.n/a SRI n/a	✓	✓	✓	✓
Opal Blend	SR.n/a SRI n/a	✓	✓	✓	✓
Sterling	SR.n/a SRI n/a	✓	✓	-	-
Dark Charcoal	SR.n/a SRI n/a	✓	✓	✓	✓
Linen Grey	SR.n/a SRI n/a	✓	✓	-	-
Linen Buff	SR.n/a SRI n/a	✓	✓	-	-



INDIANA BUFF




STERLING



OPAL BLEND



DARK CHARCOAL




LINEN GREY




LINEN BUFF


SINGLE UNITS




36 x 19 FULLNOSE
900 x 485 x 60 mm
35½ x 19 x 2⅜
12 Units /Bundle
.58 Fc.Ft/Stone



36 x 19 CHAMFERED
900 x 485 x 60 mm
35½ x 19 x 2⅜
12 Units /Bundle
.58 Fc.Ft/Stone



24 x 14 CHAMFERED
600 x 360 x 60 mm
23 ⅝ x 14 ⅛ x 2 ⅜"
20 Units /Bundle
.39 Fc.Ft/Stone



24 x 14 FULLNOSE
600 x 360 x 60 mm
23 ⅝ x 14 ⅛ x 2 ⅜"
20 Units /Bundle
.39 Fc.Ft/Stone

Notes: Coping units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. All measurements are nominal. Contact Unilock for more information.

Ledgestone™ Coping & Closed-End Coping



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Fire Feature, Structural Wall, Steps

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1776

Eligible for LEED v4.1 credits

	FULLNOSE COPING	ROCKFACE COPING	ROCKFACE CLOSED-END COPING	ROCKFACE LARGE COPING	ROCKFACE LARGE CLOSED-END COPING
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	60 mm	70 mm	70 mm	70 mm	70 mm

FCFT PER	Stone	0.39	0.46	0.46	0.57	0.57
	Layer	0.39	1.38	1.38	1.72	1.72
	Bundle	5.12	5.52	5.52	6.87	6.87


PER BUNDLE	Layers	13.00	4.00	4.00	4.00	4.00
------------	--------	-------	------	------	------	------

LNFT PER	Unit	2.00	2.00	2.00	2.50	2.50
	Bundle	26.00	24.00	24.00	30.00	30.00

UNITS PER	SqFt	2.54	2.18	2.18	1.75	1.75
	Layer	3.00	3.00	3.00	3.00	3.00
	Bundle	13.00	12.00	12.00	12.00	12.00





LBS PER	Units	56	64	66	94	93
	Layer	166	193	199	282	279
	Bundle	723	772	796	1,128	1,116

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Buff	SR.n/a SRI n/a	✓	✓	✓	✓	✓
Grey	SR.n/a SRI n/a	✓	✓	✓	✓	✓

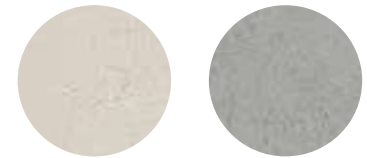

BUFF

GREY



Notes: Coping is rock faced on the front and the back. All measurements are nominal. Contact Unilock for more information.

Ledgestone™ Pillar Caps, Steps & Fire Pit Coping



APPLICATIONS

Pillar, Steps, Step Treads

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1776

Eligible for LEED v4.1 credits

	48" STEP	24" PILLAR CAP	29" PILLAR CAP	21 1/2" FIRE PIT COPING
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	MULTI-PLANT	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	150 mm	100 mm	100 mm	65 mm

FCFT PER	Stone	1.97	-	-	-
	Layer	1.97	-	-	-
	Bundle	5.91	-	-	-


PER BUNDLE	Layers	3.00	5.00	5.00	6.00
------------	--------	------	------	------	------

LNFT PER	Unit	4.00	-	-	-
	Bundle	12.00	-	-	-


UNITS PER	SqFt	0.51	-	-	-
	Layer	1.00	1.00	1.00	4.00
	Bundle	3.00	5.00	5.00	24.00

LBS PER	Units	574	159	206	37
	Layer	574	159	206	147
	Bundle	1,721	795	1,030	879

Colors	Reflectance	Stock	Stock	Stock	Stock
Buff	SR.n/a SRI n/a	✓	✓	✓	✓
Grey	SR.n/a SRI n/a	✓	✓	✓	✓

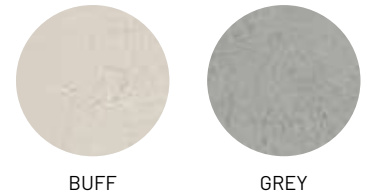

SINGLE UNIT BUNDLE




FIRE PIT COPING

254 x 546 x 65mm
10 x 21 1/2 x 2 5/8"
24 Units/Bundle


8 pieces per Fire pit,
Outside Diameter 54"
Inside Diameter 34"

SINGLE UNITS

PILLAR CAP




24"
610 x 610 x 100mm
24 x 24 x 3 7/8"
5 Units/Bundle
.66 Fc.Ft./Stone



29"
740 x 740 x 100mm
28 1/2 x 28 1/2 x 4"
5 Units/Bundle
.66 Fc.Ft./Stone

SINGLE UNITS

STEPS



48"
1220 x 610 x 150mm
48 x 24 x 5 7/8"
3 Units/Bundle
1.97 Fc.Ft./Stone

Notes: All measurements are nominal. Contact Unilock for more information.

SienaStone™ Steps



APPLICATIONS

Steps

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's

Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	48"
Bundle Type	SINGLE
Plant Produced	GORMLEY
Thickness (mm)	185mm

FCFT PER	Stone	2.41
	Layer	4.81
	Bundle	14.43

PER BUNDLE	Layers	3.00
------------	--------	------

LNFT PER	Unit	3.95
	Bundle	23.70

UNITS PER	SqFt	0.42
	Layer	2.00
	Bundle	6.00

LBS PER	Units	477
	Layer	954.4
	Bundle	2,863

Colors	Reflectance	Stock
Natural	SR.n/a SRI n/a	✓
Granite	SR.n/a SRI n/a	✓




GRANITE



NATURAL

SINGLE UNITS



48" STEP
 1200 x 500 x 185mm
 47¼ x 19¾ x 7⅜"
 6 Units/Bundle
 2.41 Fc.Ft./Stone

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pillar, Water Feature, Pool Coping
Fire Feature, Wall Coping, Steps

APPEARANCE

Surface Texture - Umbriano Mottled

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	CHAMFERED 24x14	FULLNOSE 24x14
Bundle Type	SINGLE	SINGLE
Plant Produced	AYR	AYR
Thickness (mm)	60mm	60mm






FCFT PER	Stone	0.39	0.39
	Layer	-	-
	Bundle	9.30	9.30


PER BUNDLE	Layers	6.00	6.00
------------	--------	------	------

LNFT PER	Unit	0.98	0.98
	Bundle	47.20	47.20

UNITS PER	SqFt	-	-
	Layer	4.00	4.00
	Bundle	24.00	24.00

LBS PER	Units	63	63
	Layer	252	252
	Bundle	1,510	1,510


Colors	Reflectance	Stock	Stock
French Grey 	SR .18 SRI 17	✓	✓
Grenada White 	SR .45 SRI 52	✓	✓
Midnight Sky 	SR .17 SRI 15	✓	✓
Summer Wheat 	SR .42 SRI 48	✓	✓
Winter Marvel 	SR .35 SRI 38	✓	✓



FRENCH GREY



GRENADA WHITE



MIDNIGHT SKY




SUMMER WHEAT




WINTER MARVEL

SINGLE UNITS



CHAMFERED
600 x 360 x 60 mm
24 x 14 x 2 3/8
24 Units/Bundle
0.39 Sq.Ft./Stone



FULLNOSE
600 x 360 x 60 mm
24 x 14 x 2 3/8
24 Units/Bundle
0.39 Sq.Ft./Stone

Notes: All measurements are nominal. Contact Unilock for more information.

Sunset Fire Pit Kit



APPLICATIONS

Fire Feature

APPEARANCE

Surface Texture - Standard

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	SQUARE W / INSERT	ROUND W / INSERT
Bundle Type	SINGLE	SINGLE
Thickness (mm)	300 mm	300 mm

DIAMETER (INCH)	Outside	44.00	52.00
	Inside	28.00	34.00
	Insert	36.00	34.00

LAYER PER UNIT	3.00	3.00
UNIT PER LAYER	12.00	18.00
UNIT PER PALLET	36.00	54.00

LBS PER PALLET	1,545	1,145
----------------	-------	-------

Colors	Reflectance	Stock	Stock
Charcoal	SR n/a SRI n/a	✓	✓
Limestone	SR n/a SRI n/a	✓	✓
River	SR n/a SRI n/a	✓	✓
Sandstone	SR n/a SRI n/a	✓	✓
Sierra	SR n/a SRI n/a	✓	✓



CHARCOAL



LIMESTONE



RIVER



SANDSTONE



SIERRA



SUNSET SQUARE W/INSERT

Outside Dimensions
1100 x 1100 x 300mm
43 3/8 x 43 3/8 x 11 7/8"



SUNSET ROUND W/INSERT


Outside Dimensions
1300 x 1300 x 300mm
51 1/4 x 51 1/4 x 11 7/8"

Notes: All measurements are nominal. Contact Unilock for more information.

Unilock Elements



TUSCANY
Large decorative accents adorn the top of the Tuscany fireplace. Brussels Fullnose™ is used to construct the ledges and mantle of the fireplace.

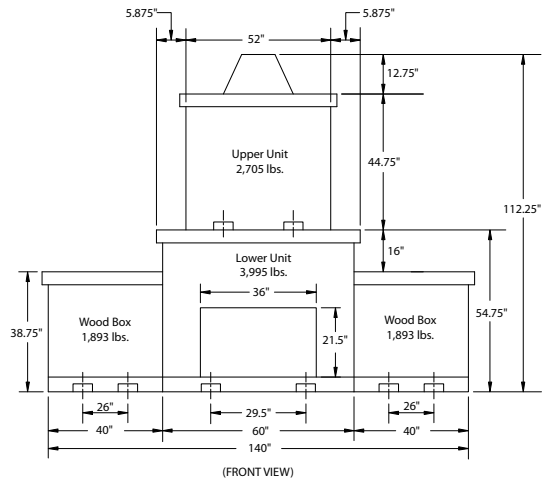

Tuscany Sierra with Copthorne® **

CUSTOM ACCENTS

Custom accents, are available as special order only, lead time required. Please contact Unilock for information on custom units.




Copthorne®

Courtstone®

Richcliff®

Umbriano®

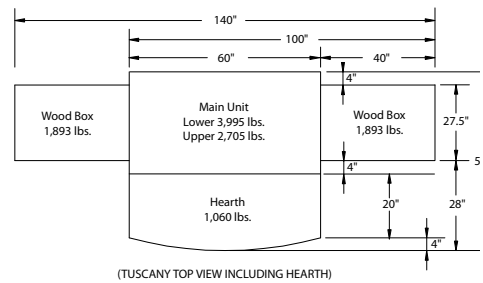

UNILOCK ELEMENTS AVAILABLE IN TUSCANY SERIES



FIREPLACE

Two piece set (base and chimney), and it comes with stainless fire box. 5,620 lbs



HEARTH

Hearth with gentle curved front. 1,025 lbs



WOOD BOXES

Sold as a set of two and flank either side of the gas or standard fireplace. 3,750 lbs per set

Guarantee: The standard Unilock guarantee applies to the units used to construct Unilock Elements. (See Unilock literature for details.) Third party grills and fireboxes carry their respective manufacturer's warranty and may change without notice.

Note: Unilock reserves the right to change model designs, accessories and colors without notice. Unilock will not be responsible for improper use or handling that results in property damage. Some models may not be exactly as shown. Fireplaces come complete with UL- approved stainless steel fireboxes. Check local building codes and regulations prior to ordering and installing Unilock Elements.

** Units and measurements may not be exactly as shown.

SKYVIEW™

ROOF DECK SYSTEM

NEW from Unilock, the SkyView Roof Deck System is a comprehensive product lineup that includes adjustable pedestals, invisible wind uplift solutions, roof deck slabs, wood tile, and fiberglass grate. Together, these components offer unmatched flexibility, empowering designers to create elevated rooftop spaces that are visually stunning, durable and high-performing. The system's intuitive design also simplifies installation for contractors, ensuring efficiency without compromising quality. With SkyView, reimagine what's possible for roof deck design and construction.

SKYVIEW PEDESTAL SYSTEM


Unilock SkyView Pedestals are patent pending, fully adjustable structural supports for elevating paving materials. Our pedestals ensure unmatched flexibility, ease of installation and durability.



- 1/2" and 1" Waffles available for low profile applications.
- 10" Cores and Collars available for taller applications up to 31".

SKYVIEW GRATE

When this 48 x 48" fiberglass grate is placed on SkyView Pedestals, it creates a stable surface for installing smaller paver units on an elevated roof deck.

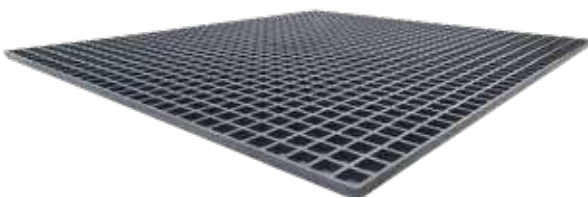


SKYVIEW WIND UPLIFT SYSTEM

When the below components are combined with the SkyView Pedestal System, they create a rafted paving surface with an invisible tie-down mechanism that resists wind uplift pressures without compromising project aesthetics.

1 | Wind Uplift Slabs

24 x 24" slabs featuring a kerfed undercut that spans the length of two opposing sides.



2 | Wind Uplift Kit

This 3-part kit is easily added to SkyView Pedestals to form a tie-down mechanism that works seamlessly with our Wind Uplift Slabs.



SCREW

KEYWAY
LOCKDOWN BAR

PUCK

SKYVIEW IPE WOOD TILE

Sustainably harvested, these 24 x 24" tiles have a dense hardwood composition that makes them perfect for use on SkyView pedestals.



Ask your Unilock Representative about the made to order roof deck slab options available for your projects.

Paver Cleaners



ALLIANCE GATOR OIL & GREASE CLEANER

RS-CLN050 1Qt 6/case

- Effective in removing oil and grease from the surface of concrete pavers and natural stones
- Easy to use - dissolves, dislodges and removes oil and grease



ALLIANCE GATOR EFFLORESCENCE CLEANER & SLURRY REMOVER

RS-CLN045 1Gal 4/case

- Removes any efflorescence stains trapped in the concrete paver and natural stone pores
- Makes the pavers look more clean and vibrant



ALLIANCE GATOR RUST CLEANER

RS-CLN051 1Qt 6/case

- Effective in removing rust from the surface of concrete pavers
- Contains no muriatic acid

Natural Stone Cleaners & Sealers



UNICARE NATURAL STONE ACID CLEAN

RS-CLN095 1L 6/Case

Removal of:

- Efflorescence
- Cement mortar & Grout



UNICARE NATURAL POWER CLEAN

RS-CLN096 1L 6/Case

Removal of:

- Oil & Grease, Food Stains
- General Dirt & Mud
- Sap & certain plant stains
- Light cement contamination (on acid sensitive surfaces)



UNICARE BIOCLEAN

RS-CLN097 1L 6/Case

Removal of:

- Green & Black spot algae
- Organic staining from leaves, berries, food, coffee and wine stains



UNICARE NATURAL STONE MATTE SEALER

RS-SEAL231 5L

For Porous Stones

- No change of color
- No surface coating, sheen or shine at all
- Riven Sandstone & Smooth Sandstone



UNICARE NATCOLOR ENHANCE SEALER

RS-SEAL232 5L

- Color Enhancement and Breathable
- Lasts several years
- Easy to apply

Sealers



ALLIANCE GATOR WET LOOK SEALER

RS-SEAL143 1GAL 4/case

RS-SEAL144 5 GAL

- Film forming, Joint Stabilizer Sealer
- Protects against de-icing salt, motor oil & grease stains
- High-Gloss, solvent-based
- Coverage: 175 SqFt/gallon (875/sq ft. 5 gallons)



ALLIANCE GATOR SATIN LOOK SEALER

RS-SEAL141 1GAL 4/case

RS-SEAL142 5 GAL

- Film forming, Joint Stabilizer Sealer
- Protects against de-icing salt, motor oil & grease stains
- High-Gloss, solvent-based
- Coverage: 175 Sq Ft/gallon (875/sq ft. 5 gallons)



ALLIANCE GATOR HYBRID SEAL HIGH GLOSS

RS-SEAL145 1GAL 4/case

RS-SEAL146 5 GAL

- Film forming, Joint Stabilizer Sealer
- Protects against de-icing salt, motor oil & grease stains
- Low VOC, High-Gloss,
- Coverage: 100-225 SqFt/gallon (500-1125 sqft. /5 gallons)



ALLIANCE GATOR LOW GLOSS

RS-SEAL147 1GAL 4/case

RS-SEAL148 5 GAL

- Film forming, Joint Stabilizer Sealer
- Protects against de-icing salt, motor oil & grease stains
- Low VOC, High-Gloss,
- Coverage: 100-225 SqFt/gallon (500-1125 sqft. /5 gallons)



SUREBOND 1300 JOINT SAND STABILIZING SEALER - MATTE FINISH

RS-SEAL008 1GAL 4/case

RS-SEAL009 5 GAL

- Seals surface & hardens joint sand, while protecting the sealer film from mold, moss & algae
- Reduces sand washout, weeds & insect infestation
- Locks in a clean, natural look & matte finish.
- Product is breathable, designed for immediate application and is water-based; moisture or efflorescence will not get trapped
- Approximate Coverage: 80-120 sq.ft

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

Sealers continued



SUREBOND 7700 JOINT STABILIZING SEALER - GLOSS FINISH WITH ANTIFUNGAL PROTECTION

RS-SEAL135 1Gal 4/Case
RS-SEAL136 5 Gal

- Breathable, Joint Stabilizer Sealer
- Anti-Fungal Film Protection, protects against mold, moss & algae
- Non-hazardous with the consistency of water; milky white in appearance when applied, dries crystal clear creating a semi-gloss finish.
- Coverage: Approx: 80-120 SqFt./Gallon creating a semi-gloss finish.



SUREBOND 8700 WET LOOK JOINT SAND STABILIZER WITH FUNGICIDE

RS-SEAL151 1Gal 4/Case
RS-SEAL152 5 Gal

- A 2 in 1 product; protects the substrate surface and stabilizes jointing sand at the same time.
- Formulated with antifungal agents designed to help stop the growth of mold, moss and algae.
- Wet look, rain safe in 90 minutes, water-repellent breathable, solvent-based.
- Coverage: Approx: 80 -120 SqFt SqFt./Gallon

Sands



POLYBIND™ HP SAND

RS-SAND078 Tan | RS-SAND080 Grey
50lb/bag * 56 bags/skid

- Designed for paver joints up to a maximum of 1 inch.
- Helps prevent weeds and damage caused by insects
- Coverage: 65-85 sq.ft./ bag for joints 1/8" to 3/8"
- 22-42 Sqft./bag for larger joints 3/4" to 1"



POLYBIND™ COMPLETE SAND

RS-SAND074 Tan | RS-SAND075 Grey
50lb/bag * 56 bags/skid

- Advanced haze-free polymeric sand.
- Formulated for pavers, slabs & wet cast pavers up to 1".
- Rain safe 1 hour after water activation.
- Coverage: 65-85 Sq.Ft./bag with joints 1/8" to 3/8".



POLYBIND G2 SAND

RS-SAND150 Tan | RS-SAND151 Grey
50lb/bag * 56 bags/skid

- No blower needed and the intelligent polymeric sand requires only one watering. application is now dust free and haze free.
- Sets above the freezing temperature 32°F and can be used for joints up to a maximum of 2 in.
- Coverage: 65-85 sq.ft./ bag for joints 1/8" to 3/8" 22-42 Sqft./bag for larger joints 3/4" to 1 1/4"

Sands continued



POLYBIND G2 COMPLETE SAND

RS-SAND152 Tan | RS-SAND153 Grey
RS-SAND154 Black | RS-SAND155 Ivory
50lb/bag * 56 bags/skid

- Designed for paver joints up to maximum of 4".
- Drainage & non-drainage overlay applications.
- Can be used with concrete pavers & natural stones, and is recommended for use in patios, pool decks, walkways, driveways, etc.
- Coverage: 65-85 sq.ft./ bag for joints 1/8" to 3/8" 22-42 Sqft./bag for larger joints 3/4" to 1 1/4"



POLYBIND DUST

RS-SAND072 Tan | RS-SAND073 Grey
50lb/bag * 56 bags/skid

- Colors: Tan & Grey
- Designed for natural stone joints 1/2" to 4".
- Once set, becomes very firm and locks between the stone joints, maintaining a bond that holds the stones securely in place.
- Coverage: 20-30 sq.ft. per bag for joints 1"-2" wide and stones approximately 2" thick



ALLIANCE GATOR NITRO SAND

RS-SAND196 Beige | RS-SAND197 Grey
RS-SAND198 Black | RS-SAND236 Silver
40 lb bucket • 48 buckets/skid

- Ready to use permeable jointing material.
- Can be installed in wet or dry weather.
- Formulated for joints from 1/2" to 2".
- Ideal for concrete & wetcast pavers, Natural Stone & Porcelain Tile.
- Coverage: 10-84 Sq.Ft./bucket depending on joint



GATOR NITRO-X FINE JOINT **NEW**

RS-SAND244 Black | RS-SAND245 Gunmetal
RS-SAND248 Taupe | RS-SAND247 Platinum
RS-SAND246 Vanilla
275 lbs Pail • 48 Pails/Pallet

- Rapid Flow Technology
- Fast and simple installation
- Xtra Fine gradation jointing sand
- Xtra Low permeability
- Xtra Strength from top to bottom ***
- Apply rain or shine
- Joint width from 1/8" to 2" (3 mm to 50 mm)****
- 5-year limited warrantywidth.

*** Gator Nitro-X Fine Joint Sand will harden from top to bottom up to 2 3/8" (60 mm).

**** Ensure there is ABSOLUTELY NO paver, porcelain tile or stone movement prior to installation to prevent joint cracking.

RAPID FLOW TECHNOLOGY



ALLIANCE EUROSTONE BOND

RS-SAND095 Beige | RS-SAND097- Grey
50lb/bag * 56 bags/skid

- The first polymeric sand specifically designed for drainage and non-drainage base systems.
- Can be used with natural stones and cobblestone.
- Sets above the freezing temperature (0°C / 32°F) and can be used for joints up to a maximum of 35mm/ 1".

Sands continued



SEK POLYSWEEP POLYMERIC SAND

RS-SAND046 Tan | RS-SAND046 Grey
RS-SAND147 - Platinum | RS-SAND200 - Fieldstone
50lb/bag * 56 bags/skid

- Recommended for joints up to 3/4".
- Haze Free Guaranteed - Advanced Clear Set Technology.
- Coverage 50-75 Sq.Ft./bag with standard 1/4" joints.



SEK POLYSWEEP SAND X-TREME WIDE JOINT

RS-SAND111 - Tan | RS-SAND117 - Grey;
RS-SAND185 - Black | RS-SAND149 - Platinum
50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Formulated for joints 1/8" up to 4".
- Haze Free Guaranteed - Advanced Clear Set Technology.
- Coverage 50-75 Sq.Ft./bag with standard 1/4" joints.



SUREBOND JOINTING SAND

RS-SAND187 - Tan | RS-SAND188 - Grey;
RS-SAND201 - Fieldstone | RS-SAND149 - Platinum
50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Formulated for joints 1/8" up to 4".
- Haze Free Guaranteed - Advanced Clear Set Technology.
- Coverage 50-75 Sq.Ft./bag with standard 1/4" joints.

X & T Slab Spacers



X & T SLAB SPACERS

RS-ACC237 - X Spacers; 2" x 2"; 250 pcs./bag
RS-ACC236 - T Spacers; 2" x 1"; 250pcs./bag

- Unilock recommends using slab spacers when installing Arcana on an open grade surface
- "T" spacers are needed for running bond patterns; "X" spacers for stack bond patterns. Please contact your sales manager for more information
- X & T bagged separately

Edging Products

SEK SNAPEDGE

RS-EDGE001 - 8' (96") piece; 24 pcs./bundle; 28 bundles (672 pcs)/skid

- One-piece edging system that handles both straight & curved installations.
- Unique and quick snip 'n flex feature.
- Open base design allows root and grass system to grow through.
- Standard Sidewall: 1 7/8" | Low Profile Sidewall: 1 3/8"
- Skid Dimensions: 98"L x 48"W x 50"H - 210 lbs./skid



PERMEDGE PERMEABLE PAVER EDGING

RS-EDGE033

- Designed specifically for permeable pavement with open-graded base material.
- Holds pavement edges securely in place.
- Does straight and curved edges.

Product Information:

8' (96") length pcs.
Weight per Unit: 2.5 lbs.
Pieces per Pallet: 64 (72 in. ft.)
Freight Class: 300
Pallet Weight: 210 lbs.
Pallet Size: 98" l x 48" w x 50" h



ALLIANCE GATOR NAIL 10" SPIRAL

RS-EDGE048 50 LB/Box (48 cases/skid)

- Use with compacted aggregate only
- Use one nail every second hole of gator edge
- Approx. 250-260 Nails per Box

PERMAPACK

- Extreme flexural strength
- Water stop technology
- Shrink control
- Void Reduction
- Macro Synthetic Fibers
- Coverage:

Open graded base: 1 Perma Pak/50-60# bag of concrete will produce 12'-16' open graded/clear base (chip bedding)

Dense Base: 1 Perma Pak/50-60# bag of concrete will produce 17'-21' dense/crushed base (sand bedding)

- Packaging:
- 1 Perma Pak (1 lb. per packet)
- 1 Box of Perma Paks (30 packets per box - 31 lbs.)
- 1 Skid (32 boxes/960 packets - 1030 lbs.)



ALLIANCE GATOR XTREME EDGE

- The ultimate fiber-reinforced structural edging solution for any hardscape project.
- Can be used for any traditional, open-graded, permeable, Gator Base or overlay application using concrete pavers or slabs, natural and wet cast stones.
- Offers permanent continuous lateral support.
- Packaging: 50 lb bag / 56 bags per skid.
- Coverage: 20-25 sqft coverage per bag for a 60mm paver.

Adhesives



SUREBOND SB-15 ADHESIVE

RS-ADH050 10oz tube; 12/case; 140cases/skid
RS-ADH051 28oz tube; 12/case; 60 Cases/skid

- Rapid set, 70% faster set time.
- Superior durability including heavy vehicular traffic.
- Temperatures ranging from 10 - 100°F.
- 1200 psi.



ALLIANCE XP GATOR BLOCK ADHESIVE

RS-ADH035 10 oz; 12/case; 90 cases/skid (1080 ea).
RS-ADH038 28 oz; 12/case; 60 cases/skid (720 ea).

- Bonds permanently in 24 hours.
- Material may be repositioned for up to 30 minutes.
- Works in temperatures above 32°F.
- 850 psi in 24 hrs (1000 psi in 7 days).



TECHNISEAL STRUCTURE BOND™ FOAM ADHESIVE

RS-ADH048 24 oz ; 12/case; 84 cases/skid (1008 ea).

- Superstrength foam adhesive
- Most items are bonded in just 8 minutes.
- Works best in temperatures between 0- 120°F.
- Yields up to 600 In.ft. with a 3/8" bead.



TECHNISEAL STRUCTURE BOND™ GUN II

RS-TOOL378 ~ 1 Dispenser (12/case)

- Perfect for hard-to-reach applications.
- Limits excessive spillage or dripping.
- Reusable: Easy clean-up using Gun Cleaner.



TECHNISEAL STICKY STONE

RS-ADH055 20.3 oz sausage; 15 sausages/case;
66 cases/skid

- Heavy-duty dispenser gun specially designed for Stickstone.
- Each gun kit includes: 6 nozzles, 2 extra pistons & steel hook pull..



STICKY STONE GUN

RS-TOOL557 1 dispenser gun kit; 10 kits/case

- Heavy-duty dispenser gun specially designed for Stickstone.
- Each gun kit includes: 6 nozzles, 2 extra pistons & steel hook pull.



TECHNISEAL STRUCTURE BOND™ CLEANER

RS-CLN093 (16 oz) / Canister; 12canister/case

Rapidly dissolves any uncured Structure Bond adhesive residue.

Geotextiles and Fabric Products



UNILOCK DRIVEGRID™ SYSTEM

- 120' x 13' Roll,
1,572 Sq.Ft./Roll
56 lbs/Roll



GATOR GRID 30-30

Gator Grid 30-30, a biaxial geogrid, provides strength, longevity, excellent stress transfer and prevents failure to the internal structure of landing areas, retaining walls and steep slopes. It has a high molecular weight as well as high-tenacity polyester yards which are woven in tension and finished with a PVC coating.

Packaging: • 4' x 50' / 16 rolls per box
• 6' x 50' / 20 rolls per pallet



GATOR FABRIC NON-WOVEN 3.5

Gator Fabric Non-Woven 3.5 geotextile is ideal for drainage, filtration and will allow water flow in a paver or retaining wall application. It is designed for soil separation for added stability, has high strength and is dimensionally stable.

Packaging: • 3' x 100' / 4 roll package
• 6' x 100' / 12 roll package



GATOR FABRIC WOVEN 5

Gator Fabric Woven 5 is a woven geotextile made from polypropylene yarns and can achieve higher tensile strength at low elongation. It is an excellent heavy-loading geotextile, ideal for driveways, alleyways, pathways and retaining walls.

Packaging: • 4' x 100' / 4 roll package
• 6.25' x 300' / 12 roll package



GATOR FABRIC POLYSPUN 20 **SPECIAL ORDER**

Gator Fabric Polyspun 20 geotextile is specially formulated to resist deterioration in garden and landscape applications. It creates a barrier to reduce weed growth and allows water, fertilizer and air to pass through.

Packaging: • 3' x 50' / 16 rolls per case / 64 rolls per skid
• 3' x 100' / 9 rolls per case / 36 rolls per skid
• 4' x 100' / 9 rolls per case / 36 rolls per skid
• 6' x 100' / 30 rolls per case / 36 rolls per skid

Tools & Accessories



Install up to 700 sq. ft. per hour!

- Access tight or narrow areas.
- Eliminate the need for a forklift on site.
- Reduce labor costs.
- Reduce shoulder, hand & knee pain and injury.
- Improve your bottom line.

Contact your local rep for details



**MODEL
MINI P**



PISA XL LIFTING TONG

- The Pisa XL tong makes it easier to lift and place units, especially on the base course.
- The action of lifting the handle secures the lifter and makes for easy, balanced lifting and placement.



U-LEVEL™

- Easy to use.
- Accurate readings.
- Low maintenance.
- Works in difficult locations.
- Large working area.

A PRECISION TOOL NO HARDSCAPER SHOULD BE WITHOUT

Base/Drainage Systems

GATOR TILE SYSTEM

Contact Unilock for more information.



RS-ACC074-1



RS-ACC087



RS-EDGE061



RS-ACC088

Turf products




Alliance xTurf Products	Premium Blend		Classic Blend		Putting Green
Colors	Forest Green	Lime Green (SO)	Forest Green	Lime Green (SO)	Summer Green
Roll Sizes	7.5x25' (RS-TURF003)	7.5x25' (RS-TURF007)	7.5x25' (RS-TURF011)	7.5x25' (RS-TURF015)	7.5x25' (RS-TURF018)
	7.5x50' (RS-TURF004)	7.5x50' (RS-TURF008)	7.5x50' (RS-TURF012)	7.5x50' (RS-TURF016)	15x25' (RS-TURF017)
	15x33' (RS-TURF002)	15x33' (RS-TURF006)	15x33' (RS-TURF010)	15x33' (RS-TURF014)	
	15x100' (RS-TURF001)	15x100' (RS-TURF005)	15x100' (RS-TURF009)	15x100' (RS-TURF013)	
Pile Height	1.75" (45mm)		1.58" (40mm)		.63" (16mm)
Face Weight oz./Sq. Yd.	85 oz.		47 oz.		50 oz.

RS-TURF019	Gator X-Turf Infill Beige 50lb
RS-TURF020	Gator X-Turf Infill Green 50lb
RS-TURF021	Gator X-Turf Infill Zeo-White 40lb

RS-TURF022	Gator X-Turf Nails Spiral 6"
RS-TURF023	Gator X-Turf Seam Tape Roll 12x100
RS-TURF024	Gator X-Turf Seam Tape Roll 12x300
RS-TURF025	Gator X-Turf XP Odor Remover 27oz 12/case



- No Mowing, No Watering
- High Quality artificial Turf
- 20 limited year warranty

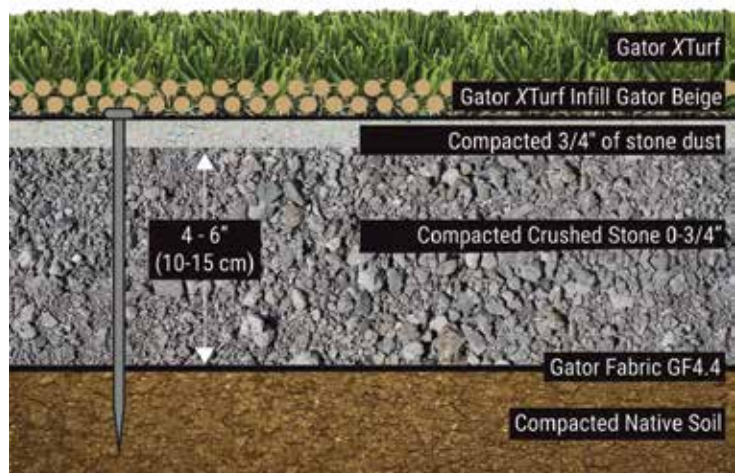

Accessory Quick Reference Guide

ADHESIVES

Paverbond Adhesive	RS-ADH001 - 10.5 oz. RS-ADH011 - 28 oz
Polybind High Strength Adhesive	RS-ADH032 - 10 oz. RS-ADH033 - 28 oz.
Alliance Gator Block Bond XP Adhesive	RS-ADH035 - 10 oz. RS-ADH038 - 28 oz.
SEK SB-15 Rapid Set Adhesive	RS-ADH050 - 10 oz. RS-ADH051 - 28 oz.
RS-ADH048	TS STRUCTUREBOND 24 OZ
RS-ADH055	TS Sticky Stone 20oz Sausage

CLEANERS

SureStrip 1 gal	RS-CLN031
Gator Efflo Cleaner 1 gal	RS-CLN045
Gator Shampoo 1 gal	RS-CLN047
Gator XP Oil and Grease Remover 1QT	RS-CLN050
Gator Rust Remover 1 QT	RS-CLN051
SEK Efflo Off 1 gal	RS-CLN062
UniCare NS AcidClean 1L	RS-CLN095
UniCare NS PowerClean 1L	RS-CLN096
UniCare NS BioClean 1L	RS-CLN097

EDGING

Perma Edge-Perma Pak - 1 lb	RS-EDGE087-1
Gator Xtreme Edge Bag 50#	RS-EDGE076
SEK Perm Edge	RS-EDGE033
SEK Snap Edge	RS-EDGE001
Gator Nail Spiral 10" Spikes	RS-EDGE048

GEOTEXTILES & FABRIC

Alliance Gator Grid 30-30	RS-FAB070 - 4X50' RS-FAB071 - 6X50'
Alliance Non-Woven 3.5 Fabric	RS-FAB037 - 3X100' RS-FAB040 - 6X100'
Alliance Woven 5 Fabric	RS-FAB049 - 4X100' RS-FAB052 - 6.25X300'
Unilock Drivegrid System	RS-FAB104
Strata Grid SGU60 6.25x288	RS-FAB101
Alliance Polyspun 20 Fabric (SO)	RS-FAB054 - 3X50' RS-FAB055 - 3X100' RS-FAB057 - 4X100' RS-FAB058 - 6X100'

SEALERS

Surebond SB1300 Joint Stabilizing Sealer	RS-SEAL008 - 1 GAL RS-SEAL009 - 5 GAL RS-SEAL011 - 55 GAL
Surebond SB7700 Antifungal Sealer	RS-SEAL135 - 1 GAL RS-SEAL136 - 5 GAL RS-SEAL241 - 55 GAL
Surebond SB8700 Joint Stabilizing Wetlook Sealer	RS-SEAL151 - 1 GAL RS-SEAL152 - 5 GAL RS-SEAL176 - 55 GAL
Alliance Gator Satin Look Solvent Based	RS-SEAL141 - 1 GAL RS-SEAL142 - 5 GAL
Alliance Gator Wet Look Solvent Based	RS-SEAL143 - 1 GAL RS-SEAL144 - 5 GAL
Alliance Gator Hybrid Water Based High Gloss	RS-SEAL145 - 1 GAL RS-SEAL146 - 5 GAL
Alliance Gator Hybrid Water Based LowGloss	RS-SEAL147 - 1 GAL RS-SEAL148 - 5 GAL
Unicare NS NatMatte Sealer 5L	RS-SEAL231
UniCare NS NatColorEnhance Sealer 5L	RS-SEAL232
Azpects Back to Black Limestone Sealer 1 qt	RS-SEAL238

SKYVIEW PEDESTALS

SkyView Pedestal Std Kit 18/case	RS-SKYVW0001
SkyView Wind Uplift Kit 100/case	RS-SKYVW0002
SkyView Core 5" 36/case	RS-SKYVW0003
SkyView Core 10" 18/case	RS-SKYVW0004
SkyView Top Pad 160/case	RS-SKYVW0005
SkyView Collar 48/case	RS-SKYVW0006
SkyView Waffle 1" 48/case	RS-SKYVW0007
SkyView WindUplift Waffle 1" 48/case	RS-SKYVW0008
SkyView Waffle 1/2" 80/case	RS-SKYVW0009
SkyView WindUplift Waffle 1/2" 80/case	RS-SKYVW0010
SkyView Grate 48"x48" 16sf/pc	RS-SKYVW0011
SkyView Washers 60/case	RS-SKYVW0012
SkyView Ipe 24x24 Wood Tile 4sf/pc	RS-SKYVW0013

SANDS

Alliance Polybind Dust - 50lbs. Bags	RS-SAND072 - TAN RS-SAND073 - GREY
Alliance Polybind HP Sand - 50lbs. Bags	RS-SAND078 - TAN RS-SAND078 - GREY
Alliance EuroStone Bond - 50lbs. Bags	RS-SAND095 - BEIGE RS-SAND097 - OXFORD GREY
Alliance Polybind G2 Sand - 50 lbs. Bags	RS-SAND150 - TAN RS-SAND151 - GREY
Alliance Polybind G2 Complete - 50lbs. Bags	RS-SAND152 - TAN RS-SAND153 - GREY RS-SAND154 - BLACK RS-SAND155 - IVORY
Alliance Polybind Complete - 50lbs. Bags	RS-SAND074 - TAN RS-SAND075 - GREY
Sek Polysweep Polymeric Sand - 50 Lbs. Bags	RS-SAND045 - TAN RS-SAND046 - GREY RS-SAND147 - PLATINUM RS-SAND200 - FIELDSTONE
Sek Polysweep X-Treme Wide Joint Polymeric Sand - 50 Lbs. Bags	RS-SAND187 - TAN RS-SAND188 - GREY RS-SAND149 - PLATINUM RS-SAND201 - FIELDSTONE
Sek Jointing Sand - 50 Lbs. Bags	RS-SAND001-1 - TAN RS-SAND121 - GREY RS-SAND148 - PLATINUM RS-SAND230 - FIELDSTONE
Techniseal Next Gel Polysand - 50 Lbs. Bags	RS-SAND241 - TAN RS-SAND133 - URBAN GREY RS-SAND183 - GRANITE RS-SAND203 - BLACK
Techniseal Noco Polysand - 50 Lbs. Bags	RS-SAND189 - DESERT TAN RS-SAND190 - IRON GREY
Techniseal Next Gel Polysand - 50 Lbs. Bags	RS-SAND241 - TAN RS-SAND133 - URBAN GREY RS-SAND183 - GRANITE RS-SAND203 - BLACK
Azpects Easy Joint Sand 28lb	RS-SAND192 - MUSHROOM RS-SAND193 - GREY RS-SAND193 - GREY RS-SAND194 - BASALT RS-SAND195 - JET BLACK
Gator Nitro Sand - 40 Lbs. Buckets	RS-SAND196 - BEIGE RS-SAND197 - GREY RS-SAND198 - BLACK RS-SAND236 - SILVER
Gator Nitro X Sand - 27.5 Lbs. Buckets	RS-SAND244 - BLACK RS-SAND245 - GUNMETAL RS-SAND246 - VANILLA RS-SAND247 - PLATINUM RS-SAND248 - TAUPE
SEK PS-1500 RJS	RS-SAND233 - PEBBLE RS-SAND234 - SLATE RS-SAND235 - DRIFTWOOD
TS Storm - 40lbs. Bucket	RS-SAND238 - TAN RS-SAND239 - GRANITE RS-SAND240 - BLACK
Gator Aqua Rock Granite Grey 50 lb	RS-SAND112
Gator Aqua Rock Granite Grey Super Sack	RS-SAND129

TOOLS

Chisel W/Hand Guard	RS-TOOL052
Heavy Duty Block Tong	RS-TOOL371
TS Structurebond Gun II	RS-TOOL378
U-Level	RS-TOOL460
Weber VPR700 2 Plate Roller Compactor	RS-TOOL468
Weber VPR450 Roller Compactor	RS-TOOL494
IQMS362 Masonry Saw System 16.5"	RS-TOOL495
TS Sticky Stone Gun	RS-TOOL557

TURF

Alliance Gator X-Turf Premium Blend Forest Green	RS-TURF001 - 15x100' RS-TURF002 - 15x33' RS-TURF003 - 7.5x25' RS-TURF004 - 7.5x50'
Alliance Gator X-Turf Premium Blend Lime Green (SO)	RS-TURF005 - 15x100' RS-TURF006 - 15x33' RS-TURF007 - 7.5x25' RS-TURF008 - 7.5x50'
Alliance Gator X-Turf Classic Blend Forest Green	RS-TURF009 - 15x100' RS-TURF010 - 15x33' RS-TURF011 - 7.5x25' RS-TURF012 - 7.5x50'
Alliance Gator X-Turf Classic Blend Lime Green (SO)	RS-TURF013 - 15x100' RS-TURF014 - 15x33' RS-TURF015 - 7.5x25' RS-TURF016 - 7.5x50'
Alliance Gator X-Turf Putting Green	RS-TURF017 - 15x25' RS-TURF018 - 7.5x25'
Alliance Gator X-Turf Infill Sand Gator 50lbs. Bag (LSA)	RS-TURF019 - Beige RS-TURF020 - Green RS-TURF021 - Zeo-White (40lbs. Bag)
Alliance Gator X-Turf Seam Tape Roll (LSA)	RS-TURF023 - 12x100' RS-TURF024 - 12x300'
Gator X-Turf Nails Spiral 6"	RS-TURF022
Gator X-Turf XP Odor Remover 27oz 12/case (SO)	RS-TURF025

UNILYFT

Unilyft Tool Mini P Machine Gas Powered 842400H	RS-TOOL511
Unilyft All-Terrain Pallet Mover 843200	RS-TOOL575
Unilyft Model P Skid Steer 841300H	RS-TOOL576
Unilyft Model E Plug-In Electric Model 841000-140	RS-TOOL614
Unilyft L Narrow Track	RS-TOOL394
Unilyft PM Wide Track 841400P	RS-TOOL395

Polysand Best Practices

- Ensure that paver surface has **proper drainage runoff** (Min 1" over 8'). Finished paver height should always be higher than grade to allow proper surface drainage.
- **Do not set pavers in limestone screenings.** This product holds moisture and does not meet the gradation, drainage qualities or strength of coarse concrete sand.
- Make sure pavers are **clean of all construction dust.** Residual construction dust will haze pavers!
- **Compact pavers** into setting bed to create proper interlock.
- Read and review all polysand manufacturers methods of application. **(Read Directions)**
- **Don't rush polysand installation.**
- Paver area must be completely dry.
- Lay bags of polysand over paver area. **Stage bags** in areas of coverage. Example: one bag for 60 square feet.
- **Do not over sweep sand.** Sweep sand back and forth within coverage area to fill paver joints.
- Compact sand into joints. This is a must in achieving proper density of the sand joint (repeat 3 times). Compaction is critical to assuring sand strength.
- Do not fill sand above the chamfer of paver. Sand should sit 1/8" below bottom of chamfer.
- Use a fine-bristle broom to **remove any excess sand from the paver surface.**
- Use a **leaf blower** remove any sand or binder residue.
- **Review all watering directions (each manufacturer has different watering instructions.) This is VERY IMPORTANT!**
- Always start watering at the **bottom of the slope.**
- Always start watering in **controlled areas** per manufacturers recommendations. Example: complete watering in 200 sq. ft. area then move on to the next 200 sq. ft. and repeat.
- During final watering of poly sand, **clean surface by removing excess water** with leaf blower or squeegee depending on paver surface texture. This will remove any leftover binder residue or sand.
- Final thoughts – Always be aware of the weather when installing poly sand. **(Temperature and setting time ratings differ between products.)**
- Refer to all manufacturers websites for installation videos.

SAND RECOMMENDATIONS BY PRODUCT	Polybind HP G2	Polybind Complete Sand G2	Polysweep Polymeric Sand	Unicare® Easy Pro®	Eurostone Eurostone Bond
PAVERS	For joints up to 1/8" May be sealed. Tan color Non-binding sand	For joints up to 1" May be sealed. Available in Tan or Grey Binding sand	For joints up to 4" May be sealed. Available in Tan or Grey Binding sand	For joints up to 1" May be sealed. Available in Tan or Black Binding sand	May be sealed. Available in Slate Grey
Copthorne®	✓	✓	✓*	✓	N/R
Courtstone®	N/R	N/R	N/R	N/R	✓
Il Campo®	N/R	N/R	N/R	N/R	N/R
Richcliff®	✓	✓	✓*	✓	N/R
Series™	N/R	N/R	N/R	N/R	N/R
Town Hall®	✓	✓	✓	✓	N/R
Umbriano®	✓	✓	N/R	N/R	N/R
Tumbled Pavers	✓	✓	✓	N/R	N/R
Standard Pavers	✓	✓	✓	✓	N/R

N/R - Not Recommended | ✓ Recommended | ✓* These pavers have a very narrow or slightly angled edge (chamfer), limiting sand penetration in the joint and causing possible weak bonding areas. The life cycle performance could be affected.

Sealer Best Practices

- The paver surface should be **clean** and free from oil, dirt, dust and any loose material. This ensures a uniform result and allows the sealer to better penetrate the surface.
- The pavers should be **free of any visible efflorescence**.
- If pavers have been sealed before, make sure to resealed with compatible product.
- **Surface must be dry** (48 hours without precipitation) and warm to the touch (morning).
- Joint sand must also be dry.
- Make sure lawn sprinklers are shut off.
- Best air temperature is between **50 degrees to 80 degrees** with no rain forecasted for the next 24 hours.
- It is best to apply product under constant weather conditions and use the **same application method from start to finish**.
- The paver joints should be completely filled with dry correctly-graded joint sand. The top level should not exceed the bottom of the chamfer or **1/8" below** the surface on the non-beveled or tumbled paver surface.
- **Always test the product** on a small hidden area to ensure the results will meet your expectations.
- Always show homeowners samples to ensure expectations.

At this point read all sealer instructions and determine the best sealer for your desired goal. Do you want to retain the original look, enhance the color, or stabilize the sand joint?

- **Read application information as each sealer can be applied differently.**
- **Make sure you have the correct equipment based on type of sealer. Solvent based sealers need solvent resistant sprayers, watering cans or paint trays.** Water base sealers can be generally applied using plastic equipment. Example: solvent based sealers come in metal containers and water based sealers come in plastic containers.
- Care should be taken that no excess sealer material is pooled on the surface during application always back roll. When using solvent based sealers make sure roller is solvent resistant or for all paints. Foam rollers work best and are less likely to pull sand from the joints.
- Stabilizing sealers are generally sprayed or flood coated with a watering can, then back rolled.
- Acrylic non-stabilizing sealers can be sprayed, then back rolled or rolled on using a metal paint tray.
- **Send your most experienced worker to do sealing projects.**

IMPORTANT NOTICE

1. DO NOT USE Polymeric Jointing Sand on the following products: Series™ Il Campo®

If joint stabilization is required, use ordinary jointing sand and apply a stabilizing sealer. Contact your local Unilock office for recommended sealants and application specifics.

2. EXTRA CARE must be exercised when using Polymeric Sand on the following products:

Courtstone® Copthorne® Richcliff® Town Hall® Umbriano®

Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Polymeric Jointing Sand have a natural tendency to adhere to the surface and therefore extra diligence must be taken to pre-clean the surface prior to "wetting the sand in" and squeegee off the surface post application. Failure to do so will result in a "whitish haze" on the surface that is difficult to remove.

3. IMPORTANT COMPACTION NOTICE: Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric sand can then be swept into the joints. Always use a compactor with a protective membrane attached to the bottom of the plate.

Polymeric Jointing Sand, cleaners and sealers, must always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.

NOTICE: Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of polymeric sand, sealers or cleaners. Unilock will not accept responsibility for alternate suppliers of polymeric sand, jointing sand, cleaners and sealers.

NATURAL STONE INSTALLATION GUIDELINES

A slurry coat, sometimes called a bond or milk sealer coat, is brushed on to the back of each natural stone unit prior to installation in order to limit moisture penetration, prevent staining and aid adhesion.

OPTIMAL COLOR BLENDING INSTALLATION

Blending colors from multiple (3+) bundles is ideal for the optimal color installation. DO NOT LAY PALLET TO PALLET!

Important notes

UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee* on the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.



Scan for full Guarantee details

*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at unilock.com and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at Unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

TRADEMARK & LEGAL INFORMATION

Umbriano® is a trademark of Metten Stein + Design GmbH & Co KG used under license by Unilock. Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area. Not all products shown are available at all Unilock locations. Log on to www.unilock.com for availability. Measurements throughout this portfolio are nominal.

©2025 Hengestone Holdings, Inc.

Unilock Finishes

When considering the finish, think about the look you are trying to achieve as well as practical performance. From traditional smooth and flagstone, to enhanced surfaces, modern granite looks and timeworn patina, Unilock offers it all.

SMOOTH FINISH



Sometimes, simple is best. A smooth surface suits contemporary styles and is available in a wide variety of shapes for paving and verticals.

FLAGSTONE FINISH



Popular for centuries, a flagstone finish never fails to add warmth to outdoor spaces.

ANTIQUED FINISH



A variety of methods are used to achieve this distressed finish, but in every case, it lends a relaxed, rustic vibe.

TIMEWORN



Our exclusive Elegance line offers the look of centuries-old cobblestone, brick, and natural stone with unsurpassed product durability.

BRUSHED FINISH




Only Unilock offers Il Campo®, a unique surface enhanced with graphically interesting etched lines. This finish has long been a favorite of commercial designers.

UMBRIANO



Umbriano is an exclusive finish only available from Unilock with color and granite particles that are randomly dispersed to achieve a unique mottled surface that is reminiscent of granite.

EXPOSED GRANITE

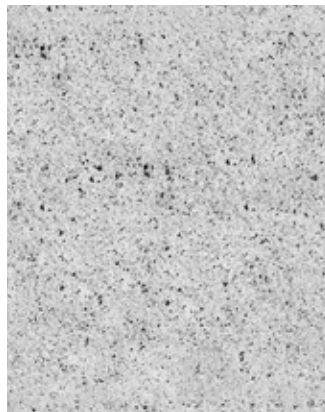


Granite, Quartz and Marble particles are embedded in the product's surface and then revealed using additional processing methods.

ENHANCED SURFACE



The surface of these products is enhanced using a special process to reveal a variety of distinctive colors and textures.

THE PERFECT MATCH FOR UNILOCK PAVERS




U-Cara™



SienaEdge™



Estate Wall™

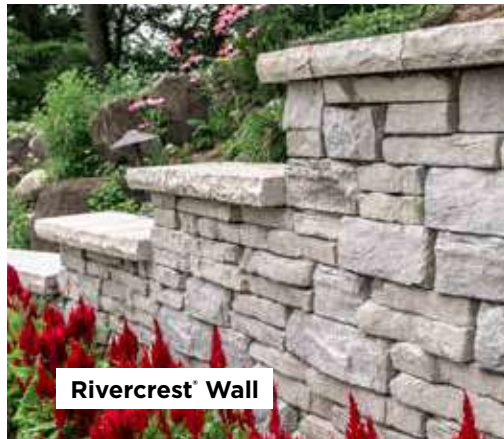

Rivercrest™ Wall



Quarry Smooth™



UNILOCK WALLS: STRENGTH MEETS STYLE

Complete your projects with wall blocks designed to coordinate seamlessly with Unilock pavers. Rich textures and premium colors create cohesive outdoor spaces, with blocks that deliver four times the industry standard for strength.

Let's **BUILD YOUR BUSINESS TOGETHER.**

**CONTACT 1-800-UNILOCK OR VISIT UNILOCK.COM TO
CONNECT WITH YOUR LOCAL TERRITORY MANAGER**

CHICAGO

(630) 892-9191

MILWAUKEE

(262) 742-3890

KANSAS

(913) 417-7985

BOSTON

(508) 278-4536

NEW YORK

(845) 278-6700

MID-ATLANTIC

(202) 798-2060

MICHIGAN

(248) 437-7037

CINCINNATI/KY/TN

(513) 202-0219

**OHIO/WESTERN PA/
WNY&CNY**

(330) 927-4000

ONTARIO

(416) 646-9000

UNILOCK®

UNILOCK.COM | 1-800-UNILOCK

