


RIVERCREST[®]

WALL W/ WOOD PRIVACY FENCE

REF: Detail_Rivercrest_Wood Fence on Top of Grid Wall

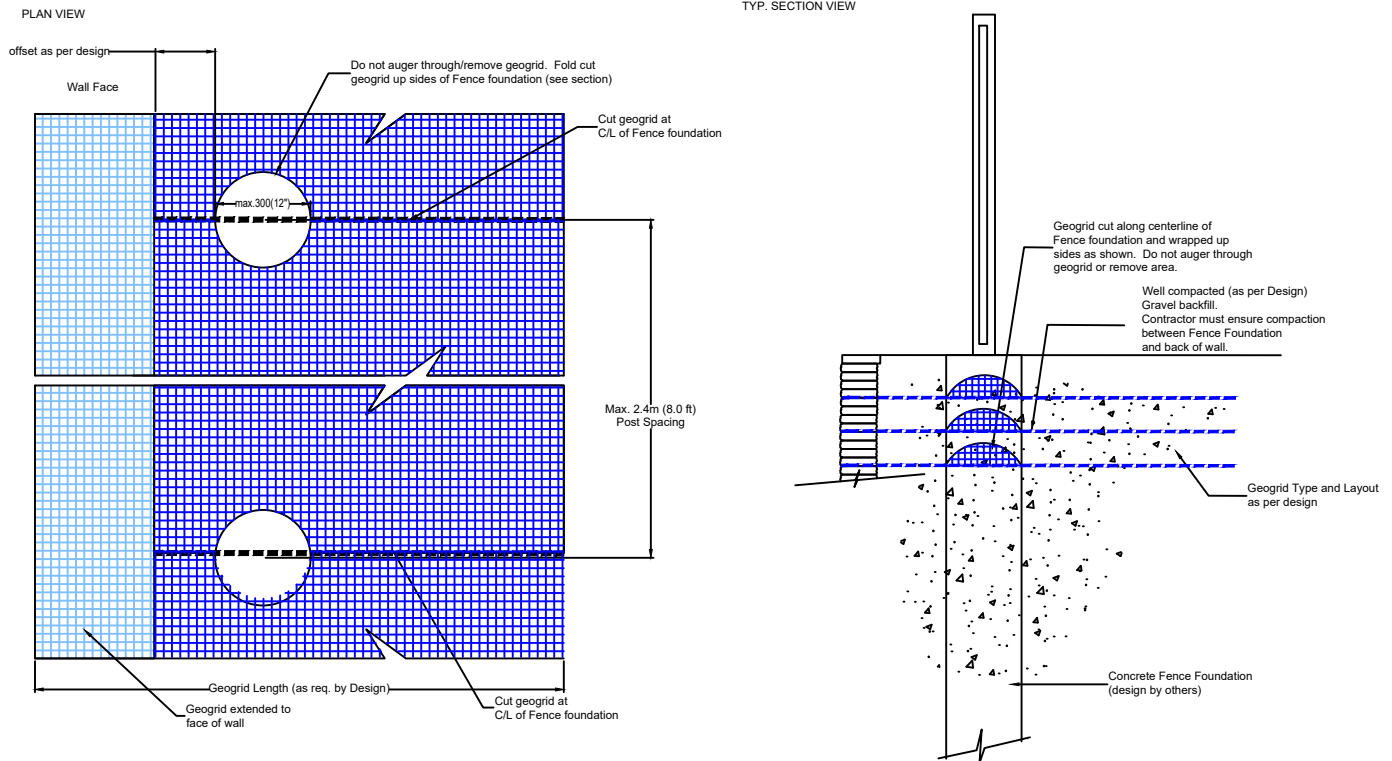

Notes:

1. Fence and foundation to be designed by others. Min. foundation depth to be 1.8m or as specified in Design.
2. Max. 300mm O/D for fence footing and min. 300 offset from back of coping unit.
3. Fence footing forms (Sonotubes) must be installed while geogrid reinforced wall is being constructed.
4. Contractor must ensure required compaction around sonotubes, including hand-compaction of area between wall and foundation.



Engineering design by RisiStone Inc.

UNILOCK.COM | 1-800-UNILOCK

UNILOCK[®]
PAVERS & WALLS