


# DURA HOLD 2<sup>®</sup>

REF: Detail\_DuraHold2\_Outside Corner with Grid

## GEOGRID PLACEMENT AT OUTSIDE CORNER

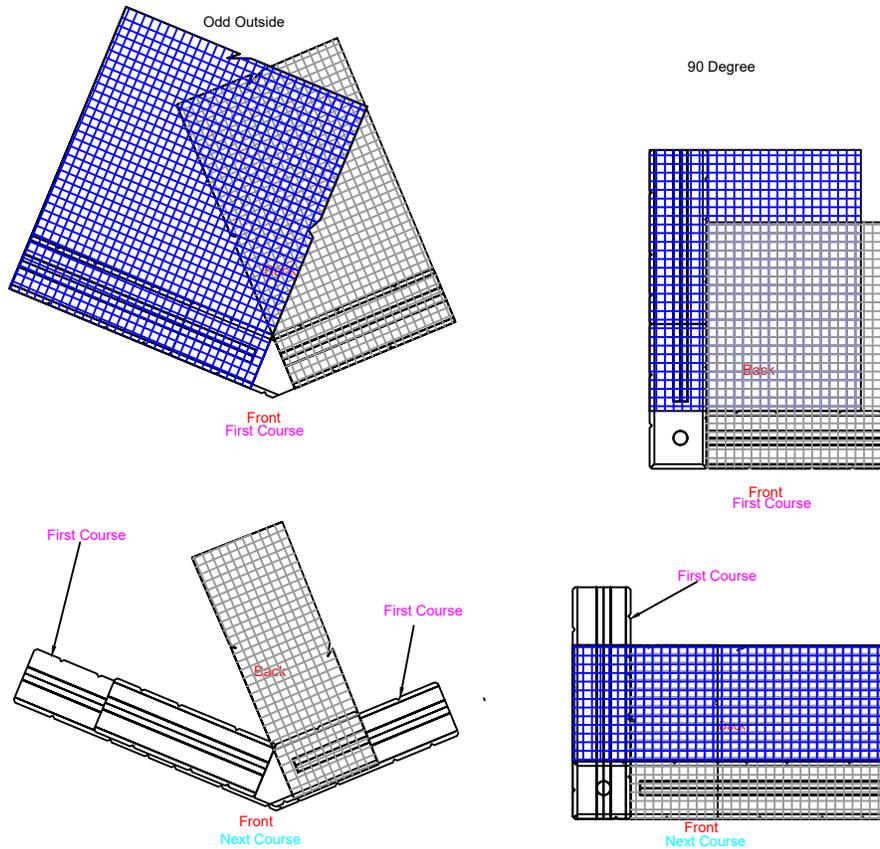

Note:

1. 3"(76mm) of Soil required between overlapping reinforcement for proper anchorage if both layers placed at the same SRW unit elevation.
2. Alternative to overlapping in a single course, reinforcement could be placed perpendicular to principle direction in the cross-over area on the succeeding course.
3. Corners greater than 90 degree are not recommended.



Engineering design by RisiStone Inc.

UNILOCK.COM | 1-800-UNILOCK

**UNILOCK<sup>®</sup>**  
PAVERS & WALLS