


DURA HOLD 2[®]

FLEXIBLE STEEL BEAM GUIDE RAIL

REF: Detail_DuraHold2_Steel Beam Guard Rail for Grid Wall

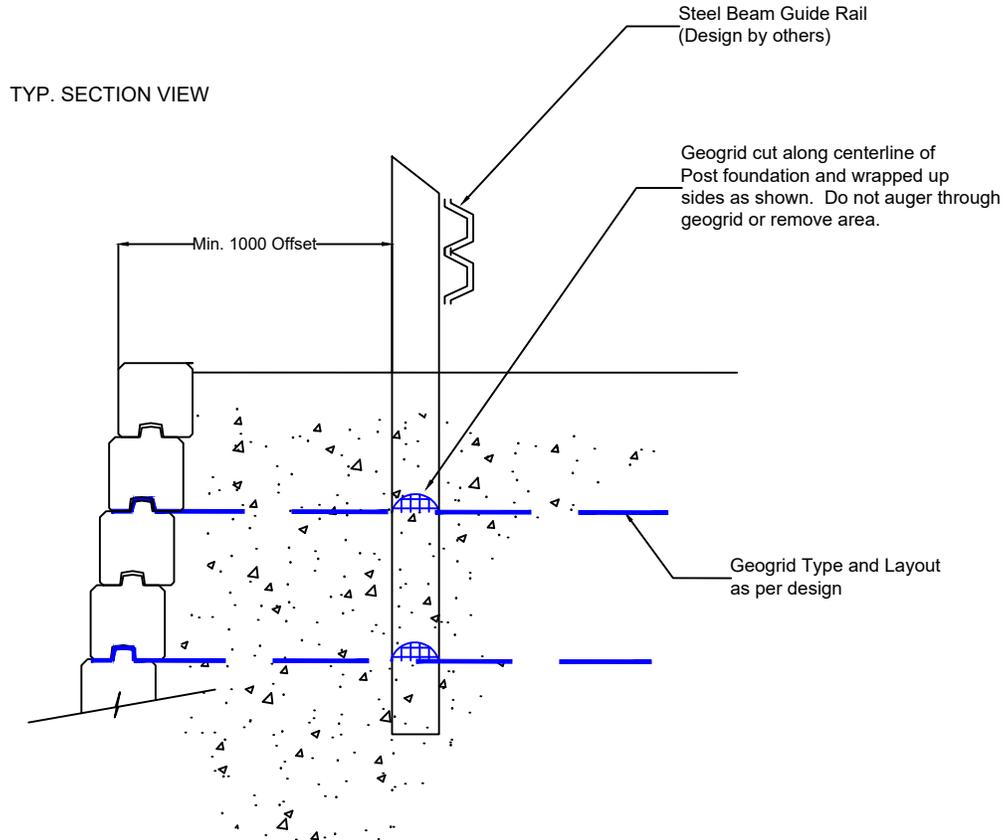

Notes:

1. Guiderail post depth to be min. 1.5m (5.0ft) below grade.
2. Guiderail posts must be placed as wall is constructed (not augered through geogrid following construction).
3. Contractor must ensure required compaction around posts, including between back of wall and back of post.
4. Civil Engineer to review required offsets to ensure they are compatible with site layout.



Engineering design by RisiStone Inc.



UNILOCK.COM | 1-800-UNILOCK