


DURA HOLD[®]

GEOGRID PLACEMENT AT OUTSIDE CORNER

REF: Detail_DuraHold_Outside Corner with Grid

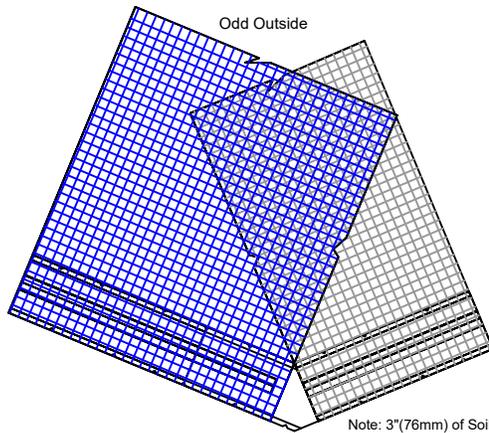


First Course

Note: 3"(76mm) of Soil required between overlapping reinforcement for proper anchorage if both layers placed at the same SRW unit elevation.


Alternative to overlapping in a single course, reinforcement could be placed perpendicular to principle direction in the cross-over area on the succeeding course.

Corners greater than 90 degree are not recommended.

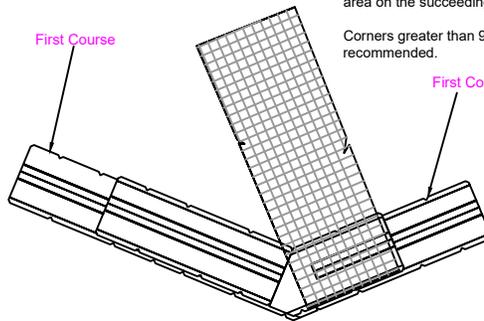


Next Course

90 Degree

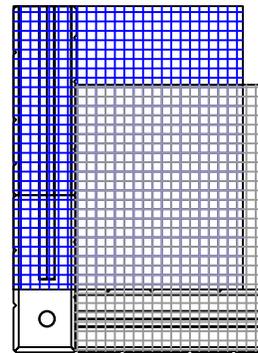

First Course

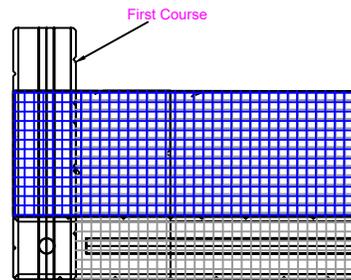

Next Course



Engineering design by RisiStone Inc.

UNILOCK.COM | 1-800-UNILOCK

UNILOCK[®]
PAVERS & WALLS