
## LINEO STONE®

## NARROW PILLAR

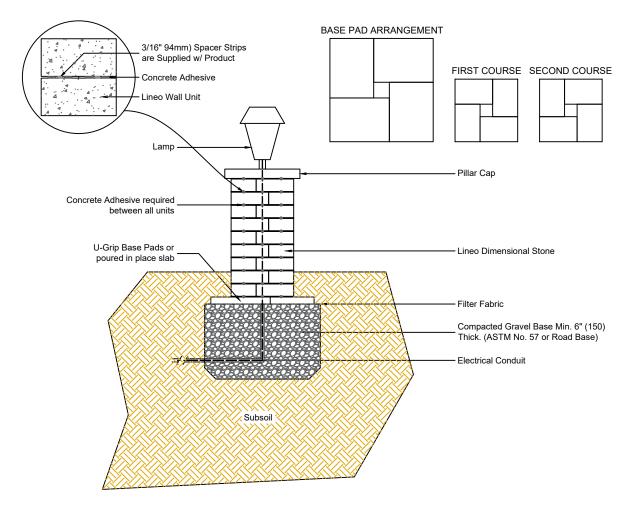

## Notes:

- 1. Each course must be glued with concrete adhesive (two 1/4" beads 5" apart).
- 2. Site soil conditions and compaction will impact the ultimate stability of the pillar.

This cross section is intended for preliminary design purposes only.

Maximum height is typical and will vary from project to project depending on site conditions and load requirements. Geogrid placement, quantity and length may change.

Consult a qualified professional engineer to determine site specific construction details.

