


PISA SMOOTH[®]


REF: Detail_Pisa Smooth_Drain Outlet Through Face of Wall

DRAIN OUTLET THROUGH FACE OF WALL


Case 1 - Flat grade along wall length: Create 2% slope to outlets as shown.

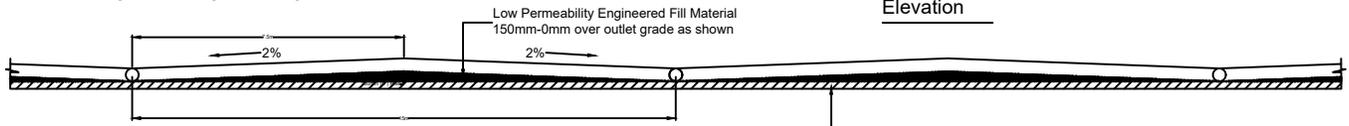


Case 2 - Grade in front of wall meets or exceeds 2%.

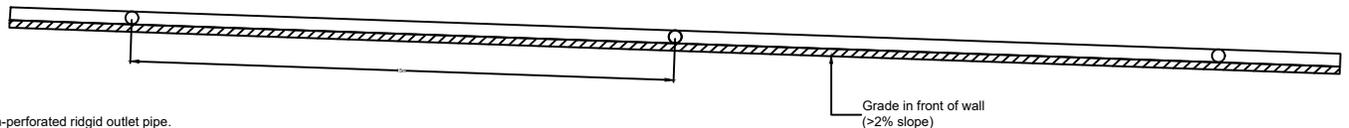

Non-perforated rigid outlet pipe.
Outlets at max 15m (45ft) o/c.
Rigid T-Connection per
manufacturers specifications.

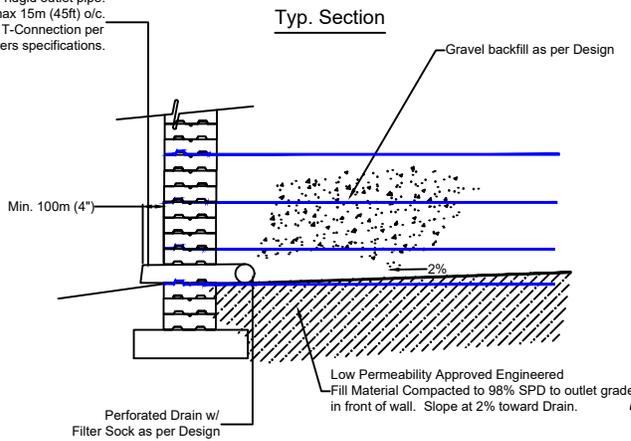

Face View (Enlarged)

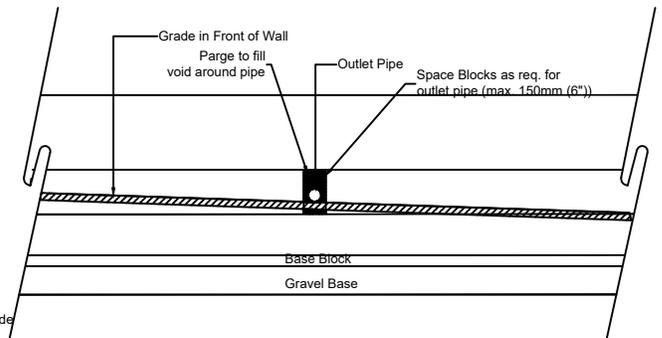

Engineering design by RisiStone Inc.



UNILOCK.COM | 1-800-UNILOCK