
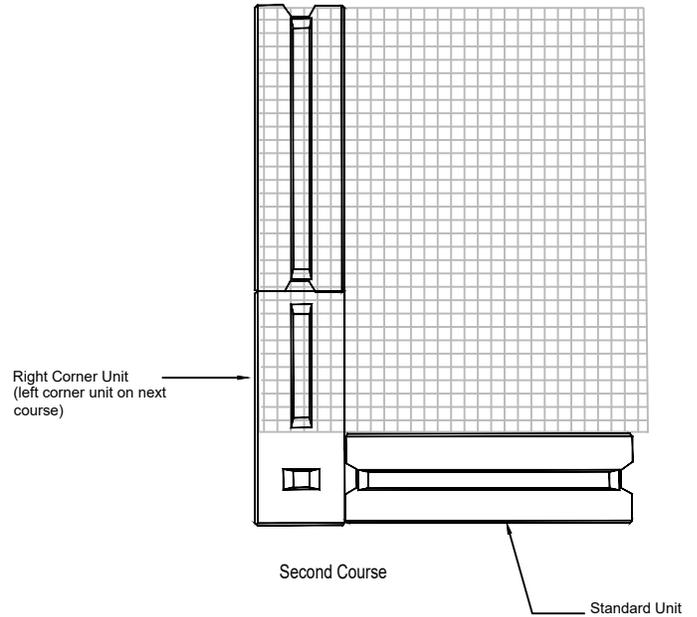


# SIENA SMOOTH<sup>®</sup>

## OUTSIDE 90 DEGREE CORNER

REF: Detail\_Siena Smooth\_Outside Corner

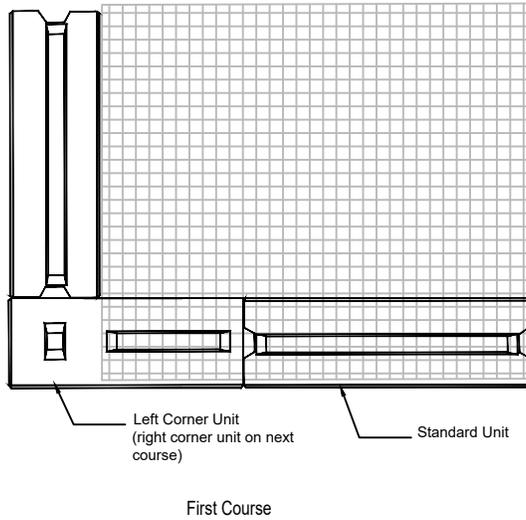

**Note:**

Geogrids will overlap and should be separated by a min. of 75mm of compacted soil.

Alternatively, geogrid placement may be stepped up by one course as the corner is turned (if permitted by design).



Engineering design by RisiStone Inc.

**UNILOCK.COM | 1-800-UNILOCK**

**UNILOCK<sup>®</sup>**  
PAVERS & WALLS