
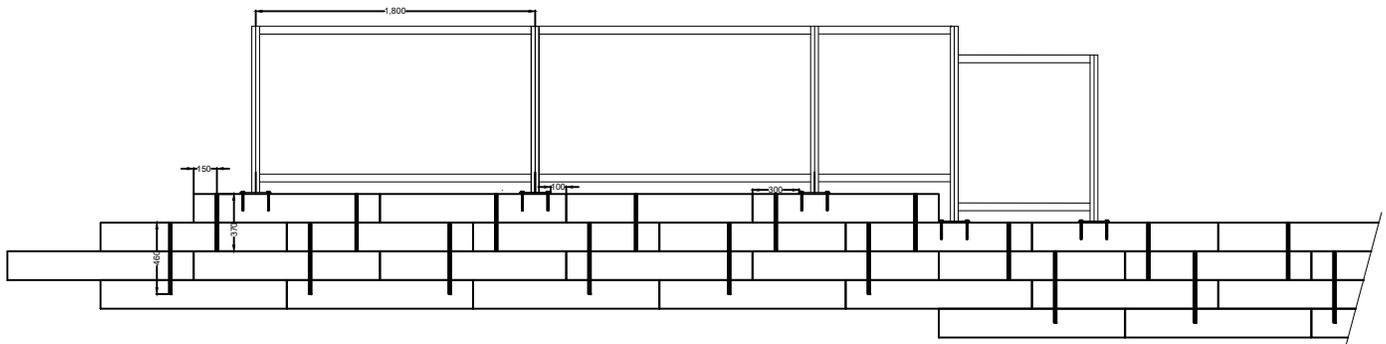


# SIENA STONE®

## FLUSH MOUNTED PEDESTRIAN GUARD

REF: Detail\_SienaStone\_Flush Mounted Pedestrian Railing 2

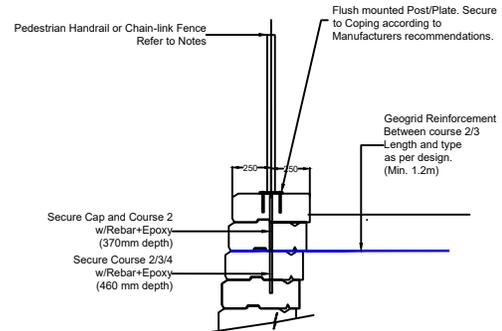

Typical Elevation View

Notes:

1. Pedestrian Guard/Handrail must be non-wind bearing.
2. Base Plate flush mounted as shown. Secure to Coping in accordance with Manufacturers recommendations with suitable concrete anchors.
3. Base Plate to be mounted in center of Block (front to back). Offset to Block ends as shown in Elevation.
4. Rebar to be 15M w/Epcon A7 Epoxy. Install in accordance with Manufacturers recommendations.
5. Rebar dowels placed at center of Block (Front to back and side to side) as shown below.



Engineering design by RisiStone Inc.

UNILOCK.COM | 1-800-UNILOCK

**UNILOCK®**  
PAVERS & WALLS