


# SONOMA STONE<sup>®</sup>

## CONVEX CURVE

---

REF: Detail\_SonomaStone\_Convex Curve

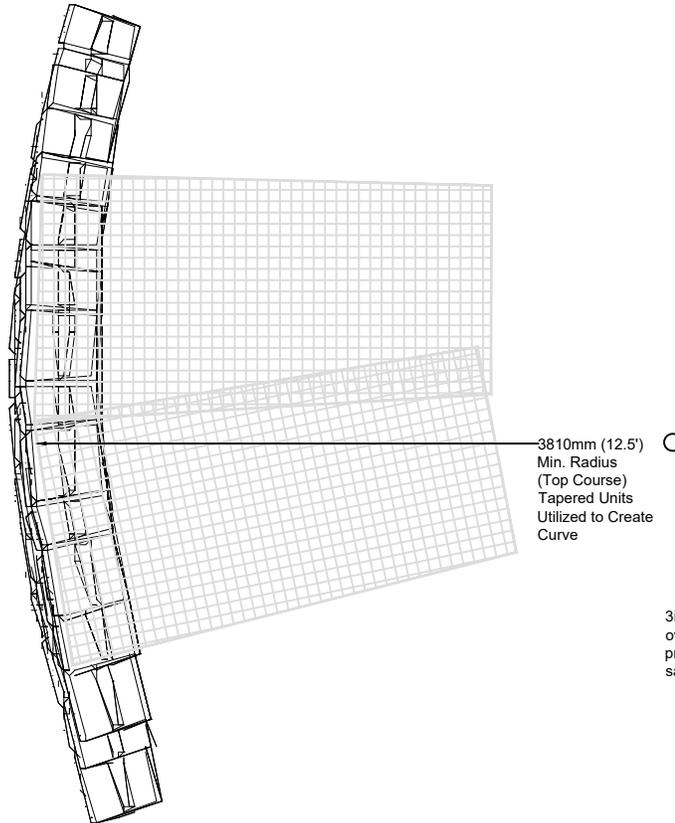

3in. (76mm) of soil required between overlapping reinforcement for proper anchorage if both layers placed at the same SRW unit elevation.

**Note:**

Geogrids will overlap and should have 75mm of compacted soil between the layers. (Geogrids should be spaced on blocks so overlap does not occur until geogrid enters soil zone as shown)



Engineering design by RisiStone Inc.

**UNILOCK.COM | 1-800-UNILOCK**

**UNILOCK<sup>®</sup>**  
PAVERS & WALLS