
CONCORD WALL[®] / ROMAN WALL[®] REF-Detail_Concord Wal_Roman Wal_Flexible Post and Beam Traffic Barrier on Top of Grid Wal

W/ FLEXIBLE POST AND BEAM TRAFFIC BARRIER

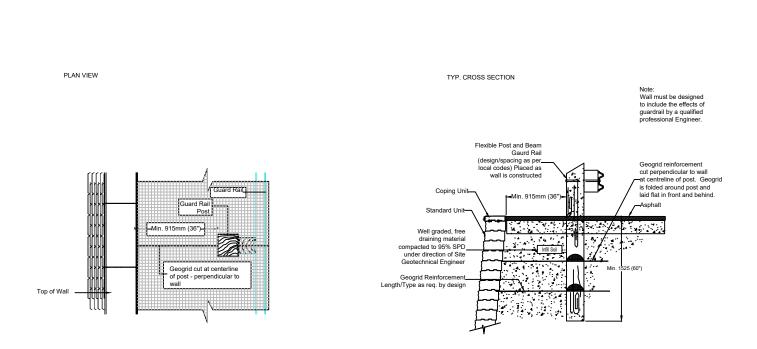

Notes

1. Guardrail posts to extend a minimum of 1525mm (60") below grade.

UNILOCK.COM | 1-800-UNILOCK

2. Posts must be placed as retaining wall is constructed.

3. Geogrid reinforcement to be cut perpendicular to wall face at centreline of sonotubes.



Engineering design by RisiStone Inc.





