

CONCORD XL®

W/FLEXIBLE POST AND BEAM TRAFFIC BARRIER

PLAN VIEW TYP. CROSS SECTION

Note: Wall must be designed to include the effects of guardrail by a qualified professional Engineer.



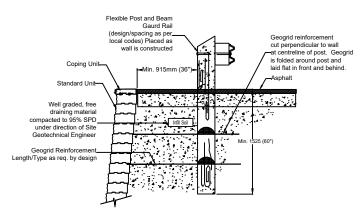

Notes

- 1. Guardrail posts to extend a minimum of 1525mm (60") below grade.
- 2. Posts must be placed as retaining wall is constructed.
- 3. Geogrid reinforcement to be cut perpendicular to wall face at centreline of sonotubes.



Engineering design by RisiStone Inc.

