
DURA HOLD 2®

WOOD PRIVACY FENCE



Notes

- 1. Fence and foundation to be designed by others. Min. foundation depth to be 1.8m or as specified in Design.
- 2. Max. 300mm O/D for fence footing and min. 300 offset from back of coping unit.
- 3. Fence footing forms (Sonotubes) must be installed while geogrid reinforced wall is being constructed.
- 4. Contractor must ensure required compaction around sonotubes, including hand-compaction of area between wall and foundation.

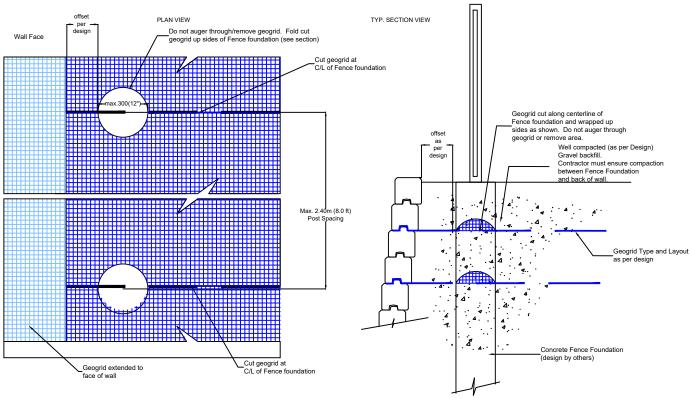

Engineering design by RisiStone Inc.

