

DIMENSIONAL SMOOTH™



REGION OHIO




UNILOCK Exclusive Technologies

■ CLASSIC COAT




APPLICATIONS


Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.



Fire Features



Garden Walls




Non structural Wall


RetainingWall Under 3', SeatWall, Garden Walls, Water Features, Outdoor Kitchen, Fire Features, Pillars



Outdoor Kitchen



Pillars



Water Features

COLORS

DARK CHARCOAL
FINISH: CLASSIC



STANDARD
300mm x 100mm x 200mm
11 7/8" x 3 7/8" x 7 7/8"

SANDSTONE
FINISH: CLASSIC



STANDARD
300mm x 100mm x 200mm
11 7/8" x 3 7/8" x 7 7/8"

LIMESTONE
FINISH: CLASSIC



STANDARD
300mm x 100mm x 200mm
11 7/8" x 3 7/8" x 7 7/8"


FIELDSTONE
FINISH: CLASSIC



STANDARD
300mm x 100mm x 200mm
11 7/8" x 3 7/8" x 7 7/8"

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

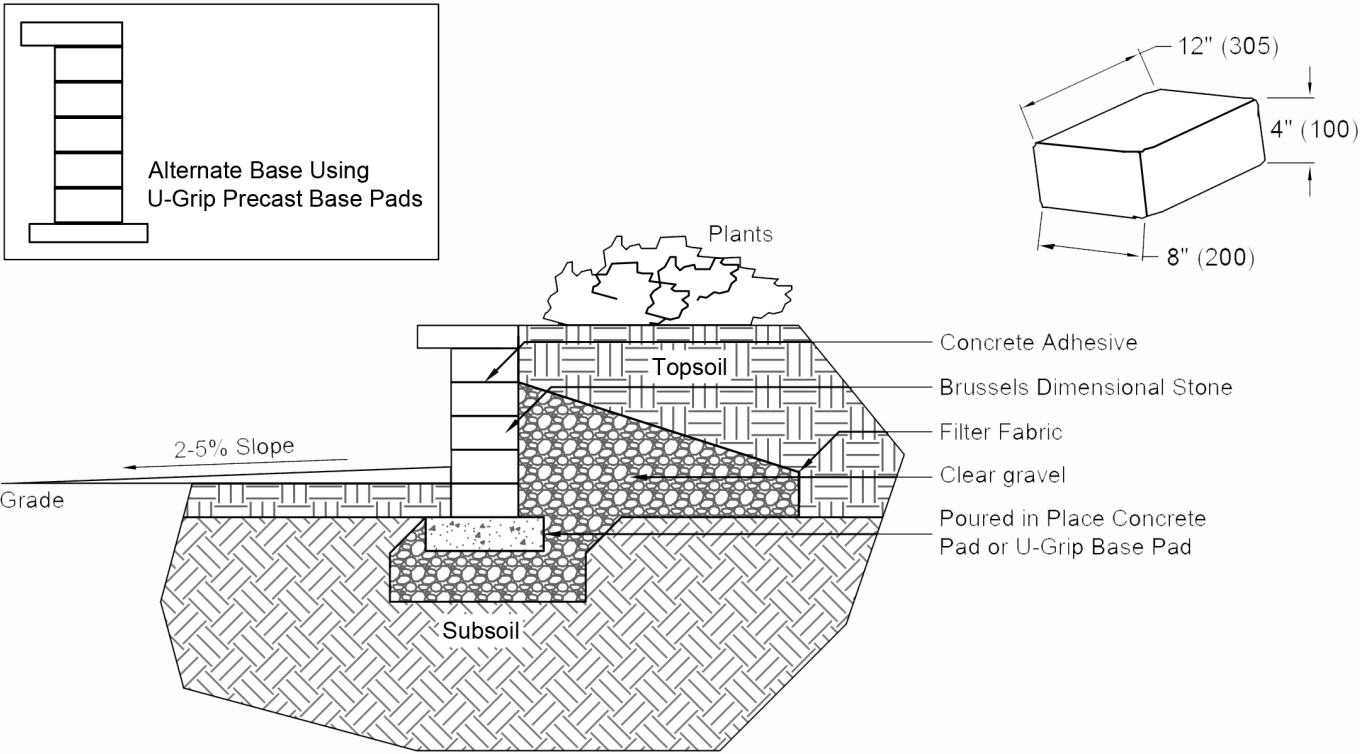

PACKAGING

	STANDARD
UNIT THICKNESS (MM)	100
LAYERS PER BUNDLE	3
FCFT PER BUNDLE	27
FCFT PER LAYER	9
FCFT PER UNIT	0.33
UNITS PER BUNDLE	81
UNITS PER LAYER	27
LBS PER BUNDLE	2,353.21
LBS PER LAYER	784.40
LBS PER UNIT	29.05

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated April 4, 2024, 11:49 am

