

# MATTONI™

THICKNESS 70MM  
REGION ONTARIO



EDGE  
ZERO EDGE DETAIL



## UNILOCK Exclusive Technologies


- ENDURACOLOR
- EASYCLEAN™

APPLICATIONS

Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.




**Borders and Accents**




**Commercial Vehicular**

Roadway, Streetscape, VehicularEntranceway, ParkingLot




**Light Duty Vehicular**

Residential Driveway, CommercialPedestrian



**Residential & Commercial Pedestrian**

Patio, Terrace, PoolDeck, Entryway, Courtyard



**Residential Driveway**

COLORS

SABLE  
FINISH: ANTIQUED /  
PROCESSED



**STANDARD**  
60mm x 240mm x 70mm  
2 3/8" x 9 1/2" x 2 3/4"

DARK CHARCOAL  
FINISH: ANTIQUED /  
PROCESSED



**STANDARD**  
60mm x 240mm x 70mm  
2 3/8" x 9 1/2" x 2 3/4"

GRANITE  
FINISH: ANTIQUED /  
PROCESSED



**STANDARD**  
60mm x 240mm x 70mm  
2 3/8" x 9 1/2" x 2 3/4"

NOTTE  
FINISH: ANTIQUED /  
PROCESSED



**STANDARD**  
60mm x 240mm x 70mm  
2 3/8" x 9 1/2" x 2 3/4"


SCURO  
FINISH: ANTIQUED /  
PROCESSED




**STANDARD**  
60mm x 240mm x 70mm  
2 3/8" x 9 1/2" x 2 3/4"

JOINT SPACING = 4MM


LAYING PATTERNS



LP MATTONI RB A



LP MATTONI HB C




LP MATTONI DHB D



TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

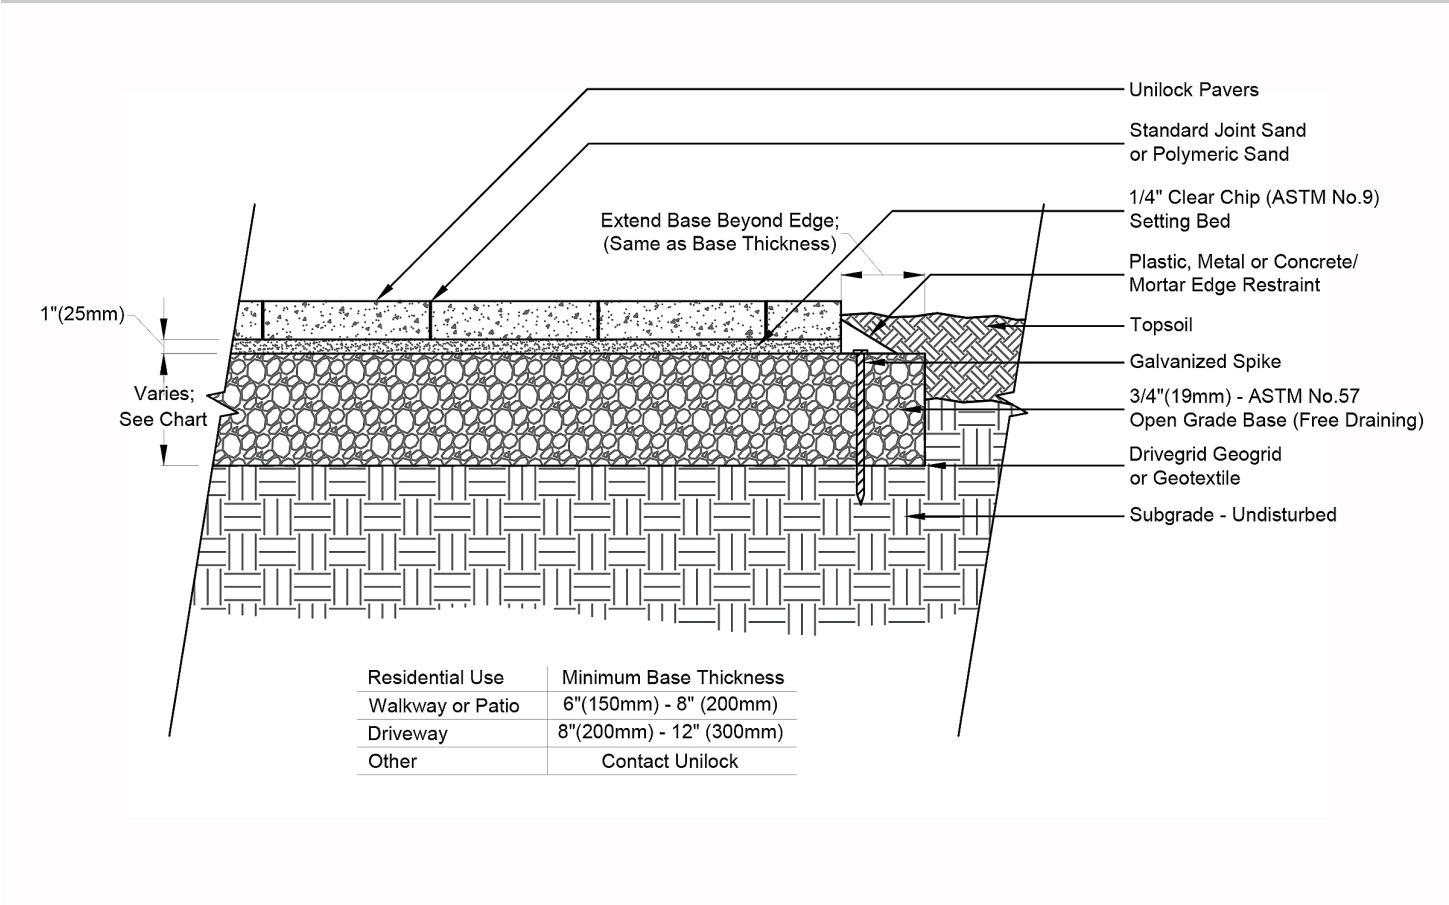

	STANDARD
UNIT THICKNESS (MM)	70
LAYERS PER BUNDLE	8
SQ FT PER BUNDLE	89.28
SQ FT PER LAYER	11.16
SQ FT PER UNIT	0.16
UNITS PER BUNDLE	576
UNITS PER LAYER	72
LIN FT PER BUNDLE - SOLDIER	113.39
LIN FT PER LAYER - SOLDIER	14.17
LIN FT PER UNIT - SOLDIER	0.20
LIN FT PER BUNDLE - SAILOR	453.54
LIN FT PER LAYER - SAILOR	56.69
LBS PER BUNDLE	2,858.70
LBS PER LAYER	357.34
LBS PER UNIT	4.96

## INSTALLATION NOTES

---

rates and application procedures. Always test a small area to make sure the results are as expected.  
Sealers

- Product may be sealed for aesthetic or cleanliness reasons but it is not required
- Use any sealer approved for concrete pavers
- Select type for desired aesthetics
- Product must be cleaned before sealing
- Always read and follow manufacturer's application procedures
- Always test a small area to make sure the results are as expected

The Americans with Disabilities Act Accessibility Guidelines (ADAAG) provides measurable criteria to determine compliance, not individual product evaluation. Gaps, joints or openings, greater than ½" horizontal and ¼" vertical should be avoided as they can disrupt wheelchair maneuvering (United States Access Board – Guidelines and Standards).

---

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated April 25, 2024, 11:11 am

