


MATTONI™

UNILOCK

TECH SHEET

THICKNESS 70MM

REGION ONTARIO



EDGE
ZERO EDGE DETAIL



UNILOCK Exclusive Technologies

- ENDURACOLOR
- EASYCLEAN™

APPLICATIONS


Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.

Borders and Accents



Commercial Vehicular

Roadway, Streetscape, VehicularEntranceway, ParkingLot



Light Duty Vehicular

Residential Driveway, CommercialPedestrian



Residential & Commercial Pedestrian

Patio, Terrace, PoolDeck, Entryway, Courtyard



Residential Driveway



COLORS

SABLE FINISH: ANTIQUED / PROCESSED



STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"

DARK CHARCOAL FINISH: ANTIQUED / PROCESSED



STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"

GRANITE FINISH: ANTIQUED / PROCESSED



STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"

NOTTE
FINISH: ANTIQUED /
PROCESSED



STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"


SCURO
FINISH: ANTIQUED /
PROCESSED




STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"

JOINT SPACING = 4MM


LAYING PATTERNS



LP MATTONI RB A




LP MATTONI HB C



LP MATTONI DHB D

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

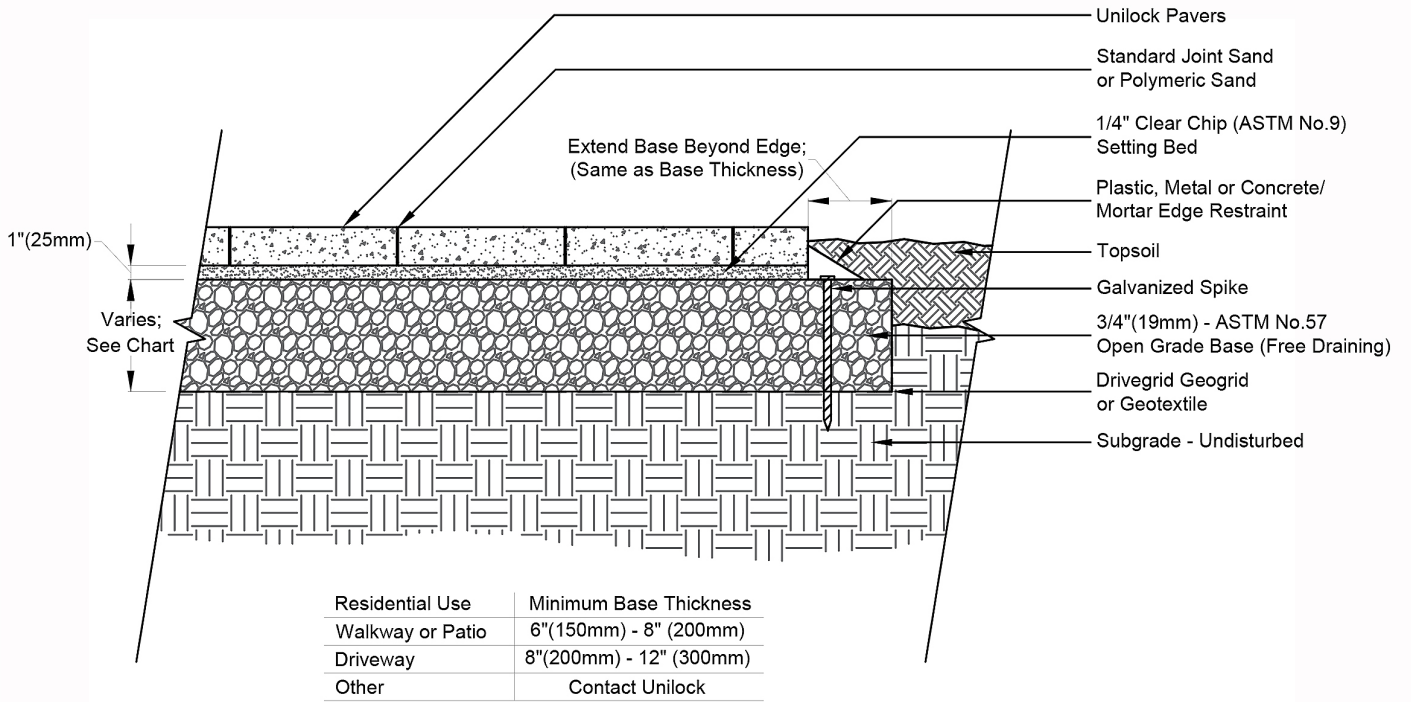

	STANDARD
UNIT THICKNESS (MM)	70
LAYERS PER BUNDLE	8
SQ FT PER BUNDLE	89.28
SQ FT PER LAYER	11.16
SQ FT PER UNIT	0.16
UNITS PER BUNDLE	576
UNITS PER LAYER	72
LIN FT PER BUNDLE - SOLDIER	113.39
LIN FT PER LAYER - SOLDIER	14.17
LIN FT PER UNIT - SOLDIER	0.20
LIN FT PER BUNDLE - SAILOR	453.54
LIN FT PER LAYER - SAILOR	56.69
LBS PER BUNDLE	2,858.70
LBS PER LAYER	357.34
LBS PER UNIT	4.96

INSTALLATION NOTES

rates and application procedures. Always test a small area to make sure the results are as expected.
Sealers

- Product may be sealed for aesthetic or cleanliness reasons but it is not required
- Use any sealer approved for concrete pavers
- Select type for desired aesthetics
- Product must be cleaned before sealing
- Always read and follow manufacturer's application procedures
- Always test a small area to make sure the results are as expected

The Americans with Disabilities Act Accessibility Guidelines (ADAAG) provides measurable criteria to determine compliance, not individual product evaluation. Gaps, joints or openings, greater than ½" horizontal and ¼" vertical should be avoided as they can disrupt wheelchair maneuvering (United States Access Board – Guidelines and Standards).

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated April 23, 2024, 11:14 am

The UNILOCK logo is displayed in a bold, red, sans-serif font. The letter 'U' is stylized with a white diagonal cutout on its left side.