

REGION      OHIO



UNILOCK® Exclusive Technologies

■ CLASSIC COAT



APPLICATIONS

Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.



Fire Features



Garden Walls



Non structural Wall

RetainingWall Under 3', SeatWall, Garden Walls,  
Water Features, Outdoor Kitchen, Fire Features



Outdoor Kitchen



Water Features

COLORS

SIERRA  
FINISH: ANTIQUED /  
PROCESSED



COPING TAPERED  
200mm x 100mm x 200mm  
7 7/8" x 3 7/8" x 7 7/8"

GRANITE  
FINISH: ANTIQUED /  
PROCESSED



COPING TAPERED  
200mm x 100mm x 200mm  
7 7/8" x 3 7/8" x 7 7/8"

RIVER  
FINISH: ANTIQUED /  
PROCESSED




COPING TAPERED  
200mm x 100mm x 200mm  
7 7/8" x 3 7/8" x 7 7/8"



TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

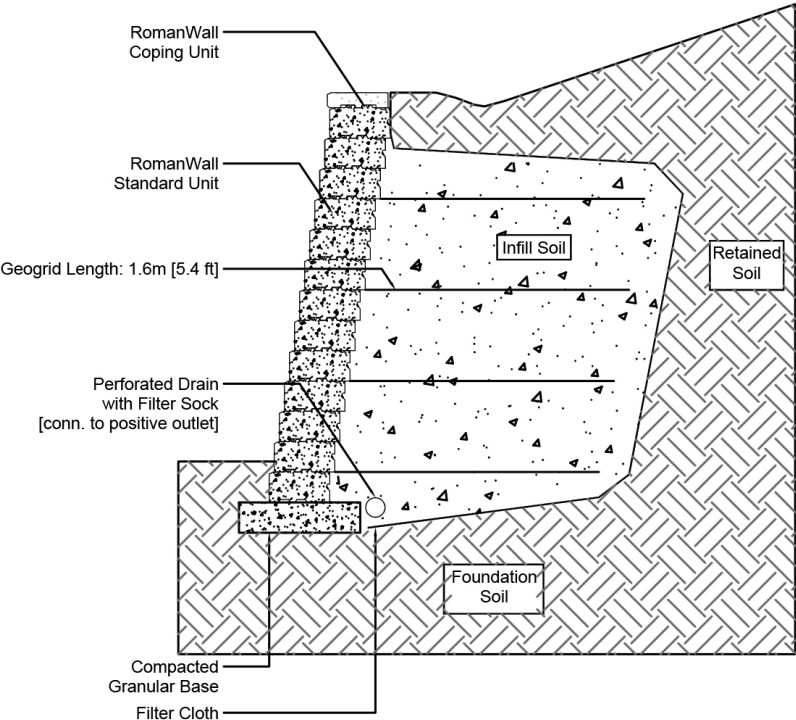

	COPING TAPERED
UNIT THICKNESS (MM)	100
LAYERS PER BUNDLE	6
FCFT PER BUNDLE	31
FCFT PER LAYER	5.17
FCFT PER UNIT	0.22
UNITS PER BUNDLE	144
UNITS PER LAYER	24
LBS PER BUNDLE	2,356.85
LBS PER LAYER	392.81
LBS PER UNIT	16.37

## INSTALLATION NOTES

---

**romanstack™** RomanStack is the most versatile residential and commercial retaining wall block on the market today. Use RomanStack to construct projects from low walls to high walls.

Applications – Design and build projects such as planters, seat walls and fire pits. Can be used for straight and curved installations. (Minimum Outside Radius 29’')

Capacity – Gravity walls up to 24’ (.5m).

Recommended Base Stabilization – one layer of DriveGrid™ stabilization grid between subgrade and base material. Use under Standard Base or Permeable Base.

Standard Base – Min. 6” – 8” of ¾” Crusher Run gravel (any road base standard in accordance with ASTM-D2940) compacted to 98% Standard Proctor Density (SPD).

Alternative Permeable Base – Min. 6” – 8” of ¾” clear open-graded stone compacted to achieve full particle lock-up and consolidation. (Clear open-graded does not compact but does consolidate slightly by rattling the particles together.)

Leveling – Leveling retaining wall blocks directly on top of gravel is tedious and generally does not yield the best results. U-Grip Base units or universal base pads are recommended under all Unilock walls for improved accuracy and speedier installation. Additional benefits include long term structural integrity and an overall better appearance. Poured concrete leveling pads, reinforced with rebar, are also a great way to accomplish leveling, particularly for larger installations. You must ensure that the concrete is poured and finished perfectly in order to achieve a good visual appearance.

Connection – features a tongue and groove connection. Use appropriate concrete adhesive for connection between units where the key has been removed or for corners. Always read adhesive manufacturers’ directions prior to gluing.

Handling – No specific handling instructions.

Coping - This wall requires coping. Use the RomanStack Coping or use any other coping that Unilock manufactures. Cutting may be required. Install with tight joints or gap 3/16” and amend with an exterior latex caulking. A diamond blade saw is required to cut coping properly. Glue all coping using a specially formulated concrete adhesive that is strong and will not break down over time. Always read adhesive manufacturers’ directions prior to gluing.

---

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated May 2, 2024, 12:01 pm

**UNILOCK**