

SANDSTONE

THICKNESS 22MM

REGION OHIO


UNILOCK

TECH SHEET




APPLICATIONS

Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.



Pedestal or Overlay
RoofDeck, DeckOverlay







Residential & Commercial Pedestrian
Walkway, Patio, Terrace, PoolDeck, Entryway, Courtyard, RoofDeck, Plaza, Park, Sidewalk

COLORS





INDIAN COAST
FINISH: NATURAL STONE



	12"X24" 297mm x 600mm x 22mm 11 3/4" x 23 5/8" x 0 7/8"		18"X24" 450mm x 600mm x 22mm 17 3/4" x 23 5/8" x 0 7/8"
	24"X24" 600mm x 600mm x 22mm 23 5/8" x 23 5/8" x 0 7/8"		24"X36" 600mm x 900mm x 22mm 23 5/8" x 35 1/2" x 0 7/8"





IVORY SAND
FINISH: NATURAL STONE




	12"X24" 297mm x 600mm x 22mm 11 3/4" x 23 5/8" x 0 7/8"		18"X24" 450mm x 600mm x 22mm 17 3/4" x 23 5/8" x 0 7/8"
	24"X24" 600mm x 600mm x 22mm 23 5/8" x 23 5/8" x 0 7/8"		24"X36" 600mm x 900mm x 22mm 23 5/8" x 35 1/2" x 0 7/8"

GOLDEN SAND
FINISH: NATURAL STONE




	12"X24" 297mm x 600mm x 22mm 11 3/4" x 23 5/8" x 0 7/8"		18"X24" 450mm x 600mm x 22mm 17 3/4" x 23 5/8" x 0 7/8"
	24"X24" 600mm x 600mm x 22mm 23 5/8" x 23 5/8" x 0 7/8"		24"X36" 600mm x 900mm x 22mm 23 5/8" x 35 1/2" x 0 7/8"


STONE CLIFF GREY
FINISH: NATURAL STONE



12\"/>
297mm x 600mm x 22mm
11 3/4\"/>



18\"/>
450mm x 600mm x 22mm
17 3/4\"/>




24\"/>
600mm x 600mm x 22mm
23 5/8\"/>




24\"/>
600mm x 900mm x 22mm
23 5/8\"/>


LAYING PATTERNS




LP NATURALSTONE MULTI UNIT E

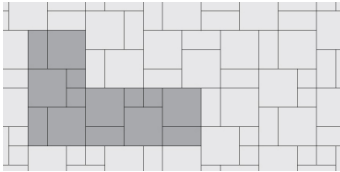


LP NATURALSTONE MULTI UNIT C




LP NATURALSTONE MULTI UNIT H




LP NATURALSTONE 12X24 RB A




LP NATURALSTONE 24X24 RB B




LP NATURALSTONE MULTI UNIT G




LP NATURALSTONE MULTI UNIT F




LP NATURALSTONE MULTI UNIT D




LP NATURALSTONE 24X24 SB P




LP NATURALSTONE MULTI UNIT L




LP NATURALSTONE MULTI UNIT N



LP NATURALSTONE MULTI UNIT K



LP NATURALSTONE MULTI UNIT I




LP NATURALSTONE MULTI UNIT J

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

TYPICAL NATURAL STONE (CONCRETE OVERLAY)

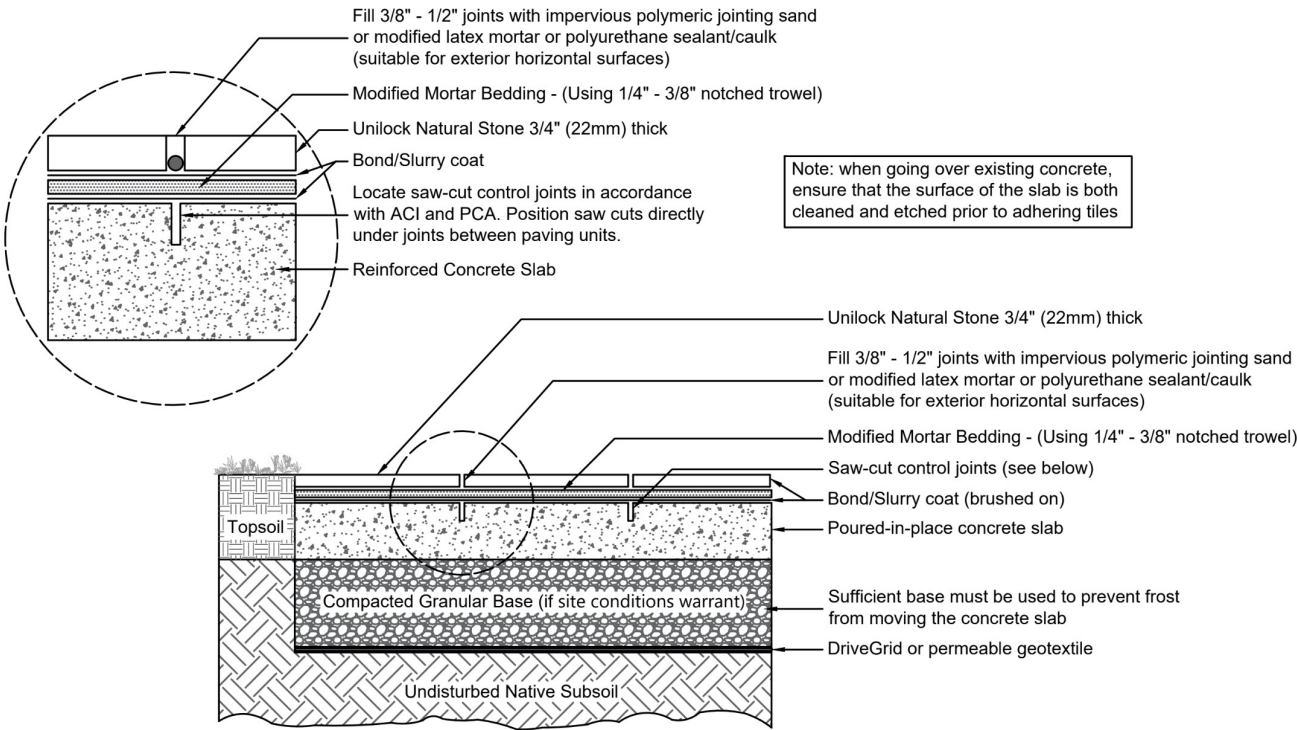

PACKAGING

	(22) RANDOM RANDOM BUNDLE	24"X24"	24"X36"	COPING W / DL FULLNOSE	COPING W / DL ROCK FACE	PILLAR CAP 24"	STEP 48"X16"
UNIT THICKNESS (MM)	22	22	22	50	50	64	150
SQ FT PER UNIT	3.63	4	6	-	-	-	-
UNITS PER CRATE	48	40	30	20	20	14	6
LIN FT PER UNIT - SOLDIER	4	-	-	-	-	-	-
LBS PER CRATE	2,265	1,851	2,082	3,174.60	2,072	1,913.59	2,645.55
LBS PER UNIT	47.19	46.28	69.40	158.73	103.60	136.69	440.93

PACKAGING

	COPING ROCK FACED	PILLAR CAP 24"	24"X24"
UNIT THICKNESS (MM)	50	65	50
SQ FT PER UNIT	4	-	-
UNITS PER CRATE	20	14	20
LBS PER CRATE	2,116	1,914	-
LBS PER UNIT	105.80	136.71	-

INSTALLATION NOTES

NATURAL STONE - SANDSTONE

Installation Manual – For complete installation information, download the manual [here](#).

Over Concrete Installation – Sandstone must be installed on a stable base. The best way to achieve this is to mortar the units on to a poured concrete pad - preferably a new concrete pad, although existing concrete can be used. It is recommended that you have a minimum 4" of ¾" crusher run gravel under the pad for support and drainage, (use any road base gravel in accordance with ASTM-D2940) compacted to 98% Standard Proctor Density (SPD).

Special Notes: Concrete Direct Overlay –

1. Concrete integrity – concrete must be in good condition, and not crumbling
2. Drainage slope – concrete below must be sloped away from all buildings and structures
3. Base drainage - the area below the concrete must not be subject to frost movement
4. Jointing – Mortar joint recommended

Alternative Permeable Base – Sandstone may also be installed on a permeable base.

Min. 6" – 8" of ¾" clear open-graded stone compacted to achieve full particle lock-up and consolidation. (Clear open-graded does not compact but does consolidate slightly by rattling the particles together.)

Alternative Permeable Bedding Course – 1" thick of 1/8" clear open-graded chip stone – (ASTM No. 8 or 9) screeded over base.

Water Proofing

- When installing over a concrete pad, waterproofing the sandstone and the concrete pad is an important procedure to prevent discoloration of the sandstone. A bond/slurry coat should be brushed onto the concrete pad prior to applying the mortar bedding. Apply the same bond coat to the backs of each sandstone unit before placing.

- When installing over a permeable base, you only need to apply the slurry coat to the back of the sandstone.

Handling – Exercise caution when handling this product, as contact between its zero-bevel edges may cause damage.

Edge Restraint - Always install an edge restraint around the perimeter of any paver installation not restrained by building structures. "Spike in" edge restraints come in plastic and various metals and work well for most applications. A concrete curb or a "sub-surface concrete wedge" can also be installed to retain the edge.

Cleaners – Unilock has partnered with United Stonecare, a UK company with over 30 years experience in the field of specialized cleaner and sealer products for natural stone. View products [here](https://www.unicare-products.com/): <https://www.unicare-products.com/>.

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated May 4, 2024, 12:35 pm