
SIENA EDGE™

REGION BOSTON





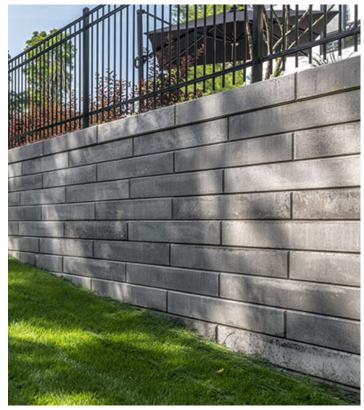

UNILOCK Exclusive Technologies


CLASSIC COAT



APPLICATIONS



Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.

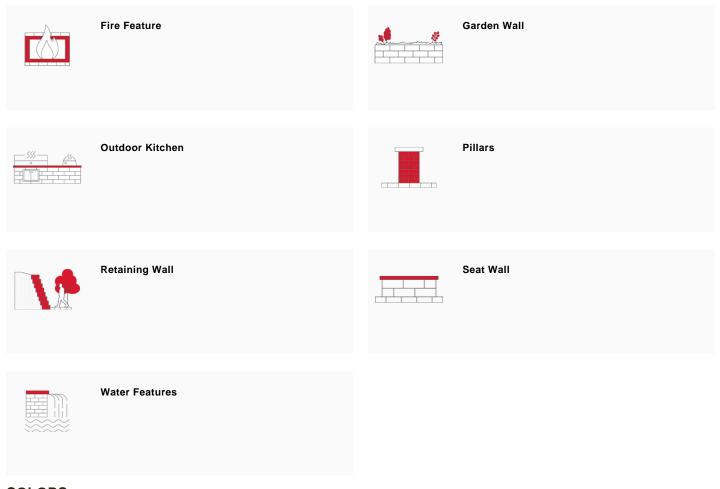

COLORS

GRANITE FINISH: CLASSIC





STANDARD

ALMOND GROVE FINISH: CLASSIC





SANDSTONE FINISH: CLASSIC






UNILOCK.COM | 1-800-UNILOCK

TYPICAL CROSS SECTION



Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

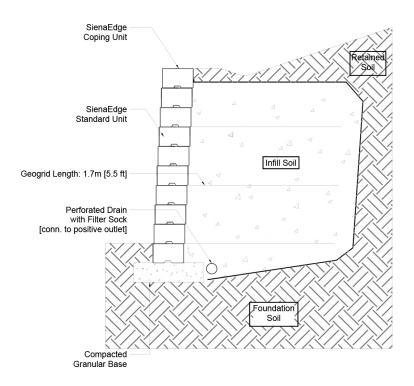





	STANDARD / CORNER	COPING
UNIT THICKNESS (MM)	180	180
LAYERS PER BUNDLE	3	3
FCFT PER BUNDLE	23.25	23.25
FCFT PER LAYER	7.75	7.75
FCFT PER UNIT	1.94	1.94
UNITS PER BUNDLE	12	12
UNITS PER LAYER	4	4
LBS PER BUNDLE	3,086.45	3,086.45
LBS PER LAYER	1,028.82	1,028.82
LBS PER UNIT	257.20	257.20

UNILOCK.COM | 1-800-UNILOCK

INSTALLATION NOTES



SIENAEDGE™

SienaEdge is a modular concrete retaining wall system that is used to stabilize and contain earth embankments, large and small. The SienaEdge wall system is a fully-engineered, structural retaining wall system constructed as either a "gravity" wall (no geogrid) or a geogrid-reinforced wall. It can be used for applications up to 30ft (9m) or even higher with proper design. The ideally-sized block provides fast, efficient machine-placed installation, while still offering a manageable weight for manual maneuvering if required. It eliminates complex estimations and ordering with the innovative multifunction block design, integrating standards & corners into the same block. The closed-end Standard block is ideal for building corners, ending two-sided seat walls and is able to create both vertical or battered walls, all with one block.

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated July 27, 2024, 12:12 pm



6