



**Senzo**<sup>™</sup> EasyClean<sup>™</sup>

1-800-UNILOCK | [UNILOCK.COM](http://UNILOCK.COM)

**UNILOCK**<sup>®</sup>  
PAVERS & WALLS




# SENZO™

## ENDURACOLOR™



MOCHA BROWN

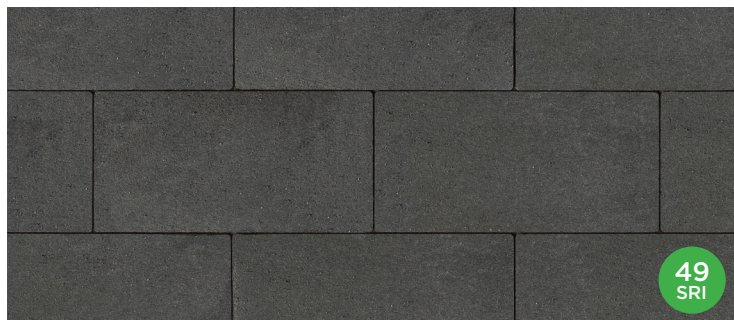

MIDNIGHT CHARCOAL



CREMA

### PRODUCT ATTRIBUTES

Visual Appearance	Linear shape, with unique, bold colours, presenting a contemporary look.
Finish	Superior smooth face.

### PRODUCT SPECIFICATIONS




8 x 16 x 2¾"  
200 x 400 x 70mm

### EDGE DETAILS




ZERO BEVEL EDGE

### LAYING PATTERNS



SENZO A  
67% Rectangle,  
33% Square



SENZO B  
67% Rectangle,  
33% Square

### RECOMMENDED SAND



#### Gator G2 MAXX Sand

- Setting time - 15 mins
- Sets above 32° F/ 0° C
- Can be applied if rain is expected (min. 1 hr)
- Dust free and haze free
- Requires only one watering
- Four colours: Beige, Grey, Black and Ivory

#### Coverage:

Colour	Narrow Joints	Wide Joints
Beige, Grey, Ivory 50lb. bag	65-85 sqft	22-42 sqft
Black 50lb. bag	58-76 sqft	20-38 sqft

TECHNICAL INFORMATION

ASTM C 936 Standard Specifications for Solid Concrete Interlocking Paving Units

Conforms to:

- C140 for Absorption 5% avg - 7% max
- Compressive Strength > 7,200 PSI avg.
- C67 for Freeze-thaw Durability
- C418 for Abrasion Durability
- Dimensional Accuracy +/- 3mm

Test results available upon request

Meets the U.S. Architectural & Transportation Barrier Compliance Board Slip-Resistance Surfaces Advisory Guidelines

TECHNICAL ADVANTAGES

ENDURACOLOR™

Refined surface and long-lasting colour



Factory sealed to provide integral surface protection from stains

DRIVE FRIENDLY

Can handle vehicular loads  
Ask about our base stabilization system

PRODUCT DATA

Stones & Bundling	Unit	SqFt Per				Per Bundle		Soldier LnFt Per			Sailor LnFt per			Units Per		Lbs Per	
	Thickness	Bundle	Layer	Section	Stone	Layers	Sections	Unit	Layer	Bundle	Unit	Layer	Bundle	SqFt	Bundle	Layer	Bundle
Georgetown Manufacturing																	
8"x16"	2 3/4" (70mm)	82.67	10.33		0.861	8	-	0.656	-	63.0	1.312	-	126.0	1.16	96	331	2,647

Notes: **Sold as full bundles only** on a refundable skid. All measurements are nominal. **Important: A urethane rubber paver mat must be used to prevent scuffing.** Contact your Unilock Territory Manager or call 1-800-UNILOCK for further information. \*For custom options, please contact your Unilock Territory Manager.

APPLICATIONS



Pedestrian



Residential Vehicular



Borders and Accents



Roof Decks



\*Wall pairing suggestion- U-CARA™ Wall or Lineo™ Dimensional Stone

SOLAR REFLECTIVE INDEX (SRI) TESTING DETAILS

Product	Solar Reflectance	SRI
Crema	0.43	49

LEED INFORMATION

Materials & Resources: LEED V4:

- Building Product Disclosure and Optimization
- Sourcing of Raw Materials - Sourcing of Raw Materials and Extraction • 1 point
- Sourcing of Raw Materials - Leadership Extraction Practices • 1 point
- Material Ingredient Reporting - Material Ingredient Reporting • 1 point
- Material Ingredient Reporting - Material Ingredient Optimization • 1 point
- Environmental Product Declaration • 1 point