

ARCHITECTURAL CAP AND COPING

THICKNESS 60MM
REGION OHIO








UNILOCK Exclusive Technologies

ENDURACOLOR




APPLICATIONS

Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.

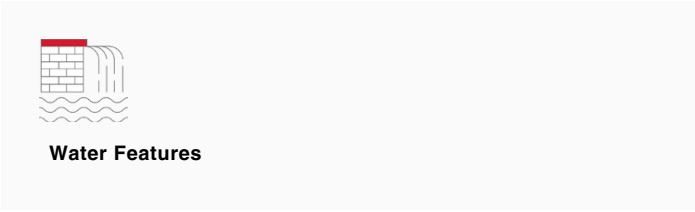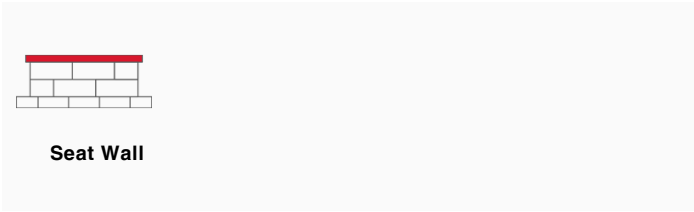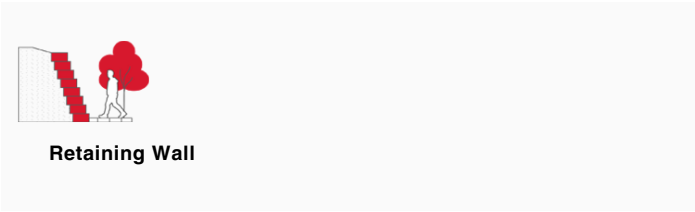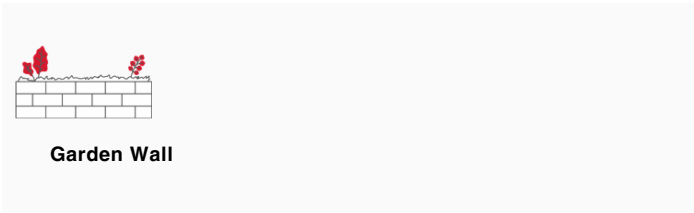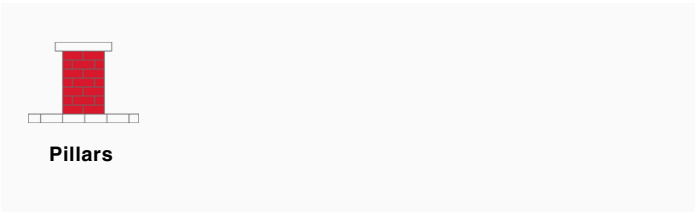



COLORS

BUFF
FINISH: CLASSIC



COPING
609mm x 60mm x 355mm
24" x 2 3/8" x 14"

CHARCOAL
FINISH: CLASSIC



COPING
609mm x 60mm x 355mm
24" x 2 3/8" x 14"

JOINT SPACING = 3MM

PACKAGING

	PILLAR CAP 28"	COPING
UNIT THICKNESS (MM)	76	60
UNITS PER BUNDLE	6	21
UNITS PER LAYER	1	1
LBS PER BUNDLE	1,098	1,428
LBS PER LAYER	183	68
LBS PER UNIT	183	68

INSTALLATION NOTES

APPLICATIONS – This non-slip surface texture is especially ideal for pool edge coping and step treads, but is also perfect for any project requiring wall coping and capping of pillars. Architectural Coping and Pillar Caps have similar attributes to our Arcana slabs, and are able to provide a complete pool deck solution.

CONNECTION – Non-mechanical connection. Use concrete adhesive specifically designed for connecting modular concrete units. Always read adhesive manufacturers' directions prior to gluing.

HANDLING – Placement of the cap onto the top of the pillar should be done with a suction lifting device (that can lift greater than 500 lbs.) or with heavy equipment straps suspended from a mini-excavator. For both the cap and coping, handle gently to avoid chipping edges.

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated July 16, 2025, 11:22 am

UNILOCK