

BRUSSELS DOUBLE FULLNOSE™

UNILOCK

TECH SHEET

THICKNESS 70MM

REGION OHIO



EDGE
ZERO EDGE DETAIL

UNILOCK Exclusive Technologies

■ CLASSIC COAT



COLORS

LIMESTONE
FINISH: ANTIQUED /
PROCESSED



STANDARD
150mm x 300mm x 70mm
5 7/8" x 11 7/8" x 2 3/4"

SANDSTONE
FINISH: ANTIQUED /
PROCESSED




STANDARD
150mm x 300mm x 70mm
5 7/8" x 11 7/8" x 2 3/4"

SIERRA
FINISH: ANTIQUED /
PROCESSED



STANDARD
150mm x 300mm x 70mm
5 7/8" x 11 7/8" x 2 3/4"

DARK CHARCOAL
FINISH: ANTIQUED /
PROCESSED



STANDARD
150mm x 300mm x 70mm
5 7/8" x 11 7/8" x 2 3/4"

MOCHA BROWN
FINISH: ANTIQUED /
PROCESSED




STANDARD
150mm x 300mm x 70mm
5 7/8" x 11 7/8" x 2 3/4"

JOINT SPACING = 2MM

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

UNIVERSAL COPING

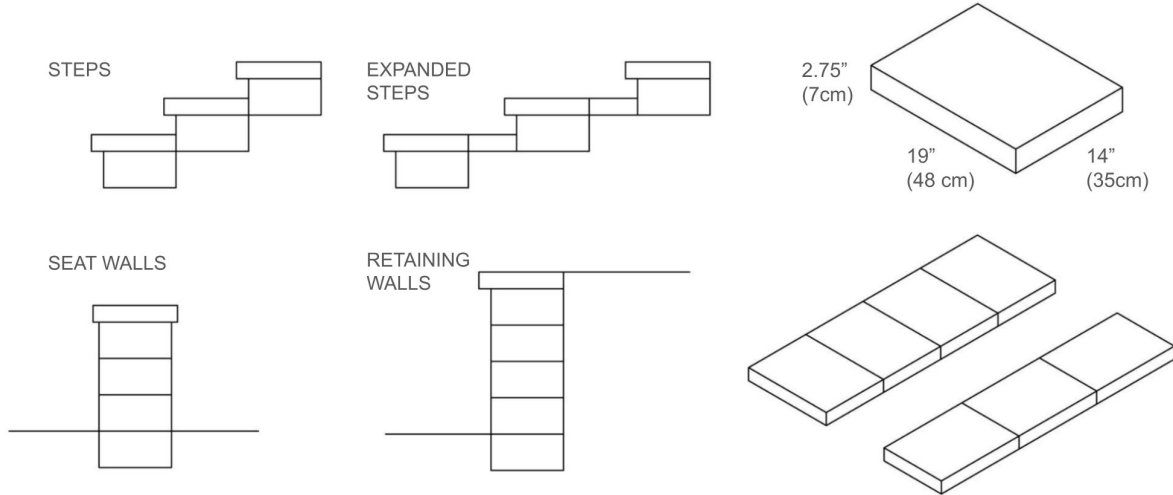

Note:

- Install in Soldier or Sailor fashion
- Adhere using concrete adhesive
- Can be used on any Unilock wall system

PACKAGING

	STANDARD
UNIT THICKNESS (MM)	70
LAYERS PER BUNDLE	8
UNITS PER BUNDLE	160
UNITS PER LAYER	20
LBS PER BUNDLE	2,376.19
LBS PER LAYER	297.02
LBS PER UNIT	14.85

INSTALLATION NOTES

BRUSSELS DOUBLE FULLNOSE™

Applications – Coping for steps, pool edges, planters and walls. Units are designed for straight applications but radius applications can be achieved by cutting tapered units.

Connection – non-mechanical connection. Use appropriate concrete adhesive for connection between units. Install with tight joints or 3/16" gap between units and amend with an exterior latex caulking. Cutting may be required; a diamond blade saw is required to cut coping properly. Glue all coping using a specially formulated concrete adhesive that is strong and will not break down over time. Always read adhesive manufacturers' directions prior to gluing.

Handling – Handle un-tumbled versions of this coping gently to avoid chipping edges.

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated October 26, 2024, 11:58 am

