
BRUSSELS FULLNOSE™

THICKNESS 70MM REGION ONTARIO







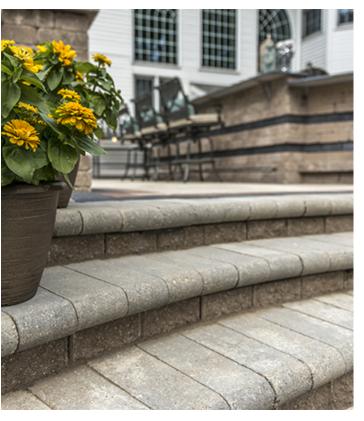

EDGE ZERO EDGE DETAIL



BRUSSELS FULLNOSE™

COLORS



SANDSTONE SRI = 46

FINISH: ANTIQUED / PROCESSED



LIMESTONE FINISH: ANTIQUED / PROCESSED





STANDARD 150mm x 300mm x 70mm 5 7/8" x 11 7/8" x 2 3/4"

STANDARD 150mm x 300mm x 70mm


5 7/8" x 11 7/8" x 2 3/4"



JOINT SPACING = 2MM

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

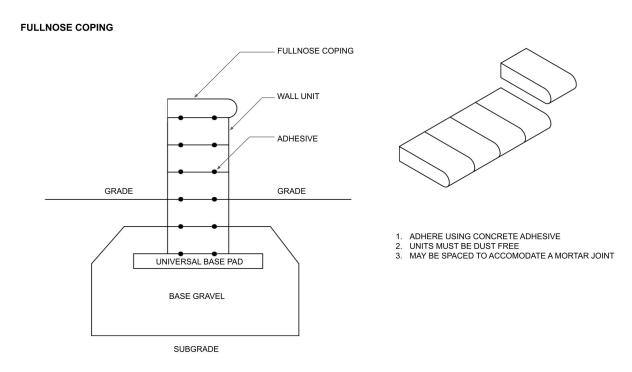

PACKAGING



	STANDARD
UNIT THICKNESS (MM)	70
LAYERS PER BUNDLE	8
UNITS PER BUNDLE	192
UNITS PER LAYER	24
LBS PER BUNDLE	2,841
LBS PER LAYER	355.13
LBS PER UNIT	14.80

INSTALLATION NOTES

Handling and Installation - Care must be taken to avoid tossing stones so that they bang against each other. Damage to the surface appearance can happen if handled too rough.

Adhesives – Any concrete adhesive from your hardscape or building supplier. Units can be mortared in, but concrete adhesives are always stronger.

Joint compounds – Use any quality exterior latex joint caulking. Be sure to space units apart 1/4". For mortar joints, space units apart approximately 3/8" to 1/2".

Cleaners – Use any concrete cleaner approved for use on paving stone. Follow manufacturer's dilution rates and application procedures. Always test in a small area to ensure desired results before cleaning entire area.

Sealers

Product may be sealed but it is not absolutely required

Use any concrete cleaner approved for use on paving stone. Select type for desired sheen. To minimize the possibility of slipping, avoid high gloss for steps and pool coping

NOTE: Always clean surface with a paver cleaner prior to sealing.

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated June 9, 2025, 7:29 pm

