

CAMELOT™ PREMIER

UNILOCK®

TECH SHEET



THICKNESS 60MM

REGION BOSTON



APPLICATIONS

Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.

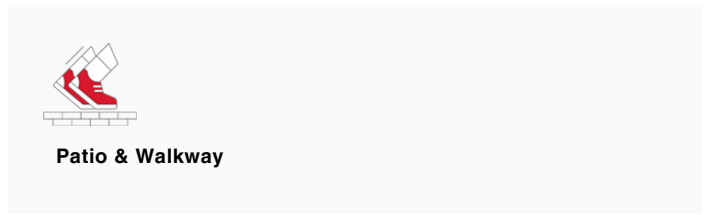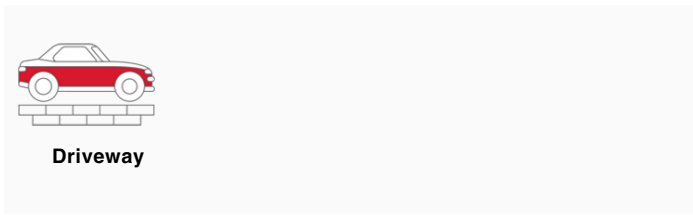

COLORS

DARK CHARCOAL FINISH: SMOOTH PREMIER



RECTANGLE
160mm x 240mm x 60mm
6 3/8" x 9 1/2" x 2 3/8"

ALMOND GROVE FINISH: SMOOTH PREMIER




RECTANGLE
160mm x 240mm x 60mm
6 3/8" x 9 1/2" x 2 3/8"



SQUARE
159.8mm x 159.8mm x 60mm
6 3/8" x 6 3/8" x 2 3/8"

GRANITE FUSION FINISH: SMOOTH PREMIER




SQUARE
159.8mm x 159.8mm x 60mm
6 3/8" x 6 3/8" x 2 3/8"



RECTANGLE
160mm x 240mm x 60mm
6 3/8" x 9 1/2" x 2 3/8"

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

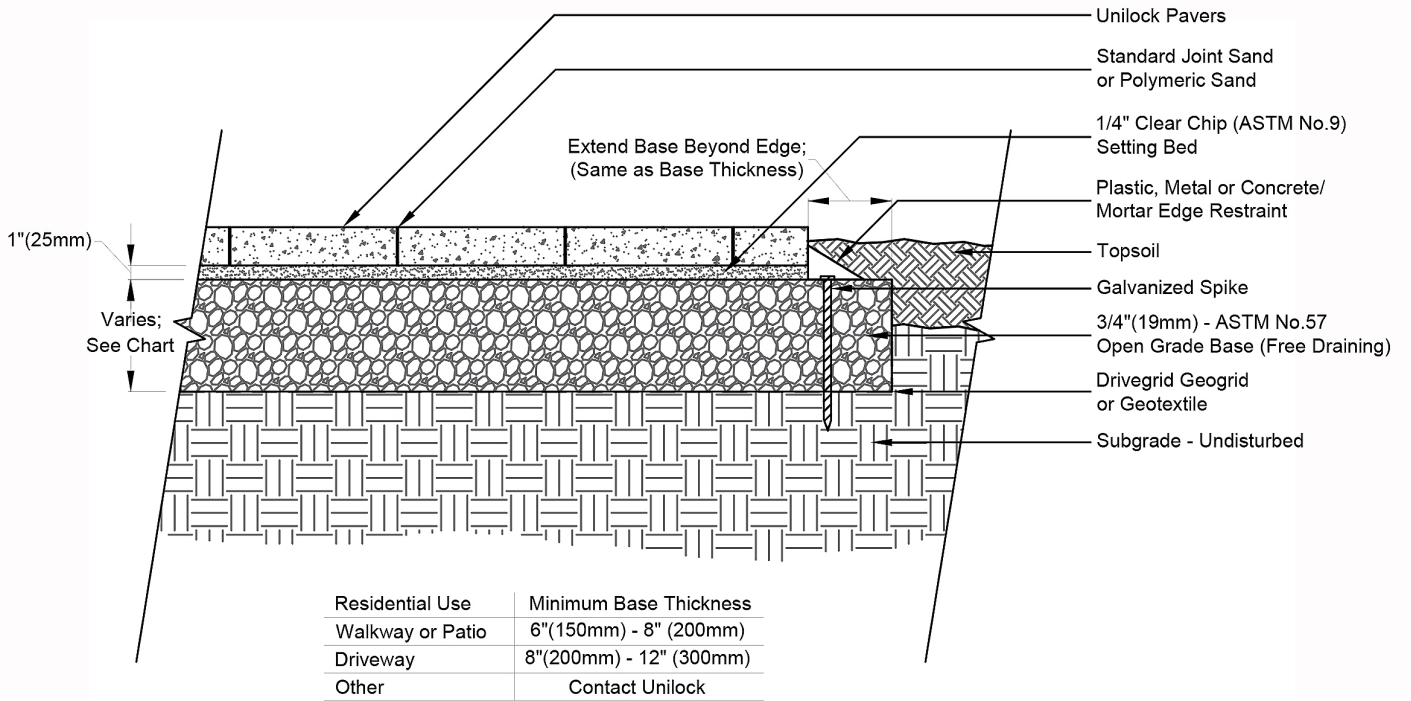

PACKAGING

	RECTANGLE	SQUARE
UNIT THICKNESS (MM)	60	60
LAYERS PER BUNDLE	9	10
SQ FT PER BUNDLE	111.33	115.50
SQ FT PER LAYER	12.37	11.55
SQ FT PER UNIT	0.41	0.28
UNITS PER BUNDLE	270	420
UNITS PER LAYER	30	42
LIN FT PER BUNDLE - SOLDIER	132.87	206.69
LIN FT PER LAYER - SOLDIER	14.76	20.67
LIN FT PER UNIT - SOLDIER	0.49	0.49
LIN FT PER BUNDLE - SAILOR	199.31	206.69
LIN FT PER LAYER - SAILOR	22.15	20.67
LBS PER BUNDLE	3,117.24	3,232.96
LBS PER LAYER	346.36	323.30
LBS PER UNIT	11.55	7.70

INSTALLATION NOTES

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated March 13, 2025, 7:37 pm

