

LEDGESTONE™

UNILOCK®

TECH SHEET

THICKNESS 150MM

REGION OHIO



UNILOCK® Exclusive Technologies

ENDURACOLOR



APPLICATIONS

Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.




Fire Feature




Garden Wall




Outdoor Kitchen



Pillars




Retaining Wall



Seat Wall



Water Features



Step


COLORS

BUFF
FINISH: FLAGSTONE



STEP 48"X24"
1,220mm x 150mm x 610mm
48" x 5 7/8" x 24"

GREY
FINISH: FLAGSTONE





STEP 48"X24"
1,220mm x 150mm x 610mm
48" x 5 7/8" x 24"

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

LEDGESTONE STEPS

- 1. UNITS ARE PLACED DIRECTLY OVER GRAVEL BASE
- 2. ADHESIVE - OPTIONAL
- 3. 0.5 DEGREE FORWARD SLOPE FOR DRAINAGE

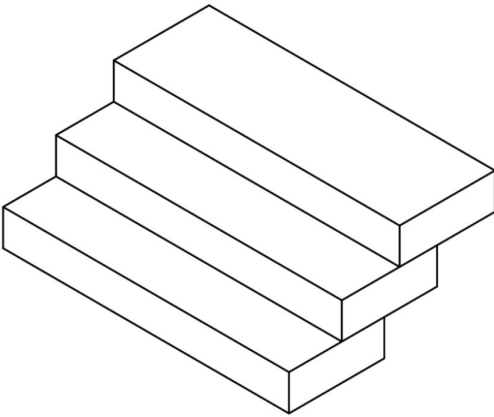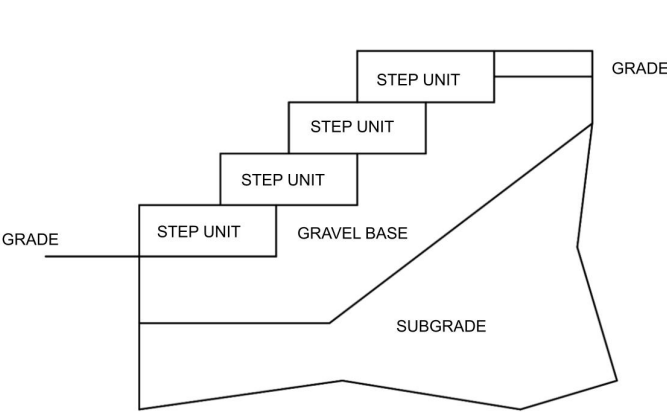

PACKAGING

	COPING	CLOSED-END COPING	PILLAR CAP 24"	FULLNOSE COPING	LARGE COPING	LARGE CLOSED-END COPING	FIREPIT COPING
UNIT THICKNESS (MM)	70	70	100	60	70	70	65
LAYERS PER BUNDLE	4	4	5	4	4	4	6
FCFT PER BUNDLE	5.52	5.52	3.28	1.58	6.87	6.87	-
FCFT PER LAYER	1.38	1.38	0.66	0.39	1.72	1.72	-
FCFT PER UNIT	0.46	0.46	0.66	0.39	0.57	0.57	-
UNITS PER BUNDLE	12	12	5	4	12	12	24
UNITS PER LAYER	3	3	1	1	3	3	4
LBS PER BUNDLE	771.96	795.96	795.01	667.38	1,128	1,116	879
LBS PER LAYER	192.99	198.99	159	166.85	282	279	146.50
LBS PER UNIT	64.33	66.33	159	166.85	94	93	36.63

PACKAGING

	STEP 48"X24"	PILLAR CAP 29"
UNIT THICKNESS (MM)	150	100
LAYERS PER BUNDLE	3	5
FCFT PER BUNDLE	5.91	-
FCFT PER LAYER	1.97	-
FCFT PER UNIT	1.97	-
UNITS PER BUNDLE	3	5
UNITS PER LAYER	1	1
LBS PER BUNDLE	1,721	1,030
LBS PER LAYER	573.67	206
LBS PER UNIT	573.67	206

INSTALLATION NOTES

Ledgestone is a universal coping system that is turning heads with its remarkably natural appearance. Featuring pitched edges to work interchangeably with any wall, the design selections are optimized.

Applications – Coping for steps, pool edges, planters and walls. Units are designed for straight applications but radius applications can be achieved by cutting tapered units.

Connection – non-mechanical connection. Use appropriate concrete adhesive for connection between units. Install with tight joints or 3/16" gap between units and amend with an exterior latex caulking. Cutting may be required; a diamond blade saw is required to cut coping properly. Glue all coping using a specially formulated concrete adhesive that is strong and will not break down over time. Always read adhesive manufacturers' directions prior to gluing. NOTE: always scarify (rough-up) the back surface of the coping units with a grinder prior to gluing so that you will have a strong secure connection.

Note: always slope Ledgestone units slightly (from front to back or back to front) to prevent pooling of water on the surface.

Handling – Handle gently to avoid chipping edges.

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated May 12, 2025, 11:49 am

