

LIMESTONE

UNILOCK

TECH SHEET

THICKNESS 64MM

REGION BOSTON



UNILOCK Exclusive Technologies

ENDURACOLOR



APPLICATIONS


Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.



Patio & Walkway



Step



Pillars

COLORS

BLACK RIVER FINISH: NATURAL STONE




PILLAR CAP 28"
710mm x 710mm x 64mm
28" x 28" x 2 5/8"



PILLAR CAP 24"
600mm x 600mm x 64mm
23 5/8" x 23 5/8" x 2 5/8"

HEARTHSTONE FINISH: NATURAL STONE




PILLAR CAP 24"
600mm x 600mm x 64mm
23 5/8" x 23 5/8" x 2 5/8"

WINTER MIST FINISH: ANTIQUED / PROCESSED




24"X24"
600mm x 600mm x 64mm
23 5/8" x 23 5/8" x 2 5/8"


LAYING PATTERNS

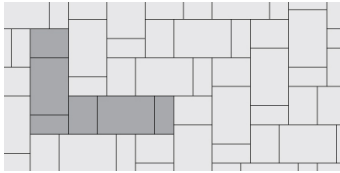


LP NATURALSTONE MULTI UNIT J

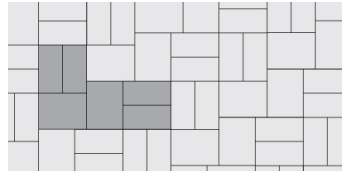


LP NATURALSTONE MULTI UNIT D

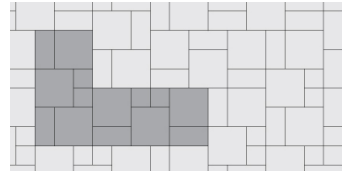


LP NATURALSTONE MULTI UNIT C

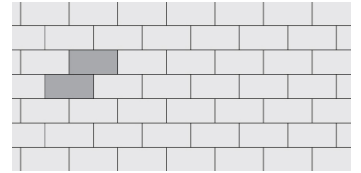


LP NATURALSTONE 12X24 RB A

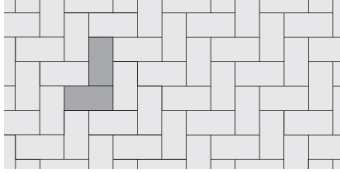


LP NATURALSTONE 12X24 HB O

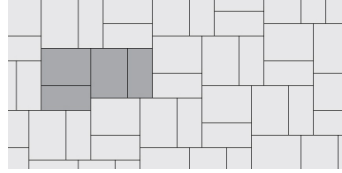


LP NATURALSTONE MULTI UNIT M

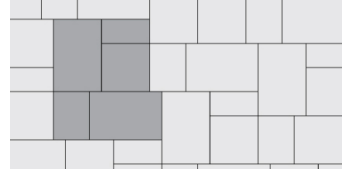


LP NATURALSTONE MULTI UNIT E

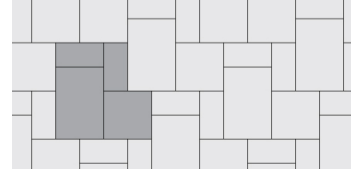


LP NATURALSTONE MULTI UNIT G

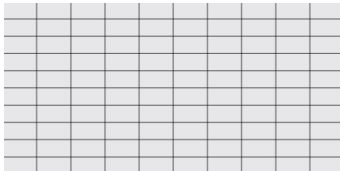


LP NATURALSTONE 12X24 SB Q

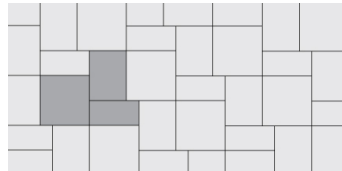


LP NATURALSTONE MULTI UNIT L

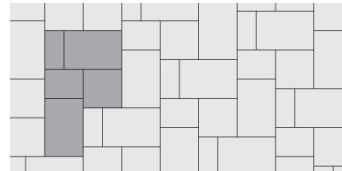


LP NATURALSTONE MULTI UNIT H

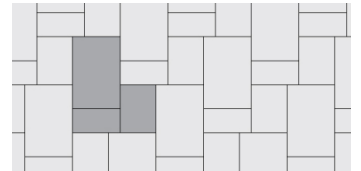


LP NATURALSTONE MULTI UNIT K

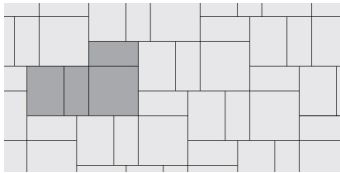


LP NATURALSTONE MULTI UNIT N

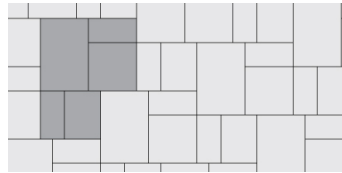


LP NATURALSTONE MULTI UNIT F

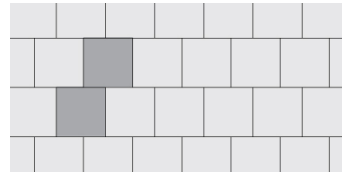

LP NATURALSTONE 24X24 RB B

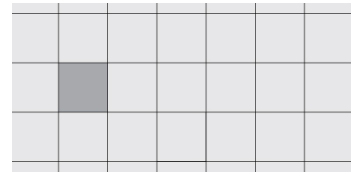


LP NATURALSTONE 24X24 SB P

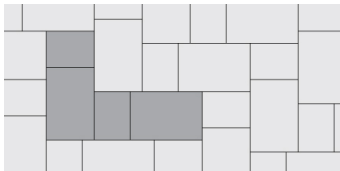

LP NATURALSTONE MULTI UNIT I

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

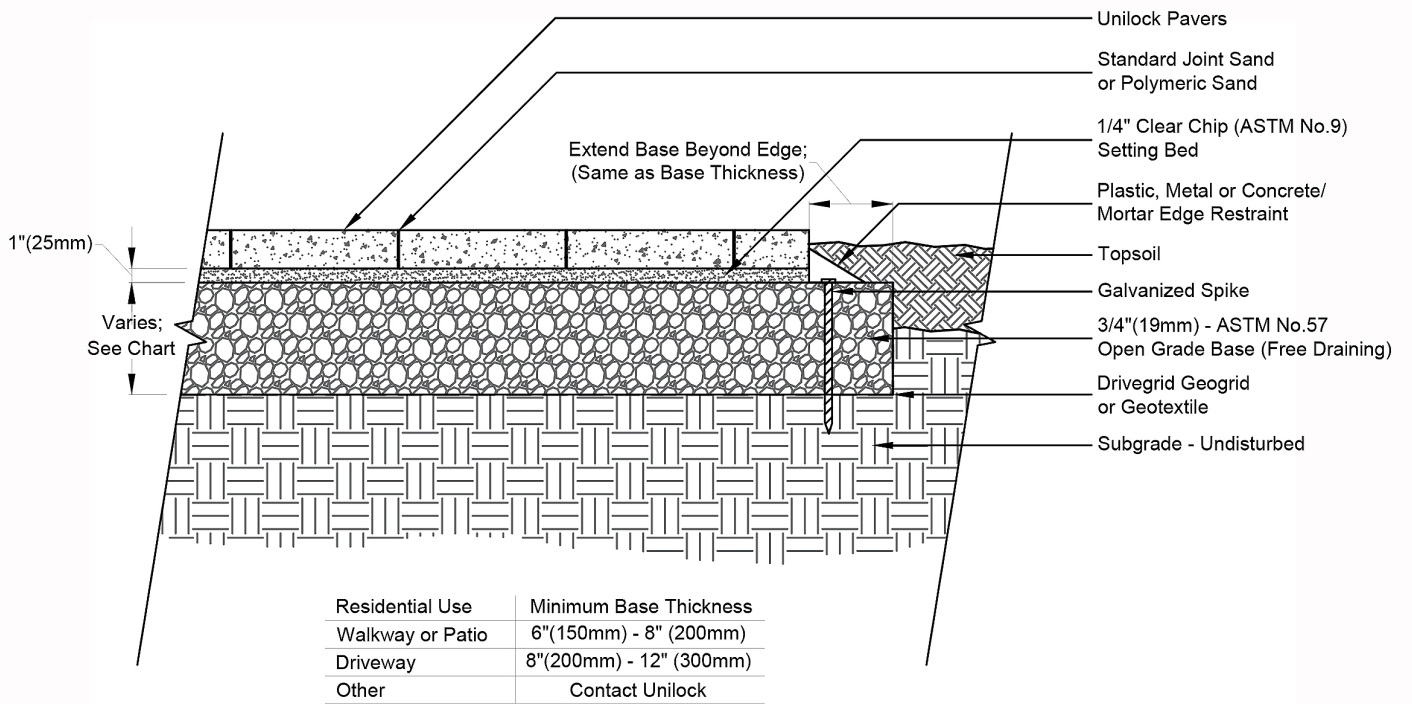

PACKAGING

	(38) PROJECT PACK 3 RANDOM BUNDLE	STEP 48"X16"	12"X24"	24"X24"	COPING ROCK FACED	18"X24"	24"X36"
UNIT THICKNESS (MM)	38	150	22	22	50	22	22
SQ FT PER UNIT	3.75	5.33	2	4	3	6	-
UNITS PER CRATE	32	6	90	40	20	62	30
UNITS PER LAYER	32	-	-	-	-	-	-
LIN FT PER UNIT - SOLDIER	4	-	-	-	-	-	-
LBS PER CRATE	2,508	2,526.47	2,149	1,910.40	2,116.42	2,221	2,149.20
LBS PER UNIT	78.38	421.08	23.88	47.76	105.82	35.82	71.64

PACKAGING

	COPING ROCK FACED	24"X24"	PILLAR CAP 28"	PILLAR CAP 24"	STEP 72"X16"	COPING ROCK FACED	COPING BULLNOSE	COPING ROCK FACED
UNIT THICKNESS (MM)	50	64	64	64	150	50	50	50
SQ FT PER UNIT	8	-	-	-	-	-	-	-
UNITS PER CRATE	12	14	12	14	4	16	12	10
LIN FT PER UNIT - SOLDIER	6	-	-	-	-	-	-	-
LBS PER CRATE	1,904.77	1,913.59	2,605.80	1,913.59	2,513.24	2,258	1,905	2,094.40
LBS PER UNIT	158.73	136.69	186.13	136.69	628.31	141.13	158.75	209.44

INSTALLATION NOTES

Limestone Slabs

Limestone is a thinly quarried slab with sharp zero-bevel edges. Limestone can be used residentially or commercially, but is not suitable for any vehicular applications. Porcelain can also be used in commercial roof deck pedestal applications where a thinner/lighter module is specified. Consult the project engineer for specific installation instructions for roof deck applications.

OVER CONCRETE INSTALLATION – Limestone slabs must be installed on a stable base. The best way to achieve this is to mortar the units on to a poured concrete pad - preferably a new concrete pad, although existing concrete can be used. It is recommended that you have a minimum 4" of ¾" crusher run gravel under the pad for support and drainage, (use any road base gravel in accordance with ASTM-D2940) compacted to 98% Standard Proctor Density (SPD).

Special Notes: Concrete Direct Overlay –

1. Concrete integrity – concrete must be in good condition, and not crumbling
2. Drainage slope – concrete below must be sloped away from all buildings and structures
3. Base drainage - the area below the concrete must not be subject to frost movement
4. Jointing – Masonry mortar.

HANDLING – Exercise caution when handling this product, as contact between its zero-bevel edges may cause damage.

EDGE RESTRAINT – not required when installed over concrete. Use manufacturer's edge restraint system for high density foam installation.

CLEANERS – Limestone slabs clean with simple soap and water. If the stains are more persistent, only use Uni-Care Stone cleaning products. Unicare Products

Unilock has partnered with United Stonecare, a UK company with over 30 years experience in the field of specialized cleaner and sealer products for natural stone.

Visit the website by clicking on the button below or contact us for information and guidance on how to ensure your external stone are easy to maintain and retain their beautiful appearance. <https://www.unicare-products.com/>

caution – Limestone can be slippery when wet.

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated April 1, 2025, 7:00 pm