


# MATTONI™

**UNILOCK®**

TECH SHEET

THICKNESS 60MM

REGION CHICAGO



EDGE  
ZERO EDGE DETAIL


**UNILOCK®** Exclusive Technologies

ENDURACOLOR



## APPLICATIONS

Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.



**Borders and Accents**



**Driveway**



**Patio & Walkway**

## COLORS

**DARK CHARCOAL**  
FINISH: SMOOTH  
PREMIER



**STANDARD**  
60mm x 240mm x 60mm  
2 3/8" x 9 1/2" x 2 3/8"

**SABLE**  
FINISH: SMOOTH  
PREMIER



**STANDARD**  
60mm x 240mm x 60mm  
2 3/8" x 9 1/2" x 2 3/8"


**COCOA BROWN**  
FINISH: SMOOTH  
PREMIER



**STANDARD**  
60mm x 240mm x 60mm  
2 3/8" x 9 1/2" x 2 3/8"

**GRANITE FUSION**  
**SRI = 29**

**FINISH: SMOOTH**  
**PREMIER**




**STANDARD**


60mm x 240mm x 60mm  
2 3/8" x 9 1/2" x 2 3/8"

## LAYING PATTERNS


---



LP MATTONI HB C




LP MATTONI DHB D

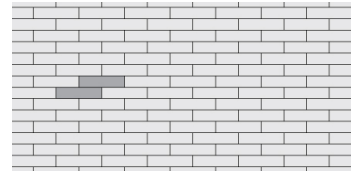

LP MATTONI RB A

**TYPICAL CROSS SECTION**

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

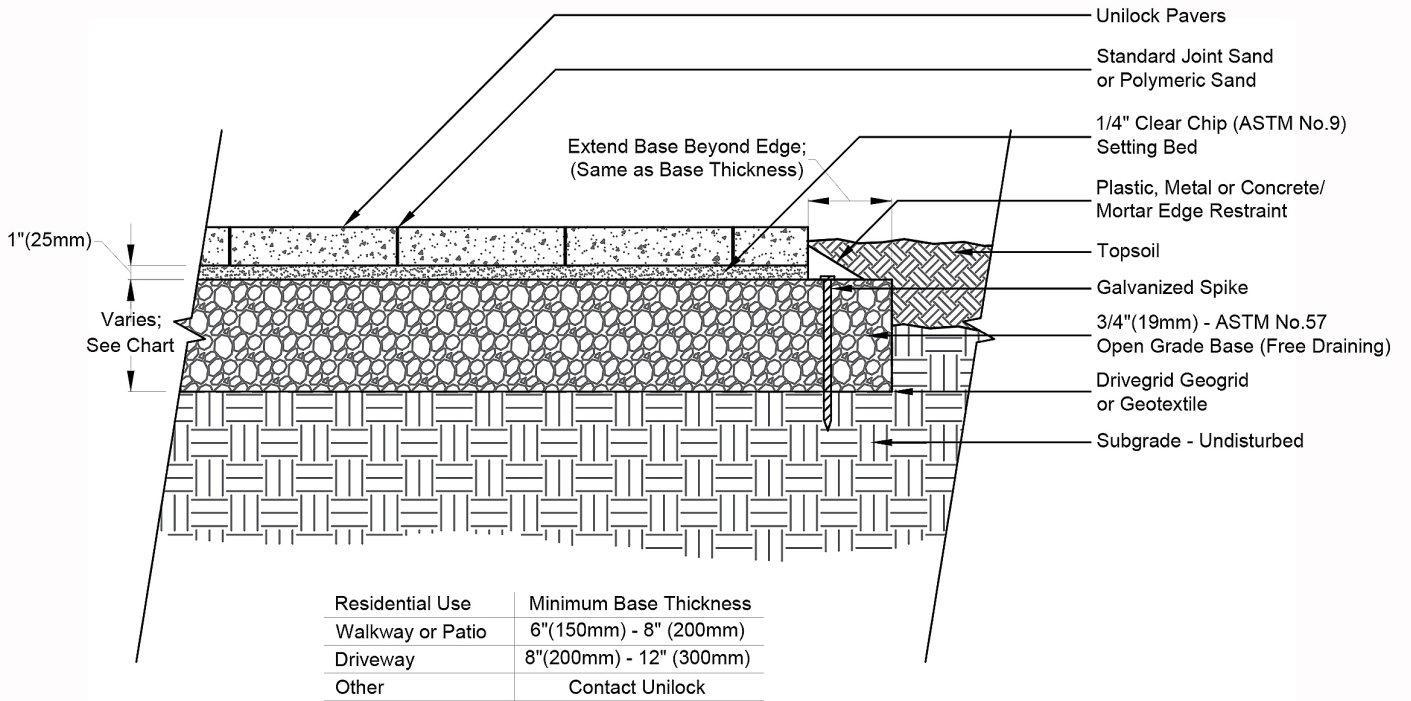

**PACKAGING**

	STANDARD
UNIT THICKNESS (MM)	60
LAYERS PER BUNDLE	10
LBS PER BUNDLE	2,965.33
LBS PER LAYER	296.53

## INSTALLATION NOTES

---

rates and application procedures. Always test a small area to make sure the results are as expected.  
Sealers

- Product may be sealed for aesthetic or cleanliness reasons but it is not required
- Use any sealer approved for concrete pavers
- Select type for desired aesthetics
- Product must be cleaned before sealing
- Always read and follow manufacturer's application procedures
- Always test a small area to make sure the results are as expected

The Americans with Disabilities Act Accessibility Guidelines (ADAAG) provides measurable criteria to determine compliance, not individual product evaluation. Gaps, joints or openings, greater than ½" horizontal and ¼" vertical should be avoided as they can disrupt wheelchair maneuvering (United States Access Board – Guidelines and Standards).

---

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated December 22, 2024, 11:35 am

The UNILOCK logo is displayed in a bold, red, sans-serif font. The letter 'U' is stylized with a white diagonal slash through it.