

MATTONI™

UNILOCK®

TECH SHEET

THICKNESS 60MM

REGION OHIO



EDGE
ZERO EDGE DETAIL


UNILOCK® Exclusive Technologies

ENDURACOLOR



APPLICATIONS

Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.



Borders and Accents



Driveway



Patio & Walkway

COLORS

DARK CHARCOAL
FINISH: SMOOTH
PREMIER



STANDARD
60mm x 240mm x 60mm
2 3/8" x 9 1/2" x 2 3/8"


SABLE
FINISH: SMOOTH
PREMIER



STANDARD
60mm x 240mm x 60mm
2 3/8" x 9 1/2" x 2 3/8"

GRANITE FUSION
SRI = 29

FINISH: SMOOTH
PREMIER



STANDARD
60mm x 240mm x 60mm
2 3/8" x 9 1/2" x 2 3/8"


**COCOA BROWN
FINISH: SMOOTH
PREMIER**




STANDARD
60mm x 240mm x 60mm
2 3/8" x 9 1/2" x 2 3/8"

JOINT SPACING = 4MM


LAYING PATTERNS



LP MATTONI DHB D




LP MATTONI HB C

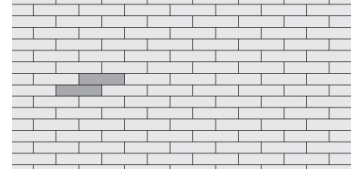

LP MATTONI RB A

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

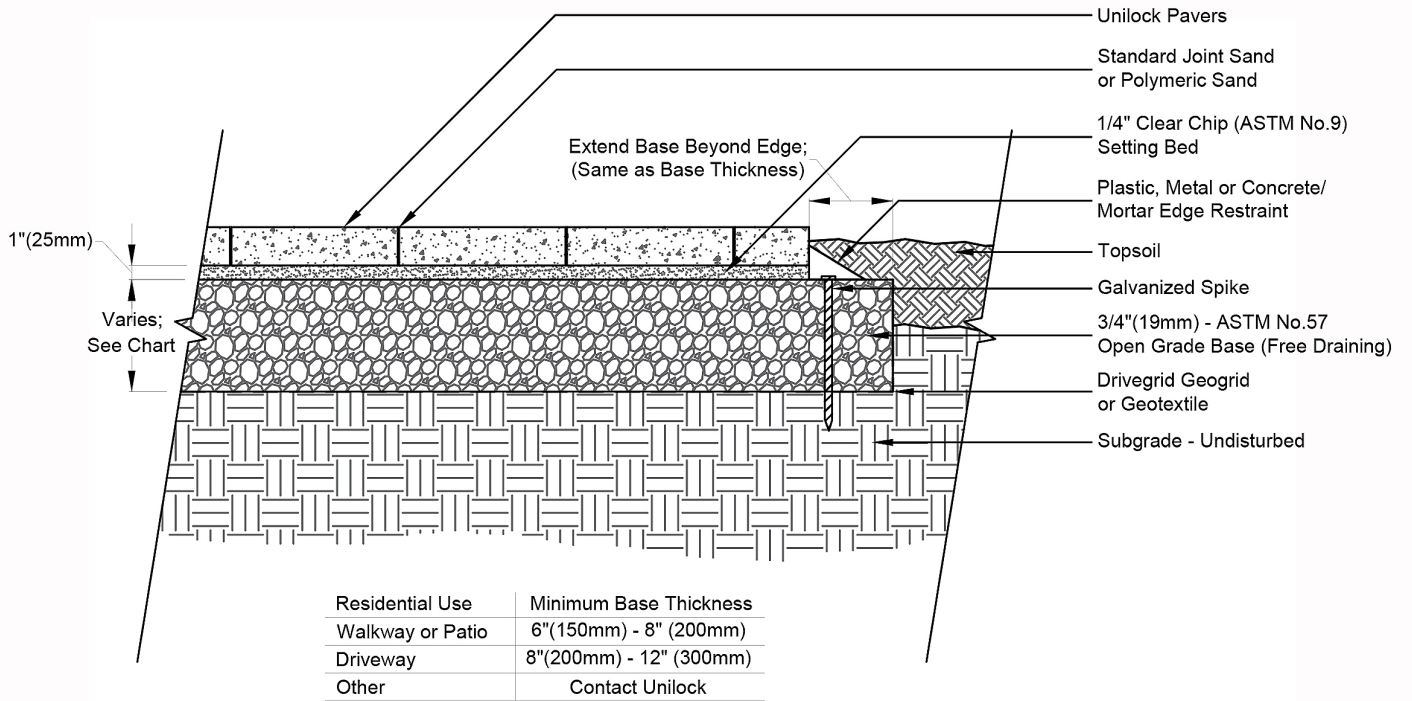

PACKAGING

	STANDARD (ANTIQUED / PROCESSED)	STANDARD (SMOOTH PREMIER)
UNIT THICKNESS (MM)	70	60
LAYERS PER BUNDLE	8	10
SQ FT PER BUNDLE	89.28	111.60
SQ FT PER LAYER	11.16	11.16
SQ FT PER UNIT	0.16	0.16
UNITS PER BUNDLE	576	720
UNITS PER LAYER	72	72
LIN FT PER BUNDLE - SOLDIER	113.39	141.73
LIN FT PER LAYER - SOLDIER	14.17	14.17
LIN FT PER UNIT - SOLDIER	0.20	0.20
LIN FT PER BUNDLE - SAILOR	453.54	566.93
LIN FT PER LAYER - SAILOR	56.69	56.69
LBS PER BUNDLE	2,859	3,062.89
LBS PER LAYER	357.38	306.29
LBS PER UNIT	4.96	4.25

INSTALLATION NOTES

rates and application procedures. Always test a small area to make sure the results are as expected.
Sealers

- Product may be sealed for aesthetic or cleanliness reasons but it is not required
- Use any sealer approved for concrete pavers
- Select type for desired aesthetics
- Product must be cleaned before sealing
- Always read and follow manufacturer's application procedures
- Always test a small area to make sure the results are as expected

The Americans with Disabilities Act Accessibility Guidelines (ADAAG) provides measurable criteria to determine compliance, not individual product evaluation. Gaps, joints or openings, greater than ½" horizontal and ¼" vertical should be avoided as they can disrupt wheelchair maneuvering (United States Access Board – Guidelines and Standards).

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated December 22, 2024, 12:01 pm

The UNILOCK logo is displayed in a bold, red, sans-serif font. The letter 'U' is stylized with a white diagonal slash through it.