# **MATTONI<sup>TM</sup>**

UNILOCK'
TECH SHEET

THICKNESS 70MM

REGION BOSTON







EDGE ZERO EDGE DETAIL



ENDURACOLOR



### **APPLICATIONS**



Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.



**Borders and Accents** 



Driveway



Patio & Walkway

### **COLORS**

#### DARK CHARCOAL FINISH: SMOOTH PREMIER





STANDARD

60mm x 240mm x 70mm 2 3/8" x 9 1/2" x 2 3/4"







STANDARD

60mm x 240mm x 70mm 2 3/8" x 9 1/2" x 2 3/4"

SABLE FINISH: SMOOTH PREMIER





STANDARD

60mm x 240mm x 70mm 2 3/8" x 9 1/2" x 2 3/4"

#### GRANITE FUSION FINISH: SMOOTH PREMIER






**STANDARD** 60mm x 240mm x 70mm 2 3/8" x 9 1/2" x 2 3/4"



## **LAYING PATTERNS**




LP MATTONI DHB D



#### **TYPICAL CROSS SECTION**

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

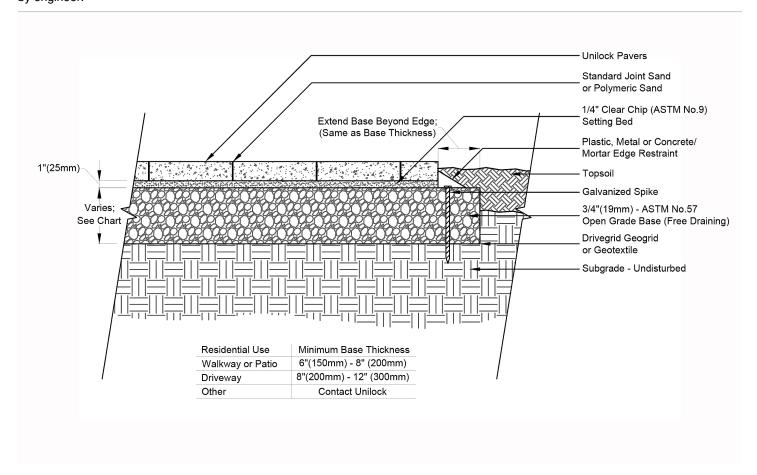





|                     | STANDARD |
|---------------------|----------|
| UNIT THICKNESS (MM) | 70       |
| LAYERS PER BUNDLE   | 8        |
| SQ FT PER BUNDLE    | 86.80    |
| SQ FT PER LAYER     | 10.85    |
| SQ FT PER UNIT      | 0.16     |
| UNITS PER BUNDLE    | 560      |
| UNITS PER LAYER     | 70       |
| LBS PER BUNDLE      | 2,797    |
| LBS PER LAYER       | 349.62   |
| LBS PER UNIT        | 4.99     |

#### **INSTALLATION NOTES**



rates and application procedures. Always test a small area to make sure the results are as expected. Sealers

- · Product may be sealed for aesthetic or cleanliness reasons but it is not required
- Use any sealer approved for concrete pavers
- Select type for desired aesthetics
- · Product must be cleaned before sealing
- Always read and follow manufacturer's application procedures
- Always test a small area to make sure the results are as expected

The Americans with Disabilities Act Accessibility Guidelines (ADAAG) provides measurable criteria to determine compliance, not individual product evaluation. Gaps, joints or openings, greater than ½" horizontal and ¼" vertical should be avoided as they can disrupt wheelchair maneuvering (United States Access Board – Guidelines and Standards).

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated December 20, 2024, 12:56 pm

