


MATTONI™

UNILOCK®

TECH SHEET

THICKNESS 70MM

REGION NEW YORK






EDGE
ZERO EDGE DETAIL



APPLICATIONS

Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.

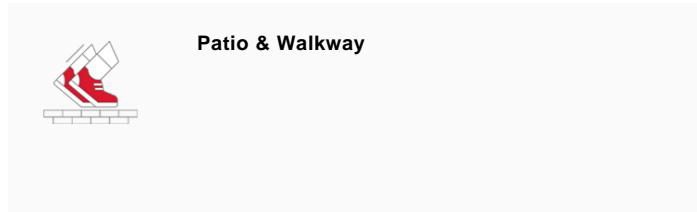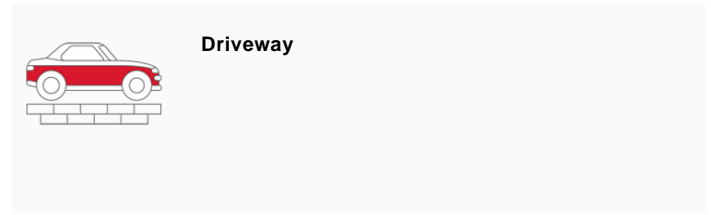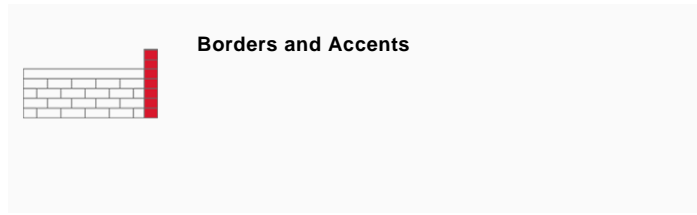

COLORS

DARK CHARCOAL
FINISH: SMOOTH
PREMIER



STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"

COCOA BROWN
FINISH: SMOOTH
PREMIER




STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"

SABLE
FINISH: SMOOTH
PREMIER




STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"

**GRANITE BLEND
FINISH: SMOOTH
PREMIER**



STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"


LAYING PATTERNS



LP MATTONI DHB D

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

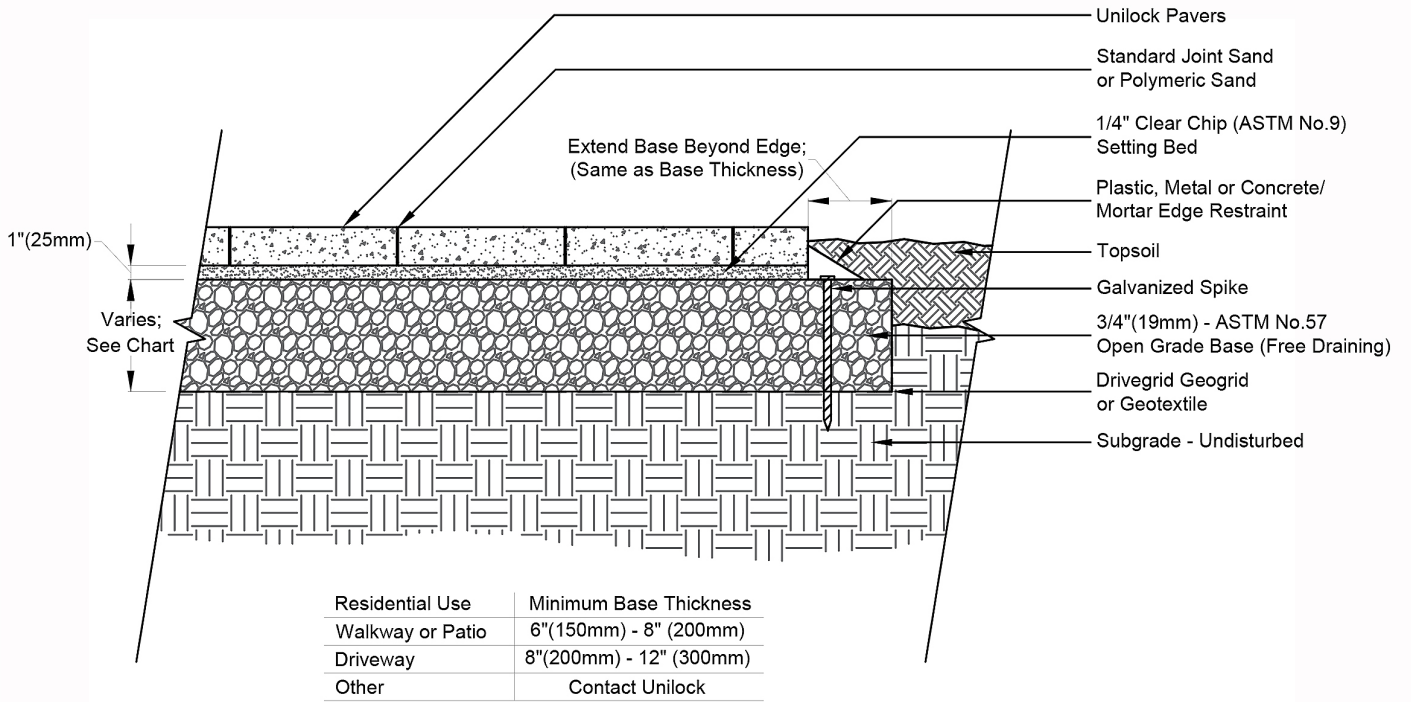

	STANDARD
UNIT THICKNESS (MM)	70
LAYERS PER BUNDLE	8
SQ FT PER BUNDLE	86.80
SQ FT PER LAYER	10.85
SQ FT PER UNIT	0.16
UNITS PER BUNDLE	560
UNITS PER LAYER	70
LBS PER BUNDLE	2,797
LBS PER LAYER	349.62
LBS PER UNIT	4.99

INSTALLATION NOTES

rates and application procedures. Always test a small area to make sure the results are as expected.
Sealers

- Product may be sealed for aesthetic or cleanliness reasons but it is not required
- Use any sealer approved for concrete pavers
- Select type for desired aesthetics
- Product must be cleaned before sealing
- Always read and follow manufacturer's application procedures
- Always test a small area to make sure the results are as expected

The Americans with Disabilities Act Accessibility Guidelines (ADAAG) provides measurable criteria to determine compliance, not individual product evaluation. Gaps, joints or openings, greater than ½" horizontal and ¼" vertical should be avoided as they can disrupt wheelchair maneuvering (United States Access Board – Guidelines and Standards).

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated October 26, 2024, 12:20 pm

The UNILOCK logo is displayed in a bold, red, sans-serif font. The letter 'U' is stylized with a white diagonal cutout on its left side.