

UMBRIANO®

UNILOCK®

TECH SHEET

THICKNESS 60MM

REGION OHIO




EDGE
ZERO EDGE DETAIL







UNILOCK® Exclusive Technologies

- ENDURACOLOR
- EASYCLEAN™
- COLORFUSION™



APPLICATIONS


Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.

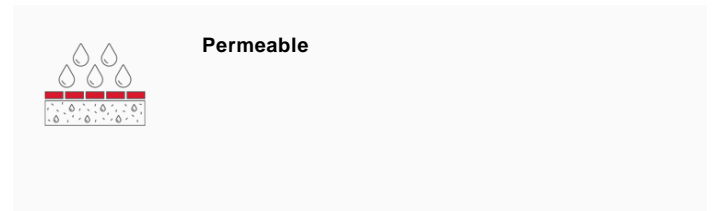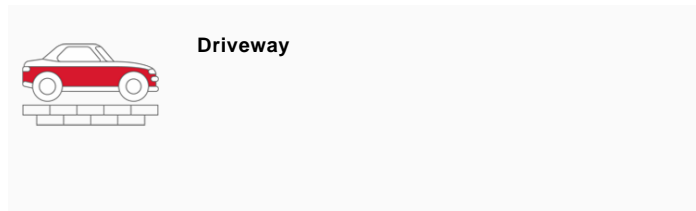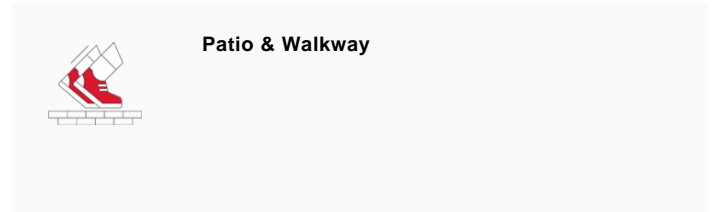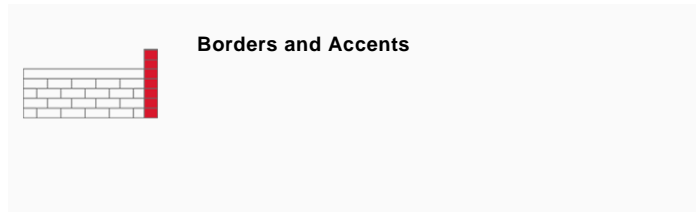

COLORS

FRENCH GREY
SRI = 17

FINISH: UMBRIANO - MOTTLED




LARGE RECTANGLE
350mm x 546mm x 60mm
13 7/8" x 21 1/2" x 2 3/8"



SQUARE
360mm x 360mm x 60mm
14 1/4" x 14 1/4" x 2 3/8"




SMALL RECTANGLE
180mm x 360mm x 60mm
7" x 14 1/4" x 2 3/8"



18"X36"
450mm x 900mm x 60mm
17 3/4" x 35 1/2" x 2 3/8"



8"X8" HEX
205mm x 205mm x 60mm
8" x 8" x 2 3/8"




XL
540mm x 900mm x 60mm
21 1/4" x 35 1/2" x 2 3/8"

WINTER MARVEL

SRI = 38

FINISH: UMBRIANO - MOTTLED




LARGE RECTANGLE
350mm x 546mm x 60mm
13 7/8" x 21 1/2" x 2 3/8"



SQUARE
360mm x 360mm x 60mm
14 1/4" x 14 1/4" x 2 3/8"



SMALL RECTANGLE
180mm x 360mm x 60mm
7" x 14 1/4" x 2 3/8"



XL
540mm x 900mm x 60mm
21 1/4" x 35 1/2" x 2 3/8"



18"X36"
450mm x 900mm x 60mm
17 3/4" x 35 1/2" x 2 3/8"



8"X8" HEX
205mm x 205mm x 60mm
8" x 8" x 2 3/8"

SUMMER WHEAT

SRI = 48

FINISH: UMBRIANO - MOTTLED




LARGE RECTANGLE
350mm x 546mm x 60mm
13 7/8" x 21 1/2" x 2 3/8"



SQUARE
360mm x 360mm x 60mm
14 1/4" x 14 1/4" x 2 3/8"



SMALL RECTANGLE
180mm x 360mm x 60mm
7" x 14 1/4" x 2 3/8"



XL
540mm x 900mm x 60mm
21 1/4" x 35 1/2" x 2 3/8"



18"X36"
450mm x 900mm x 60mm
17 3/4" x 35 1/2" x 2 3/8"


MIDNIGHT SKY

SRI = 15

FINISH: UMBRIANO - MOTTLED




LARGE RECTANGLE
350mm x 546mm x 60mm
13 7/8" x 21 1/2" x 2 3/8"



SQUARE
360mm x 360mm x 60mm
14 1/4" x 14 1/4" x 2 3/8"




SMALL RECTANGLE
180mm x 360mm x 60mm
7" x 14 1/4" x 2 3/8"



18"X36"
450mm x 900mm x 60mm
17 3/4" x 35 1/2" x 2 3/8"





8"X8" HEX
205mm x 205mm x 60mm
8" x 8" x 2 3/8"




XL
540mm x 900mm x 60mm
21 1/4" x 35 1/2" x 2 3/8"

GRENADA WHITE

FINISH: UMBRIANO - MOTTLED




XL
540mm x 900mm x 60mm
21 1/4" x 35 1/2" x 2 3/8"




18"X36"
450mm x 900mm x 60mm
17 3/4" x 35 1/2" x 2 3/8"

JOINT SPACING = 7MM


LAYING PATTERNS




LP UMBRIANO FIXED RANDOM B PDF




LP UMBRIANO FIXED RANDOM A PDF




LP UMBRIANO MULTI UNIT RANDOM G PDF

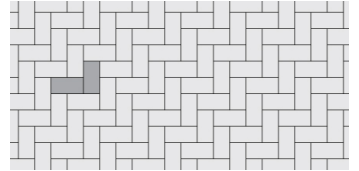


LP UMBRIANO 8X16 HB AA




LP UMBRIANO 8X16 RB AB




LP UMBRIANO 12X24 RB M




LP UMBRIANO 12X24 HB O

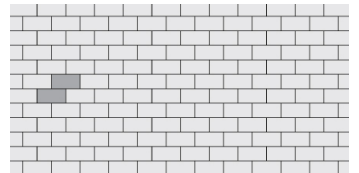


LP UMBRIANO 7X14 RB AW




LP UMBRIANO 7X14 SB AV




LP UMBRIANO 8X24 DHB W




LP UMBRIANO 8X24 HB AC

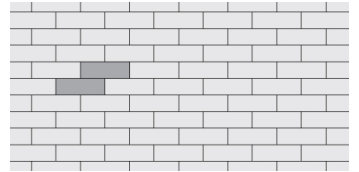


LP UMBRIANO 8X24 RB AD




LP UMBRIANO 18X36 HB AJ




LP UMBRIANO 18X36 RB AI




LP PROMENADE MULTI UNIT RANDOM G

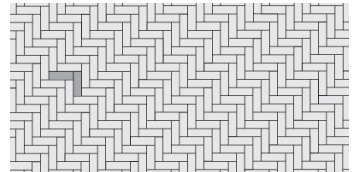


LP PROMENADE 4X12 HB I



LP PROMENADE 4X12 RB H




LP UMBRIANO HEX AM



LP ARTLINE FIXED RANDOM A

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

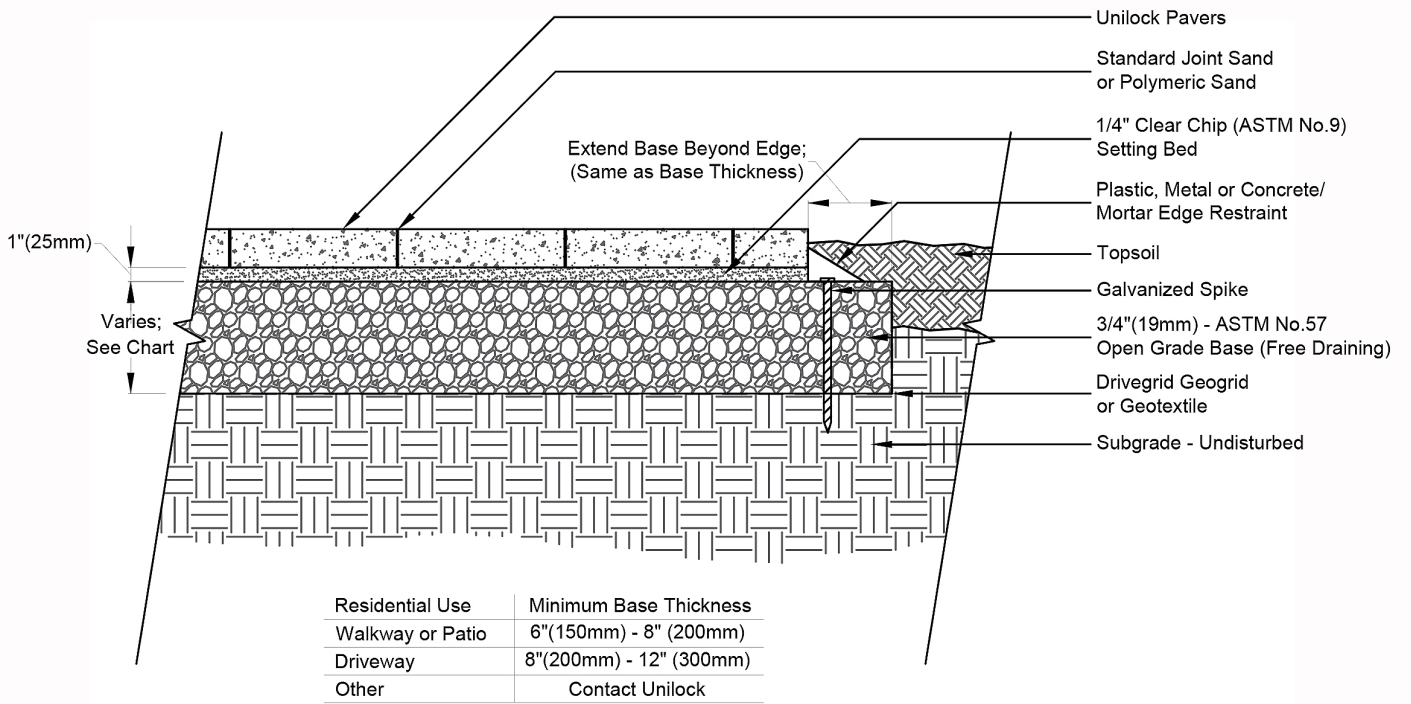

PACKAGING

	(60) RANDOM RANDOM BUNDLE	(80) RANDOM RANDOM BUNDLE	(70) RANDOM RANDOM BUNDLE	8"X16"	RECTANGLE	7"X14"	RECTANGLE
UNIT THICKNESS (MM)	60	80	70	70	70	80	70
LAYERS PER BUNDLE	9	7	8	8	8	7	8
SQ FT PER BUNDLE	94.14	73.22	93.25	82.67	93	73.24	82.67
SQ FT PER LAYER	10.46	10.46	11.66	10.33	11.63	10.46	10.33
SQ FT PER UNIT	1.31	1.31	0.49	0.86	1.94	0.70	1.29
UNITS PER BUNDLE	72	56	192	96	48	105	64
UNITS PER LAYER	8	8	24	12	6	15	8
LIN FT PER BUNDLE - SOLDIER	62.99	47.24	62.01	41.99	-	-	-
LIN FT PER LAYER - SOLDIER	7.87	5.91	8.86	5.25	-	-	-
LIN FT PER UNIT - SOLDIER	0.66	0.98	0.59	0.66	-	-	-
LIN FT PER BUNDLE - SAILOR	79.72	62.01	125.98	94.49	124.02	83.99	-
LIN FT PER LAYER - SAILOR	8.86	8.86	15.75	11.81	17.72	10.50	-
LBS PER BUNDLE	2,584.30	2,679.98	2,985.70	2,746	3,142.01	2,679.98	2,647.01
LBS PER LAYER	287.14	382.85	373.21	343.25	392.75	382.85	330.88
LBS PER UNIT	35.89	47.86	15.55	28.60	65.46	25.52	41.36

PACKAGING

	XL	18"X36"	18"X36"	4"X12"	4"X12"	8"X8" HEX	8"X8" HEX
UNIT THICKNESS (MM)	60	100	60	100	80	60	70
LAYERS PER BUNDLE	6	5	6	5	8	10	8
SQ FT PER BUNDLE	62.76	43.59	52.31	58.13	93.04	108.31	73.92
SQ FT PER LAYER	10.46	8.72	8.72	11.63	11.63	10.83	9.24
SQ FT PER UNIT	5.23	4.36	4.36	0.32	0.32	0.45	0.39
UNITS PER BUNDLE	12	10	12	180	288	240	192
UNITS PER LAYER	2	2	2	36	36	24	24
LIN FT PER BUNDLE - SOLDIER	21.26	14.75	35.44	59.06	94.49	-	-
LIN FT PER LAYER - SOLDIER	3.54	2.95	5.91	11.81	11.81	-	-
LIN FT PER UNIT - SOLDIER	1.77	1.48	2.95	0.33	0.33	-	-
LIN FT PER BUNDLE - SAILOR	35.43	29.50	70.87	177.17	283.46	-	-
LIN FT PER LAYER - SAILOR	5.91	5.90	11.81	35.43	35.43	-	-
LBS PER BUNDLE	1,722	1,994	1,739.30	2,558.30	3,404.48	2,732	2,450
LBS PER LAYER	287	398.80	289.88	511.66	425.56	273.20	306.25
LBS PER UNIT	143.50	199.40	144.94	14.21	11.82	11.38	12.76

INSTALLATION NOTES

Umbriano™

Umbriano is the ideal pool deck, patio or driveway paver. Umbriano is unaffected by chlorine, salt pool water and is resistant to de-icing salts as well. The clean, sleek and modern lines make it the most contemporary paver available. Umbriano also has Easy Clean™ Technology allowing for quick cleanup of food and other dirty spills!

Recommended Base Stabilization – one layer of DriveGrid™ stabilization grid between subgrade and base material. Recommended depth 8" to 10" below pavers for maximum stability and performance. Use under Standard Base or Permeable Base.

Special Note: To achieve applications other than the recommended based on concrete paver aspect ratio alone, additional base structures such as Drivecell and Trass base may be utilized. Contact your local representative for more information.

Standard Base – Min. 6" – 8" of ¾" Crusher Run gravel (any road base standard in accordance with ASTM-D2940) compacted to 98% Standard Proctor Density (SPD).

Standard Bedding Course – 1" thick of coarse sand– in accordance with ASTM-D2940 screeded over base.

Alternative Permeable Base – Min. 6" – 8" of ¾" clear open-graded stone compacted to achieve full particle lock-up and consolidation. (Clear open-graded does not compact but does consolidate slightly by rattling the particles together.)

Alternative Permeable Bedding Course – 1" thick of 1/4" clear open-graded chip stone – (ASTM No. 8) screeded over base.

Special Note: Concrete Direct Overlay – In some areas of the country and in some applications pavers are very successfully placed directly over concrete. Concrete as a base is in itself quite strong, but it can affect the structural integrity of the paver particularly in vehicular applications, where the concrete below is sub-par. The following considerations must be taken into account to insure that the concrete below the surface is ideal:

1. Concrete integrity – concrete must be in good condition, and not crumbling
2. Drainage slope – concrete below must be sloped away from all buildings and structures
3. Drainage holes – In lowest areas of the concrete, drill 1" holes in concrete (on 12" centers) and fill holes with ¼" chip (ASTM No. 8)
4. Base drainage - the area below the concrete must not be subject to frost movement
5. Surface - surface must be totally smooth and flat equivalent to the desired finished surface
6. Waterproofing - may be required when installing pavers over concrete where there is a basement or cold cellar below. Install an impervious rubber membrane over the surface prior to installing any pavers over the surface.
7. Jointing Sand - Use an impervious polymeric sand when installing over concrete

Jointing Material and Joint Stabilization

All sands must meet ASTM C144 or C33 Specifications. For best appearance and optimal performance,, keep jointing materials approximately 1/8" below the chamfer (bevel edge) of the paver.

Good Option: Ordinary sharp jointing sand in accordance with ASTM C144 or C33. (Common name: Concrete Sand)

Best Option: Any polymeric sand or ordinary concrete sand stabilized by a water-based or solvent-based joint sand stabilizer sealer. Always follow manufacturer's application specifications and requirements.

Handling – Exercise caution when handling this product, as contact between its zero-bevel edges may cause damage. Larger units should be placed mechanically with a vacuum lifter.

Edge Restraint - Always install an edge restraint around the perimeter of any paver installation not restrained by building structures. Spike-in edge restraints come in plastic and metal and work well for most applications. A concrete curb or a sub-surface concrete wedge can also be installed to retain the edge.

Paver Compaction - Always use a protective polymer pad on the bottom of your compactor when doing the final compaction of the pavers. An alternative is to use a rubber-roller compactor for the final compaction.

Cleaners – Any cleaner specifically designed for pavers may be used for color restoration or general cleaning. Follow manufacturer's dilution rates and application procedures. Always test a small area to make sure the results are as expected.

Sealers

- Product may be sealed for aesthetic or cleanliness reasons but it is not required

- Use any sealer approved for concrete pavers
- Select type for desired aesthetics
- Product must be cleaned before sealing
- Always read and follow manufacturer's application procedures
- Always test a small area to make sure the results are as expected

The Americans with Disabilities Act Accessibility Guidelines (ADAAG) provides measurable criteria to determine compliance, not individual product evaluation. Gaps, joints or openings, greater than ½" horizontal and ¼" vertical should be avoided as they can disrupt wheelchair maneuvering (United States Access Board – Guidelines and Standards).

Contact Unilock Representative for actual color samples and availability. Unilock reserves the right to change product information without notice.

PDF Generated October 29, 2024, 5:35 pm

