

2022

PRODUCT DATA



UNILOCK® **50**
PAVING IT FORWARD YEARS



“A beautiful outdoor space should stand the test of time, every time.”

Ed Bryant | Unilock Founder

November 30, 1935 - January 28, 2021



Laying a Foundation for Inspiration

50 years ago, our founder had a dream. When Ed Bryant introduced the UNI-Stone paver to the North American market, he essentially established the hardscaping industry here. Since then, we have continued to innovate and grow. As a result, we are proud to have played a part in creating countless beautiful spaces, from backyard patios to landmark destinations across the continent. And we're just getting started. We know Ed would be proud.



Quality

FOR US, IT'S PERSONAL

Over 50 years ago, our founder stumbled upon a unique little European product called the UNI-Stone. Intrigued by the benefits of this revolutionary paving method, he decided to license the product and bring the concept to North America. He purchased a basic paver machine from Europe and hired a small staff to produce the stones.

In those early days, most sales of Unilock were to large-scale commercial properties and streetscapes. Any lapse in quality would be costly and would jeopardize

our owner's personal reputation, so quality was of paramount importance.

From these humble beginnings, through to the multinational company we are today, Unilock has remained a family-owned company that puts quality first. For us, it's not just a matter of dollars and cents, it's our personal reputation that's on the line.

Homeowners, Contractors, Landscape Designers and Architects across North America know they can rely on us to supply them with top quality product every time.



Today we operate 20 manufacturing plants across North America.



The first Unilock press produced a humble 817 square feet of pavers a day.

UNI-STONE™



TRANSFERABLE
**LIFETIME
GUARANTEE**

See page 100 for
more information.

TABLE OF CONTENTS

PAVERS

Anchorlock™	24
Arcana™	25
Artline™	26
Beacon Hill™ Flagstone	27
Beacon Hill™ Smooth	28
Boulevard™	29
Bristol Valley®	30
Brussels Block®	31
Copthorne®	32
Courtstone®	33
Eco-Optiloc™	34
Eco-Priora™	35
Eco-Promenade®	36
Granito™	37
Hex Paver™	38
Hollandstone™	39
Holland Premier™	40
Il Campo®	41
Mattoni™	42
Natural Stone	43
Natural Stone Coping, Pillar Caps & Steps	44
Porcelain	45-46
Promenade™ Plank Paver	47-49
Richcliff®	50
Series™ 60mm	51
Series™ 70mm	52
Skyline™	53
Thornbury™	54
Town Hall®	55
Tribeca Cobble™	56
Turfstone™	57
Umbriano®	58-59
Westport™	60

RETAINING WALLS

Brussels Dimensional System™	61
DuraHold®	62
DuraHold2®	64
Estate Wall™	65
Lineo™ Dimensional Stone	66
Pisa2™	67
SienaEdge™	68
SienaStone™	69
SienaStone™ Smooth	70
U-Cara®	71
U-Cara® Modular System	75
U-Cara® Rail System	76

COPING, STEPS, PILLAR CAPS

Architectural Coping	79
Brussels Fullnose™	80
Universal Coping & Base Pad	81
Ledgestone™	82

FIRE FEATURES

Sunset Firepit	84
Unilock Elements	86

ACCESSORIES

Large Equipment (Unilyft)	85
Paver Cleaners	88
Natural Stone Cleaners	89
Paver Sealers	90
Natural Stone Sealers	89
Adhesives	90
Sands	91
Edge Restraints, X&T	93
DriveGrid, Gator Grid & Gator Base	94

PRODUCT & INSTALLATION INFORMATION

Paver Reference Guide	11
Wall Reference Guide	13
Coping Pairing Options	13
Finishes, Coatings & Edge Details	21
Application Index and Color Blends	23
Base Thickness Chart	85
Bedding Chart / Basic Depth	96
Important Information	99
Product Directory	102




PRODUCT CATEGORIES

CLASSIC

Our budget-friendly, Unilock Classic pavers and walls are manufactured to exceed ASTM standards for quality and strength. Available in classic shapes and styles, these products utilize a traditional product mix of large and small aggregates that is consistent from top to bottom with color mixed throughout.

ENDURACOLOR™

The refined surface of Unilock EnduraColor products is achieved with a two-step manufacturing process that combines a base of coarser aggregates for a stronger foundation with concentrated color and wear-resistant finer aggregates on top. This process protects the surface from the appearance of fading over time because the top layer prevents large, lighter color aggregates from ever showing through. Now, with U-Cara®, walls are available with EnduraColor too!

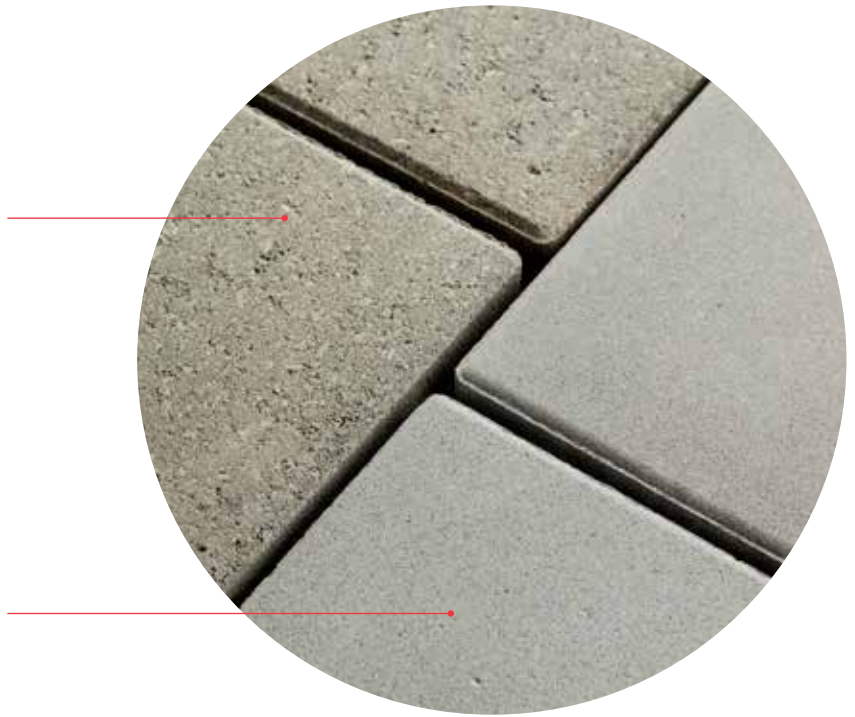


ELEGANCE®

Deep, rich colors and a multitude of unique Reala™ textures combine to deliver the timeless beauty of Unilock Elegance. From the timeworn look of European cobblestones, to the classic luxury of riven natural stone slabs, our Elegance collection offers styles you can't get anywhere else. Thanks to Ultima™ Concrete, the look you purchase is the look that will last, with up to **4x the strength of poured-in-place concrete**.






PERMEABLE Think Green

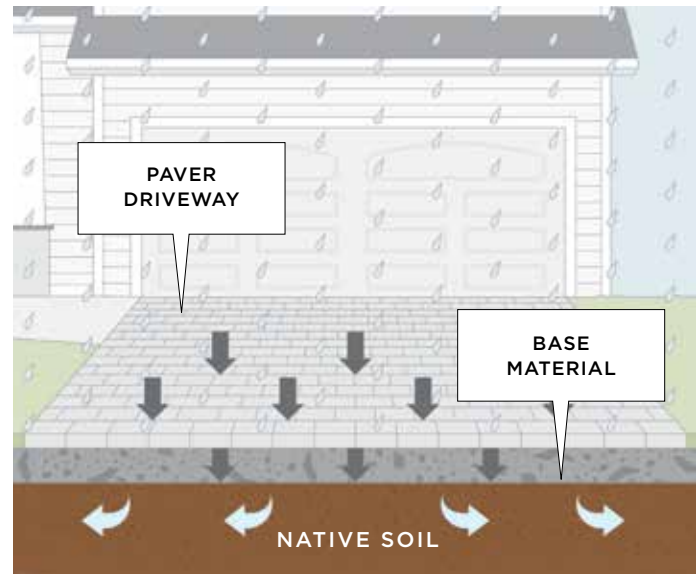


Developed in response to growing concerns around stormwater management, permeable pavers allow rainwater to flow between the joints and back into the subsoil. This provides a dual “green” benefit: it reduces the amount of water sent to storm sewers, and instead provides extra moisture to surrounding plant material.

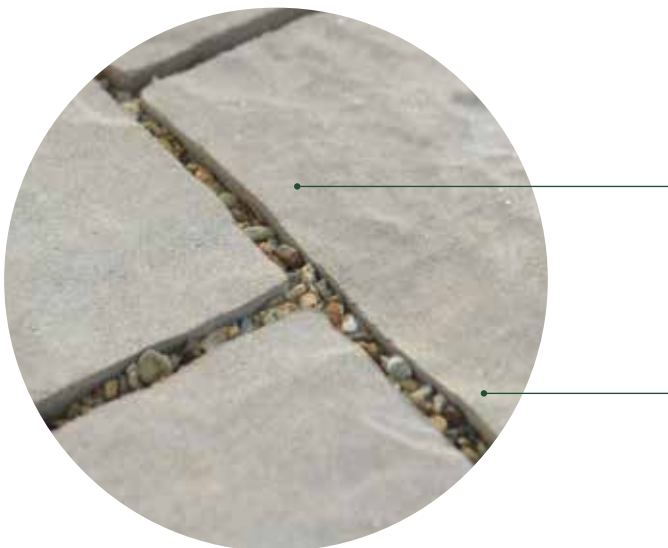

The pavers used in a permeable installation look similar to traditional pavers, but are made with special spacer bars that create a wider joint.

Special materials are used in the joints and in the permeable base below, to encourage water to flow through and reach the subsoil.

Using permeable pavers will reduce puddling on the pavement when it rains, and decrease ice build-up in winter.

 Look for this permeable icon in our Unilock paver collection.



EXCLUSIVE TECHNOLOGIES

Reala™

Utilizing REALA technology, a multitude of natural stone surfaces, brick and historic cobblestones are cast to create a **wide variety of authentic textures** with consistent dimensions that are **more cost efficient to install**.



 ELEGANCE™

With Ultima

*Unilock Town Hall® pavers
are built to last*



Without Ultima

*Deteriorating brick pavers
exposed to deicing salts*

Ultima™

Only Unilock has the technology in North America to manufacture Ultima Concrete resulting in pavers **up to four times stronger** than poured concrete. With Ultima, the look you purchase is the look that will last.

➤ Ultima Concrete is a key ingredient in the timeless elegance of our Elegance collection of premium pavers.



ColorFusion™


The look of natural granite is achieved when color and granite particles are randomly dispersed using proprietary ColorFusion technology to achieve a unique mottled surface.



ColorFusion also available on our U-Cara® Multi-Face Wall System.

EasyClean™ Integral Stain Protection

Unlike after-market sealers which merely coat the top, EasyClean goes beyond the surface and becomes integral to the product during manufacturing. The result is enhanced surface color, and protection from stains.

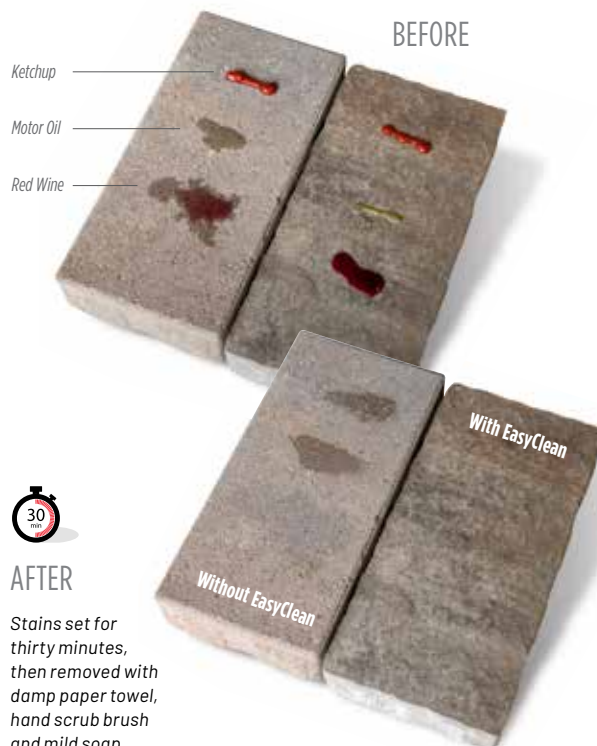

AFTER

Stains set for thirty minutes, then removed with damp paper towel, hand scrub brush and mild soap.

Nothing protects pavers from stains like EasyClean.

EASYSKLEAN ADVANTAGES

Pavers are pre-sealed at the factory

Enhanced resistance to weathering

Reduced dirt absorption

Stains from leaves, coffee, ketchup, mustard, wine and BBQ oils are easier to remove

Pavers shown on left hand side are Thrumix pavers without EasyClean. Pavers shown on right hand side are EnduraColor pavers with EasyClean Stain Resistance Technology.

UP YOUR GAME WITH

UniLyft™



**UNILYFT MINI
FOR COMPACT
TRACK LOADERS**

- ❑ Reduce labor costs
- ❑ Install pavers and walls faster and more accurately
- ❑ Reduce shoulder, hand, and knee pain
- ❑ Improve your bottom line
- ❑ Retain employees and attract new ones

**SCAN THE QR CODE FOR MORE
INFORMATION OR TO CONNECT WITH
A UNILOCK TERRITORY MANAGER
FOR A HANDS-ON DEMONSTRATION**




// FLIP TO PAGE 85 TO LEARN MORE

UNILOCK PAVER REFERENCE GUIDE

UNILOCK PAVERS	Classic	EnduraColor	Elegance	EasyClean	SoftTouch	Reala	Ultima	ColorFusion	Permeable
Arcana™		•		•	•				
Artline™		•							
Beacon Hill™ Flagstone		•							
Beacon Hill Smooth		•							
Beacon Hill Smooth XL		•							
Boulevard™		•							
Bristol Valley®		•		•	•				
Brussels Block®	•								
Cophorne®		•	•			•	•		
Courtstone®		•	•			•	•		
Eco-Optiloc™	•								•
Eco-Priora™	•								•
Granito™ Random Bundle		•		•					
Granito™ Hex		•		•					
Hex™ Paver		•							
Hollandstone™	•								
Holland Premier™		•							
Il Campo®		•							
Mattoni™		•							
Promenade™ Plank		•							
Richcliff®		•	•			•	•		
Series™ 60mm		•							
Series 70mm		•							
Thornbury™		•							•
Town Hall®		•	•			•	•		•
Tribeca Cobble™		•							•
Umbriano® 60mm		•		•				•	
Umbriano 70mm		•		•				•	
Westport™	•								

BUILD FASTER VERTICAL FEATURES

When the plan calls for pillars, a grill island or any vertical feature, the U-Cara Modular System lets you create customizable features **in hours – not days!** Simply build the sturdy, aluminum frame in any configuration and clad it with a wide selection of fascia panels. **SO INNOVATIVE. SO UNILOCK.**

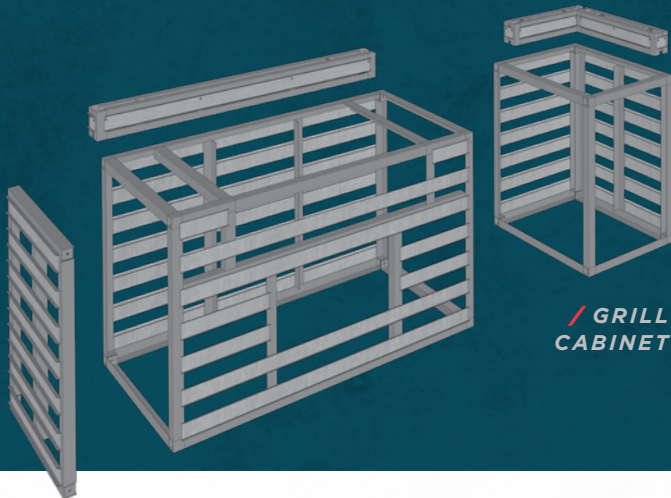

U-CARA®
Modular System



SCAN THE QR CODE TO
CONNECT WITH A UNILOCK
TERRITORY MANAGER FOR
MORE INFORMATION



// FLIP TO PAGE 75 TO LEARN MORE

UNILOCK WALL REFERENCE GUIDE

UNILOCK WALLS	Classic	EnduraColor	ColorFusion	Two-Sided	Garden	Engineered
Brussels Dimensional™	•			•	•	
Estate Wall™	•			•	•	
Lineo™ Dimensional	•			•	•	
Pisa2®	•				•	•
SienaEdge™	•			•		•
SienaStone™	•					•
U-Cara®		•	•	•	•	•

STEPS	Classic	Reala	Natural
Ledgestone™		•	
Siena Edge	•		
SienaStone	•		
Natural Stone Sandstone			•
Natural Stone Limestone			•


COPING PAIRING OPTIONS

UNILOCK COPINGS	Architectural	Ledgestone	Universal	Natural Stone	Brussels Fullnose	Estate Wall	Pisa2
Brussels Dimensional		•	•	•	•		
Estate Wall		•				•	
Lineo Dimensional		•	•	•			
Pisa2			•	•			•
U-Cara	•	•	•	•			


THE IMPORTANCE OF ASPECT RATIO

Simply defined, aspect ratio is the overall length of a paver divided by its height.
 $\text{LENGTH/HEIGHT} = \text{ASPECT RATIO}$


If an insufficient aspect ratio is used, any flexing or rocking caused by movement on the surface such as vehicular traffic, could result in breakage of the paver units. Not only is this breakage unsightly, but it can also compromise the integrity of the segmental system.



OVER 5 : 1
Pedestrian Only




4 : 1
Light-Duty
Vehicular



3 : 1 OR LESS
Heavy-Duty
Vehicular

LAYING PATTERN CONSIDERATIONS


The laying pattern used in your application can also add a significant amount of strength to your design. A herringbone pattern provides the best 'lock-up', adding strength against rotational forces such as tires at a roadway intersection in the same way the 'L' shaped paver provides maximum performance.

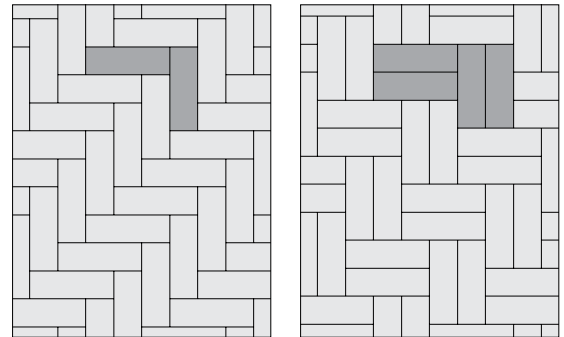

HEAVY-DUTY CONSIDERATIONS

Unilock has a variety of shapes and sizes available to fit your heavy-duty application and style preferences. For maximum performance where twisting and tipping will be factors, consider the unique "L" interlocking shape as it provides superior resistance under heavy loads. The patented locking features work in tandem with the "tri-axis" technology. The result? A stronger, more stable pavement surface.

Heavy-duty Unilock paving systems are also designed for rapid mechanized installation, making them competitive and affordable.

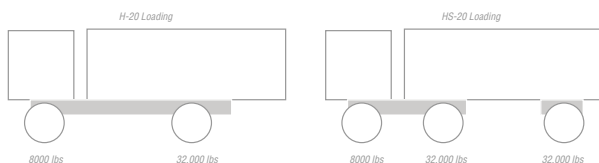


H-20 & HS-20 LOAD RATING

Similar to top of deck stresses per AASHTO H-20 loading conditions (32,000 lbs/14,500 kg), Unilock pavers can support 3-4 axle vehicles. This would include delivery, fire and semi-truck and trailer traffic in light-duty roadway applications.

SPEAK WITH YOUR UNILOCK REPRESENTATIVE FOR MORE INFORMATION.


NON-PERMEABLE INSTALLATIONS

Having the correct base design is essential for successful residential and commercial projects. Below are a couple of Examples of the base detail; however, every base detail must be specific to site conditions and load capacity. Contact your Unilock Representative to learn more.

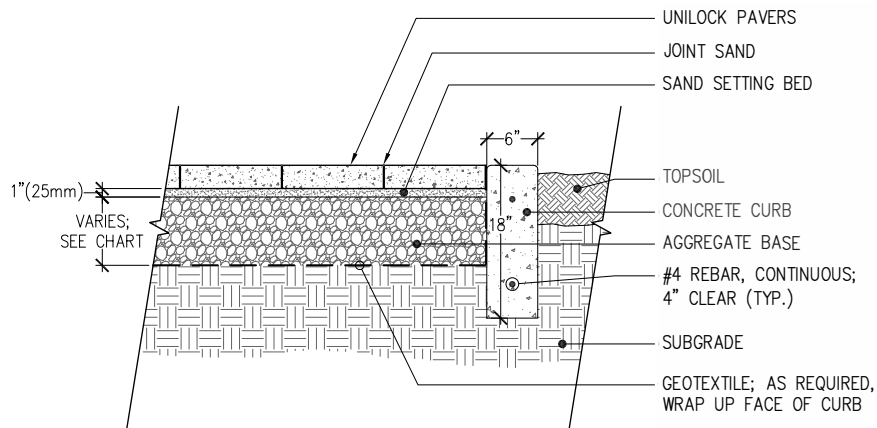

PAVER INSTALLATION ON GRANULAR

From pedestrian to heavy-duty applications this detail is tried and true. Contact your Unilock Representative to learn more. Specific installation details may vary based on site conditions.

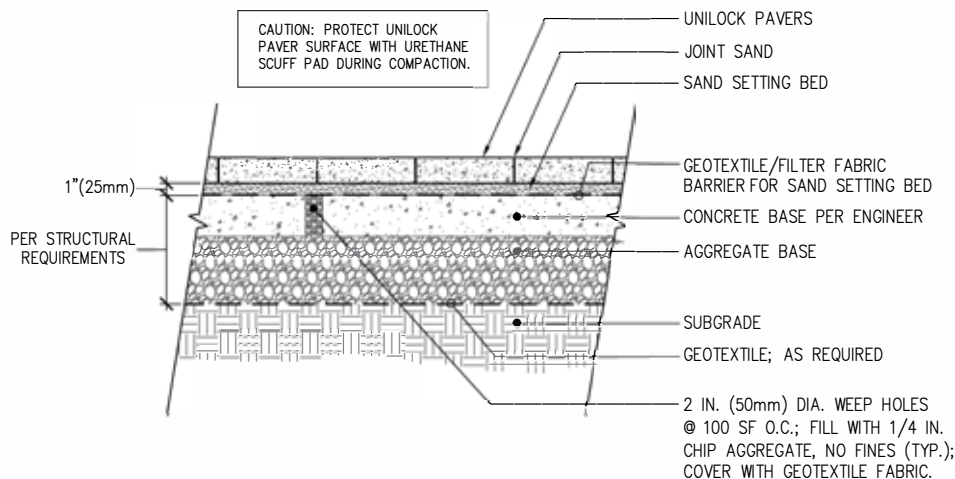

PAVER INSTALLATION ON SAND OVER CONCRETE


Ideal for heavy-duty applications, this detail ensures adequate base support under heavy loads. Approving the proper sand type and gradation is critical for lock up and drainage in vehicular applications. Contact your Unilock Representative to learn more. Specific installation details may vary based on site conditions.

PERMEABLE INSTALLATIONS

Similar to the non-permeable paver systems structural component, permeable paver installations offer a secondary purpose for capturing and detaining rainwater. Common uses can range from sidewalk and plaza areas, to heavy-duty parking lots, driveways and roadways and include various base depths as shown in the two details below.


PERMEABLE ON OPEN GRADED AGGREGATE - LIGHT DUTY

This cross-section is an example of a light-duty pedestrian sidewalk application. Contact your Unilock Representative to learn more. Specific installation details will vary based on site conditions.

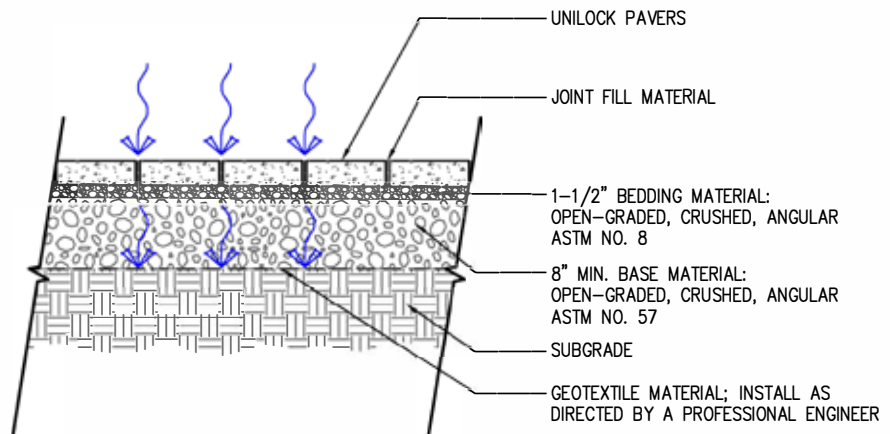

PERMEABLE ON OPEN GRADED AGGREGATE - HEAVY-DUTY


Heavy-duty permeable applications require additional base support as illustrated below. This cross section is only an example. Contact your Unilock Representative to learn more. Specific installation details will vary based on site conditions.

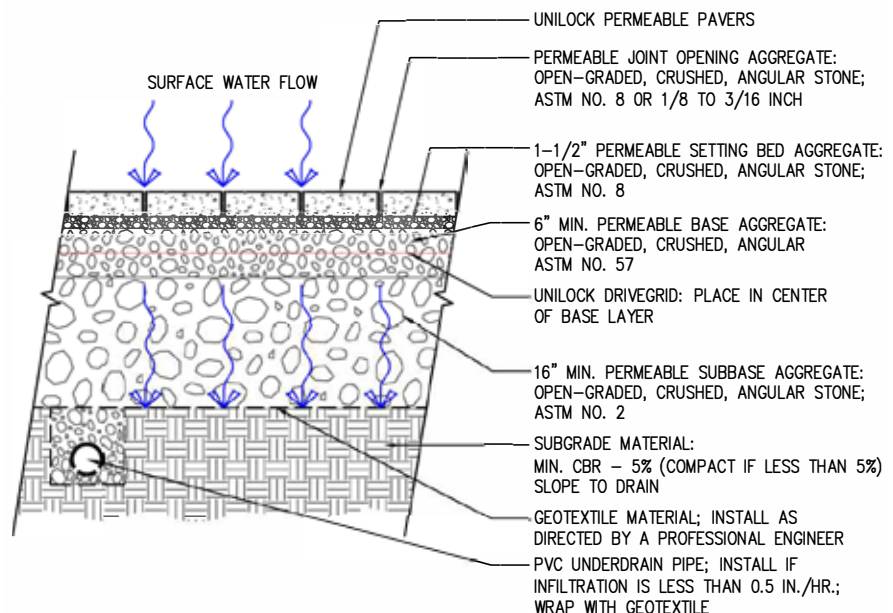


TYPICAL RETAINING WALL CROSS SECTIONS

Unilock manufactured retaining wall systems are engineered to last. Individual units range from 19lbs (8.6kg) to 1,700lbs (772.7kg), and some can be used to construct walls up to 40ft (12.2m) high. Below are a couple of cross section examples, however, retaining walls must be designed and engineered to the specific loads and site conditions.

TYPICAL GEOGRID REINFORCED APPLICATION PISA2™/CONCORD WALL™ / ROMANPISA™

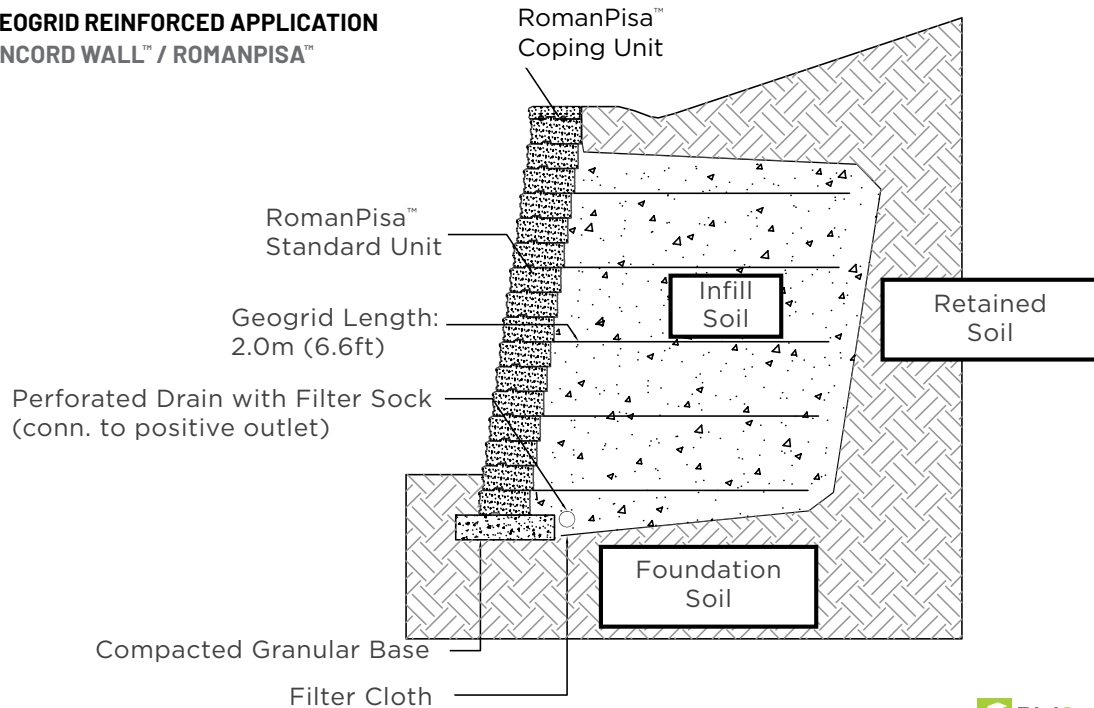

TYPICAL GRAVITY APPLICATION SIENASTONE®

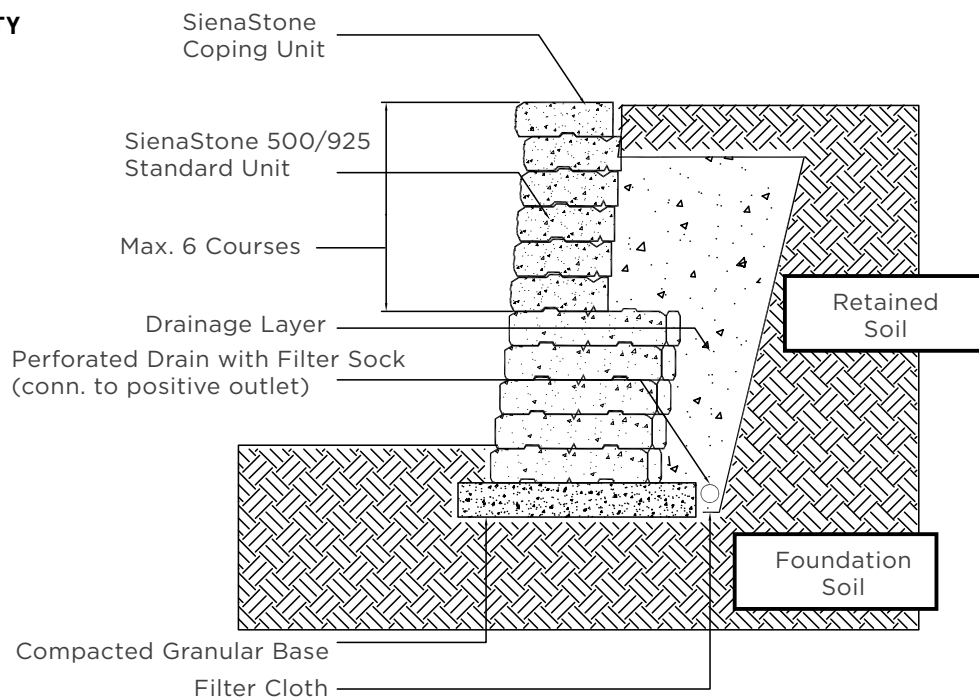

ROOF DECKS

Unilock has many options for paving products on roof decks. Various installation methods will determine the appropriate products for the application. While pedestal installation typically utilizes the square or large slabs, a granular installation will extend your product choice and design flexibility. **Ask your Unilock Representative for details.**




Product Type	Thickness	Shape	Product Weights
Arcana™ + Skyline™	50mm	606 x 606mm	24 lbs/sq.ft.
Soreno™	50mm	400 x 800mm	24 lbs/sq.ft.
Beacon Hill™ XL	60mm	900 x 540mm** 720 x 540mm**	27.5 lbs/sq.ft.




PEDESTAL SYSTEM

Unilock offers adjustable and stackable pedestal systems for your project. Contact your Unilock Representative to learn more. Specific installation details may vary based on pedestal height, load-bearing requirements, safety standards and wind-lift.

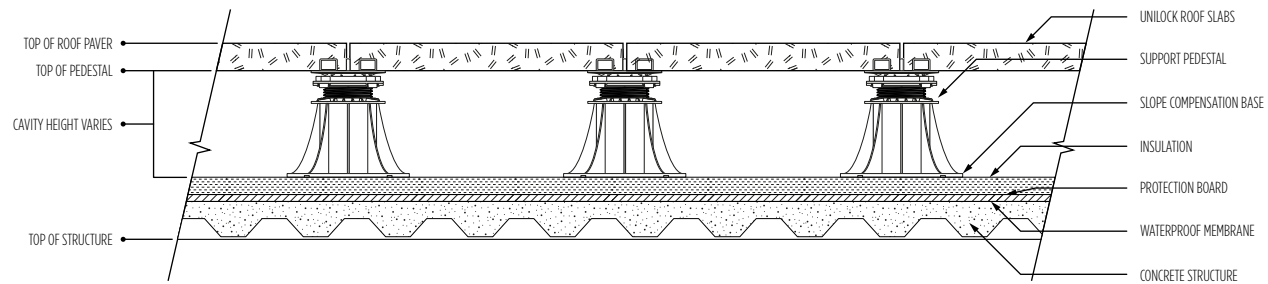

GRANULAR BASE SYSTEM

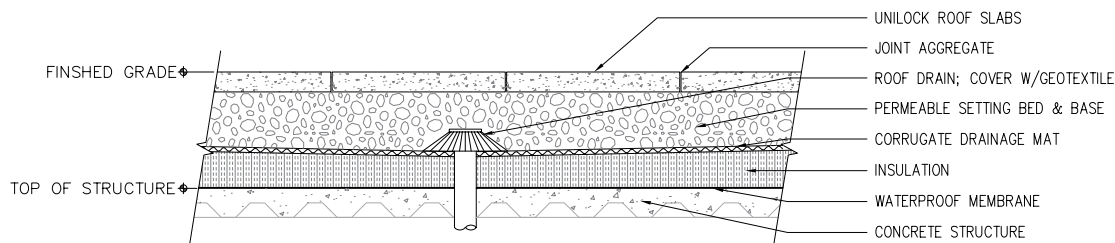

The cross sections shown are examples of the type of installation systems and technical features of Unilock products. Unilock shall not be deemed responsible for improper use of the product or of damage deriving from any

use different from those recommended and/or installation procedures not in line with the following instructions relevant to a raised installation. **All roof top slab/pedestal installations must be engineered by a professional engineer.**

LEED® CREDIT OPPORTUNITIES

LEED, Leadership in Energy & Environmental Design, is a green building certification program that recognizes best-in-class building strategies and practices that have a positive impact on the health of occupants, while promoting renewable, clean energy. To receive LEED certification, building projects satisfy prerequisites and earn points to achieve different levels of certification. Unilock products can help with your certification goals.

POTENTIAL LEED CREDITS FOR UTILIZING PERMEABLE PAVERS

RAINWATER MANAGEMENT: LEED V4.1

Up to three points can be achieved for retaining rainwater onsite based on the percentile kept. 85% (zero lot line projects only) • 3 points, 95% – 2 points and 98% – 3 points. (all except Healthcare – subtract one point). *See LEED v4.1 for more specific project/site details.*

HEAT ISLAND REDUCTION - NON-ROOF: LEED V4.1

Paving materials with a three-year aged solar reflectance (SR) value of at least 0.28. If three-year aged value information is not available, use materials with an initial SR of at least 0.33 at installation OR use an open grid pavement at least 50% pervious • 2 points (except Healthcare – 1 point). *See LEED v4.1 for more specific site calculations.*

SOLAR REFLECTANCE

Solar Reflectance Index (SRI) is a criterion used by USGBC that measures values of sunlight and radiation bouncing from built surfaces. It is used to measure urban heat island effects in city centers. Dark pavement absorbs heat during the day and then releases it at night. This process creates a situation that causes urban centers to stay warmer all the time which contributes to air pollution and increased energy consumption. Careful selection of materials and colors can help reduce urban heat island effects.

Values may change slightly by region due to variations in local aggregate and granite, please see product page for SRI values or contact your local Unilock Representative for more information.

MATERIALS AND RESOURCES: LEED V4.1

- > Building Product Disclosure and Optimization – Sourcing of Raw Materials
– **Sourcing of Raw Materials and Extraction • 1 point**
- > Building Product Disclosure and Optimization – Material Ingredient Reporting
– **Material Ingredient Reporting • 1 point**

ADD 3D LANDSCAPE DESIGN TO **YOUR TOOLBOX**



UVISION ALLOWS YOU TO VISUALLY COMMUNICATE YOUR DESIGN IDEAS TO YOUR CLIENT IN BOTH 2D PLAN VIEW AND 3D PERSPECTIVE VIEW

Whether you're coming from the hand-drawn world, or a 2D AutoCAD background, the biggest impact you'll see from adopting this new 3D design software is in how well the client will understand the project you are selling. **Uvision 3D Landscape Creator is an easy-to-use software tool that helps bring your designs ideas to life.**

**SCAN THE QR CODE FOR
MORE INFORMATION OR TO
DOWNLOAD A FREE 30-DAY TRIAL
OF UVISION 3D LANDSCAPE CREATOR.**



FINISHES



Umbriano®
Mottled Finish with
ColorFusion™ and EasyClean



Series™
Exposed Granite Finish



Il Campo®
Brushed Finish



Smooth
Premier Finish



Flagstone
Premier Finish



Antiqued
Timeworn Finish



Classic
Thrumix Finish

COATINGS



Factory sealed to provide integral
surface protection from stains

SOFT TOUCH



Ultra-smooth surface texture

DESCRIPTION OF EDGE DETAILS



Zero-Edge



Chamfered Edge



Rounded Bevel



Micro Bevel

UNSIGHTLY STRUCTURES?

U-Cara Wall Mount System has you covered.



When unsightly buildings, exposed foundation or old steps detract from your paver plan, cover them with the U-Cara Wall Mount System. Simply mount the galvanized steel rails to a concrete or wood substrate and clad with fascia panels for a finishing touch. Create matching vertical features with the U-Cara Modular System to complete your cohesive design. **SO INNOVATIVE. SO UNILOCK.**

// FLIP TO PAGE 76 TO LEARN MORE



U-CARA®

**SCAN THE QR CODE TO
CONNECT WITH A UNILOCK
TERRITORY MANAGER FOR
MORE INFORMATION**


APPLICATION INDEX



PEDESTRIAN




LIGHT VEHICULAR




HEAVY-DUTY
VEHICULAR



ROADWAYS-
STREETS



PERMEABLE



OUTDOOR KITCHEN



FIRE FEATURE



WATER FEATURE




ROOF DECK




BORDERS &
ACCENTS




SEAT WALLS




RETAINING WALLS
UNDER 3'




STRUCTURAL WALL



GARDEN WALL



PILLAR



WALL COPING



POOL COPING



STEP TREADS




STEPS

COLOR BLEND DESCRIPTIONS

COLOR NAME	DESCRIPTION
Avorio	Beige and White
Basalt	Blueish-Black
Bavarian	Brown, Cream and Charcoal
Beechwood	Tan and Charcoal
Birch	Dark Brown, Light Brown and Cream
Black Granite	Black Granite and Charcoal
Burgundy Red	Plum with Red
Burnt Clay	Brown with Red
Chamois	Medium Buff
Charleston	Plum, Charcoal and Sand
Cocoa Brown	Solid Dark Brown
Cobalt Grey	White, Grey and Blue hues
Coffee Creek	Sandstone, Brown and Charcoal
Corvara	Light Grey/Beige
Dark Charcoal	Dark Charcoal
Dawn Mist	Grey and Tan
Fossil	Light & Dark Grey, Chamois and White Accents
French Grey	Light Grey with White Flake
Granite	Natural and Charcoal
Golden Tan	Dark Brown, Light Brown with White Granite
Limestone	Light Gray and Charcoal
Mahogany Ash	Mid Brown and Light Charcoal
Midnight Charcoal	Charcoal and Black
Midnight Sky	Charcoal and Black Flake

COLOR NAME	DESCRIPTION
Mineral Ice Grey	Grey and White
Modena	White Concrete with Black Flecks
Natural	Light Grey and Medium Grey
Notte	Mid Charcoal, White and Light Natural
Old Oak	Rust with Red
Onyx Black	Dark Charcoal with Black Granite
Opal	Light Grey and White
Pebble Taupe	Tan with Light Brown
Peppered Granite	White aggregates with black flecks
River	Buff, Natural and Charcoal
Rustic Red	Red and Charcoal
Sabia	Brown, Black and Light Natural
Sable Blend	Cream Tan Brown
Sandstone	Buff and Tan
Sierra	Charcoal, Russet and Buff
Smoke Shale	Charcoal and Dark Charcoal
St. Clair	Salmon and Brown
Steel Grey	Dark Charcoal & Grey
Steel Mountain	Natural and Charcoal
Summer Wheat	Cream White with Pale Yellow & Beige Particles
Terra Cotta	Salmon and Charcoal
Vivanto	Dark Grey and Charcoal
Winter Marvel	White and Black Flake

**LAYING PATTERNS**

Anchorlock A

APPLICATIONS**APPEARANCE**

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 3 mm
 Void - n/a

TECHNOLOGIES**CLASSIC**

Budget-friendly traditional
 product mix

DRIVE FRIENDLY

Can handle vehicular loads

TECHNICAL INFORMATION

Conforms to ASTM C936
 Eligible for LEED v4.1 credits -
 see page 19.



NATURAL

		8 7/8 X 8 7/8
	Bundle Type	SINGLE
	Plant Produced	MICHIGAN
	Thickness (mm)	80MM

SQFT PER	Bundle	78.80
	Layer	11.26
	Section	-
	Stone	0.42

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.37
	Section	-
	Bundle	186.69

LBS PER	Layer	411
	Section	-
	Bundle	2,937

COLORS	Reflectance	Stock
Natural	SR .43 SRI 32	SO

Single Units


**STANDARD**

225 x 225 x 80mm
 8 7/8 x 8 7/8 x 3 1/8
 186.69 units/Bundle
 .42 Sq.Ft./Stone


Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY.** All measurements are nominal. Contact Unilock for more information.




LAYING PATTERNS



Arcana Multi-Unit
Random A



Arcana Multi-Unit
Random C



Arcana Multi-Unit
Random F

APPLICATIONS



APPEARANCE

Edge Detail - Micro
Surface Texture - Smooth
Joint Spacing - 0 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and
long-lasting color

EASYCLEAN™

Factory sealed to provide
integral surface protection
from stains

TECHNICAL INFORMATION

Conforms to ASTM C 1782
Eligible for LEED v4.1 credits -
see page 19.

	12 X 24	18 X 24	24 X 24
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	50MM	50MM	50MM

SQFT PER	Bundle	36.00	54.00	72.00
	Layer	4.00	6.00	8.00
	Section	-	-	-
	Stone	2.00	3.00	4.00

PER BUNDLE	Layers	9.00	9.00	9.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	0.49	0.50	0.50
	Section	-	-	-
	Layer	1.98	2.97	3.98
	Bundle	17.78	26.75	35.79

SAILOR LNFT PER	SqFt	0.99	0.66	0.50
	Section	-	-	-
	Layer	3.98	3.98	3.98
	Bundle	35.79	35.79	35.79

UNITS PER	SqFt	0.50	0.33	0.25
	Section	-	-	-
	Bundle	18.00	18.00	18.00

LBS PER	Layer	96	144	192
	Section	-	-	-
	Bundle	864	1,296	1,728

COLORS	Reflectance	Stock	Stock	Stock
Avorio	SR n/a SRI n/a	SO	SO	SO
Corvara	SR n/a SRI n/a	SO	SO	SO
Modena	SR n/a SRI n/a	SO	SO	SO
Vivanto	SR n/a SRI n/a	SO	SO	SO



AVORIO **NEW**



CORVARA



MODENA



VIVANTO



X & T Slab Spacers
Bagged Separately
(see page 93)

Single Units



12 X 24
301 x 606 x 50mm
11⁷/₈ x 23⁷/₈ x 2"
18 units/Bundle
2.00 Sq.Ft./Stone



18 X 24
453 x 606 x 50mm
17⁷/₈ x 23⁷/₈ x 2"
18 units/Bundle
3.00 Sq.Ft./Stone



24 X 24
606 x 606 x 50mm
23⁷/₈ x 23⁷/₈ x 2"
18 units/Bundle
4.00 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.


ARC_CH

SPECIAL ORDER PRODUCT - NON-STOCK

UNILOCK



LAYING PATTERNS



Artline Fixed
Random A

APPLICATIONS



APPEARANCE

Edge Detail - Micro
Surface Texture - Smooth &
Il Campo® Brushed (Granite)
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and
long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

	SMOOTH FINISH	BRUSHED FINISH
Bundle Type	RANDOM	RANDOM
Plant Produced	MICHIGAN	CHICAGO
Thickness (mm)	70MM	70MM

SQFT PER	Bundle	93.25	93.25
	Layer	11.66	11.66
	Section	-	-
	Stone	0.49	0.49

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-

SAILOR LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-

UNITS PER	SqFt	2.06	2.06
	Section	-	-
	Bundle	192.00	192.00

LBS PER	Layer	373	370
	Section	-	-
	Bundle	2,986	2,963


COLORS	Reflectance	Stock	
Birch	SR .28 SRI 30	✓	
Granite (Il Campo)	SR .28 SRI 29		SO
Granite	SR .28 SRI 29	✓	



BIRCH



GRANITE
IL CAMPO FINISH



GRANITE

7 Unit Random Bundle



UNIT A
125 x 169 x 70mm
4 7/8 x 6 3/4 x 2 3/4"
32 units/Bundle
.23 Sq.Ft./Stone



UNIT B
125 x 262.5 x 70mm
4 7/8 x 10 3/8 x 2 3/4"
32 units/Bundle
.35 Sq.Ft./Stone

7 Unit Random Bundle



UNIT C
125 x 337.5 x 70mm
4 7/8 x 13 3/8 x 2 3/4"
32 units/Bundle
.45 Sq.Ft./Stone



UNIT D
125 x 450 x 70mm
4 7/8 x 17 3/4 x 2 3/4"
32 units/Bundle
.61 Sq.Ft./Stone



UNIT E
187.5 x 225 x 70mm
7 1/2 x 8 7/8 x 2 3/4"
32 units/Bundle
.45 Sq.Ft./Stone



UNIT F
187.5 x 337.5 x 70mm
7 1/2 x 13 3/8 x 2 3/4"
16 units/Bundle
.58 Sq.Ft./Stone



UNIT G
187.5 x 450 x 70mm
7 1/2 x 17 3/4 x 2 3/4"
16 units/Bundle
.91 Sq.Ft./Stone


Notes: Il Campo finish is a Special Order Item - Lead time required. Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Beacon Hill™ Flagstone 60mm


ENDURACOLOR™




LAYING PATTERNS



Beacon Hill Fixed Random A



Beacon Hill Fixed Random B



Beacon Hill Multi-Unit Random C

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Textured
Joint Spacing - 7 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits - see page 19.

Bundle Type		RANDOM
Plant Produced		MICHIGAN
Thickness (mm)		60MM

SQFT PER	Bundle	104.91
	Layer	11.66
	Section	-
	Stone	1.46

PER BUNDLE	Layers	9.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Section	-
	Layer	9.35
	Bundle	84.15

UNITS PER	SqFt	0.69
	Section	-
	Bundle	72.00

LBS PER	Layer	320
	Section	-
	Bundle	2,879

COLORS	Reflectance	Stock
Birch	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓



BIRCH



FOSSIL



SIERRA

3 Unit Random Bundle



LARGE RECTANGLE

380 x 570 x 60mm
15 x 22 ½ x 2 ¾"
18 Units/Bundle
2.08 SqFt./Stone



SQUARE

380 x 380 x 60mm
15 x 15 x 2 ¾"
27 units/Bundle
1.39 Sq.Ft./Stone



SMALL RECTANGLE

380 x 190 x 60mm
15 x 7 ½ x 2 ¾"
27 units/Bundle
.69 Sq.Ft./Stone


Notes: **SOLD IN FULL BUNDLES ONLY.** This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Beacon Hill™ Smooth 60mm


ENDURACOLOR™




LAYING PATTERNS



Beacon Hill Fixed Random A



Beacon Hill Fixed Random B



Beacon Hill Multi-Unit Random C

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth
Joint Spacing - 7 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits - see page 19.

		XL	SM RECTANGLE
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
Thickness (mm)	60MM	60MM	60MM

SQFT PER	Bundle	104.91	104.91	104.91
	Layer	11.66	11.66	11.66
	Section	-	-	-
	Stone	1.46	5.83	0.78

PER BUNDLE	Layers	9.00	9.00	9.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	-	0.32	0.80
	Section	-	-	-
	Layer	-	3.74	9.35
	Bundle	-	33.66	84.15

SAILOR LNFT PER	SqFt	0.80	0.53	1.60
	Section	-	-	-
	Layer	9.35	6.23	18.70
	Bundle	84.15	56.07	168.31


UNITS PER	SqFt	0.69	0.17	1.29
	Section	-	-	-
	Bundle	72.00	18.00	135.00

LBS PER	Layer	320	320	320
	Section	-	-	-
	Bundle	2,879	2,879	2,879

COLORS	Reflectance	Stock	Stock	Stock
Birch	SR n/a SRI n/a	✓		
Dark Charcoal	SR n/a SRI n/a			✓
Fossil	SR .22 SRI 21	✓		
Granite	SR .28 SRI 29	✓	✓	
Opal	SR .24 SRI 24	✓	✓	



BIRCH



DARK CHARCOAL
Small rectangle only



FOSSIL



GRANITE




OPAL

3 Unit Random Bundle				Single Units Sold Separately		
	LARGE RECTANGLE	SQUARE	SMALL RECTANGLE		XL UNIT	SMALL RECTANGLE
	380 x 570 x 60mm 15 x 22 1/2 x 2 3/8" 18 Units/Bundle	380 x 380 x 60mm 15 x 15 x 2 3/8" 27 units/Bundle	380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 27 units/Bundle		950 x 570 x 60mm 37 1/2 x 22 1/2 x 2 3/8" 18 units/Bundle 5.83 Sq.Ft./Stone	380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 135 units/Bundle .78 Sq.Ft./Stone
					XL available only in Granite & Opal	Available only in Dark Charcoal

Notes: **SOLD IN FULL BUNDLES ONLY.** XL unit is produced and sold on a required refundable skid. This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



LAYING PATTERN



Boulevard Fixed
Random B

APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Smooth
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and
long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

Bundle Type	RANDOM
Plant Produced	MICHIGAN
Thickness (mm)	70MM

SQFT PER	Bundle	93.00
	Layer	11.63
	Section	-
	Stone	1.45

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	1.03
	Section	-
	Layer	12.00
	Bundle	96.04

UNITS PER	SqFt	0.69
	Section	-
	Bundle	64.00

LBS PER	Layer	372
	Section	-
	Bundle	2,978

COLORS	Reflectance	Stock
Granite	SR n/a SRI n/a	✓
River	SR n/a SRI n/a	✓
Sierra - while quantities last	SR n/a SRI n/a	✓



GRANITE



RIVER



SIERRA
Available while quantities last

3 Unit Random Bundle



LARGE RECTANGLE

610 x 305 x 70mm
24 x 12 x 2 ¾"
24 Units/Bundle
2.00 SqFt./Stone



MEDIUM RECTANGLE

457 x 305 x 70mm
18 x 12 x 2 ¾"
16 units/Bundle
1.50 Sq.Ft./Stone




SQUARE

305 x 305 x 70mm
12 x 12 x 2 ¾"
24 units/Bundle
1.00 Sq.Ft./Stone


Notes: **SOLD IN FULL BUNDLES ONLY.** This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



LAYING PATTERNS



Bristol Valley Fixed Random A



Bristol Valley Fixed Random B

APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Textured
Joint Spacing - 7 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and long-lasting color

EASYSKIN™

Factory sealed to provide integral surface protection from stains

SOFT TOUCH

Ultra-smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits - see page 19.



BAVARIAN



FOSSIL



STEEL MOUNTAIN

Bundle Type	RANDOM
Plant Produced	CHICAGO
Thickness (mm)	60MM

SQFT PER	Bundle	116.57
	Layer	11.66
	Section	-
	Stone	1.46

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Section	-
	Layer	9.35
	Bundle	93.50

UNITS PER	SqFt	0.69
	Section	-
	Bundle	80.00

LBS PER	Layer	311
	Section	-
	Bundle	3,113

COLORS	Reflectance	Stock
Bavarian	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	✓
Steel Mountain	SR n/a SRI n/a	✓

Old bundle sizes are available while supplies last. Please contact Customer Service for old bundle configuration.

3 Unit Random Bundle



LARGE RECTANGLE
380 x 570 x 60mm
15 x 22 1/2 x 2 3/8"
20 Units/Bundle
2.08 SqFt./Stone



SQUARE
380 x 380 x 60mm
15 x 15 x 2 3/8"
30 units/Bundle
1.39 Sq.Ft./Stone




SMALL RECTANGLE
380 x 190 x 60mm
15 x 7 1/2 x 2 3/8"
30 units/Bundle
.69 Sq.Ft./Stone


Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.




LAYING PATTERNS



Brussels Multi-Unit
Random AC



Brussels Multi-Unit
Random AD



Brussels Multi-Unit
Random AE

APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Smooth
Joint Spacing - 2 mm
Void - n/a

TECHNOLOGIES

CLASSIC

Budget-friendly traditional
product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

	HALF	STANDARD	XL
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	AYR/MI	AYR	AYR
Thickness (mm)	70MM	70MM	70MM

SQFT PER	Bundle	99.79	95.94	95.94
	Layer	12.47	11.99	11.99
	Section	14.26	-	31.98
	Stone	0.20	0.40	0.80

PER BUNDLE	Layers	8.00	8.00	8.00
	Sections	7.00	-	3.00

SOLDIER LNFT PER	SqFt	1.72	1.42	0.85
	Section	24.57	-	27.30
	Layer	21.50	17.03	10.24
	Bundle	172.00	136.22	81.90

SAILOR LNFT PER	SqFt	2.95	1.71	1.43
	Section	42.04	-	45.67
	Layer	36.79	20.47	17.13
	Bundle	294.30	163.78	137.00

UNITS PER	SqFt	5.05	2.50	1.25
	Section	72.00	-	40.00
	Bundle	504.00	240.00	120.00

LBS PER	Layer	399	383	384
	Section	457	-	1,024
	Bundle	3,195	3,064	3,072

COLORS	Reflectance	Stock	Stock	Stock
Coffee Creek	SR n/a SRI n/a	✓	✓	✓
Dark Charcoal	SR n/a SRI n/a	✓		
Limestone	SR .28 SRI 29	✓	✓	✓
Mahogany Ash	SR n/a SRI n/a	✓	✓	✓
Sandstone	SR .41 SRI 46	✓	✓	✓



COFFEE CREEK



DARK CHARCOAL
Half Unit Only



LIMESTONE



MAHOGANY ASH



SANDSTONE

Single Units



HALF

104 x 173 x 70mm
4 x 6 7/8 x 2 3/4"
504 units/Bundle
.20 Sq.Ft./Stone



STANDARD

173 x 208 x 70mm
6 7/8 x 8 1/4 x 2 3/4"
240 units/Bundle
.40 Sq.Ft./Stone




XL

208 x 348 x 70mm
8 1/4 x 13 3/4 x 2 3/4"
120 units/Bundle
.80 Sq.Ft./Stone


Notes: **SOLD IN FULL BUNDLES ONLY.** Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



LAYING PATTERNS



Copthorne BW_A



Copthorne RB_C

APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Textured
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

REALA™

Cast from historic street pavers

ULTIMA™

Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits - see page 19.

Bundle Type	SINGLE
Plant Produced	AYR
Thickness (mm)	60MM

SQFT PER	Bundle	89.20
	Layer	11.15
	Section	-
	Stone	0.15

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.43
	Section	-
	Layer	15.99
	Bundle	127.95

SAILOR LNFT PER	SqFt	4.41
	Section	-
	Layer	49.21
	Bundle	393.70

UNITS PER	SqFt	6.73
	Section	-
	Bundle	600.00

LBS PER	Layer	294
	Section	-
	Bundle	2,349

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓



BASALT



BURGUNDY RED



BURNT CLAY



OLD OAK

BURGUNDY RED/BURNT CLAY/OLD OAK 3-Color Blend is sold separately and blended on-site.

Single Unit




STANDARD

65 x 200 x 60mm
2 5/8 x 7 7/8 x 2 3/8"
600 Units/Bundle
.15 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 92. Contact Unilock for more information.



LAYING PATTERNS



Courtstone Fixed
Random A

APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Textured
Joint Spacing - 15 mm
Void - n/a

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty
with the combination of Reala
and Ultima technologies

REALA™

Cast from historic street pavers

ULTIMA™

Up to 4x stronger than
poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

Bundle Type		RANDOM
Plant Produced		AYR
Thickness (mm)		60MM
SQFT PER	Bundle	98.30
	Layer	12.29
	Section	-
	Stone	0.26
PER BUNDLE	Layers	8.00
	Sections	-
SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-
SAILOR LNFT PER	SqFt	2.25
	Section	-
	Layer	27.69
	Bundle	221.52
UNITS PER	SqFt	3.91
	Section	-
	Bundle	384.00
LBS PER	Layer	291
	Section	-
	Bundle	2,326
COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓




BASALT

5 Unit Random Bundle	XL RECTANGLE	LARGE RECTANGLE	RECTANGLE	SMALL RECTANGLE	SQUARE
	215 x 130 x 60mm 8 3/8 x 5 1/8 x 2 3/8"	185 x 130 x 60mm 7 1/4 x 5 1/8 x 2 3/8"	165 x 130 x 60mm 6 1/2 x 5 1/8 x 2 3/8"	145 x 130 x 60mm 5 3/4 x 5 1/8 x 2 3/8"	130 x 130 x 60mm 5 1/8 x 5 1/8 x 2 3/8"
	128 Units/Bundle	64 Units/Bundle	64 Units/Bundle	64 Units/Bundle	64 Units/Bundle
	.30 SqFt/Stone	.28 SqFt/Stone	.23 SqFt/Stone	.20 SqFt/Stone	.18 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 92. Contact Unilock for more information.



LAYING PATTERNS



Eco-Optiloc
Cluster A

APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
Surface Texture - Smooth
Joint Spacing - 7 mm
Void - 7.30%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits - see page 19.

	STANDARD SMOOTH
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	80MM

SQFT PER	Bundle	63.56
	Layer	9.08
	Section	-
	Stone	0.50

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.98
	Section	-
	Bundle	126.00

LBS PER	Layer	332
	Section	-
	Bundle	2,325

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	SO



NATURAL



Single Units



STANDARD

250 x 250 x 80mm
9 7/8" x 9 7/8" x 3 1/8"
126 units/Bundle
.50 Sq.Ft./Stone

Notes: **Special Order Item - Lead time required.** Most standard colors are available by special order and are subject to minimum quantities. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

**LAYING PATTERNS**Eco-Priora 5x10
RB_AEco-Priora 5x10
HB_E**APPLICATIONS****APPEARANCE**

Edge Detail - Micro
Surface Texture - Smooth
Joint Spacing - 7mm
Void - 4.6-7.08%

TECHNOLOGIES**PERMEABLE**

Can be installed to allow water to flow through

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits - see page 19.

	SMOOTH CLASSIC
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	80MM

SQFT PER	Bundle	75.95
	Layer	10.85
	Section	-
	Stone	0.31

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.27
	Section	-
	Layer	13.78
	Bundle	96.46

SAILOR LNFT PER	SqFt	2.54
	Section	-
	Layer	27.56
	Bundle	192.91

UNITS PER	SqFt	3.23
	Section	-
	Bundle	245.00

LBS PER	Layer	397
	Section	-
	Bundle	2,778

COLORS	Reflectance	
Beechwood	SR .n/a SRI n/a	✓



BEECHWOOD

Single Units




RECTANGLE
120 x 240 x 80mm
4 ¾ x 9 ½ x 3 ⅞
245 units/Bundle
.31 Sq.Ft./Stone


Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



LAYING PATTERNS



Eco-Promenade
3x12_RB_A



Eco-Promenade
3x12_DHB_B



Eco-Promenade
3x12_HB_C

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth
Joint Spacing - 7 mm
Void - 10.12%

TECHNOLOGIES

ENDURACOLOR™
Refined surface and
long-lasting color

PERMEABLE

Can be installed to allow water to
flow through

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

	3"X12" PERMEABLE SMOOTH
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	100MM

SQFT PER	Bundle	63.94
	Layer	10.66
	Section	-
	Stone	0.24

PER BUNDLE	Layers	6.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	10.83
	Bundle	64.96

SAILOR LNFT PER	SqFt	4.06
	Section	-
	Layer	43.31
	Bundle	259.84

UNITS PER	SqFt	4.13
	Section	-
	Bundle	264.00

LBS PER	Layer	482
	Section	-
	Bundle	2,893

COLORS	Reflectance	Stock
Opal Blend	SR .24 SRI 24	SO
Steel Grey	SR .n/a SRI n/a	SO



OPAL BLEND



STEEL GREY

Single Units




3X12 SMOOTH
75 x 300 x 100mm
3 x 11⁷/₈ x 3⁷/₈"
264 units/Bundle
.24 Sq.Ft./Stone


Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.




LAYING PATTERNS



Granito Hex_A



Granito Fixed Random_A



Granito Fixed Random_B

APPLICATIONS



(Note: Hex only is drive friendly)

APPEARANCE

Edge Detail - Rounded
Surface Texture - Granito/Granito
Textured (Random)
Joint Spacing - 7 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and
long-lasting color

ARTISTA™

Boldly mottled color finish

EASYSOAK™

Factory sealed to provide integral
surface protection from stains

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

	8"X8" HEX ENDURACOLOR	ENDURACOLOR
Bundle Type	SINGLE	RANDOM
Plant Produced	PICKERING	PICKERING
Thickness (mm)	70MM	60MM

SQFT PER	Bundle	73.92	94.14
	Layer	9.24	10.46
	Section	-	-
	Stone	0.39	1.31

PER BUNDLE	Layers	8.00	9.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-

SAILOR LNFT PER	SqFt	-	0.85
	Section	-	-
	Layer	-	8.86
	Bundle	-	79.72

UNITS PER	SqFt	2.60	0.76
	Section	-	-
	Bundle	192.00	72.00

LBS PER	Layer	306	287
	Section	-	-
	Bundle	2,450	2,583

COLORS	Reflectance	Stock	Stock
Notte Hex	SR n/a SRI n/a	SO	
Sabia Hex	SR n/a SRI n/a	SO	
Notte Random	SR n/a SRI n/a		SO
Sabia Random	SR n/a SRI n/a		SO



NOTTE HEX



NOTTE RANDOM



SABIA HEX



SABIA RANDOM

3-Unit Random Bundle		SMALL RECTANGLE 180 x 360 x 60mm 7 x 14 1/4 x 2 3/8" 27 units/Bundle		SQUARE 360 x 360 x 60mm 14 1/4 x 14 1/4 x 2 3/8" 27 units/Bundle		LARGE RECTANGLE 360 x 540 x 60mm 14 1/4 x 21 1/4 x 2 3/8" 18 units/Bundle	Single Unit		HEX 200 x 200 x 70mm 7 7/8 x 7 7/8 x 2 3/4" 192 units/Bundle .39 Sq.Ft./Stone


Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

GRN_Pickering

SPECIAL ORDER PRODUCT - NON -STOCK



LAYING PATTERNS



Hex Paver_A

APPLICATIONS



APPEARANCE

Edge Detail - Micro
Surface Texture - Smooth
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and
long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

HEX 8"X8" SMOOTH ENDURACOLOR	
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	70MM

SQFT PER	Bundle	73.92
	Layer	9.24
	Section	-
	Stone	0.39

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.60
	Section	-
	Bundle	192.00

LBS PER	Layer	306
	Section	-
	Bundle	2,450

COLORS	Reflectance	Stock
Dark Charcoal	SR .n/a SRI n/a	✓
Granite	SR .n/a SRI n/a	✓



DARK CHARCOAL



GRANITE

Single Unit




HEX
200 x 200 x 70mm
7 7/8 x 7 7/8 x 2 3/4"
192 Units/Bundle
.39 SqFt/Stone


Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.




LAYING PATTERNS



Hollandstone 4x8
RB_B



Hollandstone 4x8
HB_C



Hollandstone 4x8
BW_D

APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
Surface Texture - Smooth
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES

CLASSIC

Budget-friendly traditional
product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

	SMOOTH	SMOOTH SO
Bundle Type	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN
Thickness (mm)	60MM	80MM

SQFT PER	Bundle	106.20	82.60
	Layer	11.80	11.80
	Section	17.70	13.77
	Stone	0.22	0.22

PER BUNDLE	Layers	9.00	7.00
	Sections	6.00	6.00

SOLDIER LNFT PER	SqFt	1.50	1.50
	Section	26.57	20.67
	Layer	17.72	17.71
	Bundle	159.45	124.00

SAILOR LNFT PER	SqFt	3.00	-
	Section	53.15	-
	Layer	35.43	-
	Bundle	318.90	-

UNITS PER	SqFt	4.58	4.58
	Section	81.00	63.00
	Bundle	486.00	378.00

LBS PER	Layer	324	432
	Section	486	504
	Bundle	2,914	3,021

COLORS	Reflectance	Stock	Stock
Beechwood	SR n/a SRI n/a	✓	SO
Rustic Red	SR n/a SRI n/a	✓	SO
Sandstone	SR n/a SRI n/a	✓	SO
Terra Cotta	SR n/a SRI n/a	✓	SO



BEECHWOOD



RUSTIC RED



SANDSTONE



TERRA COTTA

Special Order 80mm can
be made in any stock color

Single Unit 60mm		4x8 STANDARD
		100 x 200 x 60mm 3 7/8 x 7 7/8 x 2 3/8" 486 units/Bundle .22 Sq.Ft./Stone
Single Unit 80mm		4x8 SPECIAL ORDER
		100 x 200 x 80mm 3 7/8 x 7 7/8 x 3 1/8" 378 units/Bundle .22 Sq.Ft./Stone


Notes: Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

HOL_MI


SPECIAL ORDER PRODUCT - NON - STOCK (80MM)




LAYING PATTERNS



Holland Prem 4x8
RB_B



Holland Prem 4x8
HB_C



Holland Prem 4x8
BW_D

APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
Surface Texture - Smooth
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and
long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

SMOOTH ENDURACOLOR	
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	60MM

SQFT PER	Bundle	106.20
	Layer	11.80
	Section	17.70
	Stone	0.22

PER BUNDLE	Layers	9.00
	Sections	6.00

SOLDIER LNFT PER	SqFt	1.50
	Section	26.57
	Layer	17.72
	Bundle	159.45

SAILOR LNFT PER	SqFt	3.00
	Section	53.15
	Layer	35.43
	Bundle	318.90


UNITS PER	SqFt	4.58
	Section	81.00
	Bundle	486.00

LBS PER	Layer	324
	Section	486
	Bundle	2,914

COLORS	Reflectance	Stock
Charleston	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	✓
Granite	SR n/a SRI n/a	✓



CHARLESTON



DARK CHARCOAL



FOSSIL



GRANITE

Single Unit




STANDARD

100 x 200 x 60mm
3 7/8 x 7 7/8 x 2 3/8"
486 units/Bundle
.22 Sq.Ft./Stone


Notes: **SOLD IN FULL BUNDLES ONLY.** **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.




LAYING PATTERNS



Il Campo 4x8_RB_F



Il Campo 4x8_SB_G



Il Campo 4x8_HB_H

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Il Campo® Brushed
Joint Spacing - 3 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and
long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits - see
page 19.

		BRUSHED ENDURACOLOR
Bundle Type		SINGLE
Plant Produced		PICKERING
Thickness (mm)		70MM
SQFT PER	Bundle	94.40
	Layer	11.80
	Section	15.73
	Stone	0.22
PER BUNDLE	Layers	8.00
	Sections	6.00
SOLDIER LNFT PER	SqFt	1.50
	Section	23.62
	Layer	17.72
	Bundle	141.73
SAILOR LNFT PER	SqFt	3.00
	Section	47.24
	Layer	35.43
	Bundle	283.46
UNITS PER	SqFt	4.58
	Section	72.00
	Bundle	432.00
LBS PER	Layer	377
	Section	502
	Bundle	3,014
COLORS		Reflectance
Dark Charcoal		SR n/a SRI n/a
		Stock
		✓



DARK CHARCOAL

Single Unit




4x8
100 x 200 x 70mm
3 3/8 x 7 7/8 x 2 3/4"
432 Units/Bundle
.22 SqFt/Stone


Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.




LAYING PATTERNS



RB_A



HB_C



DHB_D

APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Smooth
Joint Spacing - 4 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and
long-lasting color

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

		STANDARD SMOOTH
Bundle Type		SINGLE
Plant Produced		MARENGO
Thickness (mm)		70MM

SQFT PER	Bundle	89.28
	Layer	11.16
	Section	-
	Stone	0.16

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.27
	Section	-
	Layer	14.17
	Bundle	113.39

SAILOR LNFT PER	SqFt	5.08
	Section	-
	Layer	56.69
	Bundle	453.54

UNITS PER	SqFt	6.45
	Section	-
	Bundle	576.00

LBS PER	Layer	357
	Section	-
	Bundle	2,859

COLORS	Reflectance	Stock
Cocoa Brown	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Sable	SR n/a SRI n/a	✓



COCOA BROWN



DARK CHARCOAL



GRANITE FUSION **NEW**



SABLE

Single Unit



STANDARD


60 x 240 x 70mm
2 3/8 x 9 1/2 x 2 3/4"
576 Units/Bundle
.16 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.


Natural Stone - Sandstone & Limestone Slabs




LAYING PATTERNS



Natural Stone
12x24 RB A



Natural Stone
24x24 RB B



Natural Stone
Multi-Unit C

APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Brushed / Riven
Joint Spacing - 0 mm
Void - n/a

TECHNICAL INFORMATION

More information is available online.

BRUSHED FINISH	12" X 24"	18" X 24"	24" X 24"	24" X 36"
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	22MM	22MM	22MM	22MM

SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17

LBS PER	Unit	24	36	48	72
	Crate	2,149	2,221	1,910	2,149

COLORS	Reflectance	Stock	Stock	Stock	Stock
Ivory Sand	SR n/a SRI n/a	✓	✓	✓	✓
Golden Sand	SR n/a SRI n/a	✓	✓	✓	✓
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	✓	✓
Black River	SR n/a SRI n/a	✓	✓	✓	✓



IVORY SAND **NEW**



GOLDEN SAND **NEW**



STONE CLIFF GREY



BLACK RIVER (Limestone)

Single Units	12 X 24"	18 X 24"	24 X 24"	24 X 36"
	300 x 600 x 22mm 11 7/8 x 23 5/8 x 7/8" 2.0 Sq.Ft./Stone	450 x 600 x 22mm 17 3/4 x 23 5/8 x 7/8" 3.0 Sq.Ft./Stone	600 x 600 x 22mm 23 5/8 x 23 5/8 x 7/8" 4.0 Sq.Ft./Stone	600 x 900 x 22mm 23 5/8 x 35 1/2 x 7/8" 6.0 Sq.Ft./Stone

Notes: **SOLD IN FULL CRATES ONLY** and all units except the 24x24" require a refundable skid. This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Natural Stone - Sandstone & Limestone Steps, Coping and Pillar Cap



APPLICATIONS



	48" X 16" STEP
Bundle Type	SINGLE
Thickness (mm)	150MM

FCFT PER	Crate	32.00
----------	-------	-------

LNFT PER	Crate	24.00
----------	-------	-------

UNITS PER	Crate	6.00
-----------	-------	------

LBS PER	Crate	2,526
---------	-------	-------

COLORS	Stock
Ivory Sand	✓
Golden Sand	✓
Stone Cliff Grey	✓
Black River (Limestone)	✓



IVORY SAND **NEW**



GOLDEN SAND **NEW**



STONE CLIFF GREY










BLACK RIVER (Limestone)

		48 X 14" BULLNOSE COPING	48 X 12" BULLNOSE COPING	48 X 12" NATURAL EDGE COPING	48 X 14" NATURAL EDGE COPING	24 X 24" NATURAL EDGE PILLAR CAP	29 X 29" NATURAL EDGE PILLAR CAP
Bundle Type		SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)		50MM	50MM	50MM	50MM	65MM	65MM

UNITS PER	Crate	20.00	20.00	20.00	20.00	14.00	12.00
	SqFt	-	-	-	-	-	-

LBS PER	Unit	-	-	-	-	137	200
	Crate	2,557	2,116	2,116	2,557	1,914	2,513

COLORS		Stock	Stock	Stock	Stock	Stock	Stock
Ivory Sand		✓	✓	✓	✓	✓	✓
Golden Sand		✓	✓	✓	✓	✓	✓
Stone Cliff Grey		✓	✓	✓	✓	✓	✓
Black River (Limestone)		✓	✓	✓	✓	✓	✓


48" Step		NATURAL EDGE STEP 48 X 16" 1,200 x 150 x 400mm 47 1/4 x 5 7/8 x 15 3/4"	Pillar Cap		NATURAL EDGE PILLAR CAP 600 x 600 x 65mm 23 5/8 x 23 5/8 x 2 5/8"		NATURAL EDGE PILLAR CAP 725 x 725 x 65mm 28 5/8 x 28 5/8 x 2 5/8"
Coping		48 X 12" BULLNOSE COPING 1,200 x 50 x 300mm 47 1/4 x 2 x 11 7/8"			48 X 14" BULLNOSE COPING 1,200 x 50 x 350mm 47 1/4 x 2 x 13 7/8"		
		48 X 12" NATURAL EDGE COPING 1,200 x 50 x 300mm 47 1/4 x 2 x 11 7/8"			48 X 14" NATURAL EDGE COPING 1,200 x 50 x 350mm 47 1/4 x 2 x 13 7/8"		

Notes: **SOLD IN FULL CRATES ONLY** and all Steps, Coping & Pillar Caps require a refundable skid. This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.


Porcelain



LAYING PATTERNS



Porcelain 24x24
RB_A



Porcelain 24x24
SB_B

APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Stone Finish
Joint Spacing - n/a
Void - n/a

TECHNICAL INFORMATION

More information is available online.

	DEL CONCA SQUARE PRESSED EDGE
Bundle Type	SINGLE
Plant Produced	
Thickness (mm)	20MM

SQFT PER	Pallet	248.00
	Box	7.75
	Unit	3.88

PER PALLET	Box	32.00
	SqFt	248.00
	Unit	64.00

UNITS PER	Pallet	64.00
	Box	2.00

LBS PER	Unit	36
	SqFt	9
	Box	72
	Pallet	2,289

COLORS	Reflectance	Stock
Gotham Beige	SR n/a SRI n/a	SO
Gotham Grey	SR n/a SRI n/a	SO
Gotham Nero	SR n/a SRI n/a	SO
Travstone Beige	SR n/a SRI n/a	SO
Travstone Noce	SR n/a SRI n/a	SO



GOTHAM BEIGE



GOTHAM GREY



GOTHAM NERO



TRAVSTONE BEIGE



TRAVSTONE NOCE

Single Units



DEL CONCA SQUARE

600 x 600 x 20mm
23 5/8 x 23 5/8 x 7/8"
3.88 Sq.Ft./Stone

Notes: **SOLD IN FULL PALLETS ONLY.** Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.

SPECIAL ORDER PRODUCT - NON - STOCK

UNILOCK

45


Porcelain



LAYING PATTERNS



Porcelain 16x32
RB_C



Porcelain 16x32
HB_D

APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Woodgrain
Finish (DelConca) & Stone Finish
Joint Spacing - n/a
Void - n/a

TECHNICAL INFORMATION

More information is available online.

		DEL CONCA RECTANGLE PRESSED EDGE	DEL CONCA RECTANGLE PRESSED EDGE
Bundle Type		SINGLE	SINGLE
Plant Produced		STONE FINISH	WOOD GRAIN FINISH
Thickness (mm)		20MM	20MM
SQFT PER	Pallet	165.36	165.36
	Box	6.89	6.89
	Unit	3.45	3.45
PER PALLET	Box	24.00	24.00
	SqFt	165.36	165.36
	Unit	48.00	48.00
UNITS PER	Pallet	48.00	48.00
	Box	2.00	2.00
LBS PER	Unit	32	32
	SqFt	9	9
	Box	64	64
	Pallet	1,538	1,538
COLORS	Reflectance	Stock	
Arbor Bianco	SR n/a SRI n/a		SO
Arbor Gray	SR n/a SRI n/a		SO
Arbor Natural	SR n/a SRI n/a		SO
LaScala Beige	SR n/a SRI n/a	SO	
LaScala Grey	SR n/a SRI n/a	SO	
LaScala Noce	SR n/a SRI n/a	SO	
Travestone Beige	SR n/a SRI n/a	SO	
Travestone Grey	SR n/a SRI n/a	SO	



ARBOR BIANCO




ARBOR GRAY



ARBOR NATURAL



LASCALA BEIGE



LASCALA GREY



LASCALA NOCE



TRAVSTONE BEIGE



TRAVSTONE GREY

Single Unit



**DEL CONCA RECTANGLE
STONE FINISH**
400 x 800 x 20mm
15 3/4 x 31 1/2 x 7/8"
3.45 Sq.Ft./Stone



**DEL CONCA RECTANBLE
WOOD GRAIN FINISH**
400 x 800 x 20mm
15 3/4 x 31 1/2 x 7/8"
3.45 Sq.Ft./Stone


Notes: **SOLD IN FULL PALLET ONLY.** Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.

Promenade™ Plank Paver 4x12" - 100mm


ENDURACOLOR™



LAYING PATTERNS



Promenade 4x12
RB_H



Promenade 4x12
HB_I

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth,
Series™ Exposed & Il Campo®
Brushed
Joint Spacing - 4 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and
long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

	4X12" SMOOTH	4X12" SERIES	4X12" IL CAMPO
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	GEORGETOWN	GEORGETOWN	GEORGETOWN
Thickness (mm)	100MM	100MM	100MM

SQFT PER	Bundle	58.13	58.13	58.13
	Layer	11.63	11.63	11.63
	Section	-	-	-
	Stone	0.32	0.32	0.32

PER BUNDLE	Layers	5.00	5.00	5.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	1.02	1.02	1.02
	Section	-	-	-
	Layer	11.81	11.81	11.81
	Bundle	59.06	59.06	59.06

SAILOR LNFT PER	SqFt	3.05	3.05	3.05
	Section	-	-	-
	Layer	35.43	35.43	35.43
	Bundle	177.17	177.17	177.17

UNITS PER	SqFt	3.10	3.10	3.10
	Section	-	-	-
	Bundle	180.00	180.00	180.00

LBS PER	Layer	532	532	526
	Section	-	-	-
	Bundle	2,659	2,659	2,629

COLORS	Reflectance	Stock	Stock	Stock
Black Granite (Series)	SR n/a SRI n/a		SO	
Dark Charcoal (Il Campo)	SR n/a SRI n/a			SO
Granite Blend (Il Campo)	SR n/a SRI n/a			SO
Light Grey (Il Campo)	SR n/a SRI n/a			SO
Opal Blend (Smooth)	SR .24 SRI 24	SO		
Sandstone (Smooth)	SR n/a SRI n/a	SO		
Steel Grey Blend (Smooth)	SR n/a SRI n/a	SO		



BLACK GRANITE
SERIES FINISH



DARK CHARCOAL
IL CAMPO FINISH



GRANITE BLEND
IL CAMPO FINISH



LIGHT GREY
IL CAMPO FINISH



OPAL BLEND
SMOOTH FINISH



SANDSTONE
SMOOTH FINISH



STEEL GREY BLEND
SMOOTH FINISH

Single Unit

**4" X 12"
SMOOTH**
100 x 300 x 100mm
3 7/8 x 11 7/8 x 3 7/8"
180 units/Bundle
.32 Sq.Ft./Stone

Single Unit

**4" X 12"
SERIES EXPOSED**
100 x 300 x 100mm
3 7/8 x 11 7/8 x 3 7/8"
180 units/Bundle
.32 Sq.Ft./Stone

Single Unit

**4" X 12"
IL CAMPO BRUSHED**
100 x 300 x 100mm
3 7/8 x 11 7/8 x 3 7/8"
180 units/Bundle
.32 Sq.Ft./Stone


Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Promenade™ Plank Paver 4x16" - 100mm


ENDURACOLOR™



LAYING PATTERNS



Promenade 4x16
HB_C



Promenade 4x16
RB_A

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth
Joint Spacing - 4 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and
long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

	4X16"
	SMOOTH
Bundle Type	SINGLE
Plant Produced	GEORGETOWN / MI
Thickness (mm)	100MM

SQFT PER	Bundle	51.67
	Layer	10.33
	Section	-
	Stone	0.43

PER BUNDLE	Layers	5.00
	Sections	-

SOLDIER LNFT PER	SqFt	0.76
	Section	-
	Layer	7.87
	Bundle	39.37

SAILOR LNFT PER	SqFt	3.05
	Section	-
	Layer	31.50
	Bundle	157.48

UNITS PER	SqFt	2.32
	Section	-
	Bundle	120.00

LBS PER	Layer	488
	Section	-
	Bundle	2,440

COLORS	Reflectance	Stock
Opal Blend (Smooth)	SR .24 SRI 24	SO
Steel Grey Blend (Smooth)	SR n/a SRI n/a	SO



OPAL



STEEL GREY BLEND

Single Units



4" X 16" SMOOTH
100 x 400 x 100mm
3 7/8" x 15 3/4" x 3 7/8"
120 units/Bundle
.43 Sq.Ft./Stone


Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Promenade™ Plank Paver 8x24" - 100mm


ENDURACOLOR™



LAYING PATTERNS



Promenade 8x24
HB_F



Promenade 8x24
RB_D

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth,
Series™ Exposed & Il Campo®
Brushed
Joint Spacing - 4 mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and
long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

		8X24" SMOOTH	8X24" SERIES	8X24" IL CAMPO
Bundle Type		SINGLE	SINGLE	SINGLE
Plant Produced		PICKERING	PICKERING	PICKERING
Thickness (mm)		100MM	100MM	100MM
SQFT PER	Bundle	51.67	51.67	51.67
	Layer	10.33	10.33	10.33
	Section	-	-	-
	Stone	1.29	1.29	1.29
PER BUNDLE	Layers	5.00	5.00	5.00
	Sections	-	-	-
SOLDIER LNFT PER	SqFt	0.51	0.51	0.51
	Section	-	-	-
	Layer	5.25	5.25	5.25
	Bundle	26.25	26.25	26.25
SAILOR LNFT PER	SqFt	1.52	1.52	1.52
	Section	-	-	-
	Layer	15.75	15.75	15.75
	Bundle	78.74	78.74	78.74
UNITS PER	SqFt	0.77	0.77	0.77
	Section	-	-	-
	Bundle	40.00	40.00	40.00
LBS PER	Layer	478	478	478
	Section	-	-	-
	Bundle	2,391	2,391	2,391
COLORS		Reflectance	Stock	Stock
Black Granite (Series)		SR n/a SRI n/a		SO
Dark Charcoal (Il Campo)		SR n/a SRI n/a		SO
Granite Blend (Il Campo)		SR n/a SRI n/a		SO
Light Grey (Il Campo)		SR n/a SRI n/a		SO
Opal Blend (Smooth)		SR .24 SRI 24	SO	
Steel Grey Blend (Smooth)		SR n/a SRI n/a	SO	



BLACK GRANITE
SERIES FINISH



DARK CHARCOAL
IL CAMPO FINISH



GRANITE BLEND
IL CAMPO FINISH



LIGHT GREY
IL CAMPO FINISH



OPAL BLEND
SMOOTH FINISH



STEEL GREY BLEND
SMOOTH FINISH

Single Unit

**8" X 24"
SMOOTH**
 200 x 600 x 100mm
 7 7/8 x 23 5/8 x 3 7/8"
 40 units/Bundle
 1.29 Sq.Ft./Stone

Single Unit

**8" X 24"
SERIES EXPOSED**
 200 x 600 x 100mm
 7 7/8 x 23 5/8 x 3 7/8"
 40 units/Bundle
 1.29 Sq.Ft./Stone

Single Unit

**8" X 24"
IL CAMPO BRUSHED**
 200 x 600 x 100mm
 7 7/8 x 23 5/8 x 3 7/8"
 40 units/Bundle
 1.29 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.


PMD_ON

SPECIAL ORDER PRODUCT - NON-STOCK


UNILOCK



LAYING PATTERNS



Richcliff Fixed
Random A



Richcliff Fixed
Random B



Richcliff Large Rec
HB_H

APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Textured
Joint Spacing - 10 mm
Void - n/a

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty
with the combination of Reala
and Ultima technologies

REALA™

Cast from historic street pavers

ULTIMA™

Up to 4x stronger than
poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

		LARGE RECTANGLE	
Bundle Type		RANDOM	SINGLE
Plant Produced		AYR	AYR
Thickness (mm)		60MM	60MM

SQFT PER	Bundle	90.30	82.39
	Layer	11.29	10.30
	Section	-	-
	Stone	0.56	1.72

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.58
	Section	-	-
	Layer	-	5.94
	Bundle	-	47.56

SAILOR LNFT PER	SqFt	1.31	1.01
	Section	-	-
	Layer	14.78	10.39
	Bundle	118.22	83.15

UNITS PER	SqFt	1.77	0.58
	Section	-	-
	Bundle	160.00	48.00

LBS PER	Layer	309	301
	Section	-	-
	Bundle	2,472	2,411

COLORS	Reflectance	Stock	Stock
Dawn Mist	SR n/a SRI n/a	✓	✓
Pebble Taupe	SR n/a SRI n/a	✓	✓
Smoke Shale	SR n/a SRI n/a	✓	✓



DAWN MIST



PEBBLE TAUPE



SMOKE SHALE




DAWN MIST/PEBBLE TAUPE
BLEND (Blended on site)

3 Unit Random Bundle				Single Unit		
	RECTANGLE	SQUARE	SMALL RECTANGLE		LARGE RECTANGLE	
	226 x 300 x 60mm 8 7/8 x 11 7/8 x 2 3/8" 64 Units/Bundle .75 SqFt./Stone	226 x 226 x 60mm 8 7/8 x 8 7/8 x 2 3/8" 32 units/Bundle .58 Sq.Ft./Stone	150 x 226 x 60mm 5 7/8 x 8 7/8 x 2 3/8" 64 units/Bundle .38 Sq.Ft./Stone		302 x 528 x 60mm 11 7/8 x 20 7/8 x 2 3/8" 48 units/Bundle 1.72 Sq.Ft./Stone	


Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product can be used for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.




LAYING PATTERNS



Series Fixed
Random A



Series Fixed
Random B



Series Multi-Unit
Random C

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Series Exposed
Joint Spacing - 7mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and
long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

	SERIES EXPOSED
Bundle Type	RANDOM
Plant Produced	CHICAGO
Thickness (mm)	60MM

SQFT PER	Bundle	104.60
	Layer	10.46
	Section	17.43
	Stone	1.31

PER BUNDLE	Layers	10.00
	Sections	6.00

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.85
	Section	14.76
	Layer	8.86
	Bundle	88.58

UNITS PER	SqFt	0.76
	Section	13.33
	Bundle	80.00

LBS PER	Layer	291
	Section	485
	Bundle	2,913

COLORS	Reflectance	Stock
Cobalt Grey	SR n/a SRI n/a	SO




COBALT GREY

Single Unit		LARGE RECTANGLE 360 x 540 x 60mm 14 1/4 x 21 1/4 x 2 3/8" 20 units/Bundle 2.09 Sq.Ft./Stone		SQUARE 360 x 360 x 60mm 14 1/4 x 14 1/4 x 2 3/8" 30 units/Bundle 1.40 Sq.Ft./Stone		SMALL RECTANGLE 180 x 360 x 60mm 7 x 14 1/4 x 2 3/8" 30 units/Bundle .70 Sq.Ft./Stone


Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



LAYING PATTERNS



Series 4x8_HB_F



Series 4x8_HB_G

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Series Exposed
Joint Spacing - 7mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and
long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

	SERIES EXPOSED
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	70MM

SQFT PER	Bundle	106.20
	Layer	11.80
	Section	17.70
	Stone	0.22

PER BUNDLE	Layers	9.00
	Sections	6.00

SOLDIER LNFT PER	SqFt	1.50
	Section	26.57
	Layer	17.72
	Bundle	159.45

SAILOR LNFT PER	SqFt	3.00
	Section	53.15
	Layer	35.43
	Bundle	318.90


UNITS PER	SqFt	4.58
	Section	81.00
	Bundle	486.00

LBS PER	Layer	398
	Section	597
	Bundle	3,584

COLORS	Reflectance	Stock
Golden Tan	SR .40 SRI 45	SO
Onyx Black	SR n/a SRI n/a	✓



GOLDEN TAN
SPECIAL ORDER



ONYX BLACK

Single Unit




4 X 8
100 x 200 x 70mm
3 7/8 x 7 7/8 x 2 3/4"
486 units/Bundle
.22 Sq.Ft./Stone

Notes: **Special Order** - Lead time required. Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



LAYING PATTERNS



Skyline 24x24 SB_A



Skyline 24x24 RB_B

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth
Joint Spacing - 2mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and
long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1782
Eligible for LEED v4.1 credits -
see page 19.

	24 X 24
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	50MM

SQFT PER	Bundle	80.00
	Layer	8.00
	Section	-
	Stone	4.00

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	0.50
	Section	-
	Layer	4.00
	Bundle	40.00

SAILOR LNFT PER	SqFt	0.50
	Section	-
	Layer	4.00
	Bundle	40.00

UNITS PER	SqFt	0.25
	Section	-
	Bundle	20.00

LBS PER	Layer	183
	Section	-
	Bundle	1,833

COLORS	Reflectance	Stock
Chamois	SR .41 SRI 46	SO
Medium Grey	SR n/a SRI n/a	SO



CHAMOIS



MEDIUM GREY



24 x 24
606 x 606 x 50mm
23 7/8 x 23 7/8 x 2"
20 units/Bundle
4.00 Sq.Ft./Stone

Pedestal System


Contact your local Unilock
Rep for more information.




Notes: **Special Order items, lead time is required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Product is not intended vehicular applications.** Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. All measurements are nominal.




LAYING PATTERNS



Thornbury Fixed Random A



Thornbury Fixed Random B



Thornbury Fixed Random C

APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Textured
Joint Spacing - 11-18 mm
Void - 4.4%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits - see page 19.

Bundle Type	RANDOM
Plant Produced	MICHIGAN
Thickness (mm)	70MM

SQFT PER	Bundle	88.61
	Layer	11.08
	Section	-
	Stone	0.92

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.08
	Section	-
	Bundle	96.00

LBS PER	Layer	355
	Section	-
	Bundle	2,837

COLORS	Reflectance	Stock
Birch	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓



BIRCH



SIERRA

3 Unit Random Bundle



LARGE RECTANGLE

350 x 420 x 70mm
13 7/8 x 16 5/8 x 2 3/4"
32 Units/Bundle



MEDIUM RECTANGLE

210 x 350 x 70mm
8 3/8 x 13 7/8 x 2 3/4"
32 units/Bundle




SMALL RECTANGLE

173 x 210 x 70mm
6 7/8 x 8 3/8 x 2 3/4"
32 units/Bundle


Notes: **SOLD IN FULL BUNDLES ONLY** and is produced on an optional, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.




LAYING PATTERNS



Town Hall 4x10 HB_B



Town Hall 4x10 RB_C



Town Hall 4x10 DHB_D

APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Textured
Joint Spacing - 10 mm
Void - 6.50%

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Realta and Ultima technologies

REALTA™

Cast from historic street pavers

ULTIMA™

Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits - see page 19.

	4 X 10
Bundle Type	SINGLE
Plant Produced	AYR
Thickness (mm)	70MM

SQFT PER	Bundle	88.41
	Layer	11.050000
	Section	-
	Stone	.28

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.19
	Section	-
	Layer	13.12
	Bundle	104.99

SAILOR LNFT PER	SqFt	2.97
	Section	-
	Layer	32.81
	Bundle	262.47

UNITS PER	SqFt	3.62
	Section	-
	Bundle	320.00

LBS PER	Layer	361
	Section	-
	Bundle	2,888

COLORS	Reflectance	Stock
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓
Basalt	SR n/a SRI n/a	✓



BASALT



BURGUNDY RED



BURNT CLAY



OLD OAK

BURGUNDY RED/BURNT CLAY/OLD OAK 3-Color Blend is sold separately and blended on-site.

Single Units




4 X 10

250 x 100 x 70mm
9 7/8 x 3 7/8 x 2 3/4"
320 units/Bundle
.28 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



LAYING PATTERNS



Tribeca Cobble Fixed Random_A

APPLICATIONS



APPEARANCE

Edge Detail - Micro
Surface Texture - Series
Exposed Textured
Joint Spacing - 10mm
Void - 5.6%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits - see page 19.

		SERIES EXPOSED TEXTURED
Bundle Type		RANDOM
Plant Produced		CHICAGO
Thickness (mm)		70MM

SQFT PER	Bundle	97.53
	Layer	12.19
	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	2.34
	Section	-
	Layer	28.49
	Bundle	227.95

UNITS PER	SqFt	3.12
	Section	-
	Bundle	304.00

LBS PER	Layer	398
	Section	-
	Bundle	3,186

COLORS	Reflectance	Stock
Cobalt Grey	SR n/a SRI n/a	SO
Peppered Granite	SR .38 SRI 42	SO



COBALT GREY



PEPPERED GRANITE

Random Bundle



LARGE RECTANGLE
130 x 305 x 70mm
5 x 12 x 2 ¾"
88 units/Bundle
.43 Sq.Ft./Stone




RECTANGLE
130 x 230 x 70mm
5 x 9 x 2 ¾"
88 units/Bundle
.32 Sq.Ft./Stone



SMALL RECTANGLE
130 x 175 x 70mm
5 x 6 ⅞ x 2 ¾"
128 units/Bundle
.25 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. For permeable installations, Unilock recommends using granite chips for joint filler. For traditional applications, please refer to the Polymeric Sand Best Practices on page 92. All measurements are nominal. Contact Unilock for more information.


LAYING PATTERNS


Turfstone A

APPLICATIONS

APPEARANCE

Edge Detail - Zero
Surface Texture - Smooth
Joint Spacing - 2mm
Void - 40%

TECHNOLOGIES
PERMEABLE

Can be installed to allow water to flow through

CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C1319
Eligible for LEED v4.1 credits - see page 19.

		SMOOTH
Bundle Type		SINGLE
Plant Produced		MICHIGAN
Thickness (mm)		80MM
SQFT PER	Bundle	80.00
	Layer	10.00
	Section	-
	Stone	2.50
PER BUNDLE	Layers	8.00
	Sections	-
SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-
SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-
UNITS PER	SqFt	0.40
	Section	-
	Bundle	32.00
LBS PER	Layer	247
	Section	-
	Bundle	1,975
COLORS		Reflectance
Natural		SR .30 SRI 32
		Stock
Natural		✓



NATURAL

Single Unit



STANDARD

400 x 600 x 80mm
15 3/4 x 23 5/8 x 3 1/8"
32 units/Bundle
2.50 Sq.Ft./Stone


Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. All measurements are nominal. Contact Unilock for more information.



LAYING PATTERNS



Umbriano Fixed
Random_A



Umbriano Fixed
Random_B

APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Umbriano Mottled
Joint Spacing - 7mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™
Refined surface and
long-lasting color

EASYCLEAN™
Factory sealed to provide integral
surface protection from stains

COLORFUSION™
Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits - see
page 19.

Bundle Type		RANDOM
Plant Produced		GEORGETOWN
Thickness (mm)		60MM

SQFT PER	Bundle	94.14
	Layer	10.46
	Section	-
	Stone	1.31

PER BUNDLE	Layers	9.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.85
	Section	-
	Layer	8.86
	Bundle	79.72

UNITS PER	SqFt	0.76
	Section	-
	Bundle	72.00

LBS PER	Layer	287
	Section	-
	Bundle	2,583

COLORS	Reflectance	Stock
French Grey	SR .18 SRI 17	✓
Summer Wheat	SR .42 SRI 48	✓
Winter Marvel	SR .35 SRI 38	✓



FRENCH GREY



SUMMER WHEAT



WINTER MARVEL

Random Bundle



LARGE RECTANGLE
350 x 546 x 60mm
13 7/8 x 21 1/2 x 2 3/8"
18 units/Bundle



SQUARE
360 x 360 x 60mm
14 1/4 x 14 1/4 x 2 3/8"
27 units/Bundle




SMALL RECTANGLE
180 x 360 x 60mm
7 x 14 1/4 x 2 3/8"
27 units/Bundle


Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.




LAYING PATTERNS



Umbriano 24x24
RB_AG



Umbriano 12x24
HB_O



Umbriano 16x16
RB_AE

APPLICATIONS



(Note: 8x16" only is drive friendly)

APPEARANCE

Edge Detail - Zero
Surface Texture - Umbriano
Mottled
Joint Spacing - 7mm
Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and
long-lasting color

EASYCLEAN™

Factory sealed to provide
integral surface protection
from stains

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

	8x16	12x24	16x16	24x24
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GEORGETOWN	GEORGETOWN	GEORGETOWN	GEORGETOWN
Thickness (mm)	70MM	70MM	70MM	70MM

SQFT PER	Bundle	82.67	93.00	82.67	62.00
	Layer	10.33	11.63	10.33	7.75
	Section	27.56	-	-	-
	Stone	0.86	1.94	1.72	3.88

PER BUNDLE	Layers	8.00	8.00	8.00	8.00
	Sections	3.00	-	-	-

SOLDIER LNFT PER	SqFt	0.76	0.51	0.76	0.51
	Section	21.00	-	-	-
	Layer	7.87	5.91	7.87	3.94
	Bundle	62.99	47.24	62.99	31.50

SAILOR LNFT PER	SqFt	1.52	1.02	0.76	0.51
	Section	41.99	-	-	-
	Layer	15.75	11.81	7.87	3.94
	Bundle	125.98	94.49	62.99	31.50

UNITS PER	SqFt	1.16	0.52	0.58	0.26
	Section	32.00	-	-	-
	Bundle	96.00	48.00	48.00	16.00

LBS PER	Layer	343	393	350	258
	Section	915	-	-	-
	Bundle	2,746	3,142	2,797	2,062


COLORS	Reflectance	Stock	Stock	Stock	Stock
French Grey	SR .18 SRI 17	SO	SO	SO	SO
Midnight Sky	SR .17 SRI 15	SO			
Summer Wheat	SR .42 SRI 48	SO	SO	SO	SO
Winter Marvel	SR .35 SRI 38	SO	SO	SO	SO



FRENCH GREY



MIDNIGHT SKY
8X16 ONLY



SUMMER WHEAT



WINTER MARVEL

Single Units



8 x 16
200 x 400 x 70mm
7 7/8 x 15 3/4 x 2 3/4"
96 units/Bundle
.86 Sq.Ft./Stone



12 x 24
300 x 600 x 70mm
11 7/8 x 23 5/8 x 2 3/4"
48 units/Bundle
1.94 Sq.Ft./Stone



16 x 16
400 x 400 x 70mm
15 3/4 x 15 3/4 x 2 3/4"
48 units/Bundle
1.72 Sq.Ft./Stone



24 x 24
600 x 600 x 70mm
23 5/8 x 23 5/8 x 2 3/4"
16 units/Bundle
3.88 Sq.Ft./Stone


Notes: **Special Order items, lead time is required. SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

UMB_ON


SPECIAL ORDER PRODUCT - NON - STOCK



LAYING PATTERNS



Westport Fixed
Random_A



Westport Fixed
Random_B

APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Textured
Joint Spacing - 3-7mm
Void - n/a

TECHNOLOGIES

CLASSIC

Budget-friendly traditional
product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits -
see page 19.

Bundle Type	RANDOM
Plant Produced	MICHIGAN
Thickness (mm)	70MM

SQFT PER	Bundle	94.19
	Layer	11.77
	Section	-
	Stone	0.59

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	1.24
	Section	-
	Layer	14.57
	Bundle	116.56

UNITS PER	SqFt	1.70
	Section	-
	Bundle	160.00

LBS PER	Layer	367
	Section	-
	Bundle	2,937

COLORS	Reflectance	Stock
Beechwood	SR n/a SRI n/a	✓
Granite	SR n/a SRI n/a	✓



BEECHWOOD



GRANITE

Random Bundle



LARGE RECTANGLE

254 x 380 x 70mm
10 x 15 x 2 ¾"
32 units/Bundle



SQUARE

254 x 254 x 70mm
10 x 10 x 2 ¾"
56 units/Bundle



SMALL RECTANGLE

127 x 254 x 70mm
5 x 10 x 2 ¾"
72 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:
contractor.unilock.com

APPEARANCE

Edge Detail - n/a
 Surface Texture - Standard
 Joint Spacing - 2mm
 Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372
 Eligible for LEED v4.1 credits - see page 19.

	STANDARD CLASSIC ANTIQUED
Bundle Type	SINGLE
Plant Produced	AYR / MI
Thickness (mm)	100MM

FCFT PER	Bundle	32.00
	Layer	5.33
	Stone	0.33

PER BUNDLE	Layers	6.00
	Sections	4.00

LNFT PER	Bundle	96.00
	Unit	1.00

UNITS PER	SqFt	3.00
	Section	24.00
	Bundle	96.00

LBS PER	Layer	473
	Section	709
	Bundle	2,836

COLORS		Stock
Coffee Creek	SR n/a SRI n/a	✓
Midnight Charcoal	SR n/a SRI n/a	✓
Limestone	SR .n/a SRI n/a	✓
Mahogany Ash	SR .n/a SRI n/a	✓
Sandstone	SR .n/a SRI n/a	✓

SUNSET FIREPIT KITS

Available in the following colors - see Page 84:

- Coffee Creek • Limestone
- Mahogany Ash • Sandstone



ROUND



COFFEE CREEK



MIDNIGHT CHARCOAL
NEW



LIMESTONE



MAHOGANY ASH



SANDSTONE

Single Uni



STANDARD

300 x 100 x 200mm
 11 7/8 x 3 7/8 x 7 7/8"
 96 units/Bundle
 .33 Fc.Ft./Stone

Notes: Small tapered units are sold in full bundles only on an optional skid. Maximum height is 24" (under optimum conditions). *Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle. Ledgestone, Brussels XL or 6" x 12" Fullnose complement as a possible coping unit. All measurements are nominal. Contact Unilock for more information.

BDS_AYR/MI



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Standard

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits - see page 19.

	STANDARD	STANDARD 1/2	CORNER 45° (Left & Right)	CORNER 90° (Left & Right)
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	300MM	300MM	300MM	300MM

FCFT PER	Bundle	6.02	3.00	7.04	7.04
	Layer	6.02	3.00	7.04	7.04
	Stone	6.02	3.00	7.04	7.04

PER BUNDLE	Layers	1.00	1.00	1.00	1.00
	Sections	-	-	-	-

LNFT PER	Bundle	6.02	3.00	-	-
	Unit	6.02	3.00	-	-





UNITS PER	SqFt	0.17	0.33	0.14	0.14
	Section	-	-	-	-
	Bundle	1.00	1.00	1.00	1.00

LBS PER	Layer	1,680	800	1,480	1,320
	Section	-	-	-	-
	Bundle	1,680	800	1,480	1,320

COLORS		Stock	Stock	Stock	Stock
Natural	SR. n/a SRI n/a	SO	SO	SO	SO



NATURAL

Single Units				
	STANDARD 1830 x 300 x 600mm 72 x 11 7/8 x 23 5/8" 1 unit/Bundle 6.02 Fc.Ft./Stone	1/2 STANDARD 915 x 300 x 600mm 36 x 11 7/8 x 23 5/8" 1 unit/Bundle 3.00 Fc.Ft./Stone	CORNER 45° 1520 x 300 x 600mm 59 7/8 x 11 7/8 x 23 5/8" 1 unit/Bundle 7.04 Fc.Ft./Stone	CORNER 90° 1520 x 300 x 600mm 59 7/8 x 11 7/8 x 23 5/8" 1 unit/Bundle 7.04 Fc.Ft./Stone

Notes: *Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on an required, refundable skid. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Standard

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits - see page 19.

	COPING 1/2	COPING STANDARD	COPING CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	300MM	300MM	300MM

FCFT PER	Bundle	2.95	6.02	6.02
	Layer	2.95	6.02	6.02
	Stone	2.95	6.02	6.02

PER BUNDLE	Layers	1.00	1.00	1.00
	Sections	-	-	-

LNFT PER	Bundle	-	-	-
	Unit	-	-	-




UNITS PER	SqFt	0.34	0.17	0.17
	Section	-	-	-
	Bundle	1.00	1.00	1.00

LBS PER	Layer	780	1,560	1,560
	Section	-	-	-
	Bundle	780	1,560	1,560

COLORS		Stock	Stock	Stock
Natural	SR.n/a SRI n/a	SO	SO	SO



NATURAL

Single Units	1/2 COPING	COPING	CLOSED-END COPING
	 <p>915 x 300 x 600mm 36 x 11 7/8 x 23 5/8" 1 unit/Bundle 2.95 Fc.Ft./Stone</p>	 <p>1830 x 300 x 600mm 72 x 11 7/8 x 23 5/8" 1 unit/Bundle 6.02 Fc.Ft./Stone</p>	 <p>1830 x 300 x 600mm 72 x 11 7/8 x 23 5/8" 1 unit/Bundle 6.02 Fc.Ft./Stone</p>

Notes: *Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on an required, refundable skid.. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Standard

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits - see page 19.

	TIE-BACK	STANDARD	CORNER 90° (Left & Right)	COPING	COPING CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	300MM	300MM	300MM	300MM	300MM

FCFT PER	Bundle	4.68	24.10	16.67	24.08	24.08
	Layer	1.17	6.02	4.17	6.02	6.02
	Stone	1.17	6.02	4.17	6.02	6.02

PER BUNDLE	Layers	4.00	4.00	4.00	4.00	4.00
	Sections	-	-	-	-	-

LNFT PER	Bundle	-	24.10	-	24.10	24.10
	Unit	-	6.02	-	6.02	6.02






UNITS PER	SqFt	0.85	0.17	0.24	0.17	0.17
	Section	-	-	-	-	-
	Bundle	4.00	4.00	4.00	4.00	4.00

LBS PER	Layer	938	938	460	884	884
	Section	-	-	-	-	-
	Bundle	3,752	3,752	1,840	3,536	3,536

COLORS		Stock	Stock	Stock	Stock	Stock
Natural		SO	SO	SO	SO	SO



NATURAL

Single Units					
	TIE-BACK 360 x 300 x 1830mm 14 1/4 x 11 7/8 x 72" 4 unit/Bundle 1.17 Fc.Ft./Stone	Corner 90° 900 x 300 x 360mm 35 1/2 x 11 7/8 x 14 1/4" 4 unit/Bundle 4.17 Fc.Ft./Stone	STANDARD 1830 x 300 x 360mm 72 x 11 7/8 x 14 1/4" 4 unit/Bundle 6.02 Fc.Ft./Stone	COPING 1830 x 300 x 360mm 72 x 11 7/8 x 14 1/4" 4 unit/Bundle 6.02 Fc.Ft./Stone	CLOSED-END COPING 1830 x 300 x 360mm 72 x 11 7/8 x 14 1/4" 4 unit/Bundle 6.02 Fc.Ft./Stone

Notes: *Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on an required, refundable skid. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Split

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits - see page 19.

	TAPERED SPLIT CLASSIC ANTIQUED	CORNER SPLIT CLASSIC ANTIQUED	COPING TAPERED CLASSIC ANTIQUED
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	150MM	150MM	75MM

FCFT PER	Bundle	31.25	20.83	18.74
	Layer	6.25	4.17	2.34
	Stone	0.52	0.52	0.26

PER BUNDLE	Layers	5.00	5.00	8.00
	Sections	4.00	4.00	3.00

LNFT PER	Bundle	62.30	41.60	66.00
	Unit	1.04	1.04	.92

UNITS PER	SqFt	1.92	1.92	3.84
	Section	15.00	10.00	24.00
	Bundle	60.00	40.00	72.00

LBS PER	Layer	608	436	299
	Section	760	545	797
	Bundle	3,040	2,179	2,392

COLORS		Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓	✓



GRANITE



SANDSTONE



SIERRA

Random Bundle				Single Units		
	LARGE TAPERED 380 x 150 x 230mm 15 x 5 7/8 x 9" 20 units/Bundle .63 Fc.Ft./Stone	MEDIUM TAPERED 320 x 150 x 230mm 12 5/8 x 5 7/8 x 9" 20 units/Bundle .52 Fc.Ft./Stone	SMALL TAPERED 250 x 150 x 230mm 9 7/8 x 5 7/8 x 9" 20 units/Bundle .42 Fc.Ft./Stone		CORNER SPLIT 320 x 150 x 230mm 12 5/8 x 5 7/8 x 9" 40 units/Bundle .52 Sq.Ft./Stone	COPING TAPERED 320 x 75 x 300mm 12 5/8 x 3 x 11 7/8" 72 units/Bundle .26 Sq.Ft./Stone

Notes: 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. LedgeStone™ coping, Brussels Block® XL, Brussels Fullnose™ or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Standard
Joint Spacing - n/a
Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits - see page 19.

	RANDOM CLASSIC	PILLAR CLASSIC
Bundle Type	RANDOM	SINGLE
Plant Produced	MICHIGAN	MICHIGAN
Thickness (mm)	100MM	100MM

FCFT PER	Bundle	29.92	29.97
	Layer	9.97	9.99
	Stone	0.50	0.33

PER BUNDLE	Layers	3.00	3.00
	Sections	3.00	-

LNFT PER	Bundle	89.06	-
	Unit	1.48	-

UNITS PER	SqFt	2.01	3.00
	Section	20.00	-
	Bundle	60.00	90.00

LBS PER	Layer	881	893
	Section	881	-
	Bundle	2,643	2,679

COLORS		Stock	Stock
Limestone	SR.n/a SRI n/a	✓	✓
Midnight Charcoal	SR.n/a SRI n/a	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓



LIMESTONE



MIDNIGHT CHARCOAL



SANDSTONE

Random Bundle					Single Unit	
	XL RECTANGLE 600 x 100 x 200mm 23 5/8 x 3 7/8 x 7 7/8 15 units/Bundle	LARGE RECTANGLE 500 x 100 x 200mm 19 3/4 x 3 7/8 x 7 7/8 15 units/Bundle	RECTANGLE 400 x 100 x 200mm 15 3/4 x 3 7/8 x 7 7/8 15 units/Bundle	SMALL RECTANGLE 300 x 100 x 200mm 11 7/8 x 3 7/8 x 7 7/8 15 units/Bundle		CORNER/PILLAR 300 x 100 x 200mm 11 7/8 x 3 7/8 x 7 7/8 90 units/Bundle .33 Fc.Ft./Stone

Notes: Sold in full bundles only and is produced and sold on a required, refundable skid. Spacing strips are shipped with random wall bundles to create even spacing between units. Ledgerstone™, Unilock Natural Stone or 6"x12" Fullnose complement as possible coping options. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Split & Standard (coping)
Joint Spacing - n/a
Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits - see page 19.

	CORNER DOUBLE SPLIT CLASSIC	TAPERED SPLIT CLASSIC	COPING CLASSIC
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
Thickness (mm)	150MM	150MM	75MM

FCFT PER	Bundle	20.17	20.00	20.34
	Layer	6.72	6.67	2.91
	Stone	1.68	0.67	0.48

PER BUNDLE	Layers	3.00	3.00	7.00
	Sections	4.00	2.00	2.00

LNFT PER	Bundle	-	40.00	82.95
	Unit	-	1.33	1.97

UNITS PER	SqFt	0.59	1.50	2.06
	Section	3.00	15.00	21.00
	Bundle	12.00	30.00	42.00

LBS PER	Layer	440	860	393
	Section	330	1,290	1,375
	Bundle	1,320	2,580	2,750

COLORS		Stock	Stock	Stock
Beechwood	SR.n/a SRI n/a	✓	✓	✓
Charcoal	SR.n/a SRI n/a	✓	✓	✓
Granite	SR.n/a SRI n/a	✓	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓	✓



BEECHWOOD



CHARCOAL



GRANITE



SANDSTONE

Single Units		CORNER 300 x 150 x 200mm 11 7/8 x 5 7/8 x 7 7/8" 12 units/Bundle 1.68 Fc.Ft./Stone		TAPERED SPLIT 200 x 150 x 300mm 7 7/8 x 5 7/8 x 11 7/8" 30 units/Bundle .67 Fc.Ft./Stone		COPING 300 x 75 x 300mm 11 7/8 x 3 x 11 7/8" 42 units/Bundle .48 Fc.Ft./Stone

Notes: * **TAPERED WALL UNITS ARE DOUBLE UNITS AND ARE SOLD IN FULL BUNDLES ONLY.** 12" Coping bundle has 16 units of closed-end coping (8 left and 8 right). Closed-end 12" coping not sold separately. Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa2 wall is 3/4" every course or 1 1/2" every 2 courses. Retaining wall engineering software is also available free of charge at www.unilock.com. Walls greater than 4' in height require professional engineering. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:
contractor.unilock.com

APPEARANCE

Edge Detail - n/a
 Surface Texture - Smooth
 Joint Spacing - n/a
 Void - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
 Eligible for LEED v4.1 credits – see page 19.

	STANDARD SMOOTH	COPING SMOOTH
Bundle Type	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	180MM	180MM

FCFT PER	Bundle	23.25	23.25
	Layer	7.75	7.75
	Stone	1.94	1.94

PER BUNDLE	Layers	3.00	3.00
	Sections	-	-

LNFT PER	Bundle	39.37	39.37
	Unit	3.28	3.28

UNITS PER	SqFt	0.52	0.52
	Section	-	-
	Bundle	12.00	12.00

LBS PER	Layer	1,029	1,029
	Section	-	-
	Bundle	3,086	3,086

COLORS		Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓



GRANITE



SIERRA

Single Units



STANDARD CORNER
 1000 x 180 x 290mm
 39 3/8 x 7 x 11 1/2"
 12 units/Bundle
 1.94 Fc.Ft./Stone



COPING
 1000 x 180 x 290mm
 39 3/8 x 7 x 11 1/2"
 12 units/Bundle
 1.94 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Split

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits - see page 19.

	CORNER 90° SPLIT	CORNER 45° SPLIT	STANDARD 500 SPLIT	STANDARD 925 SPLIT	COPING SPLIT	COPING SPLIT C-E
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	185MM	185MM	185MM	185MM	185MM	185MM

FCFT PER	Bundle	19.11	-	14.43	7.21	14.43	14.43
	Layer	6.37	-	4.81	2.40	4.81	4.81
	Stone	3.19	-	2.41	2.40	2.41	2.41

PER BUNDLE	Layers	3.00	3.00	3.00	3.00	3.00	3.00
	Sections	-	-	3.00	-	3.00	3.00

LNFT PER	Bundle	-	-	24.00	12.00	23.70	23.70
	Unit	-	-	4.00	4.00	3.95	3.95







UNITS PER	SqFt	0.31	-	0.42	0.42	0.42	0.42
	Section	-	-	2.00	-	2.00	2.00
	Bundle	6.00	6.00	6.00	3.00	6.00	6.00

LBS PER	Layer	1,140	1,050	1,140	1,140	1,140	1,140
	Section	-	-	1,140	-	1,140	1,140
	Bundle	3,420	3,150	3,420	3,420	3,420	3,420

COLORS		Stock	Stock	Stock	Stock	Stock	Stock
Natural		SO	SO	SO	SO	SO	✓



NATURAL

Single Units						
	CORNER 90° SPLIT 1100 x 185 x 500mm 43 3/8 x 7 3/8 x 19 3/4" 6 units/Bundle 3.19 Fc.Ft./Stone	CORNER 45° SPLIT 1100 x 185 x 500mm 43 3/8 x 7 3/8 x 19 3/4" 6 units/Bundle	STANDARD 500 SPLIT 1200 x 185 x 500mm 47 1/4 x 7 3/8 x 19 3/4" 6 units/Bundle 2.41 Fc.Ft./Stone	STANDARD 925 SPLIT 1200 x 185 x 925mm 47 1/4 x 7 3/8 x 36 1/2" 3 units/Bundle 2.40 Fc.Ft./Stone	COPING SPLIT 1200 x 185 x 500mm 47 1/4 x 7 3/8 x 19 3/4" 6 units/Bundle 2.41 Fc.Ft./Stone	COPING C-E SPLIT 1200 x 185 x 500mm 47 1/4 x 7 3/8 x 19 3/4" 6 units/Bundle 2.41 Fc.Ft./Stone

Notes: **Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY** and is sold on a required, refundable skid. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Standard

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits - see page 19.

	SIENASTONE 48" SMOOTH STEP	SIENASTONE 72" SMOOTH STEP
Bundle Type	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY
Thickness (mm)	180MM	180MM

FCFT PER	Bundle	13.95	6.97
	Layer	4.65	3.49
	Stone	2.33	3.49

PER BUNDLE	Layers	3.00	2.00
	Sections	-	-

LNFT PER	Bundle	24.00	11.81
	Unit	4.00	5.91


UNITS PER	SqFt	0.43	0.29
	Section	-	-
	Bundle	6.00	2.00

LBS PER	Layer	1,081	540
	Section	-	-
	Bundle	3,242	1,596

COLORS		Stock	Stock
Light Grey	SR.n/a SRI n/a	✓	SO
Midnight Charcoal	SR.n/a SRI n/a	✓	SO
Tan	SR.n/a SRI n/a	✓	SO



LIGHT GREY



MIDNIGHT CHARCOAL



TAN

Single Unit



48" STEP

1200 x 180 x 500mm
47 1/4 x 7 x 19 3/4"
6 units/Bundle
2.33 Fc.Ft./Stone




72" STEP

1800 x 180 x 500mm
70 7/8 x 7 x 19 3/4"
2 units/Bundle
3.49 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is sold on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

U-Cara® Multi-Face Wall System

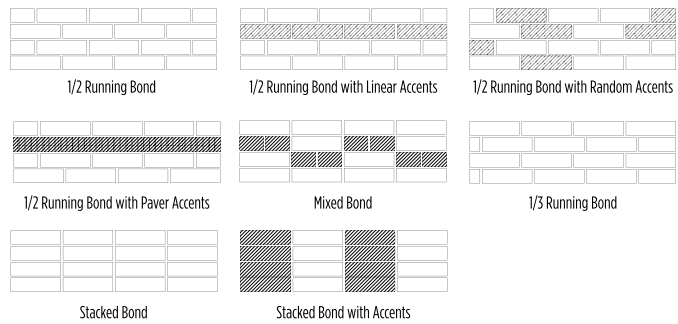

APPLICATIONS



TECHNOLOGIES

ENDURACOLOR™
Refined surface and long-lasting color















COLORFUSION™ (Umbriano)
Subtly mottled colored finish

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth, Standard, Series Exposed, Umbriano Mottled & Pitched

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits - see page 19.

Pitched Finish					
	FOSSIL	GRANITE	NATURAL	SIERRA	
Smooth Finish					
	DARK CHARCOAL	FOSSIL 3" also available	GRANITE	NATURAL	SIERRA
Umbriano Finish					UMBRIANO® FINISH COLORFUSION™ Subtly mottled color finish
	FRENCH GREY	MIDNIGHT SKY	SUMMER WHEAT	WINTER MARVEL	
Series Finish		SERIES™ FINISH Granite, Quartz and Marble surface materials			
	ONYX BLACK 3" panel only				

U-Cara® Multi-Face Wall System

	Standard 6" Fascia Smooth	Closed-End 6" Fascia Smooth	Standard 3" Fascia Smooth	Standard 3" Fascia Series Exposed	Standard 6" Fascia Umbriano	Closed-End 6" Fascia Umbriano	Standard 6" Fascia Pitched	Closed-End 6" Fascia Pitched
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN	CHICAGO	GEORGETOWN	GEORGETOWN	MICHIGAN	MICHIGAN
Thickness (mm)	150MM	150MM	71MM	71MM	150MM	150MM	150MM	150MM

FCFT PER	Bundle	61.52	54.18	63.20	59.32	61.49	54.18	61.52	54.18
	Layer	10.25	9.03	10.53	9.89	10.25	9.03	10.25	9.03
	Stone	0.73	1.29	0.19	0.18	0.73	1.29	0.73	1.29

PER BUNDLE	Layers	6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00
	Sections	-	-	-	-	-	-	-	-

LNFT PER	Bundle	129.50	104.86	-	-	-	104.86	129.50	104.86
	Unit	1.54	2.50	-	-	-	2.50	1.54	2.50

UNITS PER	SqFt	1.37	0.78	5.32	5.66	1.37	0.78	1.37	0.78
	Section	-	-	-	-	-	-	-	-
	Bundle	84.00	42.00	336.00	336.00	84.00	42.00	84.00	42.00

LBS PER	Layer	252	207	242	250	252	213	291	236
	Section	-	-	-	-	-	-	-	-
	Bundle	1,513	1,240	1,453	1,501	1,513	1,240	1,745	1,415


COLORS		Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Dark Charcoal	SR.n/a SRI n/a	✓	✓						
Fossil	SR.n/a SRI n/a	✓	✓	✓				✓	✓
French Grey	SR.n/a SRI n/a					SO	SO		
Granite	SR.n/a SRI n/a	✓	✓					✓	✓
Midnight Sky	SR.n/a SRI n/a					SO	SO		
Natural	SR.n/a SRI n/a	✓	✓					✓	✓
Onyx Black	SR.n/a SRI n/a				✓				
Summer Wheat	SR.n/a SRI n/a					SO	SO		
Sierra	SR.n/a SRI n/a	✓	✓					✓	✓
Winter Marvel						SO	SO		

Fascia Panel - 6"		6" STANDARD FASCIA PANEL 5 7/8 x 18 3/8 x 2 3/8" 150 x 466 x 60mm 84 units/Bundle .73 Sq.Ft./Stone	Fascia Panel - 3"		3" FASCIA PANEL 2 7/8 x 9 x 2 3/8" 71 x 231 x 60mm 336 units/Bundle .19 Sq.Ft./Stone
2 Unit Corner		STANDARD FASCIA HALF PANEL 5 7/8 x 9 1/4 x 2 3/8" 150 x 233 x 60mm 42 units/Bundle			CLOSED-END FASCIA PANEL 5 7/8 x 20 7/8 x 2 3/8" 150 x 530 x 60mm 42 units/Bundle

U-Cara® Multi-Face Wall System



APPLICATIONS



ENDURACOLOR™

Refined surface and long-lasting color

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 1262
Eligible for LEED v4.1 credits - see page 19.


CROSS SECTIONS

All Cross Sections are available on Unilock's Contractor web site under Products:
contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth, Standard, Series™ Exposed, Umbriano® Mottled & Pitched

U-CARA RETAINING WALL GEOGRID SECTION

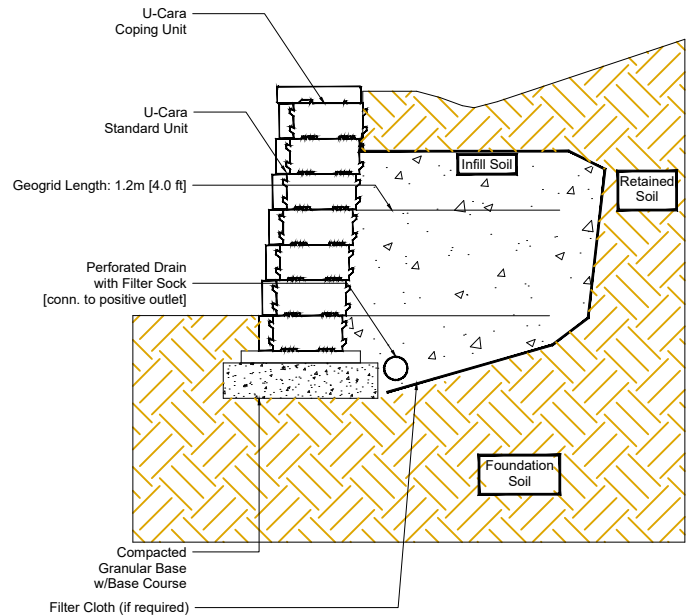


U-CARA™

CROSS SECTION

Garden Wall - Max Height 15'

REF: Detail_U-Cara_Garden_Wall

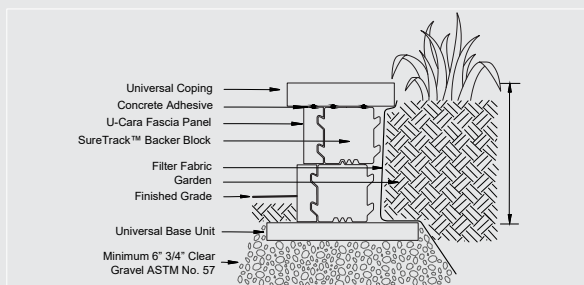


Notes:
This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

U-CARA™

CROSS SECTION

Seat Wall - Max Height 21'

REF: Detail_U-Cara_Seat_Wall

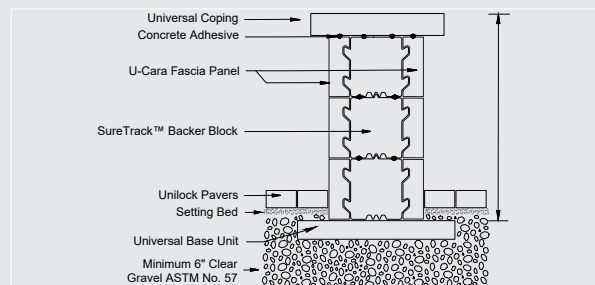

Notes:
This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

U-Cara® Multi-Face Wall System

Components



**SURE TRACK
LARGE BACKER**
6 x 7½ x 12"
150 x 190 x 300mm



**SURE TRACK
STANDARD BACKER**
6 x 8 x 6"
150 x 200 x 150mm

		LARGE BACKER	STANDARD BACKER
Bundle Type		SINGLE	SINGLE
Plant Produced		MICHIGAN	MICHIGAN
Thickness (mm)		150MM	150MM
FCFT PER	Bundle	15.82	33.91
	Layer	3.96	11.30
	Stone	0.28	0.32
PER BUNDLE	Layers	4.00	3.00
	Sections	-	-
LNFT PER	Bundle	-	69.99
	Unit	-	0.67
UNITS PER	SqFt	3.54	3.10
	Section	-	-
	Bundle	56.00	105.00
LBS PER	Layer	503	812
	Section	-	-
	Bundle	2,012	2,437

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

Recommended Base Unit



UNIVERSAL BASE UNIT
14 x 19 x 2"
355 x 482 x 55mm

Please go to page 81 for more
Universal product information.


Extra Components




**SURE TRACK
CORNER INSERT**
L = 2"
50mm
40pcs/bag

U-Cara® Modular System

The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

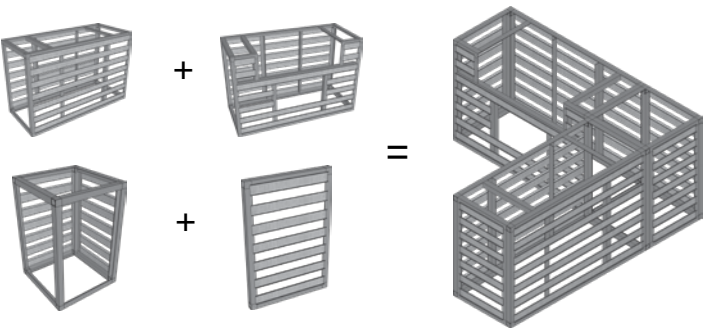

With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Tables and Pillars.

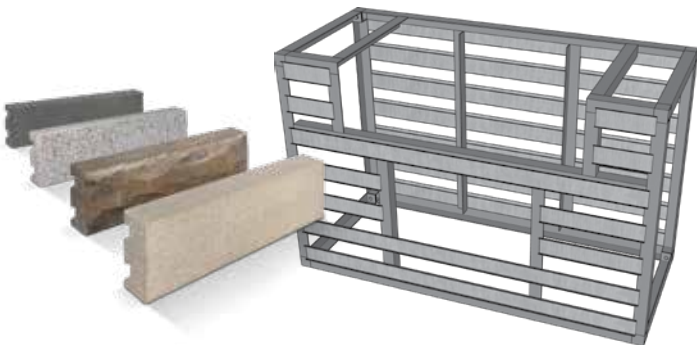

NO.	MODEL	DESCRIPTION
RS-UCARA000001	URS	UCARA 8" RAIL (10/PACK)
RS-UCARA000003	URS	ALIGNMENT BARS 39" (10/PACK)
RS-UCARA001000	UL-GC	UNIVERSAL GRILL CABINET
RS-UCARA002000	UL-BC	BASE CABINET
RS-UCARA003000	UL-CC	CORNER CABINET 27.5" x 27.5"
RS-UCARA003001	UL-CCOS	CORNER CABINET 27.5" x 36.5" OS
RS-UCARA003002	UL-CCBP	CORNER CABINET BACK PANEL
RS-UCARA004000	UL-ECK	END CLAD KIT 27.5"
RS-UCARA004001	UL-ECKOS	END CLAD KIT 36.5" OS
RS-UCARA005000	UL-BS	BACKSPLASH-GRILL/BASE UNIT
RS-UCARA005001	UL-CC-BS	BACKSPLASH CORNER CABINET
RS-UCARA005002	UL-CC-BS-OS	BACKSPLASH CORNER CABINET OS
RS-UCARA006000	UL-DD	STAINLESS DOUBLE ACCESS DOORS 27"
RL-UCARA007000	UL-PU	PILLAR UNIT



LOOKING FOR MORE INFORMATION?
Visit Unilock.com to download the U-Cara Modular System Brochure.



U-Cara® Rail System



The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.



U-CARA ALIGNMENT BAR:
39" LENGTH - SOLD IN PACKS OF 10 PIECES

U-CARA RAILS:
8' LENGTH - SOLD IN PACKS OF 10 PIECES



U-Cara® Wall Mount System INSTALLATION

Alignment Bar

- 38-5/8" tall (up to 7 courses of 6" fascia panels)
- Pre-punched to accommodate both 3" & 6" panels
- Eliminates the need to measure for rail spacing
- Speeds up installation
- 10 per bundle



Horizontal Rail

- 8' long with pre-punched holes every 8"
- Heavy duty galvanized steel
- 10 per bundle




U-Cara Fascia Panels

- EnduraColor Technology
- Available in 4 different finishes and several colors
- Apply adhesive and hang on wall mount system



Wood Substrate Application

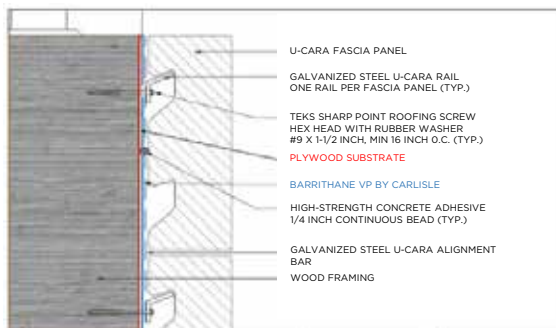

Barrithane VP


- Damp surface tolerant
- Immediately rain resistant
- Single coat application
- Apply as low as 15° F



Sharp Point Roofing Screw #9 x 1-1/2"

- Hex head
- Rubber washer
- Corrosion resistant coating


Concrete Substrate Application

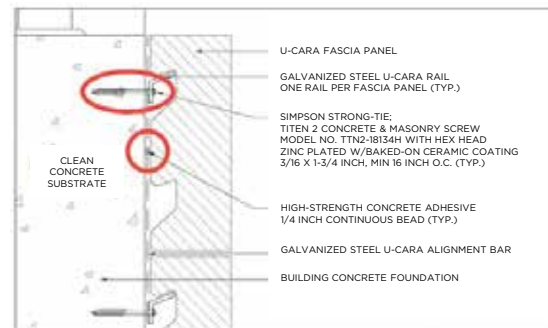

Titen 2 Hex Head 3/16" x 1-3/4"


- Improved thread design
- Increased load capacity
- Reduced snapping
- 450+ pound tension load
- 275+ pound shear load

U-Cara® Wall Mount System INSTALLATION

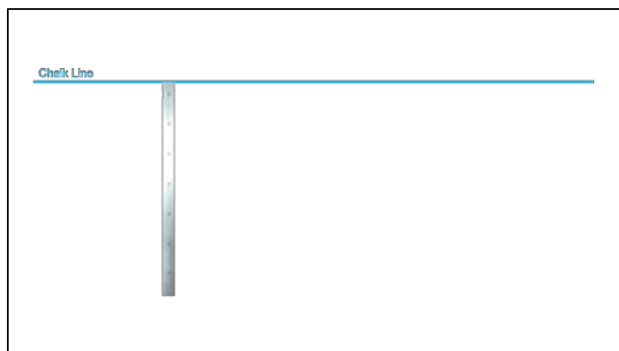


Step 1: Determine finished top height, mark with chalk line. Align orange painted end of alignment bar with chalk line.

Alignment bars should be placed 16" in from end of horizontal rail, and every 32".

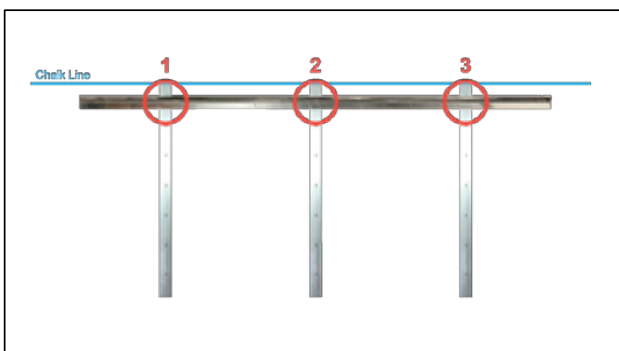


Step 2: Fasten both horizontal rail and alignment bars to substrate at points 1, 2, and 3; ensuring the rail is level.

The first four screws are the most important, as they will establish your grid pattern for all your horizontal rails in this section.

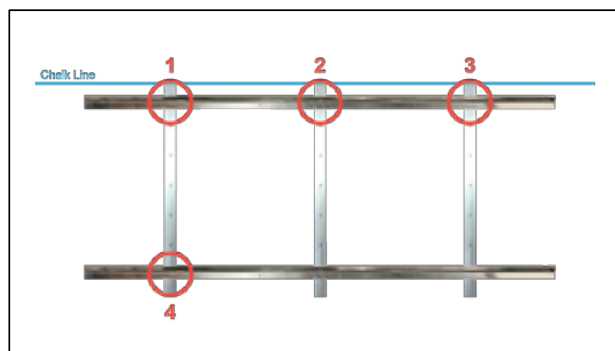


Step 3: Fasten the bottom horizontal rail and alignment bar at point 4; use a level or a square to ensure alignment bar is plumb

You have now established your grid pattern for the rest of your horizontal rails in this section.

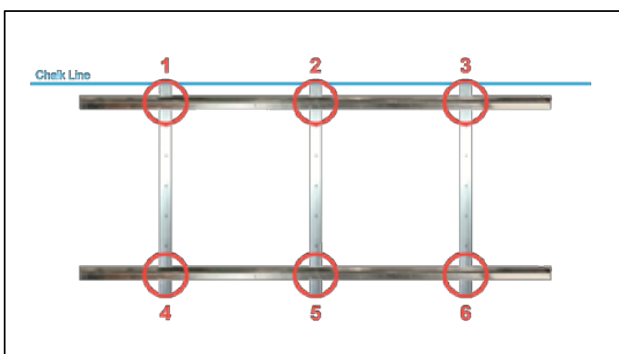

Step 4: Fasten the bottom horizontal rail and alignment bars at points 5 and 6.

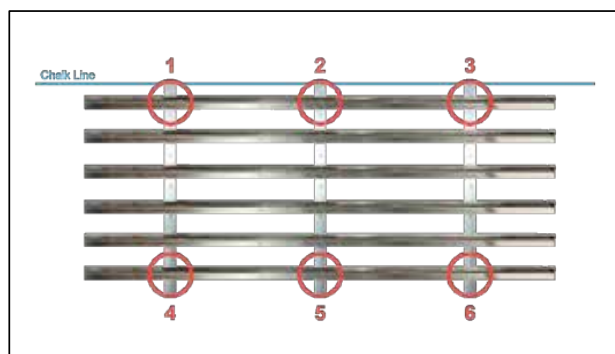

Step 5: Fasten remaining horizontal rails.

All horizontal rail should be fastened to substrate every 16" and on both ends.

Architectural Coping & Pillar Cap

ENDURACOLOR™



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Exposed
Joint Spacing - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits - see page 19.

	COPING ENDURACOLOR	PILLAR CAP 28" ENDURACOLOR
Bundle Type	SINGLE	SINGLE
Plant Produced		
Thickness (mm)	60MM	76MM

SQFT PER	Bundle	-	-
	Unit	-	-

FCFT PER	Bundle	-	-
	Layer	-	-
	Unit	-	-

LNFT PER	Bundle	42.00	-
	Unit	2.00	-

UNITS PER	Bundle	21.00	6.00
	SqFt	-	-

LBS PER	Unit	68	183
	Bundle	1,428	1,098

COLORS		Stock	Stock
Buff	SR n/a SRI n/a	✓	✓
Charcoal	SR n/a SRI n/a	✓	✓



BUFF



CHARCOAL

Single Unit



COPING
609 x 60mm x 355mm
24 x 2 3/8 x 14"
21 units/Bundle



PILLAR CAP
711 x 711mm x 76mm
28 x 28 x 3"
6 units/Bundle

Notes: **SOLD IN FULL PALLETS ONLY** and is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Smooth
Joint Spacing - 2mm

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits – see page 19.

	FULLNOSE CLASSIC ANTIQUED
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	70MM

FCFT PER	Bundle	-
	Layer	-
	Stone	-

PER BUNDLE	Layers	8.00
	Sections	4.00

LNFT PER	Bundle	96.00
	Unit	0.50

UNITS PER	SqFt	-
	Section	48.00
	Bundle	192.00

LBS PER	Layer	364
	Section	728
	Bundle	2,913

COLORS		Stock
Dark Charcoal	SR. n/a SRI n/a	✓
Coffee Creek	SR. n/a SRI n/a	✓
Limestone	SR. n/a SRI n/a	✓
Mahogany Ash	SR. n/a SRI n/a	✓
Sandstone	SR. .41 SRI 46	✓



COFFEE CREEK



DARK CHARCOAL **NEW**



LIMESTONE



MAHOGANY ASH



SANDSTONE

Single Unit



BRUSSELS FULLNOSE
150 x 300 x 70mm
5 7/8 x 11 7/8 x 2 3/4"
192 unit/Bundle

Notes: Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

Universal Coping & Base

CLASSIC ENDURACOLOR™



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Standard / Smooth

TECHNOLOGIES

CLASSIC™ (Base)

Budget-friendly traditional product mix

ENDURACOLOR™ (Coping)

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits - see page 19.

	UNIVERSAL BASE CLASSIC	UNIVERSAL COPING SMOOTH ENDURACOLOR
Bundle Type	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN
Thickness (mm)	55MM	70MM

FCFT PER	Bundle	-	17.44
	Layer	-	2.18
	Stone	-	0.36


PER BUNDLE	Layers	9.00	8.00
	Sections	-	-

LNFT PER	Bundle	85.50	75.90
	Unit	1.58	1.58

UNITS PER	SqFt	-	2.75
	Section	-	-
	Bundle	54.00	48.00

LBS PER	Layer	278	358
	Section	-	-
	Bundle	2,502	2,864

COLORS		Stock	Stock
Charcoal (EC)	SR.n/a SRI n/a		✓
Natural (Classic & EC)	SR.n/a SRI n/a	✓	✓
Tan (EC)	SR.n/a SRI n/a		✓



CHARCOAL (COPING)



NATURAL (BASE & COPING)



TAN (COPING)

Single Units



UNIVERSAL COPING
482 x 70 x 355mm
19 x 2 ¾ x 14"
48 units/Bundle
.36 Fc.Ft./Stone



UNIVERSAL BASE
482 x 55 x 355mm
19 x 2 ¼ x 14"
54 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is shipped on a required, refundable skid. Two (2) End Coping units per Layer (1 Left & 1 Right). All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Textured

TECHNOLOGIES

REALA™

Cast from historic street pavers

STONEMARK™

Natural stone appearance

TECHNICAL INFORMATION

Conforms to ASTM C 1776

Eligible for LEED v4.1 credits - see page 19.

	FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END	LARGE COPING	LARGE CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	60MM	70MM	70MM	70MM	70MM

FCFT PER	Bundle	5.12	5.52	5.52	6.87	6.87
	Layer	0.39	1.38	1.38	1.72	1.72
	Stone	0.39	0.46	0.46	0.57	0.57

PER BUNDLE	Layers	13.00	4.00	4.00	4.00	4.00
	Sections	-	-	-	-	-

LNFT PER	Bundle	26.00	24.00	24.00	30.00	30.00
	Unit	2.00	2.00	2.00	2.50	2.50

UNITS PER	SqFt	2.54	2.18	2.18	1.75	1.75
	Section	-	-	-	-	-
	Bundle	13.00	12.00	12.00	12.00	12.00

LBS PER	Layer	56	193	199	282	279
	Section	-	-	-	-	-
	Bundle	723	772	796	1,128	1,116

COLORS		Stock	Stock	Stock	Stock	Stock
Buff	SR.n/a SRI n/a	✓	✓	✓	✓	✓
Grey	SR.n/a SRI n/a	✓	✓	✓	✓	✓



BUFF



GREY

Single Units	FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END COPING	LARGE COPING	LARGE CLOSED-END COPING
	610 x 305 x 60mm 24 x 12 x 2 3/8" 13 unit/Bundle .39 Fc.Ft./Stone	610 x 305 x 70mm 24 x 12 x 2 3/4" 12 unit/Bundle .46 Fc.Ft./Stone	610 x 305 x 70mm 24 x 12 x 2 3/4" 12 unit/Bundle .46 Fc.Ft./Stone	762 x 343 x 70mm 30 x 13 1/2 x 2 3/4" 12 unit/Bundle .57 Fc.Ft./Stone	762 x 343 x 70mm 30 x 13 1/2 x 2 3/4" 12 unit/Bundle .57 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. See page 90 for caulk information. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Textured

TECHNOLOGIES

REALA™
Cast from historic street pavers

STONEMARK™
Natural stone appearance

TECHNICAL INFORMATION

Conforms to ASTM C 1776
Eligible for LEED v4.1 credits - see page 19.

	48" STEP	24" PILLAR CAP
Bundle Type	SINGLE	SINGLE
Plant Produced	GEORGETOWN	CHICAGO
Thickness (mm)	150MM	100MM

FCFT PER	Bundle	5.91	3.28
	Layer	1.97	0.66
	Stone	1.97	0.66

PER BUNDLE	Layers	3.00	5.00
	Sections	-	-

LNFT PER	Bundle	12.00	10.04
	Unit	4.00	2.01

UNITS PER	SqFt	0.51	1.52
	Section	-	-
	Bundle	3.00	5.00

LBS PER	Layer	574	159
	Section	-	-
	Bundle	1,721	795

COLORS		Stock	Stock
Buff	SR.n/a SRI n/a	✓	✓
Grey	SR.n/a SRI n/a	✓	✓



BUFF



GREY

Single Units		48" STEP 1220 x 610 x 150mm 48 x 24 x 5 7/8" 3 unit/Bundle 1.97 Fc.Ft./Stone
		24" PILLAR CAP 610 x 610 x 100mm 24 x 24 x 3 7/8" 5 unit/Bundle .66 Fc.Ft./Stone

Notes: **SOLD BY BUNDLE OR PIECE.** Produced and sold on a required, refundable skid. Step is rock-faced on one side, while the Pillar Caps are rock-faced on four sides. All measurements are nominal. Contact Unilock for more information.

Sunset Fire Pit Kit

CLASSIC



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Standard
Joint Spacing - n/a
Void % - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits - see page 19.

	ROUND
Bundle Type	SINGLE
Dimension Metric	1300 x 1300 x 300mm
Dimension Imperial	51 1/4 x 51 1/4 x 11 7/8"
Thickness (mm)	300MM

DIAMETER (inch)	Outside	52.00
	Inside	36.00
	Insert	34.00

LAYER PER UNIT	3.00
UNIT PER LAYER	20.00
UNIT PER PALLET	60.00

LBS PER PALLET	1,125
----------------	-------

COLORS		Stock
Coffee Creek	SR. n/a SRI n/a	✓
Limestone	SR. n/a SRI n/a	✓
Mahogany Ash	SR. n/a SRI n/a	✓
Sandstone	SR n/a SRI n/a	✓

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.



COFFEE CREEK



LIMESTONE



MAHOGANY ASH



SANDSTONE

Single Unit



SUNSET ROUND W/INSERT
1300 x 1300 x 300mm
51 1/4 x 51 1/4 x 11 7/8"

FIRE PIT INSERTS SOLD SEPARATELY

Notes: All measurements are nominal. Contact Unilock for more information.

Base Thickness Chart (General)

APPLICATION	GRAVEL BASE	BEDDING COURSE	BACKFILL WIDTH (WALLS ONLY)
PATIOS, WALKWAYS, POOL DECKS	4" - 6" (10cm - 15cm)	1" (2.5cm)	
DRIVEWAYS	8" - 12" (20cm - 30cm)	1" (2.5cm)	
STEPS, PLANTERS, RAISED PATIOS	6" (15cm)	0 - 1/8" (0cm - .3cm)	8" - 12" (20cm - 30cm)
RETAINING WALLS UNDER 18" (45cm)	6" (15cm)	0 - 1/8" (0cm - .3cm)	12" (30cm)
RETAINING WALLS OVER 18" (45cm)	6" (15cm)	0 - 1/8" (0cm - .3cm)	16" (50cm)

Soil condition - In areas with poor soil conditions, (e.g., heavy clay, disturbed soils) increase the depth of the base to provide more stability. Where poor soil conditions exist, it may be advisable to contract an engineer when constructing a retaining wall in excess of 24" in height.

Area = (Length) x (Width)

Area of a Circle = $3.14 \times (\text{Radius}) \times (\text{Radius})$

Area of a Half Circle = $1.57 \times (\text{Radius}) \times (\text{Radius})$

Area of a Quarter Circle = $.78 \times (\text{Radius}) \times (\text{Radius})$

Area of a Triangle = $(1/2 \text{ Base}) \times (\text{Height})$

Perimeter of a Circle = $6.28 \times (\text{Radius})$

Perimeter of a Half Circle = $3.14 \times (\text{Radius})$

Perimeter of a Quarter Circle = $1.57 \times (\text{Radius})$

Metric Equivalents

1 inch = 2.5400 centimeters

1 foot = 0.3048 meter

1 yard = 0.9144 meter

1 sq. foot = 929.030 sq. centimeters

1 sq. meter = 1.196 sq. yards

27 cu feet = 1 cu. yard

1 centimeter = 0.3937 inch

1 meter = 39.3701 inches

Large Equipment

UniLyft™



Model L



Model Mini P



Model PM

- Install up to 700 sq. ft. per hour!
- Access tight or narrow areas
- Eliminate the need for a forklift on site
- Reduce labor costs
- Reduce shoulder, hand & knee pain and injury
- Improve your bottom line

Contact your local rep for details.

VPR 700 Paver Roller

- Centrifugal Force: 3,147 lbs
- Machine Weight: 386 lbs
- Base Plate Width: 26"
- Engine: Honda GX160 Four-Stroke



VPR 450 Paver Roller

- Centrifugal Force: 1,798 lbs
- Machine Weight: 238 lbs
- Base Plate Width: 16.5"
- Engine: Honda GX160 Four-Stroke



U-LEVEL™

- Easy to use
- Accurate readings
- Low maintenance
- Works in difficult locations
- Large working area

A PRECISION TOOL NO
HARDSCAPER SHOULD BE WITHOUT



Unilock Elements

SPECIAL ORDER PRODUCT

Tuscany Collection



TUSCANY FIREPLACE **SPECIAL ORDER**
Sandstone with Copthorne® (3 Color Blend)



TUSCANY FIREPLACE
Sierra with Copthorne® (3 Color Blend)

WEIGHTS

Tuscany Collection

Fireplace Top – 2,925 lbs
Fireplace Bottom – 4,225 lbs
Wood Boxes – 4,005 lbs
Arched Hearth – 1,170 lbs

Barcelona Collection **SPECIAL ORDER**



BARCELONA FIREPLACE
Sierra with Umbriano® (Summer Wheat)

WEIGHTS:

Barcelona Collection

Fireplace Top – 2,725 lbs
Fireplace Bottom – 4,170 lbs
Wood Boxes – 4,200 lbs
Arched Hearth – 1,200 lbs



TUSCANY / BARCELONA GRILL ISLAND
SPECIAL ORDER

Available with OCS Grill, protective cover and stainless steel double door insert.



MODA
SPECIAL ORDER


The Moda pre-built fireplace is constructed from Lineo Dimensional Stone and Series™ accent.

Note: Items shown are Tuscany units. Please contact Unilock for more information on special order items. Units and measurements may not be exactly as shown.



Unilock Elements

SPECIAL ORDER PRODUCT

TYPICAL CROSS SECTION FOR CONCRETE PAD INSTALLATION

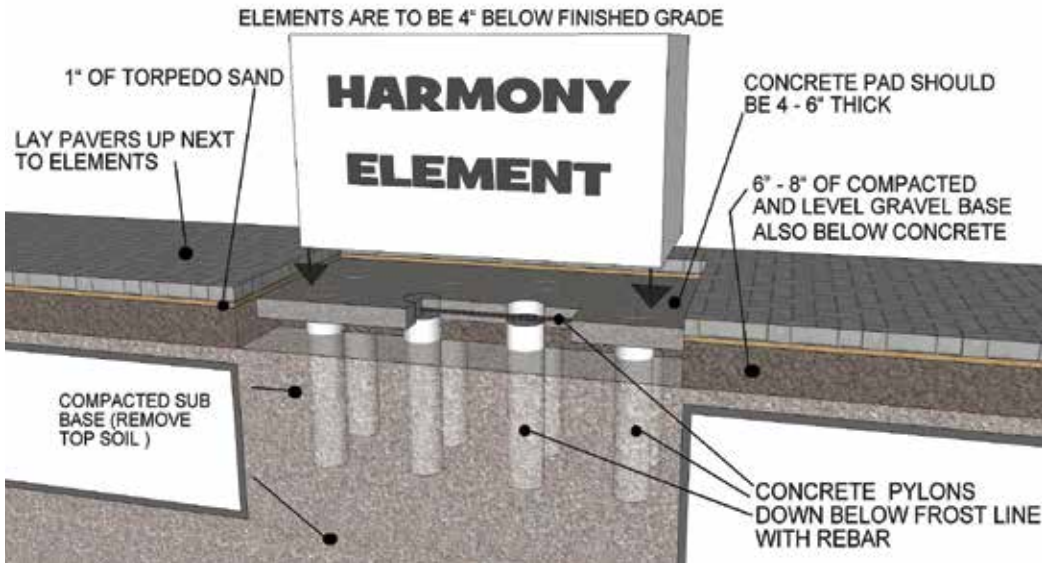

TUSCANY & BARCELONA FIREPLACE

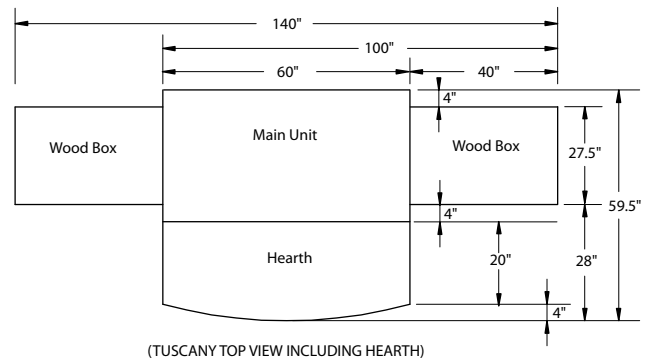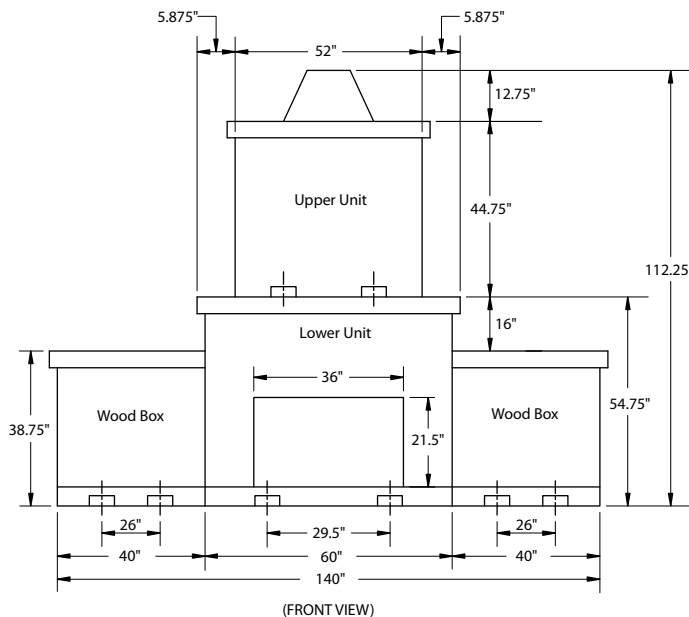

GUARANTEE

The standard Unilock guarantee applies to the units used to construct Unilock Elements. (See Unilock literature for details.) Third party grills and fireboxes carry their respective manufacturer's warranty, and may change without notice.

Note: Unilock reserves the right to change model designs, accessories and colors without notice. Unilock will not be responsible for improper use or handling that results in property damage. Some models may not be exactly as shown. Fireplaces come complete with UL- approved stainless steel fireboxes. Check local building codes and regulations prior to ordering and installing Unilock Elements.

Paver Cleaners



POLYBIND™ SHAMPOO

CLN047 (1 Gallon)

Polybind Shampoo removes ground-in dirt from the surface of concrete pavers and natural stones. It will make pavers, patio slabs, walls and natural stones look clean and vibrant. Using Polybind Shampoo before sealer application will assure you of a deeper penetration into the cleaned surface. No muriatic acid in product – washes off with water.

Packaging • 1 & 5 gallon available • Box of 4 x 1 US gallon

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



POLYBIND OIL & GREASE CLEANER

CLN050 (1 Quart)

Polybind Oil & Grease Cleaner is effective in removing oil and grease from the surface of concrete pavers and natural stones. Easy to use – dissolves, dislodges and removes oil and grease. No hydrochloric acid in product – washes off with water.

Packaging • 1 quart container (6 per carton, 24 cartons per pallet)

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



POLYBIND EFFLORESCENCE CLEANER

CLN045 (1 Gallon) & CLN046 (5 Gallon - SPECIAL ORDER)

Polybind Efflorescence Remover will remove any efflorescence stains trapped in the concrete paver and natural stone pores. It will make the pavers look more clean and vibrant. This efflorescence cleaning is a necessary step before a sealer is applied. The sealer will be able to get a deeper penetration into the now-clean pores.

Packaging • 1 & 5 gallon • Box of 4 x 1 US gallon

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



POLYBIND RUST REMOVER

CLN051 (1 Quart)

Polybind Rust Cleaner is effective in removing rust from the surface of concrete pavers. Contains no muriatic acid.

Packaging • 1 quart container (6 per carton, 24 cartons per pallet)

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



POLYBIND RUBBER, PAINT & TAR REMOVER

CLN049 (1 Quart)

Polybind Rubber, Paint & Tar Remover is effective in removing rubber, paint and tar from the surface of concrete pavers and natural stone. Easily washes off with water and is easy to use.

Packaging • 1 quart container (6 per carton, 24 cartons per pallet)

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



POLYBIND SEALER STRIPPER

CLN068 (1 gallon) & CLN069 (5 gallon)

Polybind Sealer Stripper is extremely effective for removing either water-based or solvent-based sealers from concrete pavers or stone. It is environmentally responsible (water-based), yet it removes multiple layers in a single application. It is a paste which is easily applied with a brush or roller.

Packaging • 1 & 5 gallon (Box of 4 x 1 US gallon)

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.

Natural Stone Cleaners



UNICARE BUILDERASE CLEANER

RS-CLN085 (1L) While Supplies Last

Removal of:

• Cement Staining • Efflorescence • Iron Oxide (Rust) • Cement mortar • Grout

Note: Never use hydrochloric or sulphuric acid based products. **ONLY FOR ACID RESISTANT STONE.**

Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



UNICARE BUILDERASE ACID CLEAN

RL-CLN095 (1L) & RS-CLN098 (5L)

Removal of:

• Cement Staining • Efflorescence • Iron Oxide (Rust) • Cement mortar • Grout

Note: Never use hydrochloric or sulphuric acid based products. **ONLY FOR ACID RESISTANT STONE.**

Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



UNICARE POWER CLEAN

RS-CLN096 (1L) & RS-CLN099 (5L)

• Oil & Grease • Food Stains • General Dirt & Mud • Light cement contamination

• Sap & certain plant stains sensitive surfaces

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



UNICARE BIO CLEAN

RL-CLN097 (1L) & RS-CLN100 (5L)

Removal of:

• Black spot algae • Green algae • Plant stains from leaves, wood, trees, berries & flowers

• Organic staining from bark & compost • Colored stains from food spillages, tea, coffee and wine

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.

Natural Stone Sealers



UNICARE PATIO SEAL POROUS SEALER

RS-SEAL218 (5L) While Supplies Last

For Porous Stones

• No change of color • No surface coating, sheen or shine at all • Riven Sandstone & Smooth Sandstone

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



UNICARE NATURAL MATTE SEALER

RS-SEAL229 (1L) & RS-SEAL231 (5L)

For Porous Stones

• No change of color • No surface coating, sheen or shine at all • Riven Sandstone & Smooth Sandstone

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



UNICARE NATURAL COLOUR ENHANCER SEALER

RS-SEAL230 (1L) & RS-SEAL232 (5L)

For Porous Stones

• No change of color • No surface coating, sheen or shine at all • Riven Sandstone & Smooth Sandstone

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.

Sealers



POLYBIND™ WET LOOK SEALER SB

SEAL143 (1 gallon) & SEAL144 (5 gallon)

Polybind Wet Look Sealer is made from acrylic-based polymers. It penetrates deep into the concrete paver and natural stone pores, thus reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.

Packaging • 1 and 5 gallon available • Box of 4 x 1 US gallon

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



POLYBIND ECO SEAL HIGH GLOSS SEALER + COLOR ENHANCER WB

SEAL185 (1 gallon)

Polybind Eco Seal High Gloss is 100% pure, high-grade acrylic used to seal concrete pavers, clay pavers and natural stone. It penetrates deep into the pavers and natural stone pores, thus reducing oil and dirt penetration as well as protecting them from the corrosion of de-icing salt. It provides a high-gloss finish as well as vibrant color enhancement.

Packaging • 1 gallon • Box of 4 x 1 US gallon

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



POLYBIND ECO SEAL LOW GLOSS SEALER + COLOR ENHANCER WB

SEAL178 (1 gallon) & SEAL179 (5 gallon)

Polybind Eco Low Gloss Sealer + Color Enhancer is 100% pure high-grade acrylic for concrete pavers. It penetrates deep into the concrete paver pores, reducing oil and dirt penetration as well as corrosion from de-icing salt.

Packaging • 1 & 5 gallon available • Box of 4 x 1 US gallon

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.



POLYBIND RESEALER SB

SEAL155 (1 gallon) & SEAL156 (5 gallon)

Polybind Resealer penetrates the existing sealer and reactivates it to create rejuvenated protection of the paver surface, thus reducing oil and dirt penetration as well as protecting it from the corrosion of de-icing salt.

Packaging • 1 & 5 gallon • Box of 4 x 1 US gallon

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see SDS.

Adhesives



POLYBIND XTRA PERFORMANCE (XP) POLYURETHANE ADHESIVE

ADH035 (10 oz) & ADH038 (28 oz)

10 oz. Tube = 20' at 1/4" bead & 28 oz. Tube = 52' at 1/4" bead

Polybind XP Adhesive is formulated for fast cure time, extra bond strength and durability. Applications include concrete pavers and walls, overlays, pool copings, steps and wall caps, wetcast and natural stones. It can be applied above 32° and on either dry or damp surfaces. Drying times vary depending on factors such as humidity, porosity, temperature and materials bonded together.



TECHNISEAL STRUCTURE BOND™ FOAM ADHESIVE

ADH048 (24 oz)

24 oz. Canister = 600 linear feet at 3/8" bead (12/case)

Structure Bond is an innovative super-strength foam adhesive that bonds a wide range of construction products. Application time is up to 50% faster than with conventional tube adhesives and materials are bonded in just 8 minutes and adhesive is full cured within 24 hours. Made from high-quality modified polyurethanes with excellent long-term resistance to weathering, dilute acids and caustic solutions.



TECHNISEAL STRUCTURE BOND™ GUN II

TOOL378

1 Dispenser (12/case)

The Gun II dispenser for application enables you to gain access to hard-to-reach areas and greatly limits excessive spillage or dripping, while also reducing user fatigue, with total control on product flow. The Structure Bond Gun allows for a precise adhesive delivery with a single pull of the trigger that stops as soon as you let go. Requires no pumping, cutting or puncturing of cartridge nozzles.

Adhesives (continued)



TECHNISEAL STRUCTURE BOND™ GUN CLEANER

CLN093 (16 oz)

1 Canister = (12/case)

Structure Bond Gun Cleaner is a powerful cleansing formula that rapidly dissolves any uncured Structure Bond adhesive residue. It is specifically designed to fit Structure Bond Gun II dispensers. Simply screw a canister onto the gun and press the trigger to cleanse the tool from uncured product. The built-in sprayer nozzle will also dissolve any spill, drip or adhesive residue.

Sands



POLYBIND G2 COMPLETE SAND

SAND152 (Nevada Tan), SAND153 (Oxford Gray), SAND154 (Jet Black), SAND155 (Ivory White - Special Order in Full Skid Quantities Only)

Designed for paver joints up to a maximum of 4 inches. Drainage & Non-Drainage Applications (Overlays).

No Dust - No Haze - No Blower - One Watering. G2 Complete Sand is the cleanest, fastest and easiest polymeric sand installed in the industry. It can be used with concrete pavers, wetcast and natural stones, and is recommended for use in patios, pool decks, walkways, driveways, parking spaces, etc.

Packaging: • 50 lb bag • 56 bags per skid • 65-85 sq.ft. coverage per bag for narrow joints; larger joints will require more sand



SEK POLYSWEEP SAND

SAND045 - Tan & SAND147 - Platinum

For concrete paver, cast stone pavements, slabs and natural stone joints up to 3/4". PolySweep polymeric sand is a blend of native sands and high quality synthetic polymers specially formulated to allow the joints to expand and contract with elements such as extreme heat, extreme cold and freeze/thaw cycles.

Packaging: • 50 lb/bag - 56 bags/skid



SUREBOND JOINTING SAND

SAND001-1 (Tan) & SAND140 (Gray)

This jointing sand will properly complete the interlocking of the segmental pavers because it is clean, angular and meets ASTM-C144 specifications. This type of sand is more stable in the paver joints and has the optimal gradation to ensure long term performance of the pavement system. Recommended for joints up to 3/4". Washed, screened & dried

Packaging: • 50 lb bag - 56 bags per skid



EUROSTONE BOND

SAND097 - SLATE GREY

50lb. bag (56 bags/skid)

For Driveway Aprons Application & Cobblestone Joints up to 3.5cm / 1"

Eurostone Bond is the first polymeric sand specifically designed for drainage and non-drainage base systems. It can be used with natural stones and cobblestone. Recommended for a variety of uses, including streets, plazas (pedestrian and vehicular traffic) paths, sloping areas, around pools, etc. This complete multi-purpose sand is available in 3 colors: Beige, Slate Grey and Diamond Black. It sets above the freezing temperature (0°C / 32°F) and can be used for joints up to a maximum of 3.5 cm/ 1".



PERMA EDGE PAVER EDGING

EDGE074

5 Gallon, 75 lb container

- Mix with water to use - 1 gallon water to 1 container product
- Ideal for patios, pool decks and walkways
- Better suited to open-graded aggregates, Perma Edge will outlast and out-perform traditional paver edging. It is quicker and easier to use, cutting installation time by 75%. Projects can be compacted and fine-graded immediately after installation.
- Coverage per container: about 20 lin ft on clear or permeable base/25 lin ft on crushed gravel base.

Sands continued

Sands	Polybind Complete G2 Sand
PAVERS \ FEATURES	For joints up to 4". May be sealed. Available in Tan, Gray or Black. Binding sand.
Copthorne®	✓
Courtstone®	✓
Il Campo®	N/R
Richcliff®	✓
Series™	N/R
Thornbury™	✓
Town Hall®	✓
Tribeca Cobble™	N/R
Umbriano®	✓
Natural Stone	✓
Tumbled Pavers	✓
Standard Pavers	✓

N/R - Not Recommended

ü - Recommended

✓ - These pavers have a very narrow or slightly angled edge (chamfer) limiting sand penetration in the joint and causing possible weak bonding areas. The life cycle performance could be affected.

SUGGESTED POLYMERIC SAND COVERAGE BY PRODUCT

Product	Coverage per Bag
Anchorlock	70-75 sf
Artline	60-65 sf
Beacon Hill	50-60 sf
Boulevard	55-60 sf
Bristol Valley	55-60 sf
Brussels Block	80-85 sf
Copthorne	50-60 sf
Courtstone	30-40 sf
Granito	50-60 sf
Hex Paver	50-60 sf
Hollandstone	70-75 sf
Holland Premier	70-75 sf
Mattoni	30 sf
Promenade	20 sf
Richcliff	45-50 sf
Series	60-65 sf
Thornbury	40-45 sf
Town Hall	40-45 sf
Tribeca Cobble	40-45 sf
Umbriano 6cm Random	55-60 sf
Umbriano 7cm	60-65 sf
Westport	40-45 sf

Installation practices may affect the amount of sand used per product. Review IMPORTANT NOTICE on following page.

IMPORTANT NOTICE

1. **DO NOT USE** Polymeric Jointing Sand on the following products:

Series™

Il Campo®

Tribeca Cobble™

If joint stabilization is required, use ordinary jointing sand and apply a stabilizing sealer. Contact your local Unilock office for recommended sealants and application specifics.

2. **EXTRA CARE** must be exercised when using Polymeric Sand on the following products:

Courtstone®

Copthorne®

Richcliff®

Town Hall®

Umbriano®

Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Polymeric Jointing Sand have a natural tendency to adhere to the surface and therefore extra diligence must be taken to pre-clean the surface prior to "wetting the sand in" and squeegee off the surface post application. Failure to do so will result in a "whitish haze" on the surface that is difficult to remove.

3. **IMPORTANT COMPACTION NOTICE:** Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric Sand can then be swept into the joints. Always use a compactor with a protective membrane attached to the bottom of the plate.

Polymeric Jointing Sand, cleaners and sealers, must always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.


NOTICE: Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of polymeric sand, sealers or cleaners. Unilock will not accept responsibility for alternate suppliers of polymeric sand, jointing sand, cleaners and sealers.

Edge Restraints

SnapEdge - One-Piece Edging That Does It All!

EDGE001

- Only one part required for straight runs or curved installations
- Built-in connector fastens one piece to the next – convenient 96" size, makes them easy to transport
- Unique 'Snip and Flex' feature speeds installations of curves and corners without pre-planning
- The open design allows a root system to grow through SnapEdge, further reinforcing the installation
- Engineered to provide a strong, easy-to-install edge restraint for concrete/clay pavers
- Nail hole bosses are full-length cylinders. Hammer blows will not fracture or force nail heads through edging



PRODUCT INFORMATION:

8' (96") length pcs.
 Sidewall: 1 7/8"
 Pieces per Pallet: 672 (5,376 In. ft.)
 Pieces per Bundle: 24 (192 In. ft.)
 Bundles per Pallet: 28
 Pallet Weight: 1395 lbs.
 Pallet Size: 98" l x 48"w x 50" h

Polybind Edge Edging

EDGE056 - Rigid / EDGE061 - Tile Edge

- Rigid has Twist & Lock connection system
- Rigid can be changed to a partial flex by cutting the bridge support
- Tile Edge provides stability and strong lateral support for all porcelain tile installations



RIGID EDGE



TILE EDGE

PRODUCT INFORMATION:

RIGID:

8' (96") length pcs.
 Sidewall: 1 3/4"
 Pieces per Bundle: 24 (192 In. ft.)
 Pieces per Pallet: 672 (5376 In. ft.)

TILE:

8' (96") length pcs.
 Sidewall: 5/8"
 Pieces per Bundle: 24 (192 In. ft.)
 Pieces per Pallet: 384 (3072 In. ft.)

Permedge Permeable Paver Edging

EDGE033


- Designed specifically for permeable pavement with open-graded base material.
- Holds pavement edges securely in place.
- Does straight and curved edges.



PRODUCT INFORMATION:

8' (96") length pcs.
 Weight per Unit: 2.5 lbs.
 Pieces per Pallet: 64 (72 In. ft.)
 Freight Class: 300
 Pallet Weight: 210 lbs.
 Pallet Size: 98" l x 48"w x 50" h

X & T Slab Spacers




Unilock recommends using slab spacers when installing Arcana on an open grade surface. "T" spacers are needed for running bond patterns, "X" spacers are needed for stack bond patterns. Please contact your sales manager for more information.

X & T SLAB SPACERS


- 250 per bag
- X & T bagged separately
- X spacers 2" x 2" (RS-ACC237)
- T spacers 2" x 1" (RS-ACC236)

Edge Restraints continued


TIPS FOR QUICK AND EASY INSTALLATION WITHOUT PRE-PLANNING




Sharp Inside Corner




Sharp Outside Corner




Proper Wall Installation



Gentle Outside Curves



Gentle Inside Curves



Pieces Snap Together

Drainage, Separation and Reinforcement



UNILock DRIVEGRID™ SYSTEM

FAB075

• 120' x 13.1' Roll - 1,572 sq. ft./56 lbs per roll

Drainage, Separation and Reinforcement continued



GATOR GRID 30-30

Gator Grid 30-30, a biaxial geogrid, provides strength, longevity, excellent stress transfer and prevents failure to the internal structure of landing areas, retaining walls and steep slopes. It has a high molecular weight as well as high-tenacity polyester yards which are woven in tension and finished with a PVC coating.

Packaging & Unilock SKU • 4' x 50' - [FAB070](#) / 6' x 50' - [FAB071](#) / 6' x 150' - [FAB072](#)



GATOR FABRIC NON-WOVEN 3.5

Gator Fabric Non-Woven 3.5 geotextile is ideal for drainage, filtration and will allow water flow in a paver or retaining wall application. It is designed for soil separation for added stability, has high strength and is dimensionally stable.

Packaging & Unilock SKU • 4' x 100' - [FAB038](#) / 6' x 100' - [FAB040](#)



GATOR FABRIC WOVEN 5

Gator Fabric Woven 5 is a woven geotextile made from polypropylene yarns and can achieve higher tensile strength at low elongation. It is an excellent heavy-loading geotextile, ideal for driveways, alleyways, pathways and retaining walls.

Packaging & Unilock SKU • 4' x 100' - [FAB049](#) / 6.25' x 300' - [FAB052](#)



GATOR FABRIC POLYSPUN 20 SPECIAL ORDER

Gator Fabric Polyspun 8 geotextile is specially formulated to resist deterioration in garden and landscape applications. It creates a barrier to reduce weed growth and allows water, fertilizer and air to pass through.

Packaging & Unilock SKU • 6' x 100' • [FAB058](#)

Gator Base



FEATURES: For Pedestrian use only. Replaces concrete foundations and is used to replace 6" of crushed stone. The interlocking panels distribute all dynamic and static loads to a very wide area, practically eliminating any pressure on the ground.

GATOR Base is a unique evolution in base technology. Evacuates water through channels along a 1 slope.

Manufactured using lightweight high-density polypropylene. Environmentally friendly and 100% recyclable.

Extremely durable, will not degrade in the ground. Designed with LOCK-N-GO tongue and groove system. Packaging: 10 units per pack, 12 packs per box, 120 units per pallet [SAND109](#)

BEDDING MATERIALS CHART (APPROXIMATE IMPERIAL TONS)

Bedding Course												
Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0	2.3	2.5	2.8	3.0
100	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
150	0.8	1.5	2.3	3.0	3.8	4.5	5.3	6.0	6.8	7.5	8.3	9.0
200	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0
250	1.3	2.5	3.8	5.0	6.3	7.5	8.8	10.0	11.36	12.5	13.8	15.0
300	1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15.0	16.5	18.0
350	1.8	3.5	5.3	7.0	8.8	10.5	12.3	14.0	15.8	17.5	19.3	21.0
400	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.2	22.0	24.0
450	2.3	4.5	6.8	9.8	11.3	13.5	15.8	18.0	20.3	22.5	24.8	27.0
500	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0
550	2.8	5.5	8.3	11.0	13.8	16.5	19.3	22.0	24.8	27.5	30.3	33.0
600	3.0	6.0	9.0	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0
650	3.3	6.5	9.8	13.0	16.3	19.5	22.8	26.0	29.3	32.5	35.8	39.0
700	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0
750	3.8	7.5	11.36	15.0	18.8	22.5	26.3	30.0	33.8	37.5	41.3	45.0
800	4.0	8.0	12.0	16.0	20.0	24.0	28.0	32.0	36.0	40.0	44.0	48.0
850	4.3	8.5	12.8	17.0	21.3	25.5	29.8	34.0	38.3	42.5	46.8	51.0
900	4.5	9.0	13.5	18.0	22.5	27.0	31.5	36.0	40.5	45.0	49.5	54.0
950	4.8	9.5	14.3	19.0	23.8	28.5	33.3	38.0	42.8	47.5	52.3	57.0
1000	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0

BASE DEPTH CHARTS (CUBIC YARDS)

Bedding Course												
Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.5	1.7	1.9
100	0.3	0.6	0.9	1.2	1.5	1.9	2.2	2.5	2.8	3.1	3.4	3.7
150	0.5	0.9	1.4	1.9	2.3	2.8	3.2	3.7	4.2	4.6	5.1	5.6
200	0.6	1.2	1.9	2.5	3.1	3.7	4.3	4.9	5.6	6.2	6.8	7.4
250	0.8	1.5	2.3	3.1	3.9	4.6	5.4	6.2	6.9	7.7	8.5	9.3
300	0.9	1.9	2.8	3.7	4.6	5.6	6.5	7.4	8.3	9.3	10.2	11.1
350	1.1	2.2	3.2	4.3	5.4	6.5	7.6	8.6	9.7	10.8	11.9	13.0
400	1.2	2.5	3.7	4.9	6.2	7.4	8.6	9.9	11.1	12.3	13.6	14.8
450	1.4	2.8	4.2	5.6	6.9	8.3	9.7	11.1	12.5	13.9	15.3	16.7
500	1.5	3.1	4.6	6.2	7.7	9.3	10.8	12.3	13.9	15.4	17.0	18.5
550	1.7	3.4	5.1	6.8	8.5	10.2	11.9	13.6	15.3	17.0	18.7	20.4
600	1.9	3.7	5.6	7.4	9.3	11.1	13.0	14.8	16.7	18.5	20.4	22.2
650	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.1	20.1	22.1	24.1
700	2.2	4.3	6.5	8.6	10.8	13.0	15.1	17.3	19.4	21.6	23.8	25.9
750	2.3	4.6	6.9	9.3	11.6	13.9	16.2	18.5	20.8	23.1	25.5	27.8
800	2.5	4.9	7.4	9.9	12.3	14.8	17.3	19.8	22.2	24.7	27.2	29.6
850	2.6	5.2	7.9	10.5	13.1	15.7	18.4	21.0	23.6	26.2	28.9	31.5
900	2.8	5.6	8.3	11.1	13.9	16.7	19.4	22.2	25.0	27.8	30.6	33.3
950	2.9	5.9	8.8	11.7	14.7	17.6	20.5	23.5	26.4	29.3	32.3	35.2
1000	3.1	6.2	9.3	12.3	15.4	18.5	21.6	24.7	27.8	30.9	34.0	37.0

Actual volume may vary due to type of materials, moisture content, and compaction. Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

Notes



INCREASE SALES BY OFFERING A PAYMENT OPTIONS PLAN... ON EVERY PROJECT!

Ultimately, offering payment options inspires more homeowners to complete the project they truly want without delay. When homeowners learn upfront about their payment options, they are less anxious about the potential for a large price tag during the process. **The positive customer experience due to payment arrangement flexibility often results in more and better referrals, creating a cycle of success that's a win-win for everyone.**

**SCAN THE QR CODE FOR MORE
INFORMATION OR TO CONNECT
WITH A UNILOCK TERRITORY
MANAGER FOR MORE INFORMATION.**



IMPORTANT NOTES

UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee* on the structural integrity of our paving stones, slabs and retaining wall units to the original purchaser of the product for residential use. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.

Excessive defective material (over the industry accepted normal of 2% for non-tumbled unit pavers) delivered to the purchaser will be replaced free of charge if a written claim is made within 5 days of delivery from the manufacturer. Such claims will not constitute reason for delaying payment. All goods shall be deemed accepted if completely installed. Inspect concrete products prior to opening bundle packaging to ensure that shape and color are as ordered. Unsatisfactory material must be available for inspection by Unilock to entitle the purchaser to any adjustment or credit. Inspect all concrete units during installation and set aside any which are chipped or cracked to use for any cut pieces required. The color of concrete products may vary significantly between production lots. Always install concrete units from several bundles simultaneously to ensure proper distribution of color. Prior to final compaction, inspect installed pavers for good color distribution. Relocate certain pavers, if necessary, to achieve desired color blend.

*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at unilock.com and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at Unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

TRADEMARK & LEGAL INFORMATION

Umbriano® is a trademark of Metten Stein + Design GmbH & Co KG used under license by Unilock. Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area. Not all products shown are available at all Unilock locations. Log on to www.unilock.com for availability. Measurements throughout this portfolio are nominal.

©2022 Hengestone Holdings, Inc.



QUALITY COMMITMENT

Unilock was the first concrete paver manufacturer in North America to offer a Lifetime Guarantee, and since then we have continued to stand behind it to ensure customers are completely satisfied with our products. With almost 2 billion stones in the ground, that's quite the commitment!

Our products are better and stronger than other brands. In fact, our internal standards of manufacturing in the USA and Canada far exceed industry standards set by ASTM (American Society for Testing and Materials) and CSA (Canadian Standards Association) and other European organizations.



LIFETIME GUARANTEE - RESIDENTIAL

Our Transferable Lifetime Guarantee warrants the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. It covers any structural failure or deterioration of the concrete unit resulting from normal use or from the reasonable application of sodium chloride (common rock salt used for de-icing). StoneMark™ products have the same warranties as Unilock paving stones and retaining walls, but cannot be warranted against damage resulting from de-icing products.

Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Proof of purchase is required. Customers are encouraged to submit receipts to us as soon as their project is complete, using the Unilock Warranty Registration Form on our website (Unilock.com).

Purchasers need to ensure that the product they purchase is appropriate for their intended application; for example, only certain thicknesses of products are appropriate for driveways. Color matching of the replacement product and/or lost time cannot be guaranteed and labor costs related to installing replacement product is not included. Unilock reserves the right to seek a professional diagnosis and opinion to determine the exact cause of the product failure. If the failure falls within our warranty parameters, Unilock will replace the defective product.

EXCLUSIONS – Unfortunately, some things are beyond the control of Unilock, and are therefore not covered by this warranty. These include: naturally occurring efflorescence, hazing from polymeric jointing sand, scratching and chipping resulting from snow removal or construction equipment, damage caused by natural or un-natural disasters, or negligence by anyone other than Unilock. The Unilock warranty also does not cover deterioration or damage as a result of poor design or poor installation practices that are contrary to specifications as laid out by ICPI

(Interlocking Concrete Pavement Institute) and the NCMA (National Concrete Masonry Association). For more information please visit www.icpi.org and www.ncma.org. Additionally, please refer to the Maintenance, Color and Installation Advisories.

MAINTENANCE ADVISORY

1. Cleaning and Sealing

As with anything that is outdoors, Unilock products are subject to harsh weather, dust, acid rain, leaf stains, water stains and general wear from foot or vehicular traffic. Therefore, periodic cleaning using environmentally safe detergents designed for cleaning concrete is recommended to maintain a bright, fresh appearance.

To make subsequent cleaning easier and more effective, a concrete sealer can be applied to new or cleaned products to help prevent the penetration of substances that can cause stains.

There are many types of concrete cleaners and sealers on the market. Always read the instructions carefully before using the product to make sure that it will function as expected. Testing first, in a small unobtrusive area, is always a good idea to ensure the results are acceptable. Consult your local hardscape dealer to find the products best suited for your paver or wall installation.



Visit Unilock.com to register for your Transferable Lifetime Guarantee.

2. Winter Maintenance

Snow removal by way of metal blades on plows or shovels will scratch and chip the surface of pavers, causing permanent damage. To mitigate this risk, metal snow clearing blades must always have a polyurethane or rubber cutting edge attached when plowing pavers.

De-icing Salts – The use of de-icing products on paver surfaces is important for safety and to help mitigate snow accumulation. Most de-icing products will have some effect on concrete, even if the product label indicates that it is safe on concrete. If you must use a de-icing product, we recommend that you use Sodium Chloride (ordinary rock salt) or Calcium Chloride (for colder climates). Always apply sparingly. The use of de-icing products on StoneMark, wet-cast pavers, slabs or coping may damage the product and therefore is not recommended. Whenever possible use a coarse sand as an anti-slip measure instead of de-icing chemicals.

COLOR ADVISORY

1. Selection

Due to the inherently variable nature of printed materials and digital monitors, Unilock cannot guarantee that products will match the color of printed or online images. Therefore, when making final product selections, decisions should be made based on actual stones which are readily available from Unilock, Authorized Contractors or Authorized Dealers. Most Unilock products are not comprised of a single color, but rather contain blended colors for a more natural appearance. This means that there will be significant color variance from stone to stone, so purchasers should view multiple units together to get a more accurate impression of the overall color.

Note: Unilock Natural Stone variations

are outside the control of Unilock. Purchasers of natural stone must be willing to accept this inherent variability.

2. Pre-installation checking

Always check the label to ensure that the Unilock product delivered to your project is the product and color ordered. If there is a discrepancy, or if the product inside the packaging doesn't appear to be correct, contact your hardscape dealer before installing any pavers or wall units. If the product is installed, it indicates your acceptance of the products as delivered.

3. Blending

If the project requires more than one bundle of product it's always a good idea to draw product from several bundles when installing, as this ensures that any variation between bundles will be seamlessly integrated in the project. When bundles are from different production runs, random selection from multiple bundles is even more important.

4. Efflorescence

Efflorescence is a naturally occurring process that may appear as a white or light grey powder on the surface of concrete, clay or natural stone. It is temporary, and will disappear over time. However, if it is bothersome, an efflorescence cleaner can be used to remove it. There is no way to predict or prevent efflorescence. Because it does not compromise the structural integrity of the product, it is not covered by Unilock product warranties.

INSTALLATION ADVISORY

1. Construction Residue

While a certain amount of dirt on pavers and walls is inevitable during the construction phase, installers are strongly encouraged to clean as they go as construction residue can embed in the surface and become difficult

to remove. The slurry produced during wet-saw cutting is particularly stubborn to clean if allowed to dry on the surface of pavers. Unilock warranties do not cover stains caused by a failure to remove construction residue.

2. Polymeric Haze

Surface hazing caused by polymeric jointing sand is not the responsibility of Unilock. Polymeric jointing sand should only be installed by an experienced and knowledgeable contractor. Any sand that is left on the surface prior to activation will result in a haze that is very difficult and time-consuming to remove. Only the highest quality, brand name polymeric sand that is guaranteed by the manufacturer should be used.

3. Compaction Damage

Both smooth and textured paver surfaces can be scratched by compaction equipment used to 'flatten' a new paver installation. Therefore, metal plate compactors must be fitted with a polyethylene mat to protect the paver surface from becoming scratched, or a superior option is to use a rubber-roller compactor instead. Damage to product surfaces caused by failure to follow these instructions is not covered by Unilock product warranties.

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

PRODUCT DIRECTORY

UNIT PAVERS

Product	Page	Finish	Pedestrian	Residential Vehicular	Commercial Vehicular	Environmental	For Borders & Accents
Anchorlock™	24				✓		
Arcana™	25	S	✓				
Artline™	26	S	✓				
Beacon Hill™ Flagstone	27	F	✓				
Beacon Hill™ Smooth	28	SM	✓				
Boulevard™	29	F	✓				
Bristol Valley®	30	S	✓				
Brussels Block®	31	W	✓	✓			✓
Cophorne®	32	T	✓	✓			✓
Courtstone®	33	C	✓	✓			✓
Eco-Optiloc™	34	S	✓	✓	✓	✓	
Eco-Priora™	35	B	✓	✓	✓	✓	
Eco-Promenade®	36	S	✓	✓	✓	✓	
Granito™ Random	37	S	✓				
Granito™ Hex	37	S	✓	✓			
Hex™ Paver	38	S	✓	✓			
Hollandstone™	39	S	✓	✓	✓		✓
Holland Premier®	40	S	✓	✓			✓
Il Campo®	41	B	✓	✓	✓		✓
Mattoni™	42	T	✓	✓	✓		✓
Natural Stone	43	SM	✓				
Porcelain	45	SM	✓				
Promenade® Paver	47	S	✓	✓	✓		✓
Richcliff®	50	F	✓	✓			✓
Series™	51	WS	✓	✓	✓		✓
Skyline™	53	S	✓				
Thornbury™	54	F	✓	✓		✓	
Town Hall®	55	T	✓	✓	✓	✓	✓
Tribeca Cobble™	56	C	✓	✓			✓
Turfstone™	57	S		✓		✓	
Umbriano®	58	SZ	✓	✓	✓		✓
Westport™	60	F	✓	✓			✓

RETAINING WALLS

Product	Page	Finish	Gardens	Retaining Walls	Steps	Seatwalls	Pillars
Brussels Dimensional System™	61	W	✓	✓	✓	✓	✓
DuraHold®	62	S		✓			
DuraHold2®	64	S		✓			
Estate Wall™	65	SP/W	✓	✓	✓	✓	✓
Lineo™ Dimensional Stone	66	SZ	✓	✓			
Pisa2®	67	SP	✓	✓	✓	✓	✓
SienaEdge®	68	SP	✓	✓	✓	✓	
SienaStone®	69	SP		✓	✓		
SienaStone® Smooth	70	SP		✓	✓		
U-Cara®	71		✓	✓		✓	✓

Finishes: B=Brushed; C=Cobblestone; D=Dimpled; DW=Dimpled and Weathered; F=Flagstone; S=Standard; SM=Smooth; SZ=Smooth Zero Bevel; SP=Split; SP/W=Split and Weathered; T=Timeworn; W=Weathered; WS=Washed

This application chart should only be used as a guide. Site conditions, base materials, pattern and frequency of use may vary the performance of various types and styles of products.

New for 2022

UNILOCK HOW-TO GUIDES

Be sure to check out our instructional manuals complete with not only step-by-step instructions but equipment and supply lists, detailed cross sections and diagrams, as well as full color 3D renderings.

TOPICS INCLUDED:

- ❑ Patio on Grade
- ❑ Paver Driveway
- ❑ Pool Coping
- ❑ Retaining Wall
- ❑ Outdoor Kitchen
- ❑ Many more coming soon!

**BE SURE TO CHECK BACK REGULARLY
FOR ADDITIONAL GUIDES.**



PAVER
INSTALLATION



VERTICAL
FEATURES



WALL
INSTALLATION



**SCAN THE QR CODES TO
VIEW OR DOWNLOAD OUR
NEW HOW-TO GUIDES**

Let's **BUILD YOUR BUSINESS** **together.**

Being a hardscape contractor is tough work. No one gets that better than Unilock. We've been supporting hardscaping professionals since 1973, longer than any other company in the industry. Getting our boots dirty is part of our promise to support our Unilock contractors in any way we can. You're never alone - not even on the project site.

**CONTACT 1-800-UNILOCK OR VISIT UNILOCK.COM TO CONNECT
WITH YOUR LOCAL TERRITORY MANAGER**



BOSTON
(508) 278-4536

CHICAGO
(630) 892-9191

MILWAUKEE
(262) 742-3890

KANSAS
(913) 417-7985

MICHIGAN
(248) 437-7037

NEW YORK
(845) 278-6700

MID-ATLANTIC
(202) 798-2060

ONTARIO
(416) 646-9000

CINCINNATI/KY/TN
(513) 202-0219

**OHIO/WESTERN PA/
WNY&CNY**
(330) 927-4000

UNILOCK.COM | 1-800-UNILOCK

©2022 Hengestone Holdings, Inc.

