

# 2024 **PRODUCT DATA**



TRANSFORMING  
HARDSCAPES

# UNILOCK®

## THE **ONE** INNOVATOR WITH GAME-CHANGING PRODUCTS

### **BUILD VERTICALS FASTER**

When the plan calls for pillars, a grill island or any vertical feature, the U-Cara Modular System lets you create customizable features in hours - not days!

Simply build the sturdy, aluminum frame in any configuration and choose from a wide selection of fascia panels to clad it with.



Learn more

**U-CARA**  
MODULAR SYSTEM



# TABLE OF CONTENTS - OHIO

## PAVERS

Artline™	4
Beacon Hill™ Flagstone	5
Beacon Hill™ Smooth	6
Boulevard™	7
Bristol Valley®	8
Brussels Block®	9
Camelot™	10
Copthorne®	11
Courtstone®	12
Eco-Line®	13
Eco-Optiloc™	14
Eco-Priora™	15
Eco-Promenade®	16
Granito™	17
Hex™	18
Hollandstone™	19
Holland Premier™	20
Il Campo®	21
Mattoni™	22
Natural Stone - Sandstone	23
Natural Stone - Limestone	25
Nordic Cobble™	27
Optiloc®	28
Porcelain	29
Promenade™	31
Promenade EcoTerra™	33
Richcliff®	34
Series™	35
Skyline™	36
Thornbury™	37
Town Hall®	38
Treo® Premier	39
Treo® Smooth	40
Tribeca Cobble™	41
Turfstone™	42
Umbriano®	43
Westport™	46

## RETAINING WALLS

Brussels Dimensional System™	47
Dimensional Smooth™	48
DuraHold®	49
DuraHold2®	51
Estate Wall™	52
Lineo™ Dimensional Stone	53
Pisa2™ & Pisa XL	54

Pisa Smooth™	55
Rivercrest® Wall	56
RomanPisa™	57
RomanStack™	58
SienaEdge™	59
SienaStone™	60
Split'nStack™	61
U-Cara®	62
U-Cara® Modular System	67
U-Cara® Wall Mount System	68

## COPING, STEPS, PILLAR CAPS

Architectural Coping	69
Brussels Fullnose™/DBL Fullnose	70
Ledgestone™ Coping, Cap & Step	71
SienaStone Coping	73
Umbriano Coping	74
Universal Coping	75

## FIRE FEATURES

Sunset Fire Pit	76
Unilock Elements	77


## ACCESSORIES

Paver Cleaners	78
Natural Stone Cleaners	78
Natural Stone Sealers	78
Sealers	78
Sands	79
Adhesive	81
Edging, Edge Restraints	82
Drainage	82
Tools & Accessories	83
Base Systems	83


## PRODUCT & INSTALLATION INFORMATION

Calculations	84
Bedding & Base Thickness Charts	85
Finishes & Color Blends	86
Important Notes	87
Quality Commitment	88
Product Directory	90

## APPLICATION INDEX

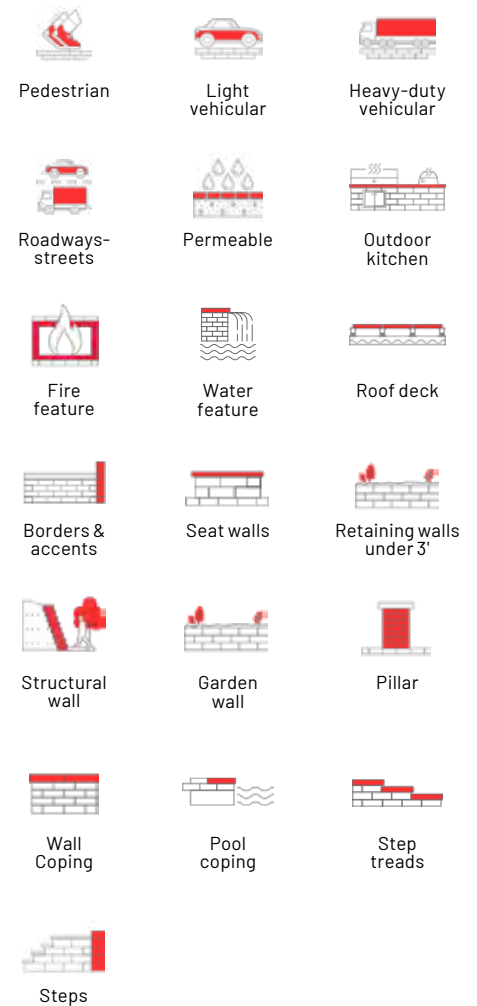

## DESCRIPTION OF EDGE DETAILS

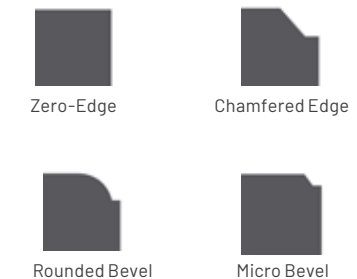



**APPLICATIONS**



**APPEARANCE**

Edge Detail - Micro  
 Surface Texture - Smooth / Brushed (Il Campo®)  
 Joint Spacing - 3 mm  
 Void - n/a


**TECHNOLOGIES**

**ENDURACOLOR™**  
 Refined surface and long-lasting color

**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

**LAYING PATTERNS**



Artline Fixed  
 Random A



FOSSIL                      GRANITE FUSION                      GRANITE FUSION (IL CAMPO)

Random Bundle					
	<b>UNIT C</b>	<b>UNIT D</b>	<b>UNIT E</b>	<b>UNIT F</b>	<b>UNIT G</b>
	125 x 337.5 x 70mm	125 x 450 x 70mm	187.5 x 225 x 70mm	187.5 x 337.5 x 70mm	187.5 x 450 x 70mm
	4 7/8 x 13 3/8 x 2 3/4"	4 7/8 x 17 3/4 x 2 3/4"	7 1/2 x 8 7/8 x 2 3/4"	7 1/2 x 13 3/8 x 2 3/4"	7 1/2 x 17 3/4 x 2 3/4"
	32 Units/Bundle	32 Units/Bundle	32 Units/Bundle	16 Units/Bundle	16 Units/Bundle
	.45 Sq.Ft./Stone	.61 Sq.Ft./Stone	.45 Sq.Ft./Stone	.58 Sq.Ft./Stone	.91 Sq.Ft./Stone

	<b>SMOOTH FINISH</b>	
	<b>Bundle Type</b>	<b>RANDOM</b>
	Plant Produced	OHIO
	Thickness (mm)	70 MM

<b>SQFT PER</b>	Bundle	93.25
	Layer	11.66
	Section	-
	Stone	0.49

<b>PER BUNDLE</b>	Layers	8.00
	Sections	-

<b>SOLDIER LNFT PER</b>	SqFt	-
	Section	-
	Layer	-
	Bundle	-

<b>SAILOR LNFT PER</b>	SqFt	-
	Section	-
	Layer	-
	Bundle	-

<b>UNITS PER</b>	SqFt	2.06
	Section	-
	Bundle	192.00

<b>LBS PER</b>	Layer	364
	Section	-
	Bundle	2,911

COLORS	Reflectance	Stock
Fossil	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Granite Fusion (Il Campo)	SR .28 SRI 29	✓

Random Bundle		
	<b>UNIT A</b>	<b>UNIT B</b>
	125 x 169 x 70mm 4 7/8 x 6 3/4 x 2 3/4" 32 units/Bundle .23 Sq.Ft./Stone	125 x 262.5 x 70mm 4 7/8 x 10 3/8 x 2 3/4" 32 units/Bundle .35 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.





## APPLICATIONS



## APPEARANCE

Edge Detail - Rounded  
 Surface Texture - Textured  
 Joint Spacing - 7 mm  
 Void - n/a


## TECHNOLOGIES

**ENDURACOLOR™**  
 Refined surface and long-lasting color

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

## LAYING PATTERNS




BeaconHill Fixed Random A



BeaconHill Fixed Random B



BeaconHill Multi-Unit Random C




BIRCH




GRANITE FUSION



RIVER



SIERRA



WALNUT

Random Bundle



**LARGE RECTANGLE**  
 380 x 570 x 60mm  
 15 x 22 1/2 x 2 3/8"  
 20 Units/Bundle



**SQUARE**  
 380 x 380 x 60mm  
 15 x 15 x 2 3/8"  
 30 Units/Bundle



**SMALL RECTANGLE**  
 380 x 190 x 60mm  
 15 x 7 1/2 x 2 3/8"  
 30 Units/Bundle

Bundle Type		RANDOM
Plant Produced		OHIO
Thickness (mm)		60 MM

SQFT PER	Bundle	116.57
	Layer	11.66
	Section	-
	Stone	1.46

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Section	-
	Layer	9.35
	Bundle	93.50

UNITS PER	SqFt	0.69
	Section	-
	Bundle	80.00

LBS PER	Layer	320
	Section	-
	Bundle	3,199

COLORS	Reflectance	Stock
Birch	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
River	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓
Walnut	SR n/a SRI n/a	✓

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Rounded  
 Surface Texture - Smooth  
 Joint Spacing - 7 mm  
 Void - n/a


## TECHNOLOGIES

**ENDURACOLOR™**  
 Refined surface and long-lasting color


## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits


## LAYING PATTERNS



Beacon Hill Fixed Random A




Beacon Hill Multi-Unit Random C




DARK CHARCOAL




FOSSIL



GRANITE FUSION



OPAL



TUSCANY

3 Unit Random Bundle



### LARGE RECTANGLE

380 x 570 x 80mm  
 15 x 22 1/2 x 3 1/8"  
 16 Units/Bundle



### SQUARE

380 x 380 x 80mm  
 15 x 15 x 3 1/8"  
 24 Units/Bundle



### SMALL RECTANGLE

380 x 190 x 80mm  
 15 x 7 1/2 x 3 1/8"  
 24 Units/Bundle

3 Unit Random Bundle



### LARGE RECTANGLE

380 x 570 x 60mm  
 15 x 22 1/2 x 2 3/8"  
 18 Units/Bundle



### SQUARE

380 x 380 x 60mm  
 15 x 15 x 2 3/8"  
 27 Units/Bundle



### SMALL RECTANGLE


380 x 190 x 60mm  
 15 x 7 1/2 x 2 3/8"  
 27 Units/Bundle

Single Units



### SMALL RECTANGLE

380 x 190 x 60mm  
 15 x 7 1/2 x 2 3/8"  
 135 Units/Bundle  
 .78 Sq.Ft./Stone



### XL UNIT

540 x 900 x 60MM  
 35 x 21 1/4 x 2 3/8"  
 20 Units/Bundle  
 2.00 Sq.Ft./Stone

				XL	SMALL RECTANGLE
	<b>Bundle Type</b>	RANDOM	RANDOM	SINGLE	SINGLE
	Plant Produced	OHIO	OHIO	OHIO	OHIO
	Thickness (mm)	80 MM	60 MM	60 MM	60 MM

SQFT PER	Bundle	73.22	116.57	104.6	116.57
	Layer	10.46	11.66	10.46	11.66
	Section	-	-	-	-
	Stone	1.31	1.46	2.00	0.78

PER BUNDLE	Layers	7.00	10.00	10.00	10.00
	Sections	-	-	-	-

SOLDIER LNFT PER	SqFt	-	-	0.34	0.80
	Section	-	-	-	-
	Layer	-	-	3.54	9.35
	Bundle	-	-	35.43	93.50


SAILOR LNFT PER	SqFt	0.85	0.80	0.56	1.60
	Section	-	-	-	-
	Layer	8.86	9.35	5.90	18.70
	Bundle	62.00	93.50	59.05	187.01

UNITS PER	SqFt	0.76	0.69	0.19	1.29
	Section	-	-	-	-
	Bundle	56.00	80.00	20.00	150.00

LBS PER	Layer	362	320	292.8	320
	Section	-	-	-	-
	Bundle	2,548	3,199	-	3,199

COLORS	Reflectance	Stock	Stock	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	-	-	-	✓
Fossil	SR n/a SRI n/a	✓	✓	✓	✓
Granite Fusion	SR n/a SRI n/a	✓	✓	✓	✓
Opal	SR n/a SRI n/a	-	✓	✓	-
Tuscany	SR n/a SRI n/a	-	✓	-	-

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.

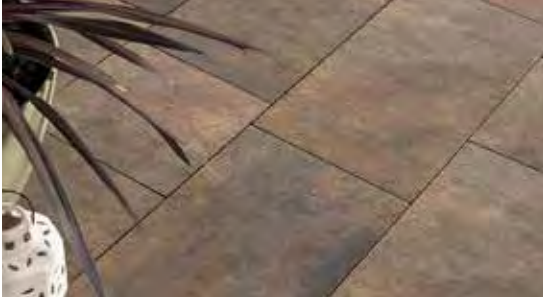

## APPLICATIONS



## APPEARANCE

Edge Detail - Zero  
 Surface Texture - Smooth  
 Joint Spacing - 3 mm  
 Void - n/a

## TECHNOLOGIES

**ENDURACOLOR™**  
 Refined surface and long-lasting color

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	OHIO
Thickness (mm)	70 MM

SQFT PER		
Bundle		93.00
Layer		11.63
Section		-
Stone		1.45

PER BUNDLE		
Layers		8.00
Sections		-

SOLDIER LNFT PER		
SqFt		-
Section		-
Layer		-
Bundle		-


SAILOR LNFT PER		
SqFt		1.03
Section		-
Layer		12.00
Bundle		96.04

UNITS PER		
SqFt		0.69
Section		-
Bundle		64.00

LBS PER		
Layer		372
Section		-
Bundle		2,978

COLORS	Reflectance	Stock
Granite Fusion	SR n/a SRI n/a	✓
River	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

## LAYING PATTERN



Boulevard Fixed  
 Random B






GRANITE FUSION



RIVER



SIERRA

Random Bundle		<b>LARGE RECTANGLE</b> 610 X 305 X 70MM 24 X 12 X 2 3/4" 24 Units/Bundle 2.00 SqFt./Stone		<b>MEDIUM RECTANGLE</b> 457 X 305 X 70MM 18 X 12 X 2 3/4" 16 Units/Bundle 1.50 Sq.Ft./Stone		<b>SQUARE</b> 305 X 305 X 70MM 12 X 12 X 2 3/4" 24 Units/Bundle 1.00 Sq.Ft./Stone
---------------	---	---	---	---	--	---

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.





## APPLICATIONS





## APPEARANCE

Edge Detail - Zero  
 Surface Texture - Textured  
 Joint Spacing - 7 mm  
 Void - n/a

## TECHNOLOGIES

**ENDURACOLOR™**  
 Refined surface and long-lasting color


**EASYCLEAN™**   
 Factory sealed to provide integral stain resistance

**COMFORT STEP**   
 Ultra smooth surface texture


## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

## LAYING PATTERNS



Bristol Valley Fixed  
 Random A



Bristol Valley Fixed  
 Random B

			<b>XL</b>
	<b>Bundle Type</b>	<b>RANDOM</b>	<b>SINGLE</b>
	Plant Produced	MARENGO	MARENGO
	Thickness (mm)	60 MM	60 MM

<b>SQFT PER</b>	Bundle	116.57	116.57
	Layer	11.66	11.66
	Section	-	-
	Stone	1.46	5.83

<b>PER BUNDLE</b>	Layers	10.00	10.00
	Sections	-	-


<b>SOLDIER LNFT PER</b>	SqFt	-	0.32
	Section	-	-
	Layer	-	3.74
	Bundle	-	37.40

<b>SAILOR LNFT PER</b>	SqFt	0.80	0.53
	Section	-	-
	Layer	9.35	6.23
	Bundle	93.50	62.30


<b>UNITS PER</b>	SqFt	0.69	0.17
	Section	-	-
	Bundle	80.00	20.00

<b>LBS PER</b>	Layer	311	321
	Section	-	-
	Bundle	3,113	3,210


COLORS	Reflectance	Stock	Stock
Bavarian	SR n/a SRI n/a	✓	✓
Fossil	SR n/a SRI n/a	✓	✓
Steel Mountain	SR n/a SRI n/a	✓	✓







BAVARIAN



FOSSIL



STEEL MOUNTAIN

<b>Random Bundle</b>		<b>LARGE RECTANGLE</b> 380 x 570 x 60mm 15 x 22 1/2 x 2 3/8" 20 Units/Bundle 2.08 SqFt./Stone		<b>SQUARE</b> 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 Units/Bundle 1.39 Sq.Ft./Stone		<b>SMALL RECTANGLE</b> 380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 30 Units/Bundle .69 Sq.Ft./Stone	<b>Single Unit</b>		<b>XL UNIT</b> 950 x 570 x 60mm 37 1/2 x 22 1/2 x 2 3/8" 20 units/Bundle 5.83 Sq.Ft./Stone
----------------------	---	---	---	---	---	--	--------------------	---	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



	HALF	STANDARD	XL
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	OHIO	OHIO	OHIO
Thickness (mm)	70 MM	70 MM	70 MM

<b>SQFT PER</b>	Bundle	88.70	88.60	76.56
	Layer	11.09	11.08	9.57
	Section	12.67	12.66	25.52
	Stone	0.20	0.40	0.80

<b>PER BUNDLE</b>	Layers	8.00	8.00	8.00
	Sections	7.00	7.00	3.00

<b>SOLDIER LNFT PER</b>	SqFt	1.72	1.44	0.86
	Section	21.84	18.27	21.84
	Layer	19.11	15.98	8.19
	Bundle	152.86	127.87	65.51

<b>SAILOR LNFT PER</b>	SqFt	2.87	1.73	1.43
	Section	36.33	21.84	36.54
	Layer	31.78	19.11	13.70
	Bundle	254.28	152.86	109.61

<b>UNITS PER</b>	SqFt	5.05	2.53	1.25
	Section	64.00	32.00	32.00
	Bundle	448.00	224.00	96.00

<b>LBS PER</b>	Layer	344	344	316
	Section	393	393	843
	Bundle	2,752	2,749	2,528

COLORS	Reflectance	Stock	Stock	Stock
Limestone	SR .28 SRI 29	✓	✓	✓
Sandstone	SR .41 SRI 46	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓

## APPLICATIONS



## APPEARANCE

Edge Detail - Zero  
 Surface Texture - Smooth  
 Joint Spacing - 2 mm  
 Void - n/a

## TECHNOLOGIES

**CLASSIC**  
 Budget-friendly traditional product mix


## ANTIQUED™

Distressed, timeworn finish


## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

## LAYING PATTERNS




Brussels Multi-Unit Random AC



Brussels Multi-Unit Random AD



LIMESTONE



SANDSTONE



SIERRA

Single Units



**HALF**  
 104 x 173 x 70mm  
 4 x 6 7/8 x 2 3/4"  
 448 Units/Bundle  
 .20 Sq.Ft./Stone



**STANDARD**  
 173 x 208 x 70mm  
 6 7/8 x 8 1/4 x 2 3/4"  
 224 Units/Bundle  
 .40 Sq.Ft./Stone



**XL**  
 208 x 348 x 70mm  
 8 1/4 x 13 3/4 x 2 3/4"  
 96 Units/Bundle  
 .80 Sq.Ft./Stone

Notes: **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact UniLock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Chamfer  
 Surface Texture - Smooth  
 Joint Spacing - 3 mm  
 Void - n/a

## TECHNOLOGIES

### CLASSIC

Budget-friendly traditional product mix

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

	SQUARE	RECTANGLE
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	OHIO	OHIO
Thickness (mm)	60 MM	60 MM

SQFT PER	Bundle	92.40	98.96
	Layer	11.55	12.37
	Section	13.20	19.79
	Stone	0.28	0.41

PER BUNDLE	Layers	8.00	8.00
	Sections	7.00	5.00

SOLDIER LNFT PER	SqFt	1.79	1.19
	Section	23.62	23.62
	Layer	20.67	14.76
	Bundle	165.35	118.11


SAILOR LNFT PER	SqFt	1.79	1.79
	Section	23.62	35.43
	Layer	20.67	22.15
	Bundle	165.35	177.17

UNITS PER	SqFt	3.64	2.43
	Section	48.00	48.00
	Bundle	336.00	240.00


LBS PER	Layer	325	350
	Section	371	560
	Bundle	2,598	2,800

COLORS	Reflectance	Stock	Stock
Granite	SR .26 SRI 27	✓	✓
River	SR .32 SRI 34	✓	✓
Sierra	SR n/a SRI n/a	✓	✓


## LAYING PATTERNS




Camelot 6x9\_HB\_A



Camelot 6x9\_HB\_B



GRANITE



RIVER




SIERRA

Single Units



**SQUARE**  
 159.8 x 159.8 x 60mm  
 6 3/8 x 6 3/8 x 2 3/8"  
 336 Units/Bundle  
 .28 Sq.Ft./Stone



**RECTANGLE**  
 160 x 240 x 60mm  
 6 3/8 x 9 1/2 x 2 3/8"  
 240 Units/Bundle  
 .41 Sq.Ft./Stone

Notes: Camelot is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.





## APPLICATIONS



## APPEARANCE

Edge Detail - n/a  
 Surface Texture - Textured  
 Joint Spacing - 3 mm

## TECHNOLOGIES

### ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

### REALA™

Cast from European cobblestones

### ULTIMA™

Up to 4x stronger than poured-in-place concrete


### EASYCLEAN™

Factory Sealed to provide integral stain resistance


## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

## LAYING PATTERNS



Copthorne BW A



Copthorne RB C



ARCTIC GREY



BASALT



BURGUNDY RED



BURNT CLAY



OLD OAK



STEEL BLUE

Single Unit



**STANDARD**  
 65 x 200 x 60mm  
 2 5/8 x 7 7/8 x 2 3/8"  
 600 Units/Bundle  
 .15 SqFt/Stone

Bundle Type		SINGLE
Plant Produced		AYR
Thickness (mm)		60 MM

SQFT PER	Bundle	89.20
	Layer	11.15
	Section	-
	Stone	0.15

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.43
	Section	-
	Layer	15.99
	Bundle	127.95

SAILOR LNFT PER	SqFt	4.41
	Section	-
	Layer	49.21
	Bundle	393.70

UNITS PER	SqFt	6.73
	Section	-
	Bundle	600.00

LBS PER	Layer	294
	Section	-
	Bundle	2,349

COLORS	Reflectance	Stock
Arctic Grey	SR n/a SRI n/a	✓
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓
Steel Blue	SR n/a SRI n/a	✓

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 80. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Zero  
 Surface Texture - Textured  
 Joint Spacing - 15 mm

## TECHNOLOGIES

### ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

### REALA™

Cast from European cobblestones

### ULTIMA™

Up to 4x stronger than poured-in-place concrete

### EASYCLEAN™

Factory Sealed to provide integral stain resistance

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

Bundle Type		RANDOM
Plant Produced		AYR
Thickness (mm)		60 MM

SQFT PER	Bundle	98.30
	Layer	12.29
	Section	-
	Stone	0.26

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	2.25
	Section	-
	Layer	27.69
	Bundle	221.52

UNITS PER	SqFt	3.91
	Section	-
	Bundle	384.00

LBS PER	Layer	291
	Section	-
	Bundle	2,326

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓

## LAYING PATTERNS



Courtstone Fixed Random A



BASALT

Random Bundle					
	<b>XL RECTANGLE</b>	<b>LARGE RECTANGLE</b>	<b>RECTANGLE</b>	<b>SMALL RECTANGLE</b>	<b>SQUARE</b>
	215 x 130 x 60mm	185 x 130 x 60mm	165 x 130 x 60mm	145 x 130 x 60mm	130 x 130 x 60mm
	8 3/8 x 5 1/8 x 2 3/8"	7 1/4 x 5 1/8 x 2 3/8"	6 1/2 x 5 1/8 x 2 3/8"	5 3/4 x 5 1/8 x 2 3/8"	5 1/8 x 5 1/8 x 2 3/8"
	128 Units/Bundle	64 Units/Bundle	64 Units/Bundle	64 Units/Bundle	64 Units/Bundle
	.30 SqFt/Stone	.28 SqFt/Stone	.23 SqFt/Stone	.20 SqFt/Stone	.18 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 80. Contact Unilock for more information.



**APPLICATIONS**



**APPEARANCE**

Edge Detail - Micro  
 Surface Texture - Smooth  
 Joint Spacing - 6.25 mm  
 Void - 5.80%

**TECHNOLOGIES**

**PERMEABLE**

Can be installed to allow water to flow through

**ENDURACOLOR™**

Refined surface and long-lasting color

**TECHNICAL INFORMATION**

Conforms to ASTM C 936 -Eligible for LEED v4.1 credits

**LAYING PATTERN**



EcoLine Fixed Random A

		SMOOTH ENDURA
<b>Bundle Type</b>		<b>SINGLE</b>
Plant Produced		OHIO
Thickness (mm)		100 MM
<b>SQFT PER</b>	Bundle	66.20
	Layer	11.03
	Section	-
	Stone	0.34
<b>PER BUNDLE</b>	Layers	6.00
	Sections	-
<b>SOLDIER LNFT PER</b>	SqFt	-
	Section	-
	Layer	-
	Bundle	-
<b>SAILOR LNFT PER</b>	SqFt	-
	Section	-
	Layer	-
	Bundle	-
<b>UNITS PER</b>	SqFt	2.90
	Section	-
	Bundle	192.00
<b>LBS PER</b>	Layer	504
	Section	-
	Bundle	3,025
<b>COLORS</b>	<b>Reflectance</b>	<b>Stock</b>
All Colors & Finishes	SR n/a SRI n/a	SO

Single Units								
<b>UNIT A</b>	<b>UNIT B</b>	<b>UNIT C</b>	<b>UNIT D</b>	<b>UNIT E</b>	<b>UNIT F</b>	<b>UNIT G</b>	<b>UNIT H</b>	
357 x 84 x 100mm 14 x 3 3/8 x 3 3/8"	317 x 84 x 100mm 12 1/2 x 3 3/8 x 3 3/8"	277 x 84 x 100mm 10 7/8 x 3 3/8 x 3 3/8"	237 x 84 x 100mm 9 3/8 x 3 3/8 x 3 3/8"	357 x 114 x 100mm 14 x 4 1/2 x 3 3/8"	317 x 114 x 100mm 12 1/2 x 4 1/2 x 3 3/8"	277 x 114 x 100mm 10 7/8 x 4 1/2 x 3 3/8"	237 x 114 x 100mm 9 3/8 x 4 1/2 x 3 3/8"	
24 Units/Bundle .32 SqFt/Stone	24 Units/Bundle .29 SqFt/Stone	24 Units/Bundle .25 SqFt/Stone	24 Units/Bundle .21 SqFt/Stone	24 Units/Bundle .44 SqFt/Stone	24 Units/Bundle .39 SqFt/Stone	24 Units/Bundle .34 SqFt/Stone	24 Units/Bundle .29 SqFt/Stone	

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.





**APPLICATIONS**



**APPEARANCE**

Edge Detail - Chamfer  
 Surface Texture - Smooth  
 Joint Spacing - 7 mm  
 Void - 7.30%

**TECHNOLOGIES**

**PERMEABLE**

Can be installed to allow water to flow through


**CLASSIC**

Budget-friendly traditional product mix

**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

**LAYING PATTERN**



Pattern Cluster C

		STANDARD
<b>Bundle Type</b>		<b>SINGLE</b>
Plant Produced		OHIO
Thickness (mm)		80 MM

<b>SQFT PER</b>	Bundle	84.80
	Layer	10.60
	Section	-
	Stone	0.50

<b>PER BUNDLE</b>	Layers	8.00
	Sections	-

<b>SOLDIER LNFT PER</b>	SqFt	-
	Section	-
	Layer	-
	Bundle	-

<b>SAILOR LNFT PER</b>	SqFt	-
	Section	-
	Layer	-
	Bundle	-

<b>UNITS PER</b>	SqFt	1.98
	Section	-
	Bundle	168.00

<b>LBS PER</b>	Layer	354
	Section	-
	Bundle	2,831

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	✓
River	SR .32 SRI 34	✓



NATURAL



RI VER

Single Unit



**STANDARD**  
 250 x 250 x 80mm  
 9 7/8 x 9 7/8 x 3 1/8"  
 168 Units/Bundle  
 .50 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



**APPLICATIONS**



**APPEARANCE**

Edge Detail - Micro  
 Surface Texture - Smooth  
 Joint Spacing - 7mm  
 Void - 4.6-7.08%

**TECHNOLOGIES**

**PERMEABLE**

Can be installed to allow water to flow through


**CLASSIC**

Budget-friendly traditional product mix


**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits


**LAYING PATTERNS**




EcoPriora 5x10  
RB\_A



EcoPriora 5x10  
HB\_E



EcoPriora Multi-Unit  
Random C



NATURAL



RIVER

Bundle Type		SINGLE
Plant Produced		OHIO
Thickness (mm)		80 MM

SQFT PER	Bundle	75.95
	Layer	10.85
	Section	15.19
	Stone	0.31

PER BUNDLE	Layers	7.00
	Sections	5.00

SOLDIER LNFT PER	SqFt	1.27
	Section	19.29
	Layer	13.78
	Bundle	96.46

SAILOR LNFT PER	SqFt	2.25
	Section	34.17
	Layer	24.41
	Bundle	170.87

UNITS PER	SqFt	3.23
	Section	49.00
	Bundle	245.00

LBS PER	Layer	381
	Section	534
	Bundle	2,614

COLORS	Reflectance	Stock
Natural	SR n/a SRI n/a	SO
River	SR n/a SRI n/a	✓

Single Unit



**5 x 10**  
 120 x 240 x 80mm  
 4 3/4 x 9 1/2 x 3 1/8"  
 245 Units/Bundle  
 .31 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



	6 x 24 SMOOTH	3 x 12 PERMEABLE SMOOTH	3 x 12 PERMEABLE SERIES	4 x 12 SERIES
<b>Bundle Type</b>	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	OHIO	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	70 MM	100 MM	100 MM	80 MM

SQFT PER	Bundle	93.00	63.94	63.94	93.04
	Layer	11.63	10.66	10.66	11.63
	Section	-	-	-	-
	Stone	0.97	0.24	0.24	0.32

PER BUNDLE	Layers	8.00	6.00	6.00	8.00
	Sections	-	-	-	-

SOLDIER LNFT PER	SqFt	0.51	1.02	1.02	1.02
	Section	-	-	-	-
	Layer	5.91	10.83	10.83	11.81
	Bundle	47.25	64.96	64.96	94.49

SAILOR LNFT PER	SqFt	2.03	4.06	4.06	3.05
	Section	-	-	-	-
	Layer	23.62	43.31	43.31	35.43
	Bundle	188.98	259.84	259.84	283.46

UNITS PER	SqFt	1.03	4.13	4.13	3.10
	Section	-	-	-	-
	Bundle	96.00	264.00	264.00	288.00

LBS PER	Layer	372	465	483	426
	Section	-	-	-	-
	Bundle	2,978	2,789	2,898	3,404

COLORS	Reflectance	Stock	Stock	Stock	Stock
All Finishes/Colors	SR n/a SRI n/a	SO	SO	SO	-
Arctic Grey	SR n/a SRI n/a	-	-	-	✓
Nordic Star	SR n/a SRI n/a	-	-	-	✓

**APPLICATIONS**



**APPEARANCE**

Edge Detail - Rounded  
 Surface Texture - Smooth / Series™ Exposed  
 Joint Spacing - 7 mm  
 Void - 10.12%

**TECHNOLOGIES**

**ENDURACOLOR™ (3x12)**

Refined surface and long-lasting color


**PERMEABLE**

Can be installed to allow water to flow through


**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits


**LAYING PATTERNS**



EcoPromenade 3x12 RB\_A



EcoPromenade 3x12\_DHB\_B



EcoPromenade 3x12 HB\_C



ARCTIC GREY



NORDIC STAR

Single Units		<b>6 x 24 SMOOTH</b> 150 x 600 x 70mm 5 7/8 x 6 3/8 x 2 3/4" 96 Units/Bundle .97 Sq.Ft./Stone		<b>3 x 12 SMOOTH</b> 75 x 300 x 100mm 3 x 11 1/2 x 3 7/8" 264 Units/Bundle .24 Sq.Ft./Stone		<b>3 x 12 SERIES</b> 75 x 300 x 100mm 3 x 11 1/2 x 3 7/8" 264 Units/Bundle .24 Sq.Ft./Stone		<b>4 x 12 SERIES</b> 100 x 300 x 80mm 3 7/8 x 11 7/8 x 3 1/8" 288 Units/Bundle .32 Sq.Ft./Stone
--------------	---	---	---	---	---	---	---	---

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.





## APPLICATIONS



## APPEARANCE

Edge Detail - Rounded

Surface Texture - Granito/Granito Textured (Random)

Joint Spacing - 7 mm

Void - n/a

## TECHNOLOGIES

### ENDURACOLOR™

Refined surface and long-lasting color

### ARTISTA™

Boldly mottled color finish

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

		HEX	
Bundle Type		RANDOM	SINGLE
Plant Produced		PICKERING	PICKERING
Thickness (mm)		60 MM	70 MM

SQFT PER	Bundle	94.14	73.92
	Layer	10.46	9.24
	Section	-	-
	Stone	1.31	2.6

PER BUNDLE	Layers	9.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-


SAILOR LNFT PER	SqFt	0.85	-
	Section	-	-
	Layer	8.86	-
	Bundle	79.72	-

UNITS PER	SqFt	0.76	0.39
	Section	-	-
	Bundle	72.00	192.00


LBS PER	Layer	287	306.24
	Section	-	-
	Bundle	2,584	2,450

COLORS	Reflectance	Stock	Stock
Notte Random/Hex	SR n/a SRI n/a	✓	✓
Sabia Random/Hex	SR n/a SRI n/a	✓	✓
Scuro Random/Hex	SR n/a SRI n/a	✓	✓


## LAYING PATTERNS



Pattern Hex\_A



Pattern Random\_A







Pattern Random\_B



NOTTE

SABIA

SCURO

Random Bundle		<b>SMALL RECTANGLE</b> 180 x 360 x 60mm 7 x 14 1/4 x 2 3/8" 27 Units/Bundle .655 Sq.Ft./Stone		<b>SQUARE</b> 360 x 360 x 60mm 14 1/4 x 14 1/4 x 2 3/8" 27 Units/Bundle 1.31 Sq.Ft./Stone		<b>LARGE RECTANGLE</b> 360 x 540 x 60mm 14 1/4 x 21 1/4 x 2 3/8" 18 Units/Bundle 1.966 Sq.Ft./Stone	Single Unit		<b>HEX</b> 200 x 200 x 70mm 7 7/8 x 7 7/8 x 3 1/8" 192 Units/Bundle .42 Sq.Ft./Stone
---------------	---	---	---	---	---	---	-------------	---	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Random bundle is not suitable for vehicular use. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



**APPLICATIONS**



**APPEARANCE**

Edge Detail Smooth and Granito - Micro  
 Edge Detail Umbriano- Zero  
 Surface Texture - Smooth / Mottled  
 Joint Spacing Smooth - 3 mm  
 Joint Spacing Umbriano - 7mm

**TECHNOLOGIES**

**ENDURACOLOR™**

Refined surface and long-lasting color

**EASYSOAK™ (+ Umbriano)**

Factory Sealed to provide integral stain resistance

**COLORFUSION™ (Umbriano)**

Subtly mottled color finish

**PERMEABLE (Eco-Hex)**

Can be installed to allow water to flow through

**ARTISTA™ (Granito)**

Boldly mottled color finish

**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits



	HEX SMOOTH ENDURACOLOR	UMBRIANO® PERMEABLE	GRANITO HEX
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	OHIO	CHICAGO	PICKERING
Thickness (mm)	70 MM	60 MM	70 MM

<b>SQFT PER</b>	Bundle	73.92	108.31	73.92
	Layer	9.24	10.83	9.24
	Section	-	-	-
	Stone	0.39	0.45	0.39

<b>PER BUNDLE</b>	Layers	8.00	10.00	8.00
	Sections	-	-	-

<b>SOLDIER LNFT PER</b>	SqFt	-	-	-
	Section	-	-	-
	Layer	-	-	-
	Bundle	-	-	-


<b>SAILOR LNFT PER</b>	SqFt	-	-	-
	Section	-	-	-
	Layer	-	-	-
	Bundle	-	-	-

<b>UNITS PER</b>	SqFt	2.60	2.22	2.60
	Section	-	-	-
	Bundle	192.00	240.00	192.00

<b>LBS PER</b>	Layer	306	273	306
	Section	-	-	-
	Bundle	2,450	2,732	2,450

COLORS	Reflectance	Stock	Stock	Stock
Medium Gray	SR n/a SRI n/a	✓		
Opal	SR n/a SRI n/a	✓		
Dark Charcoal	SR n/a SRI n/a	✓		
French Grey	SR .18 SRI 17		✓	
Summer Wheat	SR .42 SRI 48		✓	
Winter Marvel	SR .35 SRI 38		✓	
Midnight Sky	SR n/a SRI n/a		✓	
Notte	SR n/a SRI n/a			✓
Sabia	SR n/a SRI n/a			✓
Scuro	SR n/a SRI n/a			✓

**LAYING PATTERN**



Single Unit



**HEX**  
 200 x 200 x 70mm  
 7 7/8 x 7 7/8 x 2 3/4"  
 192 Units/Bundle  
 .39 SqFt/Stone




**ECO-HEX UMBRIANO**  
 200 x 200 x 70mm  
 7 7/8 x 7 7/8 x 2 3/4"  
 240 Units/Bundle  
 .45 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Chamfer  
 Surface Texture - Smooth  
 Joint Spacing - 3 mm  
 Void - n/a

## TECHNOLOGIES

### CLASSIC

Budget-friendly traditional product mix


## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits


## LAYING PATTERNS



Pattern RB\_B




Pattern HB\_C



Pattern BW\_D



CHARCOAL



RIVER



RUSTIC RED



SIERRA

<b>Bundle Type</b>	<b>SINGLE</b>
Plant Produced	OHIO
Thickness (mm)	60 MM

<b>SQFT PER</b>	Bundle	106.20
	Layer	11.80
	Section	17.70
	Stone	0.22

<b>PER BUNDLE</b>	Layers	9.00
	Sections	6.00

<b>SOLDIER LNFT PER</b>	SqFt	1.50
	Section	26.57
	Layer	17.72
	Bundle	159.45

<b>SAILOR LNFT PER</b>	SqFt	3.00
	Section	53.15
	Layer	35.43
	Bundle	318.90

<b>UNITS PER</b>	SqFt	4.58
	Section	81.00
	Bundle	486.00

<b>LBS PER</b>	Layer	319
	Section	478
	Bundle	2,868

COLORS	Reflectance	Stock
Charcoal	SR .12 SRI 9	✓
River	SR .32 SRI 34	✓
Rustic Red	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

Single Unit



**STANDARD**  
 100 x 200 x 60mm  
 3 7/8 x 7 7/8 x 2 3/8"  
 540 Units/Bundle  
 .22 Sq.Ft./Stone

Notes: Hollandstone is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Rounded  
 Surface Texture - Smooth  
 Joint Spacing - 3 mm  
 Void - n/a


## TECHNOLOGIES

**ENDURACOLOR™**  
 Refined surface and long-lasting color


## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

## LAYING PATTERNS




Pattern RB\_B




Pattern HB\_C



DARK CHARCOAL




FOSSIL



GRANITE FUSION



IVORY



MOCHA BROWN

<b>Bundle Type</b>	<b>SINGLE</b>
Plant Produced	OHIO
Thickness (mm)	60 MM

<b>SQFT PER</b>	Bundle	106.20
	Layer	11.80
	Section	17.70
	Stone	0.22

<b>PER BUNDLE</b>	Layers	9.00
	Sections	6.00

<b>SOLDIER LNFT PER</b>	SqFt	1.50
	Section	26.57
	Layer	17.72
	Bundle	159.45

<b>SAILOR LNFT PER</b>	SqFt	3.00
	Section	53.15
	Layer	35.43
	Bundle	318.90

<b>UNITS PER</b>	SqFt	4.58
	Section	81.00
	Bundle	486.00

<b>LBS PER</b>	Layer	307
	Section	460
	Bundle	2,759

COLORS	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Ivory	SR n/a SRI n/a	✓
Mocha Brown	SR n/a SRI n/a	✓

Single Unit



**STANDARD**  
 100 x 200 x 60mm  
 3 7/8 x 7 7/8 x 2 3/8"  
 486 units/Bundle  
 .22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.





## APPLICATIONS



## APPEARANCE

Edge Detail - Micro  
 Surface Texture - Il Campo® Brushed  
 Joint Spacing - 3 mm  
 Void - n/a


## TECHNOLOGIES

**ENDURACOLOR™**  
 Refined surface and long-lasting color


## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits


## LAYING PATTERNS



Pattern 4x8\_RB\_F




Pattern 4x8\_SB\_G



Pattern 4x8\_HB\_H



DARK CHARCOAL



MOCHA BROWN

Bundle Type	SINGLE	SINGLE
Plant Produced	OHIO	OHIO
Thickness (mm)	60 MM	70 MM

SQFT PER	Bundle	106.2	94.40
	Layer	11.80	11.80
	Section	-	15.73
	Stone	0.22	0.22

PER BUNDLE	Layers	9.00	8.00
	Sections	-	6.00

SOLDIER LNFT PER	SqFt	-	1.50
	Section	-	23.62
	Layer	-	17.72
	Bundle	-	141.73

SAILOR LNFT PER	SqFt	-	3.00
	Section	-	47.24
	Layer	-	35.43
	Bundle	-	283.46

UNITS PER	SqFt	4.58	4.58
	Section	-	72.00
	Bundle	-	432.00

LBS PER	Layer	-	362
	Section	-	483
	Bundle	2,759	2,898

COLORS	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	✓	-
Mocha Brown	SR n/a SRI n/a	-	✓

Single Unit



**STANDARD**  
 100 x 200 x 60mm  
 3 3/8 x 7 7/8 x 2 3/4"  
 432 Units/Bundle  
 .22 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



**APPLICATIONS**



**APPEARANCE**

Edge Detail - Zero  
 Surface Texture - Smooth  
 Joint Spacing - 4 mm  
 Void - n/a


**TECHNOLOGIES**

**ENDURACOLOR™**  
 Refined surface and long-lasting color


**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits


**LAYING PATTERNS**



Pattern RB\_A



Pattern HB\_C



Pattern DHB\_D

	<b>STANDARD</b>
<b>Bundle Type</b>	<b>SINGLE</b>
Plant Produced	MARENGO
Thickness (mm)	60 MM

<b>SQFT PER</b>	Bundle	111.60
	Layer	11.16
	Section	-
	Stone	0.16

<b>PER BUNDLE</b>	Layers	10.00
	Sections	-

<b>SOLDIER LNFT PER</b>	SqFt	1.27
	Section	-
	Layer	14.17
	Bundle	141.73

<b>SAILOR LNFT PER</b>	SqFt	5.08
	Section	-
	Layer	56.69
	Bundle	566.93


<b>UNITS PER</b>	SqFt	6.45
	Section	-
	Bundle	720.00

<b>LBS PER</b>	Layer	306
	Section	-
	Bundle	3062.89

COLORS	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Sable	SR n/a SRI n/a	✓
Cocoa Brown	SR n/a SRI n/a	✓



DARK CHARCOAL



GRANITE FUSION



SABLE



COCOA BROWN

Single Unit

**STANDARD**  
 60 x 240 x 60mm  
 2 3/8 x 9 1/2 x 2 3/8"  
 720 Units/Bundle  
 .16 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

# Natural Stone - Sandstone Slabs



BRUSHED FINISH	4 PC BUNDLE	24 x 24	24 x 36
Bundle Type	RANDOM	SINGLE	SINGLE
Thickness (mm)	22 MM	22 MM	22 MM

SQFT PER	Crate	174.00	160.00	180.00
	Units	3.63	4.00	6.00

UNITS PER	Crate	48.00	40.00	30.00
	SqFt	0.28	0.25	0.17

LBS PER	Unit	47	46	69
	Bundle	2,265	1,851	2,082

COLORS	Reflectance	Stock	Stock	Stock
Autumn Harvest (Riven)	SR n/a SRI n/a	✓	✓	✓
Golden Sand (Brushed)	SR n/a SRI n/a	✓	✓	✓
Indian Coast (Brushed)	SR n/a SRI n/a	✓	✓	✓
Ivory Sand (Brushed)	SR n/a SRI n/a	✓	✓	✓
Stone Cliff Grey (Riven)	SR n/a SRI n/a	✓	✓	✓

## APPLICATIONS



## APPEARANCE

Edge Detail - Zero  
 Surface Texture - Brushed / Riven  
 Joint Spacing - 0 mm  
 Void - n/a

## TECHNICAL INFORMATION

Visit [Unilock.com](http://Unilock.com) for more information.

## LAYING PATTERNS



NaturalStone  
Multi-Unit D




NaturalStone  
Multi-Unit E




NaturalStone  
Multi-Unit F




AUTUMN HARVEST




GOLDEN SAND



INDIAN COAST



IVORY SAND



STONE CLIFF GREY

Random Bundle	12 x 24	18 x 24	24 x 24	24 x 36	Single Units	24 x 24	24 x 36
	300 x 600 x 22mm 11 3/4 x 23 5/8 x 7/8"	450 x 600 x 22mm 17 3/4 x 23 5/8 x 7/8"	600 x 600 x 22mm 23 5/8 x 23 5/8 x 7/8"	600 x 900 x 22mm 23 5/8 x 35 1/2 x 7/8"		600 x 600 x 22mm 23 5/8 x 23 5/8 x 7/8"	600 x 900 x 22mm 23 5/8 x 35 1/2 x 7/8"
			Also sold separately in all colors	Also sold separately in all colors		Also sold separately in all colors	Also sold separately in all colors

Notes: **SOLD IN FULL CRATES ONLY.** Natural Stone is available for purchase by Unilock Authorized Dealers only. Unilock offers adjustable and stackable pedestal system; please contact your Territory Manager for pricing and availability. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone. **Important:** Natural Stone is covered under Unilock's Transferable Lifetime Guarantee. All measurements are nominal. **Product is not intended for vehicular applications.**

# Natural Stone - Sandstone Steps, Coping and Pillar Cap



	48 x 12 FULLNOSE COPING	48 x 12 ROCK FACED COPING	24 x 24 PILLAR CAP	28 x 28 PILLAR CAP	14 x 48 COPING	
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>	
Thickness (mm)	50 MM	50 MM	64 MM	100 MM	50 MM	
<b>UNITS PER</b>	Crate	20.00	20.00	14.00	12.00	20.00
	SqFt	-	-	-	-	-
<b>LBS PER</b>	Unit	101	106	137	200	127.86
	Bundle	2,028	2,116	1,914	2,401	2,557

## APPLICATIONS



## APPEARANCE

Edge Detail - Zero

Surface Texture - Brushed / Riven

Joint Spacing - 0 mm

Void - n/a

## TECHNICAL INFORMATION

Visit [Unilock.com](http://Unilock.com) for more information.

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Autumn Harvest (Riven)	SR n/a SRI n/a	✓	✓	✓	-	-
Golden Sand (Brushed)	SR n/a SRI n/a	✓	✓	✓	-	-
Indian Coast (Brushed)	SR n/a SRI n/a	✓	✓	✓	-	-
Ivory Sand (Brushed)	SR n/a SRI n/a	✓	✓	✓	-	-
Stone Cliff Grey (Riven)	SR n/a SRI n/a	✓	✓	✓	✓	✓


	48 x 16 STEP
<b>Bundle Type</b>	SINGLE
Thickness (mm)	150 MM

<b>FCFT PER</b>	Crate	32.00
-----------------	-------	-------

<b>LNFT PER</b>	Crate	24.00
-----------------	-------	-------





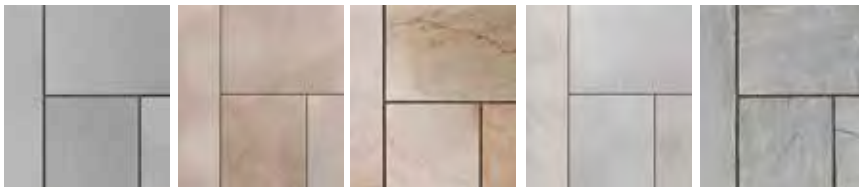

<b>UNITS PER</b>	Crate	6.00
------------------	-------	------

<b>LBS PER</b>	Bundle	2,526
----------------	--------	-------



AUTUMN HARVEST    GOLDEN SAND    INDIAN COAST    IVORY SAND    STONE CLIFF GREY

COLORS	Reflectance	Stock
Autumn Harvest (Riven)	SR n/a SRI n/a	✓
Golden Sand (Brushed)	SR n/a SRI n/a	✓
Indian Coast (Brushed)	SR n/a SRI n/a	✓
Ivory Sand (Brushed)	SR n/a SRI n/a	✓
Stone Cliff Grey (Riven)	SR n/a SRI n/a	✓

Single Units		<b>COPING</b> 1,200 x 50 x 350mm 48 x 2 x 14"		<b>PILLAR CAP</b> 720 x 720 x 100mm 28 x 28 x 4"			
		<b>4' FULLNOSE</b> 1,200 x 50 x 300mm 47 1/4 x 2 x 11 7/8"		<b>4' ROCK FACE</b> 1,200 x 50 x 300mm 47 1/4 x 2 x 11 7/8"		<b>PILLAR CAP</b> 600 x 600 x 64mm 23 5/8 x 23 5/8 x 2 5/8"	

Notes: Natural Stone is available for purchase by Unilock Authorized Dealers only. Unilock offers adjustable and stackable pedestal system; please contact your Territory Manager for pricing and availability. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone. **Important:** Natural Stone is covered under Unilock's Transferable Lifetime Guarantee. All measurements are nominal. **Product is not intended for vehicular applications.**



# Natural Stone - Limestone Slabs



BRUSHED FINISH	4 PC BUNDLE	24 x 24	24 x 36
Bundle Type	RANDOM	SINGLE	SINGLE
Thickness (mm)	22 MM	22 MM	22 MM

SQFT PER	Crate	174.00	160.00	180.00
	Units	3.63	4.00	6.00

UNITS PER	Crate	48.00	40.00	30.00
	SqFt	0.28	0.25	0.17

LBS PER	Unit	47	46	69
	Bundle	2,265	1,851	2,082

COLORS	Reflectance	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓
Winter Mist	SR n/a SRI n/a	✓	✓	✓

## APPLICATIONS



## APPEARANCE

Edge Detail - Zero  
 Surface Texture - Riven  
 Joint Spacing - 0 mm  
 Void - n/a

## TECHNICAL INFORMATION

Visit [Unilock.com](http://Unilock.com) for more information.

## LAYING PATTERNS




NaturalStone  
Multi-Unit D



NaturalStone  
Multi-Unit E



NaturalStone  
Multi-Unit F



BLACK RIVER



WINTER MIST

Random Bundle	12 x 24	18 x 24	24 x 24	24 x 36	Single Units	24 X 24	24 x 36
	300 x 600 x 22mm 11 3/4 x 23 5/8 x 7/8"	450 x 600 x 22mm 17 3/4 x 23 5/8 x 7/8"	600 x 600 x 22mm 23 5/8 x 23 5/8 x 7/8" Also sold separately in all colors	600 x 900 x 22mm 23 5/8 x 35 1/2 x 7/8" Also sold separately in all colors		600 x 600 x 22mm 23 5/8 x 23 5/8 x 7/8" Also sold separately in all colors	600 x 900 x 22mm 23 5/8 x 35 1/2 x 7/8" Also sold separately in all colors

Notes: **SOLD IN FULL CRATES ONLY.** Natural Stone is available for purchase by Unilock Authorized Dealers only. Unilock offers adjustable and stackable pedestal system; please contact your Territory Manager for pricing and availability. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone. **Important:** Natural Stone is covered under Unilock's Transferable Lifetime Guarantee. All measurements are nominal. **Product is not intended for vehicular applications.**

# Natural Stone - Limestone Steps, Coping and Pillar Cap



## APPLICATIONS




## APPEARANCE

Edge Detail - Zero  
 Surface Texture - Riven  
 Joint Spacing - 0 mm  
 Void - n/a

## TECHNICAL INFORMATION

Visit [Unilock.com](http://Unilock.com) for more information.



BLACK RIVER



WINTER MIST

	48 x 12 ROCK FACED COPING	48 x 12 FULLNOSE COPING	24 x 24 PILLAR CAP	28 x 28 PILLAR CAP	14 x 48 COPING
<b>Bundle Type</b>	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	50 MM	50 MM	64 MM	64 MM	50 MM

UNITS PER	Crate	20.00	20.00	14.00	12.00	20.00
	SqFt	-	-	-	-	-

LBS PER	Unit	104	159	137	233.5	127.86
	Bundle	2,072	3,175	1,914	2,802	2,557

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓	✓	✓
Winter Mist	SR n/a SRI n/a			✓		

	48 x 16 STEP
<b>Bundle Type</b>	SINGLE
Thickness (mm)	150 MM

<b>FCFT PER</b>	Crate	32.00
-----------------	-------	-------

<b>LNFT PER</b>	Crate	24.00
-----------------	-------	-------

<b>UNITS PER</b>	Crate	6.00
------------------	-------	------

<b>LBS PER</b>	Bundle	2,646
----------------	--------	-------

COLORS	Reflectance	Stock
Black River	SR n/a SRI n/a	✓

Single Units



**PILLAR CAP**  
 710 x 710 x 64mm  
 28 x 28 x 2 5/8"



**COPING**  
 1,200 x 50 x 350mm  
 48 x 2 x 14"

Single Units



**4' FULLNOSE**  
 1,200 x 50 x 300mm  
 47 1/4 x 2 x 11 7/8"



**4' ROCK FACE**  
 1,200 x 50 x 300mm  
 47 1/4 x 2 x 11 7/8"



**PILLAR CAP**  
 600 x 600 x 64mm  
 23 5/8 x 23 5/8 x 2 5/8"



**48 x 16 STEP**  
 1,200 x 150 x 400mm  
 47 1/4 x 5 7/8 x 15 3/4"  
 Black River only

Notes: Natural Stone is available for purchase by Unilock Authorized Dealers only. Unilock offers adjustable and stackable pedestal system; please contact your Territory Manager for pricing and availability. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone. **Important:** Natural Stone is covered under Unilock's Transferable Lifetime Guarantee. All measurements are nominal. **Product is not intended for vehicular applications.**



**APPLICATIONS**



**APPEARANCE**

Edge Detail - Zero  
Surface Texture - Textured

**TECHNOLOGIES**

**PERMEABLE**

Can be installed to allow water to flow through


**ENDURACOLOR™**

Refined surface and long-lasting color


**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
Eligible for LEED v4.1 credits


**LAYING PATTERNS**



NordicCobble\_A



NordicCobble\_Fan




NordicCobble\_Circle



DARK CHARCOAL



GRANITE FUSION



OPAL

		<b>PREMIER</b>
<b>Bundle Type</b>		<b>SINGLE</b>
Plant Produced		CHICAGO
Thickness (mm)		60 MM
<b>SQFT PER</b>	Bundle	98.25
	Layer	9.82
	Section	-
	Stone	0.09
<b>PER BUNDLE</b>	Layers	10.00
	Sections	-
<b>SOLDIER LNFT PER</b>	SqFt	3.39
	Section	-
	Layer	33.30
	Bundle	333.07
<b>SAILOR LNFT PER</b>	SqFt	-
	Section	-
	Layer	-
	Bundle	-
<b>UNITS PER</b>	SqFt	10.99
	Section	-
	Bundle	1,080
<b>LBS PER</b>	Layer	230.10
	Section	-
	Bundle	2,301

COLORS	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Opal	SR n/a SRI n/a	✓

Single Unit



**STANDARD**  
89.9 x 94 x 60mm  
3 5/8 x 3 3/4 x 2 3/8"  
1,080 units/Bundle  
.09 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Chamfer  
 Surface Texture - Smooth  
 Joint Spacing - 8 mm  
 Void - n/a


## TECHNOLOGIES

**CLASSIC**  
 Budget-friendly traditional product mix


## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

## LAYING PATTERNS



Optiloc A



Optiloc B

Bundle Type		SINGLE
Plant Produced		OHIO
Thickness (mm)		80 MM

SQFT PER	Bundle	77.33
	Layer	9.67
	Section	-
	Stone	0.54

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.86
	Section	-
	Bundle	144.00

LBS PER	Layer	350
	Section	-
	Bundle	2,801

COLORS	Reflectance	Stock
All Colors & Finishes	SR n/a SRI n/a	SO

Single Unit



**STANDARD**  
 100 x 200 x 80mm  
 3 7/8 x 7 7/8 x 3 1/8"  
 378 units/Bundle  
 .22 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.





## APPLICATIONS




## APPEARANCE

Edge Detail - n/a  
 Surface Texture - Woodgrain & Stone Finish  
 Joint Spacing - n/a  
 Void - n/a

## TECHNICAL INFORMATION

Visit [Unilock.com](http://Unilock.com) for more information.

## LAYING PATTERNS



Porcelain 24x24 RB\_A



Porcelain 16x48 RB\_E

	24 x 24 DEL CONCA SQUARE PRESSED EDGE	DEL CONCA SQUARE PRESSED EDGE	16 x 48 DEL CONCA RECTANGLE PRESSED EDGE
<b>Bundle Type</b>	<b>SINGLE</b>	<b>RANDOM</b>	<b>SINGLE</b>
<b>Thickness (mm)</b>	20 MM	20 MM	20 MM

SQFT PER	Pallet	248.00	434.00	279.18
	Box	7.75	-	5.17
	Unit	3.88	-	5.17

PER PALLET	Box	32.00	-	54.00
	SqFt	248.00	-	279.18
	Unit	64.00	-	54.00

UNITS PER	Pallet	64.00	192	54.00
	Box	2.00	-	1.00

LBS PER	Unit	36	-	52
	SqFt	9	-	10
	Box	72	-	52
	Pallet	2,310	4,005	2,797

COLORS	Reflectance	Stock	Stock	Stock
Chamonix Beige	n/a	✓	-	-
Chamonix Bianco	n/a	✓	-	-
Chamonix Dark Grey	n/a	✓	-	-
Chamonix Grey	n/a	✓	-	-
Gotham Bianco	n/a	✓	-	-
Gotham Grey	n/a	✓	✓	-
Gotham Nero	n/a	✓	-	-
Travstone Beige	n/a	✓	✓	-
Travstone Grey	n/a	✓	-	-
West 57th Bianco	n/a	✓	-	-
West 57th Grey	n/a	✓	-	-
Essential White	n/a	✓	-	-
Essential Grey	n/a	✓	-	-
Essential Anthracite	n/a	✓	-	-
Essential Beige	n/a	✓	-	-
Nature Dolomite	n/a	✓	-	-
Nature Carrara	n/a	✓	-	-
New England White	n/a	✓	-	-
New England Ivory	n/a	✓	-	-
New England Cold Grey	n/a	✓	-	-
Monteverde Beige	n/a	-	-	✓
Monteverde Grey	n/a	-	-	✓
Monteverde Noce	n/a	-	-	✓



Notes: **SOLD IN FULL CRATES ONLY.** All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. **Product is not intended for vehicular applications.**



		DEL CONCA RECTANGLE PRESSED EDGE (STONE)	DEL CONCA RECTANGLE PRESSED EDGE (WOOD)	24 x 48
<b>Bundle Type</b>		<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>
Thickness (mm)		20 MM	20 MM	20 MM
<b>SQFT PER</b>	Pallet	165.36	268.71	103.4
	Box	6.89	6.89	5.17
	Unit	3.45	3.45	5.17
<b>PER PALLET</b>	Box	24.00	39.00	20.00
	SqFt	165.36	268.71	103.4
	Unit	48.00	78.00	20.00
<b>UNITS PER</b>	Pallet	48.00	78.00	20.00
	Box	2.00	2.00	1.00
<b>LBS PER</b>	Unit	32	32	49.82
	SqFt	9	9	9.63
	Box	65	64	49.82
	Pallet	1,552	2,504	996.4

## APPLICATIONS



## APPEARANCE

Edge Detail - n/a

Surface Texture - Woodgrain & Stone Finish

Joint Spacing - n/a

## TECHNICAL INFORMATION

Visit [Unilock.com](http://Unilock.com) for more information.

## LAYING PATTERNS



Porcelain 16x32  
RB\_C



Porcelain 16x32  
HB\_D

COLORS	Reflectance	Stock	Stock	Stock
Arbor Bianco (WG)	n/a	-	✓	-
Quartzite Bianco	n/a	✓	-	-
Quartzite Dark Grey	n/a	✓	-	-
Quartzite Grey	n/a	✓	-	-
Quartzite Sand	n/a	✓	-	-
Travstone Beige	n/a	✓	-	-
Travstone Grey	n/a	✓	-	-
New England White	n/a	✓	-	✓
New England Ivory	n/a	✓	-	✓
New England Cold Grey	n/a	✓	-	-



ARBOR BIANCO



QUARTZITE BIANCO



QUARTZITE  
DARK GRAY



QUARTZITE GREY




QUARTZITE SAND




TRAVSTONE BEIGE




TRAVSTONE GRAY



NEW ENGLAND WHITE



NEW ENGLAND IVORY



NEW ENGLAND COLD GRAY

Single Units



### PRESSED EDGE RECTANGLE

400 x 800 x 20mm  
15 3/4 x 31 1/2 x 7/8"  
3.45 Sq.Ft./Stone



### 24 x 48

600 x 1200 x 20mm  
23 5/8 x 47 1/4 x 7/8"  
5.17 Sq.Ft./Stone

Notes: **SOLD IN FULL CRATES ONLY.** All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. **Product is not intended for vehicular applications.**



## APPLICATIONS



## APPEARANCE

Edge Detail - Rounded  
 Surface Texture - Smooth,  
 Series™ Exposed & Il Campo® Brushed  
 Joint Spacing - 4 mm  
 Void - n/a


## TECHNOLOGIES

**ENDURACOLOR™**  
 Refined surface and long-lasting color


## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

## LAYING PATTERNS



Promenade 8x24  
 RB\_D



Promenade 8x24  
 HB\_F

	4 x 16 SMOOTH	8 x 24 SMOOTH	8 x 24 SERIES	8 x 24 IL CAMPO	8 x 24 UMBRIANO
<b>Bundle Type</b>	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	PICKERING	PICKERING	GEORGETOWN	GEORGETOWN	GEORGETOWN
Thickness (mm)	100 MM	100 MM	100 MM	100 MM	70 MM

SQFT PER	Bundle	51.67	51.67	51.67	51.67	82.67
	Layer	10.33	10.33	10.33	10.33	10.33
	Section	-	-	-	-	-
	Stone	0.43	1.29	1.29	1.29	1.29

PER BUNDLE	Layers	5.00	5.00	5.00	5.00	8.00
	Sections	-	-	-	-	-

SOLDIER LNFT PER	SqFt	0.76	0.51	0.51	0.51	0.51
	Section	-	-	-	-	-
	Layer	7.87	5.25	5.25	5.25	5.25
	Bundle	39.37	26.25	26.25	26.25	41.99

SAILOR LNFT PER	SqFt	3.05	1.52	1.52	1.52	1.02
	Section	-	-	-	-	-
	Layer	31.50	15.75	15.75	15.75	10.50
	Bundle	157.48	78.74	78.74	78.74	83.99

UNITS PER	SqFt	2.32	0.77	0.77	0.77	0.77
	Section	-	-	-	-	-
	Bundle	120.00	40.00	40.00	40.00	64.00

LBS PER	Layer	488	478	478	478	331
	Section	-	-	-	-	-
	Bundle	2,440	2,391	2,391	2,391	2,647

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Black Granite	SR n/a SRI n/a	-	-	✓	-	-
Dark Charcoal	SR n/a SRI n/a	-	-	-	✓	-
Granite Fussion	SR n/a SRI n/a	-	-	-	✓	-
Light Grey	SR n/a SRI n/a	-	-	-	✓	-
Opal	SR .24 SRI 24	-	✓	-	-	-
Steel Grey	SR n/a SRI n/a	✓	-	-	-	-
French Grey	SR .18 SRI 17	-	-	-	-	✓
Midnight Sky	SR .17 SRI 15	-	-	-	-	✓
Summer Wheat	SR .42 SRI 48	-	-	-	-	✓
Winter Marvel	SR .35 SRI 38	-	-	-	-	✓

Single Units		<b>4 x 16 SMOOTH</b> 100 x 400 x 100mm 3 7/8 x 15 3/4 x 3 7/8" 120 units/Bundle .43 Sq.Ft./Stone		<b>8 x 24 SMOOTH</b> 200 x 600 x 100mm 7 7/8 x 23 5/8 x 3 7/8" 40 Units/Bundle 1.29 Sq.Ft./Stone		<b>8 x 24 SERIES EXPOSED</b> 200 x 600 x 100mm 7 7/8 x 23 5/8 x 3 7/8" 40 units/Bundle 1.29 Sq.Ft./Stone		<b>8 x 24 IL CAMPO BRUSHED</b> 200 x 600 x 100mm 7 7/8 x 23 5/8 x 3 7/8" 40 units/Bundle 1.29 Sq.Ft./Stone
--------------	---	--	---	--	---	--	---	--

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth, Series™ & Umbriano

Il Campo® Brushed®

Joint Spacing - 4 mm / 7mm (Umbriano)

Void - n/a

## TECHNOLOGIES

### ENDURACOLOR™

Refined surface and long-lasting color

### EASYSOAK™ (Umbriano)

Factory Sealed to provide integral stain resistance

### COLORFUSION™ (Umbriano)


Subtly mottled colored finish

## TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits

## LAYING PATTERNS



Promenade 4x12  
RB\_A



Promenade 4x12  
HB\_C

	SMOOTH	SERIES	IL CAMPO	SMOOTH	UMBRIANO®	
<b>Bundle Type</b>	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	
Plant Produced	PICKERING	GEORGETOWN	GEORGETOWN	OHIO	MARENGO	
Thickness (mm)	100 MM	100 MM	100 MM	80 MM	80 MM	
<b>SQFT PER</b>	Bundle	58.13	58.13	58.13	81.41	93.04
	Layer	11.63	11.63	11.63	11.63	11.63
	Section	-	-	-	-	-
	Stone	0.32	0.32	0.32	0.32	0.32
<b>PER BUNDLE</b>	Layers	5.00	5.00	5.00	7.00	8.00
	Sections	-	-	-	-	-
<b>SOLDIER LNFT PER</b>	SqFt	1.02	1.02	1.02	1.02	1.02
	Section	-	-	-	-	-
	Layer	11.81	11.81	11.81	11.81	11.81
	Bundle	59.06	59.06	59.06	82.68	94.49
<b>SAILOR LNFT PER</b>	SqFt	3.05	3.05	3.05	3.05	3.05
	Section	-	-	-	-	-
	Layer	35.43	35.43	35.43	35.43	35.43
	Bundle	177.17	177.17	177.17	248.03	283.46
<b>UNITS PER</b>	SqFt	3.10	3.10	3.10	3.10	3.10
	Section	-	-	-	-	-
	Bundle	180.00	180.00	180.00	252.00	288.00
<b>LBS PER</b>	Layer	532	532	532	425	426
	Section	-	-	-	-	-
	Bundle	2,659	2,659	2,659	2,978	3,404

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Black Granite	n/a	-	✓	-	-	-
Light Grey	n/a	-	-	✓	-	-
Sandstone	n/a	✓	-	-	-	-
Opal Blend	n/a	-	-	-	✓	-
Dark Charcoal	n/a	-	-	-	✓	-
Medium Grey	n/a	-	-	-	✓	-
French Grey	SR .17 SRI 15	-	-	-	-	✓
Midnight Sky	SR .17 SRI 15	-	-	-	-	✓
Winter Marvel	SR .17 SRI 15	-	-	-	-	✓

Single Units



### 4 x 12 SMOOTH

100 x 300 x 80mm  
3 7/8 x 11 7/8 x 3 1/8"  
252 units/Bundle  
.32 Sq.Ft./Stone



### 4 x 12 UMBRIANO®

100 x 300 x 80mm  
3 7/8 x 11 7/8 x 3 1/8"  
288 units/Bundle  
.32 Sq.Ft./Stone



### 4 x 12 SMOOTH

100 x 300 x 100mm  
3 7/8 x 11 7/8 x 3 7/8"  
180 units/Bundle  
.32 Sq.Ft./Stone



### 4 x 12 SERIES

100 x 300 x 100mm  
3 7/8 x 11 7/8 x 3 7/8"  
180 units/Bundle  
.32 Sq.Ft./Stone



### 4 x 12 IL CAMPO BRUSHED

100 x 300 x 100mm  
3 7/8 x 11 7/8 x 3 7/8"  
180 units/Bundle  
.32 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Rounded  
 Surface Texture - Shot Blast  
 Joint Spacing - n/a  
 Void - n/a

## TECHNOLOGIES

**ENDURACOLOR™**  
 Refined surface and long-lasting color

## ECOTERRA®

Reduced carbon emissions and refined surface protection

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

	<b>4 x 12</b>
<b>Bundle Type</b>	<b>SINGLE</b>
Plant Produced	ONTARIO
Thickness (mm)	70 MM

<b>SQFT PER</b>	Bundle	93.04
	Layer	11.63
	Section	23.26
	Stone	0.32

<b>PER BUNDLE</b>	Layers	8.00
	Sections	4.00

<b>SOLDIER LNFT PER</b>	SqFt	1.02
	Section	23.62
	Layer	11.81
	Bundle	94.49


<b>SAILOR LNFT PER</b>	SqFt	3.05
	Section	70.87
	Layer	35.43
	Bundle	283.46

<b>UNITS PER</b>	SqFt	3.10
	Section	36.00
	Bundle	288.00


<b>LBS PER</b>	Layer	393
	Section	785
	Bundle	3,140

COLORS	Reflectance	Stock
Light Opal Blend	SR n/a SRI n/a	SO
Light Steel Gray	SR n/a SRI n/a	SO

## LAYING PATTERNS



4x12 RB\_A



4x12 HB\_C



LIGHT OPAL BLEND



LIGHT STEEL GRAY

Single Unit



**4 x 12**  
 100 x 300 x 70 mm  
 3 7/8 x 11 7/8 x 2 3/4  
 288 units/Bundle  
 .32 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.





**APPLICATIONS**



**APPEARANCE**

Edge Detail - n/a  
 Surface Texture - Textured  
 Joint Spacing - 10 mm  
 Void - n/a

**TECHNOLOGIES**

**ELEGANCE™**

Timeless, long-lasting beauty with the combination of Realta and Ultima technologies

**EASYCLEAN™** 

Factory Sealed to provide integral stain resistance

**REALTA™**

Cast from natural stone

**ULTIMA™**

Up to 4x stronger than poured-in-place concrete


**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

**LAYING PATTERNS**



Richcliff Fixed Random A




Richcliff Fixed Random B



Richcliff LargeRec HB\_H



DAWN MIST



PEBBLE TAUPE



SMOKE SHALE

		LARGE RECTANGLE	
Bundle Type		RANDOM	SINGLE
Plant Produced		AYR	AYR
Thickness (mm)		60 MM	60 MM

SQFT PER	Bundle	90.30	82.39
	Layer	11.29	10.30
	Section	-	-
	Stone	-	1.72

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.58
	Section	-	-
	Layer	-	5.94
	Bundle	-	47.56

SAILOR LNFT PER	SqFt	1.31	1.01
	Section	-	-
	Layer	14.78	10.39
	Bundle	118.22	83.15

UNITS PER	SqFt	1.77	0.58
	Section	-	-
	Bundle	160.00	48.00

LBS PER	Layer	309	301
	Section	-	-
	Bundle	2,472	2,411

COLORS	Reflectance	Stock	Stock
Dawn Mist	SR n/a SRI n/a	✓	✓
Pebble Taupe	SR n/a SRI n/a	✓	✓
Smoke Shale	SR n/a SRI n/a	✓	✓

Random Bundle		<b>RECTANGLE</b> 226 x 300 x 60mm 8 7/8 x 11 7/8 x 2 3/8" 64 Units/Bundle .75 SqFt./Stone		<b>SQUARE</b> 226 x 226 x 60mm 8 7/8 x 8 7/8 x 2 3/8" 32 units/Bundle .58 Sq.Ft./Stone		<b>SMALL RECTANGLE</b> 150 x 226 x 60mm 5 7/8 x 8 7/8 x 2 3/8" 64 units/Bundle .38 Sq.Ft./Stone	Single Unit		<b>LARGE RECTANGLE</b> 302 x 528 x 60mm 11 7/8 x 20 7/8 x 2 3/8" 48 units/Bundle 1.72 Sq.Ft./Stone
---------------	---	---	---	--	---	---	-------------	---	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



**APPLICATIONS**



**APPEARANCE**

Edge Detail - Chamfer  
 Surface Texture - Series Exposed  
 Joint Spacing - n/a  
 Void - n/a


**TECHNOLOGIES**

**ENDURACOLOR™**  
 Refined surface and long-lasting color


**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

**LAYING PATTERNS**



Series 4x8\_HB\_G



Series 4x8\_RB\_F



ONYX BLACK



ARCTIC GREY








NORDIC STAR



LIGHT GREY



BLACK GRANITE

Single Units		<b>4 x 8</b> 100 x 200 x 60mm 3 7/8 x 7 7/8 x 2 3/8" 540 Units/Bundle .22 Sq.Ft./Stone		<b>4 x 12</b> 100 x 300 x 80mm 3 7/8 x 11 7/8 x 3 1/8" 288 units/Bundle .32 Sq.Ft./Stone		<b>4 x 12</b> 100 x 300 x 100mm 3 7/8 x 11 7/8 x 3 7/8" 180 units/Bundle .32 Sq.Ft./Stone		<b>3 x 12 PERMEABLE</b> 75 x 300 x 100mm 3 x 11 1/2 x 3 7/8" 264 Units/Bundle .24 Sq.Ft./Stone		<b>8 x 24</b> 200 x 600 x 100mm 7 7/8 x 23 5/8 x 3 7/8" 40 units/Bundle 1.29 Sq.Ft./Stone
--------------	---	--	---	--	---	---	--	--	---	---

	4 x 8	4 x 12	3 x 12 PERMEABLE	4 x 12	8 x 24
<b>Bundle Type</b>	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO	GEORGETOWN	GEORGETOWN
Thickness (mm)	60 MM	80 MM	100 MM	100 MM	100 MM

<b>SQFT PER</b>	Bundle	117.90	93.04	63.94	58.13	51.67
	Layer	11.79	11.63	10.66	11.63	10.33
	Section	-	-	-	-	-
	Stone	0.22	0.32	0.24	0.32	1.29

<b>PER BUNDLE</b>	Layers	10.00	8.00	6.00	5.00	5.00
	Sections	-	-	-	-	-

<b>SOLDIER LNFT PER</b>	SqFt	1.50	1.02	1.02	1.02	0.51
	Section	-	-	-	-	-
	Layer	17.72	11.81	10.83	11.81	5.25
	Bundle	177.17	94.49	64.96	59.06	26.25

<b>SAILOR LNFT PER</b>	SqFt	3.01	3.05	4.06	3.05	1.52
	Section	-	-	-	-	-
	Layer	35.43	35.43	43.31	35.43	15.75
	Bundle	354.33	283.46	259.84	177.17	78.74

<b>UNITS PER</b>	SqFt	4.58	3.10	4.13	3.10	0.77
	Section	-	-	-	-	-
	Bundle	540.00	288.00	264.00	180.00	40.00

<b>LBS PER</b>	Layer	328	426	483	532	478
	Section	-	-	-	-	-
	Bundle	3,283	3,404	2,898	2,659	2,391

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Onyx Black	SR n/a SRI n/a	✓	-	-	-	-
Arctic Grey	SR n/a SRI n/a	-	✓	✓	-	-
Nordic Star	SR n/a SRI n/a	-	✓	✓	-	-
Light Grey	SR n/a SRI n/a	-	-	-	✓	-
Black Granite	SR n/a SRI n/a	-	-	-	-	✓

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Micro  
 Surface Texture - Smooth  
 Joint Spacing - 2mm  
 Void - n/a


## TECHNOLOGIES

**ENDURACOLOR™**  
 Refined surface and long-lasting color


## TECHNICAL INFORMATION

Conforms to ASTM C 1782  
 Eligible for LEED v4.1 credits

## LAYING PATTERNS



Skyline 24x24 SB\_A



Skyline 24x24 RB\_B




CHAMOIS



SILVER GREY

Single Unit



**24 x 24**  
 606 x 606 x 50mm  
 23 7/8 x 23 7/8 x 2"  
 20 units/Bundle  
 4.00 Sq.Ft./Stone



## PEDESTAL SYSTEM

Contact your local Unilock Rep for more information.

	<b>24 x 24</b>
<b>Bundle Type</b>	<b>SINGLE</b>
Plant Produced	OHIO
Thickness (mm)	50 MM

<b>SQFT PER</b>	Bundle	80.00
	Layer	8.00
	Section	-
	Stone	-

<b>PER BUNDLE</b>	Layers	10.00
	Sections	-

<b>SOLDIER LNFT PER</b>	SqFt	0.50
	Section	-
	Layer	4.00
	Bundle	40.00

<b>SAILOR LNFT PER</b>	SqFt	0.50
	Section	-
	Layer	4.00
	Bundle	40.00

<b>UNITS PER</b>	SqFt	0.25
	Section	-
	Bundle	20.00

<b>LBS PER</b>	Layer	183
	Section	-
	Bundle	1,756

COLORS	Reflectance	Stock
Chamois	SR n/a SRI n/a	✓
Silver Grey	SR n/a SRI n/a	✓

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Product is not intended vehicular applications.** Minimum quantities apply. Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. All measurements are nominal.



**APPLICATIONS**



**APPEARANCE**

Edge Detail - Zero  
 Surface Texture - Textured  
 Joint Spacing - 11-18 mm  
 Void - 4.4%

**TECHNOLOGIES**

**PERMEABLE**

Can be installed to allow water to flow through

**ENDURACOLOR™**

Refined surface and long-lasting color

**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	OHIO
Thickness (mm)	70 MM

SQFT PER	Bundle	88.61
	Layer	11.08
	Section	-
	Stone	0.92

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.08
	Section	-
	Bundle	96.00

LBS PER	Layer	330
	Section	-
	Bundle	2,638

COLORS	Reflectance	Stock
Fossil	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

**LAYING PATTERNS**



Thornbury Fixed Random A



Thornbury Fixed Random B






Thornbury Fixed Random C



FOSSIL



SIERRA

Random Bundle		<p><b>LARGE RECTANGLE</b>                  350 x 420 x 70mm                  13 7/8 x 16 5/8 x 2 3/4"                  32 Units/Bundle                  1.58 SqFt./Stone</p>		<p><b>SQUARE</b>                  210 x 350 x 70mm                  8 3/8 x 13 7/8 x 2 3/4"                  32 units/Bundle                  .79 Sq.Ft./Stone</p>		<p><b>SMALL RECTANGLE</b>                  173 x 210 x 70mm                  6 7/8 x 8 3/8 x 2 3/4"                  32 units/Bundle                  .39 Sq.Ft./Stone</p>
---------------	---	--	---	--	--	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



**APPLICATIONS**



**APPEARANCE**

Edge Detail - n/a  
 Surface Texture - Textured  
 Joint Spacing - 3 mm  
 Void - n/a

**TECHNOLOGIES**

**PERMEABLE**

Can be installed to allow water to flow through

**ELEGANCE™**

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

**EASYCLEAN™** 

Factory Sealed to provide integral stain resistance

**REALA™**

Cast from historical brick


**ULTIMA™**

Up to 4x stronger than poured-in-place concrete


**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

**LAYING PATTERNS**



TownHall 4x10 HB\_B



TownHall 4x10 RB\_C



BASALT



BURGUNDY RED



BURNT CLAY



OLD OAK

Bundle Type		SINGLE
Plant Produced		AYR
Thickness (mm)		70 MM

SQFT PER	Bundle	88.41
	Layer	11.05
	Section	-
	Stone	0.28

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.19
	Section	-
	Layer	13.12
	Bundle	104.99

SAILOR LNFT PER	SqFt	2.97
	Section	-
	Layer	32.81
	Bundle	262.47

UNITS PER	SqFt	3.62
	Section	-
	Bundle	320.00

LBS PER	Layer	361
	Section	-
	Bundle	2,888

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓

Single Unit



**STANDARD**  
 100 x 250 x 70mm  
 3 7/8 x 9 7/8 x 2 3/4"  
 320 Units/Bundle  
 .28 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 80. Contact Unilock for more information.





## APPLICATIONS



## APPEARANCE

Edge Detail - Rounded  
 Surface Texture - Textured  
 Joint Spacing - 4mm  
 Void - n/a

## TECHNOLOGIES

**ENDURACOLOR™**  
 Refined surface and long-lasting color

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

		TREO PREMIER TEXTURED
	Bundle Type	RANDOM
	Plant Produced	OHIO
	Thickness (mm)	60 MM

SQFT PER	Bundle	98.09
	Layer	10.90
	Section	-
	Stone	0.45

PER BUNDLE	Layers	9.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	1.79
	Section	-
	Layer	19.56
	Bundle	176.06

UNITS PER	SqFt	2.20
	Section	-
	Bundle	216.00

LBS PER	Layer	285
	Section	-
	Bundle	2,565

COLORS	Reflectance	Stock
Granite Fusion	SR n/a SRI n/a	✓
River	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

## LAYING PATTERNS



TreoSmooth Fixed  
Random\_R




TreoSmooth Fixed  
Random\_S



GRANITE FUSION



RIVER



SIERRA

Random Bundle	Image	Shape	Dimensions (mm)	Dimensions (in)	Units/Bundle	Sq.Ft./Stone
		LARGE RECTANGLE	225 x 337.5 x 60mm	8 7/8 x 13 3/8 x 2 3/8"	45 units/Bundle	.82 Sq.Ft./Stone
		SQUARE	225 x 225 x 60mm	8 7/8 x 8 7/8 x 2 3/8"	54 units/Bundle	.55 Sq.Ft./Stone
		SMALL RECTANGLE	112.5 x 225 x 60mm	4 1/2 x 8 7/8 x 2 3/8"	117 units/Bundle	.27 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



**APPLICATIONS**



**APPEARANCE**

Edge Detail - Rounded  
 Surface Texture - Textured  
 Joint Spacing - 7mm  
 Void - 5.5 %

**TECHNOLOGIES**

**ENDURACOLOR™**  
 Refined surface and long-lasting color

**PERMEABLE**

Can be installed to allow water to flow through

**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits


**LAYING PATTERNS**



TreoSmooth Fixed  
Random\_R




TreoSmooth Fixed  
Random\_S



FOSSIL



GRANITE FUSION



TUSCANY

TREO SMOOTH PERMEABLE	
<b>Bundle Type</b>	<b>RANDOM</b>
Plant Produced	OHIO
Thickness (mm)	60 MM

<b>SQFT PER</b>	Bundle	108.99
	Layer	10.90
	Section	-
	Stone	0.52

<b>PER BUNDLE</b>	Layers	10.00
	Sections	-




<b>SOLDIER LNFT PER</b>	SqFt	-
	Section	-
	Layer	-
	Bundle	-

<b>SAILOR LNFT PER</b>	SqFt	1.35
	Section	-
	Layer	14.76
	Bundle	147.64

<b>UNITS PER</b>	SqFt	1.93
	Section	-
	Bundle	210.00

<b>LBS PER</b>	Layer	296
	Section	-
	Bundle	2,960

COLORS	Reflectance	Stock
Fossil	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Tuscany	SR n/a SRI n/a	✓

Random Bundle		<p><b>LARGE RECTANGLE</b>                  225 x 337.5 x 60mm                  8 7/8 x 13 3/8 x 2 3/8"                  60 units/Bundle                  .82 Sq.Ft./Stone</p>		<p><b>SQUARE</b>                  225 x 225 x 60mm                  8 7/8 x 8 7/8 x 2 3/8"                  70 units/Bundle                  .55 Sq.Ft./Stone</p>		<p><b>SMALL RECTANGLE</b>                  112.5 x 225 x 60mm                  4 1/2 x 8 7/8 x 2 3/8"                  80 units/Bundle                  .27 Sq.Ft./Stone</p>
---------------	---	---	---	---	---	--

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



**APPLICATIONS**



**APPEARANCE**

Edge Detail - Micro  
 Surface Texture - Series Exposed Textured  
 Joint Spacing - 10mm  
 Void - 5.6%

**TECHNOLOGIES**

**PERMEABLE**

Can be installed to allow water to flow through

**ENDURACOLOR™**

Refined surface and long-lasting color

**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

<b>Bundle Type</b>	<b>RANDOM</b>
Plant Produced	CHICAGO
Thickness (mm)	70 MM

<b>SQFT PER</b>	Bundle	97.53
	Layer	12.19
	Section	12.19
	Stone	0.32

<b>PER BUNDLE</b>	Layers	8.00
	Sections	8.00

<b>SOLDIER LNFT PER</b>	SqFt	-
	Section	-
	Layer	-
	Bundle	-

<b>SAILOR LNFT PER</b>	SqFt	2.34
	Section	28.49
	Layer	28.49
	Bundle	227.95

<b>UNITS PER</b>	SqFt	3.12
	Section	38.00
	Bundle	304.00

<b>LBS PER</b>	Layer	398
	Section	398
	Bundle	3,186

COLORS	Reflectance	Stock
Cobalt Grey	SR n/a SRI n/a	✓
Peppered Granite	SR .38 SRI 42	✓

**LAYING PATTERNS**



Tribeca Cobble  
 Fixed Random\_A



COBALT GREY



PEPPERED GRANITE

<b>Random Bundle</b>		<p><b>LARGE RECTANGLE</b>                  130 x 305 x 70mm                  5 x 12 x 2 ¾"                  88 units/Bundle                  .43 Sq.Ft./Stone</p>		<p><b>RECTANGLE</b>                  130 x 230 x 70mm                  5 x 9 x 2 ¾"                  88 units/Bundle                  .32 Sq.Ft./Stone</p>		<p><b>SMALL RECTANGLE</b>                  130 x 175 x 70mm                  5 x 6 7/8 x 2 ¾"                  128 units/Bundle                  .25 Sq.Ft./Stone</p>
----------------------	---	---	---	--	---	---

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** For permeable installations, Unilock recommends using granite chips for joint filler. For traditional applications, please refer to the Polymeric Sand Best Practices on page 80. All measurements are nominal. Contact Unilock for more information.



**APPLICATIONS**



**APPEARANCE**

Edge Detail - Zero  
 Surface Texture - Smooth  
 Joint Spacing - 2mm  
 Void - 40%

**TECHNOLOGIES**

**CLASSIC**  
 Budget-friendly traditional product mix

**PERMEABLE**

Can be installed to allow water to flow through

**TECHNICAL INFORMATION**

Conforms to ASTM C1319  
 Eligible for LEED v4.1 credits

	<b>SMOOTH</b>
<b>Bundle Type</b>	<b>RANDOM</b>
Plant Produced	OHIO
Thickness (mm)	80 MM

<b>SQFT PER</b>	Bundle	70.00
	Layer	10.00
	Section	-
	Stone	2.50

<b>PER BUNDLE</b>	Layers	7.00
	Sections	-

<b>SOLDIER LNFT PER</b>	SqFt	-
	Section	-
	Layer	-
	Bundle	-


<b>SAILOR LNFT PER</b>	SqFt	-
	Section	-
	Layer	-
	Bundle	-

<b>UNITS PER</b>	SqFt	0.40
	Section	-
	Bundle	28.00

<b>LBS PER</b>	Layer	249
	Section	-
	Bundle	1,746

<b>COLORS</b>	<b>Reflectance</b>	<b>Stock</b>
Natural	SR .30 SRI 32	✓

**LAYING PATTERNS**



Turfstone A



NATURAL

Single Unit



**LARGE RECTANGLE**  
 400 x 600 x 80mm  
 15 3/4 x 23 5/8 x 3 1/8"  
 28 units/Bundle  
 2.50 Sq.Ft./Stone

Notes: Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



		4 x 8	7 x 14	18 x 36
<b>Bundle Type</b>	<b>RANDOM</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	GEORGETOWN	MARENGO	GEORGETOWN	GEORGETOWN
Thickness (mm)	60 MM	60 MM	60 MM	60 MM

<b>SQFT PER</b>	Bundle	94.14	106.20	94.20	
	Layer	10.46	11.80	10.46	8.71
	Section	-	-	-	-
	Stone	1.31	0.22	1.43	0.23

<b>PER BUNDLE</b>	Layers	9.00	9.00	9.00	-
	Sections	-	-	-	-

<b>SOLDIER LNFT PER</b>	SqFt	-	1.50	0.85	0.68
	Section	-	-	-	-
	Layer	-	17.72	8.85	5.90
	Bundle	-	159.45	79.72	-

<b>SAILOR LNFT PER</b>	SqFt	0.85	3.00	1.69	1.35
	Section	-	-	-	-
	Layer	8.86	35.43	17.71	11.81
	Bundle	79.72	318.90	159.4	-

<b>UNITS PER</b>	SqFt	0.76	4.58	1.43	4.36
	Section	-	-	-	-
	Bundle	72.00	486.00	135.00	-

<b>LBS PER</b>	Layer	287	322	-	-
	Section	-	-	-	-
	Bundle	2,584	2,900	-	-

<b>COLORS</b>	<b>Reflectance</b>	<b>Stock</b>	<b>Stock</b>	<b>Stock</b>	<b>Stock</b>
French Grey	SR .18 SRI 17	✓	-	✓	✓
Grenada White	SR .n/a SRI 52	✓	-	✓	✓
Midnight Sky	SR .17 SRI 15	-	✓	✓	✓
Summer Wheat	SR .42 SRI 48	✓	-	✓	✓
Winter Marvel	SR .35 SRI 2	✓	-	✓	✓

## APPLICATIONS



## APPEARANCE

- Edge Detail - Zero
- Surface Texture - Umbriano Mottled
- Joint Spacing - 7mm
- Void - n/a

## TECHNOLOGIES

### ENDURACOLOR<sup>™</sup>

Refined surface and long-lasting color

### EASYCLEAN<sup>™</sup>

Factory Sealed to provide integral stain resistance


### COLORFUSION<sup>™</sup>

Subtly mottled colored finish

## TECHNICAL INFORMATION

- Conforms to ASTM C 936
- Eligible for LEED v4.1 credits

## LAYING PATTERNS



Umbriano Fixed  
Random\_A



Umbriano Fixed  
Random\_B




FRENCH GREY



GRENADA WHITE



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

<b>Random Bundle</b>	<b>LARGE RECTANGLE</b>	<b>SQUARE</b>	<b>SMALL RECTANGLE</b>	<b>Single Units</b>	<b>4 x 8</b>	<b>7 x 14</b>	<b>18 x 36</b>
		350 x 546 x 60mm 13 7/8 x 21 1/2 x 2 3/8" 18 Units/Bundle 1.965 Sq.Ft./Stone	360 x 360 x 60mm 14 1/4 x 14 1/4 x 2 3/8" 27 Units/Bundle 1.431 Sq.Ft./Stone		180 x 360 x 60mm 7 x 14 1/4 x 2 3/8" 27 Units/Bundle .655 Sq.Ft./Stone		100 x 200 x 60mm 3 7/8 x 7 7/8 x 2 3/8" 486 Units/Bundle .22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.





	24 x 24	12 x 24	8 x 24	8 x 16	16 x 16
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	GEORGETOWN	GEORGETOWN	GEORGETOWN	GEORGETOWN	GEORGETOWN
Thickness (mm)	70 MM	70 MM	70 MM	70 MM	70 MM

<b>SQFT PER</b>	Bundle	62.00	93.00	82.67	82.67	82.67
	Layer	7.75	11.63	10.33	10.33	10.33
	Section	-	-	-	-	-
	Stone	3.88	1.94	1.29	0.86	1.72

<b>PER BUNDLE</b>	Layers	8.00	8.00	8.00	8.00	8.00
	Sections	-	-	-	-	-

<b>SOLDIER LNFT PER</b>	SqFt	0.51	0.51	0.51	0.76	0.76
	Section	-	-	-	-	-
	Layer	3.94	5.91	5.25	7.87	7.87
	Bundle	31.50	47.24	41.99	62.99	62.99

<b>SAILOR LNFT PER</b>	SqFt	0.51	1.02	1.02	1.52	0.76
	Section	-	-	-	-	-
	Layer	3.94	11.81	10.50	15.75	7.87
	Bundle	31.50	94.49	83.99	125.98	62.99

<b>UNITS PER</b>	SqFt	0.26	0.52	0.77	1.16	0.58
	Section	-	-	-	-	-
	Bundle	16.00	48.00	64.00	96.00	48.00

<b>LBS PER</b>	Layer	258	393	331	343	350
	Section	-	-	-	-	-
	Bundle	2,062	3,142	2,647	2,746	2,797

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
French Grey	SR .18 SRI 17	✓	✓	✓	✓	✓
Midnight Sky	SR .17 SRI 15	-	-	✓	✓	-
Summer Wheat	SR .42 SRI 48	✓	✓	✓	✓	✓
Winter Marvel	SR .35 SRI 38	✓	✓	✓	✓	✓

## APPLICATIONS



## APPEARANCE

- Edge Detail - Zero
- Surface Texture - Umbriano Mottled
- Joint Spacing - 7mm
- Void - n/a

## TECHNOLOGIES

### ENDURACOLOR<sup>™</sup>

Refined surface and long-lasting color

### EASYCLEAN<sup>™</sup>

Factory Sealed to provide integral stain resistance

### COLORFUSION<sup>™</sup>

Subtly mottled colored finish

## TECHNICAL INFORMATION


- Conforms to ASTM C 936
- Eligible for LEED v4.1 credits

## LAYING PATTERNS



Umbriano 24x24  
RB\_AG

Umbriano 12x24  
HB\_O

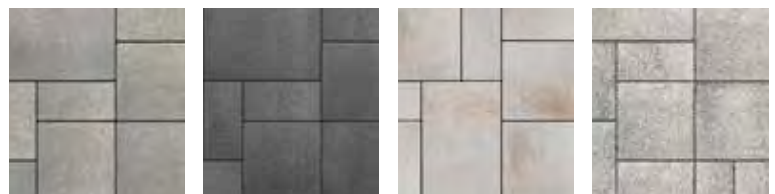

FRENCH GREY

MIDNIGHT SKY

SUMMER WHEAT

WINTER MARVEL

Single Units	24 x 24	12 x 24	8 x 24	8 x 16	16 x 16
	600 x 600 x 70mm 23 5/8 x 23 5/8 x 2 3/4"	300 x 600 x 70mm 11 7/8 x 23 5/8 x 2 3/4"	200 x 600 x 70mm 7 7/8 x 23 5/8 x 2 3/4"	200 x 400 x 70mm 7 7/8 x 15 3/4 x 2 3/4"	400 x 400 x 70mm 15 3/4 x 15 3/4 x 2 3/4"
	16 Units/Bundle 3.88 Sq.Ft./Stone	48 Units/Bundle 1.94 Sq.Ft./Stone	64 Units/Bundle 1.29 Sq.Ft./Stone	96 Units/Bundle .86 Sq.Ft./Stone	48 Units/Bundle 1.72 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. 24x24" paver is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Zero  
 Surface Texture - Umbriano Mottled  
 Joint Spacing - 7mm  
 Void - n/a

## TECHNOLOGIES

### ENDURACOLOR™

Refined surface and long-lasting color

### EASYCLEAN™

Factory Sealed to provide integral stain resistance

### COLORFUSION™

Subtly mottled colored finish

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

## LAYING PATTERNS



Umbriano Fixed  
Random A

Umbriano Fixed  
Random B

Umbriano Multi-Unit  
Random G

FRENCH GREY

GRENADA WHITE

MIDNIGHT SKY

SUMMER WHEAT

WINTER MARVEL

		<b>7 x 14</b>	<b>18 x 36</b>
<b>Bundle Type</b>	<b>RANDOM</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	GEORGETOWN	GEORGETOWN	GEORGETOWN
Thickness (mm)	80 MM	80 MM	100 MM

<b>SQFT PER</b>	Bundle	73.22	73.24	43.59
	Layer	10.46	-	8.72
	Section	-	-	-
	Stone	1.31	-	-

<b>PER BUNDLE</b>	Layers	7.00	7.00	5.00
	Sections	-	-	-





<b>SOLDIER LNFT PER</b>	SqFt	-	62.01	-
	Section	-	0.59	-
	Layer	-	-	-
	Bundle	-	-	-

<b>SAILOR LNFT PER</b>	SqFt	0.85	1.77	-
	Section	-	-	-
	Layer	8.86	-	-
	Bundle	62.01	62.01	-

<b>UNITS PER</b>	SqFt	0.76	-	-
	Section	-	-	-
	Bundle	56.00	105.00	10

<b>LBS PER</b>	Layer	383	383	399
	Section	-	-	-
	Bundle	2,680	2,680	1,994

COLORS	Reflectance	Stock	Stock	Stock
French Grey	SR .18 SRI 17	✓	✓	✓
Grenada White	SR .n/a SRI 52	✓	✓	-
Midnight Sky	SR .17 SRI 15	-	✓	-
Summer Wheat	SR .42 SRI 48	✓	✓	✓
Winter Marvel	SR .35 SRI 38	✓	✓	✓

<b>Random Bundle</b>		<b>LARGE RECTANGLE</b> 360 x 540 x 80mm 14 x 21 x 2 3/8" 14 Units/Bundle 2.09 Sq.Ft./Stone		<b>SQUARE</b> 360 x 360 x 80mm 14 x 14 x 2 3/8" 21 Units/Bundle 1.40 Sq.Ft./Stone		<b>SMALL RECTANGLE</b> 180 x 360 x 80mm 7 x 14 1/4 x 2 3/8" 21 Units/Bundle 0.70 Sq.Ft./Stone	<b>Single Unit</b>		<b>18 x 36</b> 450 x 900 x 100mm 18 x 36 x 4" 14 Units/Bundle 4.36 Sq.Ft./Stone
----------------------	---	--	---	---	---	---	--------------------	---	---

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Zero  
 Surface Texture - Textured  
 Joint Spacing - 3-7mm  
 Void - n/a

## TECHNOLOGIES

### CLASSIC

Budget-friendly traditional product mix

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	OHIO
Thickness (mm)	70 MM

SQFT PER	Bundle	94.19
	Layer	11.77
	Section	-
	Stone	0.59

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	1.24
	Section	-
	Layer	14.57
	Bundle	116.56

UNITS PER	SqFt	1.70
	Section	-
	Bundle	160.00

LBS PER	Layer	361
	Section	-
	Bundle	2,884

COLORS	Reflectance	Stock
Granite	SR n/a SRI n/a	✓
River	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

## LAYING PATTERNS




Westport Fixed  
Random\_A



Westport Fixed  
Random\_B



GRANITE



RIVER



SIERRA

Random Bundle



**LARGE RECTANGLE**  
 254 x 380 x 70mm  
 10 x 15 x 2 ¾"  
 32 units/Bundle  
 XX Sq.Ft./Stone



**SQUARE**  
 254 x 254 x 70mm  
 10 x 10 x 2 ¾"  
 56 units/Bundle  
 XX Sq.Ft./Stone



**SMALL RECTANGLE**  
 127 x 254 x 60mm  
 5 x 10 x 2 ¾"  
 72 units/Bundle  
 XX Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: [contractor.unilock.com](http://contractor.unilock.com)

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix

### ANTIQUED™

Distressed, timeworn finish

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits

	SMALL TAPERED	STANDARD
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	OHIO	OHIO
Thickness (mm)	100 MM	100 MM

FCFT PER	Bundle	36.00	36.00
	Layer	6.00	6.00
	Stone	0.25	0.33

PER BUNDLE	Layers	6.00	6.00
	Sections	-	6.00

LNFT PER	Bundle	108.00	108.00
	Unit	0.75	1.00

UNITS PER	SqFt	4.00	3.00
	Section	-	18.00
	Bundle	144.00	108.00

LBS PER	Layer	480	530
	Section	-	530
	Bundle	2,880	3,182

COLORS	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	-	✓
Limestone	SR n/a SRI n/a	✓	✓
River	SR n/a SRI n/a	✓	✓
Sandstone	SR n/a SRI n/a	✓	✓
Sierra	SR n/a SRI n/a	✓	✓

## SUNSET FIREPIT KITS

Located on page 76



ROUND



SQUARE



DARK CHARCOAL



LIMESTONE



RIVER



SANDSTONE



SIERRA

Single Units



**SMALL TAPERED**  
229 x 100 x 200mm  
9 x 3 7/8 x 7 7/8"  
144 units/Bundle  
.25 Fc.Ft./Stone



**STANDARD**  
300 x 100 x 200mm  
11 7/8 x 3 7/8 x 7 7/8"  
108 units/Bundle  
.33 Fc.Ft./Stone

Notes: Small tapered units are sold in full bundles only. Maximum height is 24" (under optimum conditions). \*Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle. LedgeStone, Brussels XL or 6" x 12" Fullnose complement as a possible coping unit. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: [contractor.unilock.com](http://contractor.unilock.com)

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits

	STANDARD
<b>Bundle Type</b>	<b>SINGLE</b>
Plant Produced	OHIO
Thickness (mm)	100 MM

<b>FCFT PER</b>	Bundle	27.00
	Layer	9.00
	Stone	0.33

<b>PER BUNDLE</b>	Layers	3.00
	Sections	3.00

<b>LNFT PER</b>	Bundle	54.00
	Unit	0.67

<b>UNITS PER</b>	SqFt	3.00
	Section	27.00
	Bundle	81.00

<b>LBS PER</b>	Layer	784
	Section	784
	Bundle	2,353


COLORS	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Limestone	SR n/a SRI n/a	✓
Sandstone	SR n/a SRI n/a	✓



DARK CHARCOAL



LIMESTONE



SANDSTONE

Single Unit



**STANDARD**  
300 x 100 x 200mm  
11 7/8 x 3 7/8 x 7 7/8"  
81 units/Bundle  
.33 Fc.Ft./Stone

Notes: Small tapered units are sold in full bundles only. Maximum height is 24" (under optimum conditions). \*Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle. LedgeStone, Brussels XL or 6" x 12" Fullnose complement as a possible coping unit. All measurements are nominal. Contact Unilock for more information.





## APPLICATIONS



## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	STANDARD	HALF COPING	COPING STANDARD	COPING CLOSED-END
<b>Bundle Type</b>	SINGLE	SINGLE	SINGLE	SINGLE
<b>Plant Produced</b>	ONTARIO	ONTARIO	ONTARIO	ONTARIO
<b>Thickness (mm)</b>	600 MM	600 MM	600 MM	600 MM

FCFT PER	Bundle	6.02	2.95	6.02	6.02
	Layer	6.02	2.95	6.02	6.02
	Stone	6.02	2.95	6.02	6.02

PER BUNDLE	Layers	1.00	1.00	1.00	1.00
	Sections	-	-	-	-

LNFT PER	Bundle	6.02	-	-	-
	Unit	6.02	-	-	-





UNITS PER	SqFt	0.17	0.34	0.17	0.17
	Section	-	-	-	-
	Bundle	1.00	1.00	1.00	1.00

LBS PER	Layer	1,680	780	1,560	1,560
	Section	-	-	-	-
	Bundle	1,680	780	1,560	1,560

COLORS	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO



NATURAL

Single Units				
	<b>STANDARD</b>	<b>HALF COPING</b>	<b>COPING</b>	<b>CLOSED-END COPING</b>
	1830 x 300 x 600mm	915 x 300 x 600mm	1830 x 300 x 600mm	1830 x 300 x 600mm
	72 x 11 7/8 x 23 5/8"	36 x 11 7/8 x 23 5/8"	60 x 11 7/8 x 23 5/8"	72 x 11 7/8 x 23 5/8"
	1 unit/Bundle 6.02 Fc.Ft./Stone	1 unit/Bundle 2.95 Fc.Ft./Stone	1 unit/Bundle 6.02 Fc.Ft./Stone	1 unit/Bundle 6.02 Fc.Ft./Stone

Notes: \*Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



	TIE-BACK	HALF STANDARD	CORNER 45°	CORNER 90°
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	600 MM	600 MM	600 MM	600 MM

FCFT PER	Bundle	2.00	3.00	7.04	7.04
	Layer	2.00	3.00	7.04	7.04
	Stone	2.00	3.00	7.04	7.04

PER BUNDLE	Layers	1.00	1.00	1.00	1.00
	Sections	-	-	-	-

LNFT PER	Bundle	-	3.00	-	-
	Unit	-	3.00	-	-

UNITS PER	SqFt	0.50	0.33	0.14	0.14
	Section	-	-	-	-
	Bundle	1.00	1.00	1.00	1.00

LBS PER	Layer	1,660	800	1,480	1,320
	Section	-	-	-	-
	Bundle	1,660	800	1,480	1,320

COLORS	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO

## APPLICATIONS



## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: [contractor.unilock.com](http://contractor.unilock.com)

## APPEARANCE

Edge Detail - n/a  
Surface Texture - Smooth


## TECHNOLOGIES

### CLASSIC™





Budget-friendly traditional product mix

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits



NATURAL

Single Units				
	<b>TIE-BACK</b>	<b>HALF STANDARD</b>	<b>CORNER 45°</b>	<b>CORNER 90°</b>
	1830 x 300 x 600mm	915 x 300 x 600mm	1520 x 300 x 600mm	1520 x 300 x 600mm
	72 x 12 x 24"	36 x 12 x 24"	60 x 12 x 24"	72 x 12 x 24"
	1 unit/Bundle	1 unit/Bundle	1 unit/Bundle	1 unit/Bundle
2.00 Fc.Ft./Stone	3.00 Fc.Ft./Stone	7.04 Fc.Ft./Stone	7.04 Fc.Ft./Stone	

Notes: \*Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



	TIE-BACK	STANDARD	COPING	COPING CLOSED-END
<b>Bundle Type</b>	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	600 MM	600 MM	600 MM	600 MM

FCFT PER	Bundle	1.17	6.02	24.08	24.08
	Layer	1.17	6.02	6.02	6.02
	Stone	1.17	6.02	6.02	6.02

PER BUNDLE	Layers	1.00	1.00	4.00	4.00
	Sections	-	-	-	-

LNFT PER	Bundle	-	6.02	-	-
	Unit	-	6.02	-	-

UNITS PER	SqFt	0.85	0.17	0.17	0.17
	Section	-	-	-	-
	Bundle	1.00	1.00	4.00	4.00

LBS PER	Layer	938	938	884	884
	Section	-	-	-	-
	Bundle	938	938	3,536	3,536

COLORS	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO

## APPLICATIONS



## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix





## TECHNICAL INFORMATION

Conforms to ASTM C1372

Eligible for LEED v4.1 credits



NATURAL

Single Units				
	<b>TIE-BACK</b>	<b>STANDARD</b>	<b>COPING</b>	<b>CLOSED-END COPING</b>
	1830 x 360 x 300mm	1830 x 360 x 300mm	1830 x 360 x 300mm	1830 x 360 x 300mm
	72 x 14 1/4 x 11 7/8"	72 x 14 1/4 x 11 7/8"	72 x 14 1/4 x 11 7/8"	72 x 14 1/4 x 11 7/8"
	1 unit/Bundle 1.17 Fc.Ft./Stone	1 unit/Bundle 6.02 Fc.Ft./Stone	4 units/Bundle 6.02 Fc.Ft./Stone	4 units/Bundle 6.02 Fc.Ft./Stone

Notes: \*Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## APPEARANCE

Edge Detail - n/a

Surface Texture - Split

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix

### ANTIQUED™

Distressed, timeworn finish

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	TAPERED SPLIT CLASSIC ANTIQUED	CORNER SPLIT CLASSIC ANTIQUED
<b>Bundle Type</b>	<b>RANDOM</b>	<b>SINGLE</b>
Plant Produced	OHIO	OHIO
Thickness (mm)	150 MM	150 MM

FCFT PER	Bundle	24.00	16.66
	Layer	6.00	4.17
	Stone	0.50	0.52

PER BUNDLE	Layers	4.00	4.00
	Sections	4.00	4.00

LNFT PER	Bundle	42.56	33.28
	Unit	0.89	1.04

UNITS PER	SqFt	2.00	1.92
	Section	12.00	8.00
	Bundle	48.00	32.00

LBS PER	Layer	574	444
	Section	574	444
	Bundle	2,297	1,776

COLORS	Reflectance	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓
River	SR n/a SRI n/a	✓	✓
Sierra	SR n/a SRI n/a	✓	✓



GRANITE



RIVER



SIERRA

Random Bundle				Single Units	
	<b>LARGE TAPERED</b> 375 x 150 x 230mm 14 7/8 x 5 7/8 x 9" 16 units/Bundle	<b>MEDIUM TAPERED</b> 300 x 150 x 230mm 11 7/8 x 5 7/8 x 9" 16 units/Bundle	<b>SMALL TAPERED</b> 228 x 150 x 230mm 9 x 5 7/8 x 9" 16 units/Bundle		<b>CORNER SPLIT</b> 320 x 150 x 230mm 12 5/8 x 5 7/8 x 9" 32 units/Bundle .52 Sq.Ft./Stone

Notes: 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. LedgeStone™, Brussels Block® XL, or Brussels Fullnose™ complement as a possible coping. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: [contractor.unilock.com](http://contractor.unilock.com)

## APPEARANCE

Edge Detail - n/a  
Surface Texture - Smooth

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits

	RANDOM CLASSIC	PILLAR CLASSIC
<b>Bundle Type</b>	<b>RANDOM</b>	<b>SINGLE</b>
Plant Produced	OHIO	OHIO
Thickness (mm)	100 MM	100 MM

FCFT PER	Bundle	29.92	48.24
	Layer	9.97	16.08
	Stone	0.50	0.67

PER BUNDLE	Layers	3.00	3.00
	Sections	-	-

LNFT PER	Bundle	89.06	96.00
	Unit	1.48	1.33

UNITS PER	SqFt	2.01	1.49
	Section	-	-
	Bundle	60.00	72.00

LBS PER	Layer	881	936
	Section	-	-
	Bundle	2,642	2,808

COLORS	Reflectance	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓
Fieldstone	SR n/a SRI n/a	✓	✓
Sierra	SR n/a SRI n/a	✓	✓



GRANITE



FIELDSTONE



SIERRA

Random Bundle	LARGE RECTANGLE	RECTANGLE	SMALL RECTANGLE	XL RECTANGLE	Single Unit	CORNER/PILLAR
	500 x 100 x 200mm 19 3/4 x 3 7/8 x 7 7/8 15 units/Bundle 55 Fc.Ft./Stone	400 x 100 x 200mm 15 3/4 x 3 7/8 x 7 7/8 15 units/Bundle 44 Fc.Ft./Stone	300 x 100 x 200mm 11 7/8 x 3 7/8 x 7 7/8 15 units/Bundle 33 Fc.Ft./Stone	600 x 100 x 200mm 23 5/8 x 3 7/8 x 7 7/8 15 units/Bundle 66 Fc.Ft./Stone		400 x 100 x 200mm 15 3/4 x 3 7/8 x 7 7/8 72 units/Bundle .67 Sq.Ft./Stone

Notes: Sold in full bundles only and is produced and sold on a required, refundable skid. Spacing strips are shipped with random wall bundles to create even spacing between units. LedgeStone®, Unilock Natural Stone or 6"x12" Fullnose complement as possible coping options. All measurements are nominal. Contact Unilock for more information.





	CORNER SPLIT	STANDARD SPLIT	TAPERED SPLIT	12" COPING SPLIT	XL WALL SPLIT
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	OHIO	OHIO	OHIO	OHIO	OHIO
Thickness (mm)	150 MM	150 MM	150 MM	150 MM	150 MM

FCFT PER	Bundle	15.00	20.00	20.00	21.00	21.33
	Layer	5.00	6.67	6.67	3.00	5.33
	Stone	0.83	0.33	0.33	0.25	0.67

PER BUNDLE	Layers	15.00	20.00	20.00	7.00	4.00
	Sections	5.00	6.67	6.67	2.00	4.00

LNFT PER	Bundle	-	40.00	40.00	-	42.67
	Unit	-	0.67	0.67	-	1.33

UNITS PER	SqFt	1.20	3.00	3.00	4.00	1.50
	Section	6.00	30.00	30.00	42.00	8.00
	Bundle	18.00	60.00	60.00	84.00	32.00

LBS PER	Layer	314	857	768	388	617
	Section	314	1,285	1,153	1,357	617
	Bundle	943	2,570	2,305	2,714	2,467

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓	✓	✓	✓
River	SR n/a SRI n/a	✓	✓	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓	✓	✓

## APPLICATIONS



## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## APPEARANCE

Edge Detail - n/a  
 Surface Texture - Split  
 Joint Spacing - n/a  
 Void - n/a

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
 Eligible for LEED v4.1 credits



GRANITE

RIVER

SIERRA

Single Units	CORNER	STANDARD	TAPERED	XL WALL	COPING
	200 x 150 x 300mm 7 7/8 x 5 7/8 x 11 7/8" 18 units/Bundle .83 Fc.Ft./Stone	200 x 75 x 300mm 7 7/8 x 5 7/8 x 11 7/8" 60 units/Bundle .33 Fc.Ft./Stone	300 x 75 x 300mm 7 7/8 x 5 7/8 x 11 7/8" 60 units/Bundle .33 Fc.Ft./Stone	400 x 150 x 300mm 15 3/4 x 5 7/8 x 11 7/8" 32 units/Bundle .67 Fc.Ft./Stone	400 x 150 x 300mm 11 7/8 x 3 x 11 7/8" 84 units/Bundle .25 Fc.Ft./Stone

Notes: XL Wall units are single units and are sold in full bundles only. When purchased by the full bundle, 12" Coping bundle has 14 units of closed-end coping (7 left and 7 right). Closed-end 12" coping not sold separately. Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa2 wall is 3/4" every course or 1 1/2" every 2 courses. Retaining wall engineering software is also available free of charge at [www.unilock.com](http://www.unilock.com). Walls greater than 4' in height require professional engineering. Tapered Units allow for a minimum 5' Radius. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - n/a  
Surface Texture - Split

## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:  
[contractor.unilock.com](http://contractor.unilock.com)

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits

	CORNER	XL TAPERED	COPING & CLOSED-END / COPING
<b>Bundle Type</b>	SINGLE	SINGLE	BUNDLE
Plant Produced	OHIO	OHIO	OHIO
Thickness (mm)	150 MM	150 MM	75 MM

FCFT PER	Bundle	46.52	20.67	15.50
	Layer	11.63	5.17	1.94
	Stone	0.97	0.65	0.32

PER BUNDLE	Layers	4.00	4.00	8.00
	Sections	3.00	4.00	-

LNFT PER	Bundle	-	-	62.99
	Unit	-	-	1.31

UNITS PER	SqFt	1.03	1.55	3.10
	Section	16.00	8.00	-
	Bundle	48.00	32.00	48.00

LBS PER	Layer	629	617	388
	Section	839	617	-
	Bundle	2,516	2,467	3,101





COLORS	Reflectance	Stock	Stock	Stock
Fieldstone	SR n/a SRI n/a	✓	✓	✓
Granite	SR n/a SRI n/a	✓	✓	✓



FIELDSTONE



GRANITE

Single Units		<b>CORNER</b> 400 x 150 x 200mm 15 3/4 x 5 7/8 x 7 7/8" 48 units/Bundle 0.97 Fc.Ft./Stone	2 Unit Bundle		<b>COPING</b> 400 x 75 x 300mm 15 3/4 x 3 x 11 7/8" 24 units/Bundle 0.32 Fc.Ft./Stone
		<b>XL TAPERED</b> 400 x 150 x 300mm 15 3/4 x 5 7/8 x 11 7/8" 32 units/Bundle 0.65 Fc.Ft./Stone			<b>CLOSED-END / COPING</b> 400 x 75 x 300mm 15 3/4 x 3 x 11 7/8" 24 units/Bundle 0.32 Fc.Ft./Stone

Notes: \*Special Order - Lead time is required, minimum quantities apply. All Special Order items are sold in full bundles only. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at [www.unilock.com](http://www.unilock.com). All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Zero  
Surface Texture - Textured

## TECHNOLOGIES

**REALA™**  
Cast from natural stone

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits

	WALL	CORNER
<b>Bundle Type</b>	<b>RANDOM</b>	<b>RANDOM</b>
Plant Produced	AYR	AYR
Thickness (mm)	57 MM	57 MM

FCFT PER	Bundle	24.30	16.21
	Layer	3.0	4.0
	Stone	0.19	0.41

PER BUNDLE	Layers	8.00	4.00
	Sections	-	-

LNFT PER	Bundle	130.69	-
	Unit	1.02	-

UNITS PER	SqFt	5.27	2.47
	Section	-	-
	Bundle	128.00	40.00

LBS PER	Layer	252	293
	Section	-	-
	Bundle	2,015	1,173







COLORS	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓
Coastal Slate	SR n/a SRI n/a	✓	✓



BUFF



COASTAL SLATE

Corner Bundle		<b>LONG CORNER UNIT</b> 17½ x 9-10 x 2¼" 450 x 230-250 x 57mm		<b>SHORT CORNER UNIT</b> 14½ x 9-10 x 2¼" 375 x 230-250 x 57mm				
Random Bundle		<b>STANDARD UNIT 1</b> 8 x 9-10 x 2¼" 200 x 230-250 x 57mm		<b>STANDARD UNIT 2</b> 12 x 9-10 x 2¼" 300 x 230-250 x 57mm		<b>STANDARD UNIT 3</b> 12 x 9-10 x 2¼" 300 x 230-250 x 57mm		<b>STANDARD UNIT 4</b> 17 x 9-10 x 2¼" 425 x 230-250 x 57mm

Notes: All measurements are nominal. Contact Unilock for more information.



	CORNER SPLIT	STANDARD SPLIT	TAPERED SPLIT
<b>Bundle Type</b>	<b>RANDOM</b>	<b>RANDOM</b>	<b>SINGLE</b>
Plant Produced	OHIO	OHIO	OHIO
Thickness (mm)	100 MM	100 MM	100 MM

<b>FCFT PER</b>	Bundle	20.00	19.98	19.98
	Layer	6.67	6.66	6.66
	Stone	0.83	0.33	0.33

<b>PER BUNDLE</b>	Layers	3.00	3.00	3.00
	Sections	2.00	2.00	2.00

<b>LNFT PER</b>	Bundle	-	40.00	39.99
	Unit	-	0.67	0.67

<b>UNITS PER</b>	SqFt	1.20	3.00	3.00
	Section	12.00	30.00	30.00
	Bundle	24.00	60.00	60.00

<b>LBS PER</b>	Layer	343	857	750
	Section	514	1,285	1,126
	Bundle	1,028	2,570	2,251

COLORS	Reflectance	Stock	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓	✓
River	SR n/a SRI n/a	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓

## APPLICATIONS



## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## APPEARANCE

Edge Detail - n/a

Surface Texture - Split

Joint Spacing - n/a

Void - n/a

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix

### ANTIQUED™

Distressed, timeworn finish

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits



GRANITE



RIVER



SIERRA

Random Bundle



**CORNER SPLIT**  
200 x 150 x 300mm  
7 7/8 x 5 7/8 x 11 7/8  
24 units/Bundle  
.83 Fc.Ft./Stone



**STANDARD SPLIT**  
200 x 150 x 300mm  
7 7/8 x 5 7/8 x 11 7/8  
60 units/Bundle  
.33 Fc.Ft./Stone

Single Unit



**TAPERED SPLIT**  
200 x 150 x 300mm  
7 7/8 x 5 7/8 x 11 7/8  
60 units/Bundle  
.33 Fc.Ft./Stone

Notes: Maximum height - 48" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. All measurements are nominal. Corners are sold as double units (one left and one right). Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Contact your local Unilock representative for details. Retaining wall engineering software is also available free of charge at [www.unilock.com](http://www.unilock.com). All measurements are nominal.



## APPLICATIONS



## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: [contractor.unilock.com](http://contractor.unilock.com)

## APPEARANCE

Edge Detail - n/a  
 Surface Texture - Split  
 Joint Spacing - n/a  
 Void - n/a

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix

### ANTIQUED™

Distressed, timeworn finish

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
 Eligible for LEED v4.1 credits



GRANITE



RIVER



SIERRA

	<b>CORNER SPLIT</b>
<b>Bundle Type</b>	<b>SINGLE</b>
Plant Produced	OHIO
Thickness (mm)	100 MM

<b>FCFT PER</b>	Bundle	31.00
	Layer	5.17
	Stone	0.22

<b>PER BUNDLE</b>	Layers	6.00
	Sections	-

<b>LNFT PER</b>	Bundle	-
	Unit	-

<b>UNITS PER</b>	SqFt	4.65
	Section	-
	Bundle	144.00

<b>LBS PER</b>	Layer	393
	Section	-
	Bundle	2,357

COLORS	Reflectance	Stock
Granite	SR n/a SRI n/a	✓
River	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

Single Unit



**COPING TAPERED SPLIT**  
 200 x 100 x 200mm  
 7<sup>7</sup>/<sub>8</sub> x 3<sup>7</sup>/<sub>8</sub> x 7<sup>7</sup>/<sub>8</sub>  
 144 units/Bundle  
 .22 Fc.Ft./Stone

Notes: Maximum height - 20" (under optimum conditions) including materials below grade. Radius - minimum outside radius 29.5". All measurements are nominal.





## APPLICATIONS



## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: [contractor.unilock.com](http://contractor.unilock.com)

## APPEARANCE

Edge Detail - n/a  
Surface Texture - Smooth

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits

	STANDARD SMOOTH	COPING SMOOTH
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	180 MM	180 MM

FCFT PER	Bundle	23.25	23.25
	Layer	7.75	7.75
	Stone	1.94	1.94

PER BUNDLE	Layers	3.00	3.00
	Sections	3.00	-

LNFT PER	Bundle	39.37	-
	Unit	3.28	-

UNITS PER	SqFt	0.52	0.52
	Section	4.00	-
	Bundle	12.00	12.00

LBS PER	Layer	1,029	1,029
	Section	1,029	-
	Bundle	3,086	3,086

COLORS	Reflectance	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓



GRANITE

Single Units



**STANDARD CORNER**  
1000 x 180 x 290mm  
39 3/8 x 7 x 11 1/2"  
12 units/Bundle  
1.94 Fc.Ft./Stone



**COPING**  
1000 x 180 x 290mm  
39 3/8 x 7 x 11 1/2"  
12 units/Bundle  
1.94 Fc.Ft./Stone



## APPLICATIONS



## APPEARANCE

Edge Detail - n/a

Surface Texture - Split

## CROSS SECTIONS

Cross Sections are available on Unilock's

Contractor web site under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	CORNER SPLIT	STANDARD 333 SPLIT	STANDARD 500 SPLIT	STANDARD 925 SPLIT	COPING SPLIT	COPING C-E SPLIT 48"
<b>Bundle Type</b>	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	OHIO	OHIO	OHIO	OHIO	OHIO	GORMLEY
Thickness (mm)	185 MM	185 MM	185 MM	185 MM	185 MM	185 MM

FCFT PER	Bundle	17.19	18.00	12.00	6.00	12.00	14.43
	Layer	5.73	6.00	4.00	2.00	4.00	4.81
	Stone	2.87	2.00	2.00	2.00	2.00	2.41

PER BUNDLE	Layers	3.00	3.00	3.00	3.00	3.00	3.00
	Sections	3.00	-	3.00	3.00	3.00	3.00

LNFT PER	Bundle	-	-	19.50	9.75	-	-
	Unit	-	-	3.25	3.25	-	-


UNITS PER	SqFt	0.35	0.50	0.50	0.50	0.50	0.42
	Section	2.00	-	2.00	1.00	2.00	2.00
	Bundle	6.00	9.00	6.00	3.00	6.00	6.00

LBS PER	Layer	834	864	878	942	954	1,140
	Section	834	-	878	942	954	1,140
	Bundle	2,502	2,592	2,635	2,827	2,863	3,420

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Granite	SR n/a SRI n/a	SO	SO	SO	SO	SO	✓
Natural	SR n/a SRI n/a	SO	SO	✓	SO	✓	✓



GRANITE



NATURAL

Single Units	CORNER SPLIT 90°	STANDARD 333 SPLIT	STANDARD 500 SPLIT	STANDARD 925 SPLIT	COPING SPLIT	COPING C-E SPLIT 48"
	925 x 185 x 500mm 36 1/2 x 7 3/8 x 19 3/4" 6 units/Bundle 2.87 Fc.Ft./Stone	1000 x 185 x 500mm 39 3/8 x 7 3/8 x 13" 6 units/Bundle 2.00 Fc.Ft./Stone	1000 x 185 x 500mm 39 3/8 x 7 3/8 x 19 3/4" 6 units/Bundle 2.00 Fc.Ft./Stone	1000 x 185 x 925mm 39 3/8 x 7 3/8 x 36 1/2" 3 units/Bundle 2.00 Fc.Ft./Stone	1000 x 185 x 500mm 39 3/8 x 7 3/8 x 19 3/4" 6 units/Bundle 2.00 Fc.Ft./Stone	1200 x 185 x 500mm 47 1/4 x 7 3/8 x 19 3/4" 6 units/Bundle 2.41 Fc.Ft./Stone

Notes: \* Special Order - Lead time is required, minimum quantities apply. All Special Order items are sold in full bundles only. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at [www.unilock.com](http://www.unilock.com). All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## APPEARANCE

Edge Detail - n/a

Surface Texture - Split

Joint Spacing - n/a

Void - n/a

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

		TAPERED COPING SPLIT
<b>Bundle Type</b>		<b>SINGLE</b>
Plant Produced		OHIO
Thickness (mm)		100 MM

<b>FCFT PER</b>	Bundle	32.30
	Layer	6.46
	Stone	0.22

<b>PER BUNDLE</b>	Layers	5.00
	Sections	25.00

<b>LNFT PER</b>	Bundle	87.50
	Unit	0.58

<b>UNITS PER</b>	SqFt	4.64
	Section	6.00
	Bundle	150.00

<b>LBS PER</b>	Layer	522
	Section	104
	Bundle	2,611

COLORS	Reflectance	Stock
Granite	SR n/a SRI n/a	✓
River	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓



GRANITE



RIVER



SIERRA

Single Unit



### TAPERED COPING SPLIT

200 x 100 x 200mm

7 7/8" x 3 7/8" x 7 7/8"


150 units/Bundle

.22 Fc.Ft./Stone

# U-Cara® Multi-Face Wall System



## APPLICATIONS



## APPEARANCE

Edge Detail - n/a  
 Surface Texture - Smooth, Standard, Series  
 Exposed, Umbriano® Mottled & Pitched

## TECHNOLOGIES

**ENDURACOLOR™**  
 Refined surface and long-lasting color



**COLORFUSION™**  
 Subtly mottled colored finish

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
 Eligible for LEED v4.1 credits



Download the U-Cara Multi-Face Wall Installation Guide.

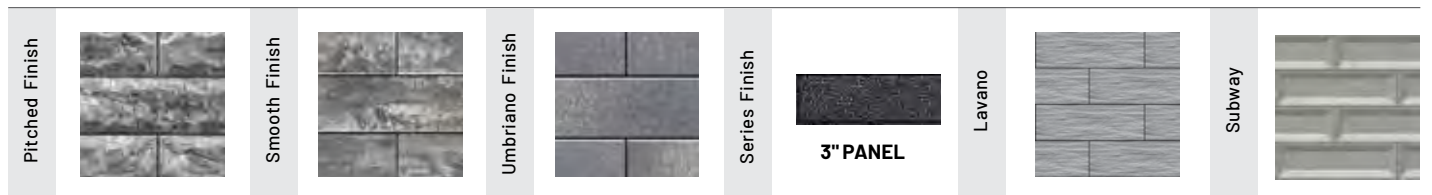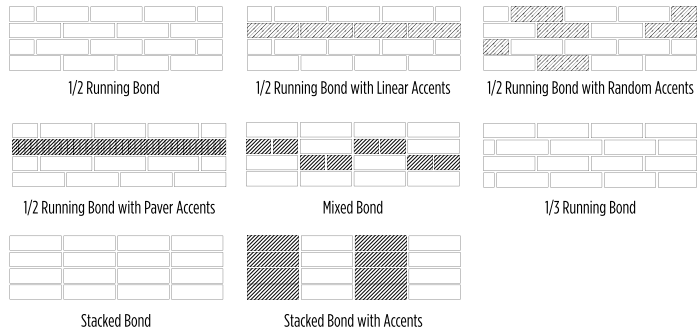

# U-Cara® Multi-Face Wall System

	STANDARD FASCIA SMOOTH	STANDARD CLOSED-END SMOOTH	STANDARD CLOSED-END UMBRIANO	STANDARD FASCIA UMBRIANO	3" FASCIA PANEL SERIES	STANDARD FASCIA PITCHED	STANDARD CLOSED-END PITCHED
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGE</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	OHIO	OHIO	ONTARIO	ONTARIO	CHICAGO	OHIO	OHIO
Thickness (mm)	150 MM	150 MM	150 MM	150 MM	71 MM	150 MM	150 MM

FCFT PER	Bundle	61.52	54.18	54.18	61.52	59.32	61.52	54.18
	Layer	10.25	9.03	9.03	10.25	9.89	10.25	9.03
	Section	-	-	-	-	-	-	-
	Stone	0.73	1.29	1.29	0.73	0.18	0.73	1.29

PER BUNDLE	Layers	6.00	-	6.00	6.00	6.00	-	-
	Sections	-	-	-	-	-	-	-

LNFT PER	Bundle	129.50	104.86	107.94	-	-	129.50	104.86
	Unit	1.54	2.50	2.57	-	-	1.54	2.50

UNITS PER	SqFt	1.37	0.78	0.78	1.37	5.66	1.37	0.78
	Section	-	-	-	-	-	-	-
	Bundle	84.00	42.00	42.00	84.00	336.00	84.00	42.00

LBS PER	Layer	275	207	207	252	250	302	236
	Section	-	-	-	-	-	-	-
	Bundle	1,648	1,242	1,240	1,513	1,501	1,809	1,416

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Granite Fusion	SR n/a SRI n/a	✓	✓	-	-	-	✓	✓
Dark Charcoal	SR n/a SRI n/a	✓	✓	-	-	-	-	-
Fossil	SR n/a SRI n/a	✓	✓	-	-	-	✓	✓
Onyx Black	SR n/a SRI n/a	-	-	-	-	✓	-	-
French Grey	SR n/a SRI n/a	-	-	✓	✓	-	-	-
Midnight Sky	SR n/a SRI n/a	-	-	✓	✓	-	-	-
Summer Wheat	SR n/a SRI n/a	-	-	✓	✓	-	-	-
Winter Marvel	SR n/a SRI n/a	-	-	✓	✓	-	-	-

Single Units	 <p><b>6" STANDARD FASCIA PANEL</b> 5 7/8 x 18 3/8 x 2 3/8" 150 x 466 x 60mm 84 Units/Bundle .73 Sq.Ft./Stone</p>	 <p><b>3" FASCIA PANEL</b> 2 7/8 x 9 x 2 3/8" 71 x 231 x 60mm 336 Units/Bundle .18 Sq.Ft./Stone</p>
	 <p><b>STANDARD FASCIA HALF PANEL</b> 5 7/8 x 9 1/4 x 2 3/8" 150 x 233 x 60mm 42 Units/Bundle .37 Sq.Ft./Stone</p>	 <p><b>CLOSED-END FASCIA PANEL</b> 5 7/8 x 20 7/8 x 2 3/8" 150 x 530 x 60mm 42 Units/Bundle 1.29 Sq.Ft./Stone</p>

Notes: Sold in full bundles. Produced and sold on a required refundable skids. Sure Track Large Backer Units when used as corners in a pillar application, can achieve 42 FFT/bundle or .757 FFT/unit.




# U-Cara® Multi-Face Wall System

NEW DESIGNS COMING SOON



## APPLICATIONS



## CROSS SECTIONS

All Cross Sections are available on Unilock's Contractor web site under Products: [contractor.unilock.com](http://contractor.unilock.com)

## APPEARANCE

Edge Detail - n/a  
Surface Texture - Smooth

## TECHNOLOGIES

### COLORFUSION™

Subtly mottled colored finish

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits

	LAVANO STANDARD	SUBWAY STANDARD
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	MICHIGAN	MICHIGAN
Thickness (mm)	150 MM	150 MM

FCFT PER	Bundle	61.52	61.52
	Layer	10.25	10.25
	Section	-	-
	Stone	0.73	0.73



PER BUNDLE	Layers	6.00	6.00
	Sections	-	-

LNFT PER	Bundle	129.50	129.50
	Unit	1.54	1.54

UNITS PER	SqFt	1.37	1.37
	Section	-	-
	Bundle	84.00	84.00

LBS PER	Layer	252.00	252.00
	Section	-	-
	Bundle	1,513	1,513

COLORS	Reflectance	Stock	Stock
Granite Fusion	SR n/a SRI n/a	✓	-
Fossil	SR n/a SRI n/a	✓	-
Dark Charcoal	SR n/a SRI n/a	-	✓
Opal	SR n/a SRI n/a	-	✓
Ivory	SR n/a SRI n/a	-	✓

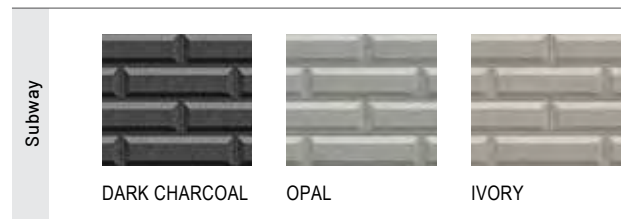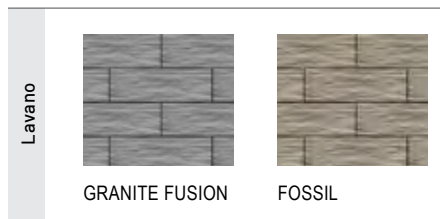

**LAVANO STANDARD FASCIA PANEL**  
5 7/8" x 18 3/8" x 2 3/8"  
150 x 466 x 60mm  
84 Units/Bundle  
.73 Fc.Ft./Stone




**SUBWAY STANDARD FASCIA PANEL**  
5 7/8" x 18 3/8" x 2 3/8"  
150 x 466 x 60mm  
84 Units/Bundle  
.73 Fc.Ft./Stone

Notes: Sold in full bundles. Produced and sold on a required refundable skids. Sure Track Large Backer Units when used as corners in a pillar application, can achieve 42 FFT/bundle or .757 FFT/unit.

# U-Cara® Multi-Face Wall System



## APPLICATIONS



## TECHNOLOGIES

**ENDURACOLOR™**  
Refined surface  
and long-lasting color

**COLORFUSION™**  
Subtly mottled colored finish

## CROSS SECTIONS

All Cross Sections are available  
on Unilock's Contractor web site  
under Products:

[contractor.unilock.com](http://contractor.unilock.com)


## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits

## APPEARANCE

Edge Detail - n/a  
Surface Texture - Smooth,  
Standard, Series Exposed,  
Umbriano® Mottled & Pitched

## U-CARA RETAINING WALL GEOGRID SECTION

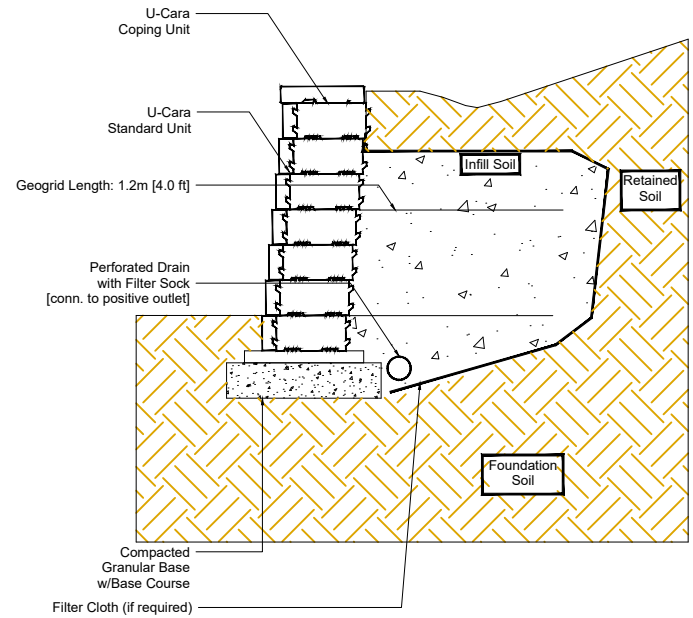


## U-CARA®

CROSS SECTION

REF-Detail\_U-Cara\_Garden\_Wall

Garden Wall - Max Height 15'

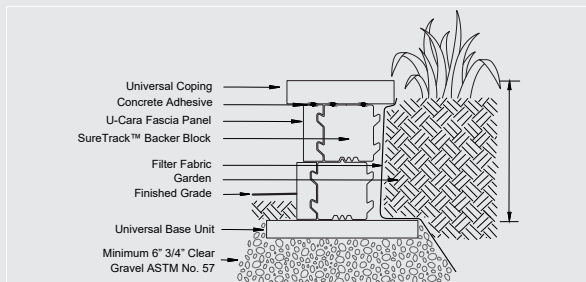


Notes:  
This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

## U-CARA®

CROSS SECTION

REF-Detail\_U-Cara\_Seat\_Wall

Seat Wall - Max Height 21'

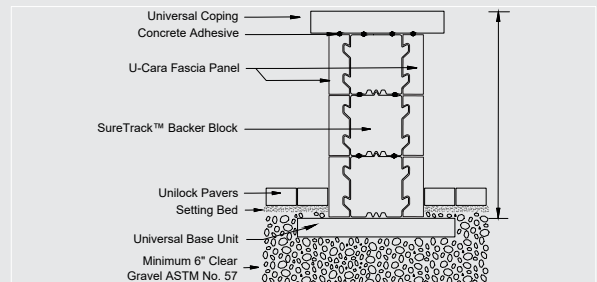

Notes:  
This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

# U-Cara® Multi-Face Wall System

		LARGE/CORNER/ PILLAR BACKER	STANDARD BACKER	UNIVERSAL BASE CLASSIC
<b>Bundle Type</b>		<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced		OHIO	OHIO	OHIO
Thickness (mm)		150 MM	150 MM	55 MM
<b>FCFT PER</b>	Bundle	15.82	33.91	-
	Layer	3.96	11.30	-
	Stone	0.28	0.32	-
<b>PER BUNDLE</b>	Layers	4.00	3.00	10.00
	Sections	-	-	-
<b>LNFT PER</b>	Bundle	-	69.99	70.00
	Unit	-	0.67	1.17
<b>UNITS PER</b>	SqFt	3.54	3.10	-
	Section	-	-	-
	Bundle	56.00	105.00	60.00
<b>LBS PER</b>	Layer	498	773	282
	Section	-	-	-
	Bundle	1,992	2,320	2,816

Components




**SURE TRACK  
LARGE BACKER**  
6 x 7½ x 12"  
150 x 190 x 300mm



**SURE TRACK  
STANDARD BACKER**  
6 x 8 x 6"  
150 x 200 x 150mm

*Notes: Sold in full pallets only on a refundable, optional skid. All measurements are nominal. Contact Unilock for more information.*

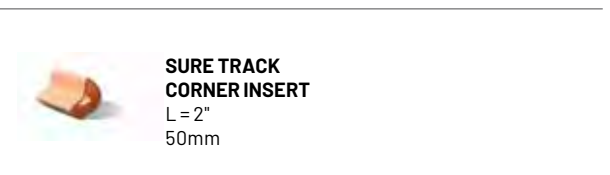


Notes: Sold in full bundles. Produced and sold on a required refundable skids. Sure Track Large Backer Units when used as corners in a pillar application, can achieve 42 FFT/bundle or .757 FFT/unit.

# U-Cara® Modular System

The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

**With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Places and Pillars.**

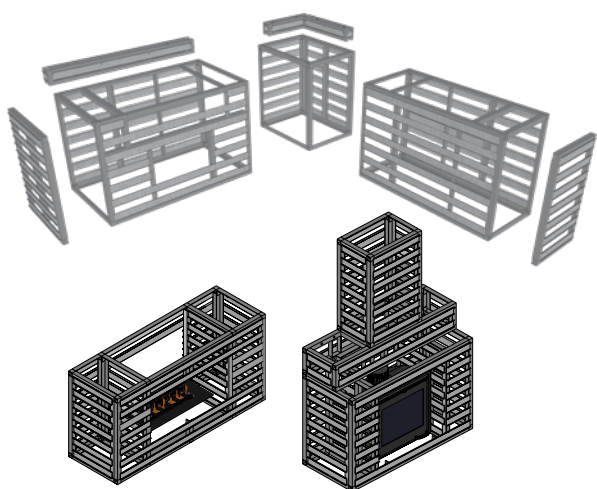

NO.	MODEL	DESCRIPTION
UCARA000001	URS	UCARA 8' RAIL (10/PACK)
UCARA000003	URS	ALIGNMENT BARS 39" (10/PACK)
UCARA000007	UL-OSK	CABINET DEPTH CHANGE KIT
RS-UCARA000009	UL-FIR	U-CARA FIREPLACE
RS-UCARA000010	UL-FIR-M	U-CARA FIREPLACE MANTLE
RS-UCARA000015	UL-HCK-CC	U-CARA HEIGHT CONVERSION CORNER CAB
RS-UCARA000016	UL-FIR-MW	U-CARA FIREPLACE MANTLE WIDE UNIT
RS-UCARA000017	UL-FIR-CH	U-CARA U-CARA FIREPLACE CHIMNEY UNIT
RS-UCARA000018	UL-FIR-CH-MW	U-CARA FIREPLACE CHIMNEY WIDE UNIT
RS-UCARA000019	UL-FIR-RTN	U-CARA FIREPLACE RETURN
RS-UCARA000020	UL-FIR-RTN-OS	U-CARA FIREPLACE RETURN OVERSIZED
UCARA001000	UL-GC	UNIVERSAL GRILL CABINET (fits 36-42" grill)
UCARA002000	UL-BC	BASE CABINET (fits fire table or fridge)
UCARA003000	UL-CC	CORNER CABINET 27.5" x 27.5"
UCARA003001	UL-CC-OS	CORNER CABINET 27.5" x 36.5" OS
UCARA003002	UL-CC-BP	CORNER CABINET BACK PANEL
UCARA004000	UL-ECK	END CLAD KIT 27.5"
UCARA004001	UL-ECK-OS	END CLAD KIT 36.5" OS
UCARA005000	UL-BS	BACKSPLASH-GRILL/BASE UNIT 64½"
UCARA005001	UL-BS-CC	BACKSPLASH CORNER CABINET
UCARA005002	UL-BS-CC-OS	BACKSPLASH CORNER CABINET OS
UCARA006000	UL-DD	STAINLESS DOUBLE ACCESS DOORS 27"
UCARA007000	UL-PU	PILLAR UNIT (18⅜" x 18⅜")
RS-UCARA001002	UL-GC-36	UNIVERSAL GRILL CABINET (FITS 36"-42" GRILL)
RS-UCARA002001	UL-BC-36	BASE CABINET (FITS FIRE TABLE OR FRIDGE)
RS-UCARA003004	UL-CC-OS-36	CRNR CABINET 27.5X36.5 OS
RS-UCARA003005	UL-CC-36	CORNER CABINET 27.5X27.5
RS-UCARA004002	UL-ECK-36	END CLAD KIT 27.5"
RS-UCARA004003	UL-ECK-OS-36	END CLAD KIT 36.5" OS



Download the U-Cara Modular Fireplace Installation Guide.



# U-Cara® Wall Mount System

---



The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.



U-CARA ALIGNMENT BAR:  
39" LENGTH - SOLD IN PACKS OF 10 PIECES

U-CARA RAILS:  
8' LENGTH - SOLD IN PACKS OF 10 PIECES





**APPLICATIONS**



**APPEARANCE**

Edge Detail - n/a  
 Surface Texture - Exposed  
 Joint Spacing - n/a

**TECHNOLOGIES**

**ENDURACOLOR™**  
 Refined surface and long-lasting color

**TECHNICAL INFORMATION**

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

	COPING ENDURACOLOR	PILLAR CAP 28" ENDURACOLOR
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>
<b>Thickness (mm)</b>	60 MM	76 MM

<b>SQFT PER</b>	Bundle	-	-
	Unit	-	-

<b>FCFT PER</b>	Bundle	-	-
	Layer	-	-
	Unit	-	-

<b>LNFT PER</b>	Bundle	42.00	-
	Unit	2.00	-

<b>UNITS PER</b>	Bundle	21.00	6.00
	SqFt	-	-

<b>LBS PER</b>	Unit	68	183
	Bundle	1,428	1,098

COLORS	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓
Charcoal	SR n/a SRI n/a	✓	✓



BUFF



CHARCOAL

Single Units



**COPING**  
 609 x 60 x 355mm  
 24 x 2 3/8 x 14"



**PILLAR CAP**  
 711 x 76 x 711mm  
 28 x 3 x 28"

Notes: Shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Zero  
 Surface Texture - Smooth  
 Joint Spacing - 2mm

## TECHNOLOGIES

### CLASSIC™

Budget-friendly traditional product mix

### ANTIQUED™

Distressed, timeworn finish

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

	DOUBLE FULLNOSE	FULLNOSE CLASSIC
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	OHIO	OHIO
Thickness (mm)	70 MM	60 MM

FCFT PER	Bundle	78.27	104.00
	Layer	19.57	10.00
	Stone	0.49	0.49


PER BUNDLE	Layers	4.00	4.00
	Sections	4.00	4.00

LNFT PER	Bundle	78.27	104.00
	Unit	0.50	0.5

UNITS PER	SqFt	0.5	0.5
	Section	40.00	52.00
	Bundle	160.00	208.00

LBS PER	Layer	594	737.75
	Section	594	737.75
	Bundle	2,376	2,951


COLORS	Reflectance	Stock	Stock
Dark Charcoal	SR .12 SRI 9	✓	✓
Limestone	SR .41 SRI 46	✓	✓
Sandstone	SR .41 SRI 46	✓	✓
Sierra	SR n/a SRI n/a	✓	✓
Mocha	SR n/a SRI n/a	✓	✓




DARK CHARCOAL




LIMESTONE



SANDSTONE



SIERRA



MOCHA

Single Units



**BRUSSELS FULLNOSE CLASSIC / TUMBLED**  
 150 x 300 x 60mm  
 5 7/8 x 11 7/8 x 2 3/8"  
 208 units/Bundle



**BRUSSELS DOUBLE FULLNOSE CLASSIC / TUMBLED**  
 150 x 300 x 70mm  
 5 7/8 x 11 7/8 x 2 3/4"  
 160 units/Bundle



	24" COPING	24" CLOSED-END COPING	24" FULLNOSE COPING	30" COPING	30" CLOSED-END COPING
<b>Bundle Type</b>	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	70 MM	70 MM	60 MM	70 MM	70 MM

FCFT PER	Bundle	5.52	5.52	5.12	6.87	6.87
	Layer	1.38	1.38	0.39	1.72	1.72
	Stone	0.46	0.46	0.39	0.57	0.57

## APPLICATIONS



## APPEARANCE

Edge Detail - n/a  
Surface Texture - Textured

## TECHNOLOGIES

**REALA™**  
Cast from natural stone

## TECHNICAL INFORMATION

Conforms to ASTM C 1776  
Eligible for LEED v4.1 credits

PER BUNDLE	Layers	-	-	-	-	-
	Sections	-	-	-	-	-

LNFT PER	Bundle	24.00	24.00	26.00	30.00	30.00
	Unit	-	-	-	-	-

UNITS PER	SqFt	2.18	2.18	2.54	1.75	1.75
	Section	-	-	-	-	-
	Bundle	12.00	12.00	13.00	12.00	12.00

LBS PER	Layer	-	-	-	-	-
	Section	-	-	-	-	-
	Bundle	722	796	723	1,128	1,116

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓	✓	✓	✓
Grey	SR n/a SRI n/a	✓	✓	✓	✓	✓



BUFF



GREY

Single Units					
	<b>24" COPING</b>	<b>24" CLOSED-END COPING</b>	<b>24" FULLNOSE COPING</b>	<b>LARGE (30") COPING</b>	<b>LARGE (30") CLOSED-END COPING</b>
	610 x 305 x 70mm	610 x 305 x 70mm	610 x 305 x 60mm	762 x 343 x 70mm	762 x 343 x 70mm
	24 x 12 x 2 3/8"	24 x 12 x 2 3/4"	24 x 12 x 2 3/8"	30 x 13 1/2 x 2 3/4"	30 x 13 1/2 x 2 3/4"
	12 units/Bundle	12 units/Bundle	13 units/Bundle	12 units/Bundle	12 units/Bundle
	.46 Fc.Ft./Stone	.46 Fc.Ft./Stone	.46 Fc.Ft./Stone	.57 Fc.Ft./Stone	.57 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - n/a  
Surface Texture - Textured

## TECHNOLOGIES

**REALA™**  
Cast from natural stone

## TECHNICAL INFORMATION

Conforms to ASTM C 1776  
Eligible for LEED v4.1 credits

	48" STEP	24" PILLAR CAP	29" PILLAR CAP
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	ONTARIO	CHICAGO	CHICAGO
Thickness (mm)	150 MM	100 MM	100 MM

FCFT PER	Bundle	5.91	3.28	-
	Layer	1.97	0.66	-
	Stone	1.97	0.66	-

PER BUNDLE	Layers	3.00	5.00	5.00
	Sections	-	-	-

LNFT PER	Bundle	12.00	10.04	-
	Unit	4.00	2.01	-

UNITS PER	SqFt	0.51	1.52	-
	Section	-	-	-
	Bundle	3.00	5.00	5.00

LBS PER	Layer	574	159	206
	Section	-	-	-
	Bundle	1,721	795	1,030

COLORS	Reflectance	Stock	Stock	Stock
Buff	SR n/a SRI n/a	*	✓	✓
Grey	SR n/a SRI n/a	*	✓	✓

*\*While Supplies Last*



BUFF



GREY

Single Units		<b>48" STEP</b> 1220 x 610 x 150mm 48 x 24 x 5 7/8" 3 units/Bundle 1.97 Fc.Ft./Stone		<b>24" PILLAR CAP</b> 610 x 610 x 100mm 24 x 24 x 3 7/8" 5 units/Bundle .66 Fc.Ft./Stone		<b>29" PILLAR CAP</b> 740 x 740 x 100mm 29 1/8 x 29 1/8 x 3 7/8" 5 units/Bundle .66 Fc.Ft./Stone
--------------	---	--	---	--	---	--

Notes: Produced and sold on a required, refundable skid. Coping is rock faced on the front and the back. All measurements are nominal. Contact Unilock for more information.



**APPLICATIONS**



**APPEARANCE**

Edge Detail - n/a  
Surface Texture - Split

**CROSS SECTIONS**

Cross Sections are available on Unilock's Contractor web site under Products: [contractor.unilock.com](http://contractor.unilock.com)

**TECHNOLOGIES**

**CLASSIC™**

Budget-friendly traditional product mix

**TECHNICAL INFORMATION**

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits

	COPING SPLIT	COPING C-E SPLIT
<b>Bundle Type</b>	<b>SINGLE</b>	<b>SINGLE</b>
Plant Produced	OHIO	ONTARIO
Thickness (mm)	185 MM	185 MM

FCFT PER	Bundle	12.00	14.43
	Layer	4.00	4.81
	Stone	2.00	2.41

PER BUNDLE	Layers	3.00	3.00
	Sections	3.00	3.00

LNFT PER	Bundle	-	-
	Unit	-	-

UNITS PER	SqFt	0.50	0.42
	Section	2.00	2.00
	Bundle	6.00	6.00

LBS PER	Layer	954	1,140
	Section	954	1,140
	Bundle	2,863	3,420

COLORS	Reflectance	Stock	Stock
Granite	SR n/a SRI n/a	-	✓
Natural	SR n/a SRI n/a	✓	✓




GRANITE




NATURAL

Single Units



**COPING SPLIT**  
1000 x 185 x 500mm  
39 3/8 x 7 3/8 x 19 3/4"  
6 units/Bundle  
2.00 Fc.Ft./Stone




**COPING SPLIT**  
1200 x 185 x 500mm  
47 1/4 x 7 3/8 x 19 3/4"  
6 units/Bundle  
2.41 Fc.Ft./Stone

Notes: Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at [www.unilock.com](http://www.unilock.com). All measurements are nominal. Contact Unilock for more information.





## APPLICATIONS



## APPEARANCE

Edge Detail - Zero  
 Surface Texture - Umbriano Mottled  
 Joint Spacing - 7mm  
 Void - n/a

## TECHNOLOGIES

**ENDURACOLOR™**  
 Refined surface and long-lasting color

## EASYSOFT™

Factory Sealed to provide integral stain resistance

## COLORFUSION™

Subtly mottled colored finish

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
 Eligible for LEED v4.1 credits

	CHAMFERED	BULLNOSE
<b>Bundle Type</b>	SINGLE	SINGLE
Plant Produced	PICKERING	PICKERING
Thickness (mm)	60 MM	60 MM

FCFT PER	Bundle	9.30	9.30
	Layer	-	-
	Stone	0.39	0.39


PER BUNDLE	Layers	6.00	6.00
	Sections	2.00	2.00

LNFT PER	Bundle	47.24	47.24
	Unit	1.97	1.97

UNITS PER	SqFt	12.00	12.00
	Section	-	-
	Bundle	24.00	24.00

LBS PER	Layer	252	252
	Section	755	755
	Bundle	1,510	1,510

COLORS	Reflectance	Stock	Stock
French Grey	SR n/a SRI n/a	✓	✓
Grenada White	SR n/a SRI 52	✓	✓
Midnight Sky	SR n/a SRI n/a	✓	✓
Summer Wheat	SR n/a SRI 48	✓	✓
Winter Marvel	SR n/a SRI 38	✓	✓

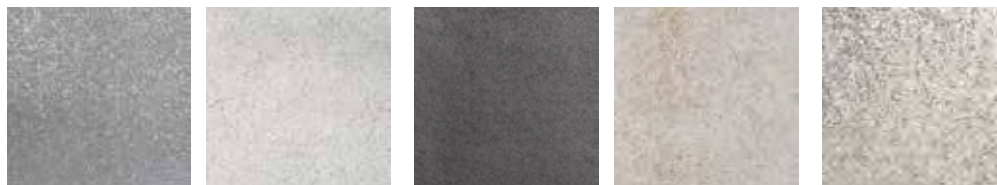


FRENCH GREY      GRENADA WHITE      MIDNIGHT SKY      SUMMER WHEAT      WINTER MARVEL

Single Units		<b>CHAMFERED</b> 360 x 600 x 60 mm 14 x 24 x 2 3/8"		<b>BULLNOSE</b> 360 x 600 x 60 mm 14 x 24 x 2 3/8"
--------------	---	---	---	--

Notes: Shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - n/a  
Surface Texture - Standard / Smooth

## TECHNOLOGIES

**ENDURACOLOR™**  
Refined surface and long-lasting color

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits

UNIVERSAL COPING SMOOTH ENDURACOLOR	
<b>Bundle Type</b>	<b>SINGLE</b>
Plant Produced	OHIO
Thickness (mm)	70 MM

<b>FCFT PER</b>	Bundle	13.08
	Layer	2.18
	Stone	0.36

<b>PER BUNDLE</b>	Layers	6.00
	Sections	-

<b>LNFT PER</b>	Bundle	-
	Unit	-

<b>UNITS PER</b>	SqFt	2.75
	Section	-
	Bundle	36.00

<b>LBS PER</b>	Layer	353
	Section	-
	Bundle	2,118

COLORS	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓



DARK CHARCOAL

Single Units

**UNIVERSAL COPING  
ENDURACOLOR**  
482 x 355 x 70mm  
19 x 14 x 2 ¾"  
36 units/Bundle  
.36 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS



## APPEARANCE

Edge Detail - Zero  
 Surface Texture - Standard  
 Joint Spacing - n/a  
 Void % - n/a

## TECHNOLOGIES

**CLASSIC™**  
 Budget-friendly traditional product mix

## ANTIQUED™

Distressed, timeworn finish

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
 Eligible for LEED v4.1 credits

	SQUARE W / INSERT	ROUND W / INSERT
Bundle Type	SINGLE	SINGLE
Thickness (mm)	300 MM	300 MM

DIAMETER (inch)	Outside	44.00	52.00
	Inside	28.00	34.00
	Insert	36.00	34.00

LAYER PER UNIT	3.00	3.00
UNIT PER LAYER	12.00	18.00
UNIT PER PALLET	36.00	54.00

LBS PER PALLET	1,545	1,145
----------------	-------	-------

COLORS	Reflectance	Stock	Stock
Limestone	SR n/a SRI n/a	✓	✓
River	SR n/a SRI n/a	✓	✓
Sandstone	SR n/a SRI n/a	✓	✓
Sierra	SR n/a SRI n/a	✓	✓



LIMESTONE



RIVER



SANDSTONE



SIERRA

Single Units



**SUNSET SQUARE W/INSERT**  
 1100 x 1100 x 300mm  
 43 3/8 x 43 3/8 x 11 7/8"



**SUNSET ROUND W/INSERT**  
 1300 x 1300 x 300mm  
 51 1/4 x 51 1/4 x 11 7/8"

Notes: All measurements are nominal. Contact Unilock for more information.

# Unilock Elements

## TUSCANY

Large decorative accents adorn the top of the Tuscany fireplace. Brussels Fullnose™ is used to construct the ledges and mantle of the fireplace.



Tuscany Sierra with Copthorne® \*\*



## MODA SPECIAL ORDER

The Moda pre-built fireplace is constructed from Lineo™ Dimensional Stone and Series™ accent.



Moda (Lineo Dimensional Stone & Series)

## TUSCANY FIREPLACE

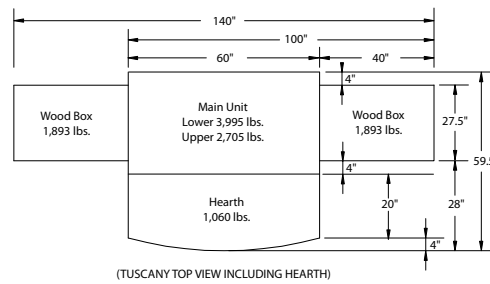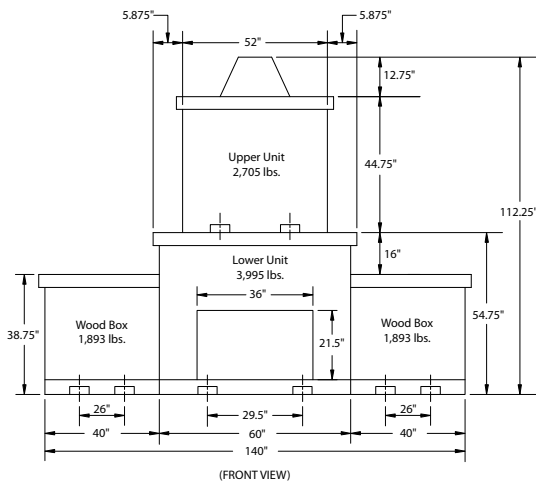

## CUSTOM ACCENTS



Copthorne®

Courtstone®



Richcliff®

Umbriano®

## UNILOCK ELEMENTS ARE AVAILABLE IN TUSCANY AND BARCELONA SERIES



FIREPLACE

Two piece set (base and chimney), and it comes with stainless fire box. 5,620 lbs



HEARTH

Hearth with gentle curved front. 1,025 lbs



WOOD BOXES

Sold as a set of two and flank either side of the gas or standard fireplace. 3,750 lbs per set



GRILL ISLAND

Available with OCS Grill, protective cover, and stainless double door insert. 3,800 lbs

Guarantee: The standard Unilock guarantee applies to the units used to construct Unilock Elements. (See Unilock literature for details.) Third party grills and fireboxes carry their respective manufacturer's warranty and may change without notice.

Note: Unilock reserves the right to change model designs, accessories and colors without notice. Unilock will not be responsible for improper use or handling that results in property damage. Some models may not be exactly as shown. Fireplaces come complete with UL- approved stainless steel fireboxes. Check local building codes and regulations prior to ordering and installing Unilock Elements.

\*\* Units and measurements may not be exactly as shown.

## Paver Cleaners



### ALLIANCE GATOR OIL & GREASE CLEANER

- Effective in removing oil and grease from the surface of concrete pavers and natural stones
- Easy to use - dissolves, dislodges and removes oil and grease



### ALLIANCE GATOR EFFLORESCENCE CLEANER & SLURRY REMOVER

- Removes any efflorescence stains trapped in the concrete paver and natural stone pores
- Makes the pavers look more clean and vibrant



### ALLIANCE GATOR RUST CLEANER

- Effective in removing rust from the surface of concrete pavers
- Contains no muriatic acid



### ALLIANCE GATOR RUBBER, PAINT & TAR REMOVER

- Effective in removing rubber, paint and tar from the surface of concrete pavers and natural stone
- Easily washes off with water and is easy to use

## Natural Stone Cleaners



### UNICARE NATURAL STONE ACID CLEAN

1L and 5L

#### Removal of:

- Cement Staining
- Efflorescence
- Iron Oxide (Rust) Cement mortar
- Grout



### UNICARE NATURAL POWER CLEAN

1L and 5L

#### Removal of:

- Oil & Grease
- Food Stains
- General Dirt & Mud
- Sap & certain plant stains
- Light cement contamination (on acid sensitive surfaces)



### UNICARE BIOCLEAN

1L and 5L

#### Removal of:

- Black spot algae
- Green algae
- Plant stains from leaves, wood, trees, berries & flowers
- Organic staining from bark & compost, colored stains from food spillages, tea, coffee and wine

## Natural Stone Sealers



### UNICARE NATURAL STONE NATMATTE SEALER

1L and 5L

For Porous Stones

- No change of color
- No surface coating, sheen or shine at all
- Riven Sandstone & Smooth Sandstone



### UNICARE NATURAL STONE NATCOLORENHANCE SEALER

1L and 5L

Color Enhancement For Porous Stones

- No surface coating, sheen or shine
- Breathable
- Lasts several years
- Easy to apply

## Sealers



### ALLIANCE GATOR WET LOOK SEALER

- Made from acrylic-based polymers
- Penetrates deep into concrete paver and natural stone pores, reducing oil and dirt penetration
- Protects them from de-icing salt corrosion



### ALLIANCE GATOR SATIN LOOK SEALER

- Made from acrylic-based polymers
- Penetrates deep into concrete paver and natural stone pores, reducing oil and dirt penetration
- Protects them from de-icing salt corrosion
- Low-gloss matte finish, solvent-based



### ALLIANCE GATOR ECO SEAL HIGH GLOSS

- 100% pure, high-grade acrylic used to seal concrete pavers, clay pavers and natural stone
- Penetrates deep into paver and natural stone pores, reducing oil and dirt penetration
- Protects them from de-icing salt corrosion



### ALLIANCE GATOR ECO SEAL LOW GLOSS

- 100% pure, high-grade acrylic used to seal concrete pavers, clay pavers and natural stone
- Penetrates deep into paver and natural stone pores, reducing oil and dirt penetration
- Protects them from de-icing salt corrosion



### SUREBOND 1300 JOINT SAND STABILIZING SEALER - MATTE FINISH

- Seals surface & hardens joint sand, while protecting the sealer film from mold, moss & algae
- Reduces sand washout, weeds & insect infestation
- Locks in a clean, natural look & matte finish.
- Product is breathable, designed for immediate application and is water-based; moisture or efflorescence will not get trapped
- Approximate Coverage: 80-120 sq.ft



## Sealers continued



### SUREBOND 7700 JOINT STABILIZING SEALER - GLOSS FINISH WITH ANTIFUNGAL PROTECTION

- Seals the surface and bonds joint sand between interlocking concrete pavers.
- Protects colored, stained and exposed aggregate concrete from staining.
- Resists acid, salt, other corrosives and weathering.
- Stabilizing sealer, water-based, single component and epoxy-modified; exceeds all VOC and EPA standards.
- Non-hazardous with the consistency of water; milky white in appearance when applied, dries crystal clear creating a semi-gloss finish.



### SUREBOND 8700 WET LOOK JOINT SAND STABILIZER WITH FUNGICIDE

- An advanced premium acrylic sealer that will not yellow under exposure to sunlight.
- A 2 in 1 product; protects the substrate surface and stabilizes jointing sand at the same time.
- Specially formulated with antifungal agents designed to help inhibit the growth of mold, fungi and moss on horizontal pavement surfaces.
- Forms a tenacious bond to the concrete or masonry surface.
- Wet look, rain safe in 90 minutes, water-repellant, breathable, solvent-based.

## Sands



### TECHNISEAL HP NEXTGEL 50 lb/bag

- Colors: Granite & Prairie Tan
- 56 bags/skid (2860 lbs/skid)
- Dust & haze-free, fast-setting polymeric sand.
- Formulated for heavy-sloped, heavy traffic, high humidity and pool decks.
- For joints from 1/16" to 4", ideal for joints up to 1".
- Coverage: 60-120 Sq.Ft./bag for narrow joints.



### TECHNISEAL NOCO STORM (40 LB)

- Colors: Tan, Granite & Black
- Multi-weather.
- For the durable jointing of pavers, natural stone, large concrete slabs, and porcelain.
- Permeable, efficient, reusable.
- Perfect for walkways, pool decks, patios, and non-vehicular areas.
- Ready-to-use, no mixing required.



### POLYBIND™ HP SAND

- Colors: Nevada, Tan & Oxford Grey.
- Designed for paver joints up to a maximum of 1 inch.
- Unique mixture of polymer binders and calibrated sand.
- Installation almost identical to using regular paver joint sand, except for the application of water; once set, it becomes very firm and locks between the paver joints, maintaining pavers securely in place.
- Equally effective on both horizontal & sloped surfaces.
- Packaging: 50 lb bag 56 bags/skid.
- Coverage: 65-85 sq.ft. per bag for narrow joints/larger joints require more sand.

## Sands continued



### POLYBIND™ COMPLETE SAND

- Colors: Nevada, Tan & Oxford Grey
- Specifically designed for drainage and non-drainage base systems.
- Can be used with concrete pavers, wetcast and natural stones for a variety of uses including pool sides, patios, paths, driveways, parking spaces, etc.
- Sets above the freezing temperature 32°F and can be used for joints up to a maximum of 1.5 in.
- Packaging: 50 lb bag 56 bags/skid.
- Coverage: 65-85 sq.ft. per bag for narrow joints/larger joints require more sand.



### POLYBIND G2 SAND - NO DUST • HAZE FREE • NO BLOWER • ONE WATERING

- Colors: Nevada & Oxford Grey
- Made with calibrated sand that is mixed with sophisticated intelligent polymers, which neutralize haze and dust; application is now dust free and haze free.
- No blower needed and the intelligent polymeric sand requires only one watering.
- Recommended for a variety of uses including pool decks, patios, footpaths, driveways, parking spaces, pavements, etc.
- Sets above the freezing temperature 32°F and can be used for joints up to a maximum of 2 in.
- Packaging: 50 lb bag 56 bags/skid  
Coverage: 65-85 sq.ft. per bag for narrow joints/larger joints require more sand.



### POLYBIND G2 COMPLETE SAND - NO DUST • HAZE FREE • NO BLOWER • ONE WATERING

- Designed for paver joints up to maximum of 4".
- Drainage & non-drainage applications (overlays).
- The cleanest, fastest and easiest polymeric sand installed in the industry.
- Can be used with concrete pavers, wetcast & natural stones, and is recommended for use in patios, pool decks, walkways, driveways, etc.
- Packaging: 50 lb bag 56 bags/skid  
Coverage: 65-85 sq.ft./ bag for narrow joints/larger joints require more sand; 58-76 sq.ft./ bag for narrow joints/larger joints need more sand.



### POLYBIND DUST

- Colors: Tan & Grey
- Designed for natural stone joints 1/2" to 4".
- A unique mixture of polymer binders and calibrated crushed stone.
- Once set, becomes very firm and locks between the stone joints, maintaining a bond that holds the stones securely in place.
- Equally effective on both horizontal and sloped surfaces.
- Packaging: 50 lb bag 56 bags/skid  
Coverage: 20-30 sq.ft. per bag for joints 1"-2" wide and stones approximately 2" thick



### ALLIANCE EUROSTONE BOND

- Colors: Slate Grey.
- The first polymeric sand specifically designed for drainage and non-drainage base systems.
- Can be used with natural stones and cobblestone.
- Sets above the freezing temperature (0°C / 32°F) and can be used for joints up to a maximum of 35mm/ 1".
- Packaging: 50 lb bag 56 bags/skid.

# Sands continued



## ALLIANCE GATOR NITRO SAND

- Colors: Beige, Grey, Black & Silver
- Ready-to-use mixture of calibrated sand and resins which cure when exposed to air, harden from top to bottom of the joint.
- Can be installed in wet or dry weather, in joints ranging from a minimum 3/16" (5mm) to a maximum 2" (50mm) joint width; minimum jointing depth is 1" (25mm).
- Packaging: 40 lb bucket • 48 buckets/skid.
- Coverage: 10-56sf = 1 bucket depending on joint size.



## SEK POLYSWEEP POLYMERIC SAND

- Colors: Tan & Grey
- Designed to keep sand in the joints by creating a semi-solid joint.
- A blend of native sands conforming to ASTM-C-144 and binders specially formulated to allow the joints to expand and contract with the elements (ie. heat, cold & freeze/thaw cycles).
- Prevents sand erosion from the pavement joints caused by rain and other water run-off, proven to produce less hazing.
- Also deters weed growth and reduces overall pavement maintenance.
- Max width: 2.5cm (1"); a larger joint width is acceptable where pavers intersect. Min depth: 3cm (1.25").
- Packaging: 50 lb bag, 56 bags / skid (2,860 lbs / skid)
- Coverage: Courtstone - 1 bag covers approx. 25sq.ft.

*Note: Extra care must be exercised when using with Courtstone®, Copthorne®, Richcliff® & Town Hall®. This product is not recommended for use with Il Campo®, Series™ & Umbriano®.*



## SUREBOND JOINTING SAND

- Colors: Tan & Grey
- Will properly complete the interlocking of segmental pavers because it is clean, angular and meets ASTM-C144 specifications.
- More stable in the paver joints and has optimal gradation to ensure long term performance of the pavement system.
- Recommended for joints up to 3/4" • Washed, screened & dried
- Packaging: 50 lb bag

### SAND RECOMMENDATIONS BY PRODUCT

Sands	SAND RECOMMENDATIONS BY PRODUCT			
	Polybind HP G2	Polybind Complete Sand G2	Polysweep Polymeric Sand	Unicare® Easy Pro®
PAVERS	For joints up to 1/8" May be sealed. Tan color Non-binding sand	For joints up to 1" May be sealed. Available in Tan or Grey Binding sand	For joints up to 4" May be sealed. Available in Tan or Grey Binding sand	For joints up to 1" May be sealed. Available in Tan or Black Binding sand
Copthorne®	✓	✓	✓*	✓
Courtstone®	✓	✓	✓	✓
Il Campo®	N/R	N/R	N/R	N/R
Richcliff®	✓	✓	✓*	✓
Senzo™	✓	✓	N/R	N/R
Series™	N/R	N/R	N/R	N/R
Town Hall®	✓	✓	✓	✓
Umbriano®	✓	✓	N/R	N/R
Tumbled Pavers	✓	✓	✓	N/R
Standard Pavers	✓	✓	✓	✓

N/R - Not Recommended

✓ Recommended

✓\* These pavers have a very narrow or slightly angled edge (chamfer), limiting sand penetration in the joint and causing possible weak bonding areas. The life cycle performance could be affected.

## IMPORTANT NOTICE

**1. DO NOT USE** Polymeric Jointing Sand on the following products: Series™ Il Campo®

If joint stabilization is required, use ordinary jointing sand and apply a stabilizing sealer. Contact your local Unilock office for recommended sealants and application specifics.

**2. EXTRA CARE** must be exercised when using Polymeric Sand on the following products:

Courtstone®

Copthorne®

Richcliff®

Town Hall®

Umbriano®

Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Polymeric Jointing Sand have a natural tendency to adhere to the surface and therefore extra diligence must be taken to pre-clean the surface prior to "wetting the sand in" and squeegee off the surface post application. Failure to do so will result in a "whitish haze" on the surface that is difficult to remove.

**3. IMPORTANT COMPACTION NOTICE:** Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric sand can then be swept into the joints. Always use a compactor with a protective membrane attached to the bottom of the plate.

**Polymeric Jointing Sand, cleaners and sealers, must always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.**

NOTICE: Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of polymeric sand, sealers or cleaners. Unilock will not accept responsibility for alternate suppliers of polymeric sand, jointing sand, cleaners and sealers.

## Adhesives



### UNILOCK SB-10 ADHESIVE

- 10 oz - ADH009-1 / 28 oz RS-ADH015-1.
- 10 oz. Tube: 20' at 1/4" bead (12/Case)(140 cs/skid) 28 oz. Tube: 52' at 1/4" bead (12/Case)(60 cs/skid).
- SPECIFICATIONS - (Conforms to UN-STD. 1804, ASTM 2339-70& FHA UM-60).



### ALLIANCE XP GATOR BLOCK ADHESIVE

- RS-ADH039 10 oz; 12/case; 90 cases/skid (1080 ea).  
RS-ADH040 28 oz; 12/case; 60 cases/skid (720 ea).
- Bonds permanently in 24 hours.
  - Material may be repositioned for up to 30 minutes.
  - Works in temperatures above 32°F.
  - 850 psi in 24 hrs (1000 psi in 7 days).



### TECHNISEAL STRUCTURE BOND™ FOAM ADHESIVE ADH048 (24 oz)

24 oz. Canister = 600 linear feet at 3/8" bead (12/case)

An innovative super-strength foam adhesive that bonds a wide range of construction products with an application time up to 50% faster than with conventional tube adhesives. Materials are bonded in just 8 minutes and adhesive is fully cured within 24 hours. Made from high-quality modified polyurethanes with excellent long-term resistance to weathering, dilute acids and caustic solutions.

### TECHNISEAL STRUCTURE BOND™ GUN II TOOL378 1 Dispenser (12/case)

The Gun II dispenser for application enables you to gain access to hard-to-reach areas and greatly limits excessive spillage or dripping, while also reducing user-fatigue, with total control on product flow. The gun allows for a precise adhesive delivery with a single pull of the trigger that stops as soon as you let go. Requires no pumping, cutting or puncturing of cartridge nozzles.

### TECHNISEAL STICKY STONE

RS-ADH055 20.3 oz sausage; 15 sausages/case; 66 cases/skid

- Professional-grade vertical hardscape adhesive.
- Perfect for outdoor kitchens, fire pits & columns, etc.
- Coverage: 1/4" x 1/4" deep area, each sausage will cover 50 linft.
- Applies mess-free and easily with gun applicator.

### STICKY STONE GUN

RS-TOOL557 1 dispenser gun kit; 10 kits/case

- Heavy-duty dispenser gun specially designed for Stickstone.
- Each gun kit includes: 6 nozzles, 2 extra pistons & steel hook pull.

### TECHNISEAL STRUCTURE BOND™ FOAM CLEANER


CLN093 (16 oz) 1 Canister = (12/case)

Structure Bond Gun Cleaner is a powerful cleansing formula that rapidly dissolves any uncured Structure Bond adhesive residue. Specifically designed to fit Structure Bond Gun II dispensers. Simply screw a canister onto the gun and press the trigger to cleanse the tool from uncured product. The built-in sprayer nozzle will dissolve any spill, drip or adhesive residue.

## X & T Slab Spacers

### X & T SLAB SPACERS

- 250 per bag
- X & T bagged separately
- X spacers 2" x 2" (RS-ACC237)
- T spacers 2" x 1" (RS-ACC236)



Unilock recommends using slab spacers when installing Arcana on an open grade surface. "T" spacers are needed for running bond patterns, "X" spacers are needed for stack bond patterns. Please contact your sales manager for more information.

## Edging



### PERMA EDGE PAVER EDGING

- Designed to float & flex with the sub base and not work independently like standard edging & spikes.
- Quick & easy to install, typically cutting edging install time down by 80%.
- Stays under the soil/mulch grade invisible edging.
- Combats the freeze/thaw cycles in cold weather; won't deteriorate in moist/humid conditions.
- Coverage per container; yields approx. 25-30 linear feet of edging per bucket.
- Packaging: 75 lb container / 34 kg bucket 35 / skid.



### ALLIANCE GATOR XTREME EDGE

- The ultimate fiber-reinforced structural edging solution for any hardscape project.
- Can be used for any traditional, open-graded, permeable, Gator Base or overlay application using concrete pavers or slabs, natural and wet cast stones.
- Offers permanent continuous lateral support.
- Packaging: 50 lb bag / 56 bags per skid.
- Coverage: 20-25 sqft coverage per bag for a 60mm paver.

## Edge Restraints



### PERMEDGE PERMEABLE PAVER EDGING RS-EDGE033

- Designed specifically for permeable pavement with open-graded base material.
- Holds pavement edges securely in place.
- Does straight and curved edges.

#### Product Information:

8' (96") length pcs.  
Weight per Unit: 2.5 lbs.  
Pieces per Pallet: 64 (72 ln. ft.)  
Freight Class: 300  
Pallet Weight: 210 lbs.  
Pallet Size: 98" l x 48" w x 50" h



#### Spikes

- 10" Round Spikes.
- About 150 spikes per case.
- **Sold in full cases only.**

### SNAPEDGE - ONE-PIECE EDGING THAT DOES IT ALL!


- Only one part required for straight runs or curved installations.
- Built-in connector fastens one piece to the next - convenient 96" size, easy to transport.
- Unique 'Snip and Flex' feature speeds installations of curves and corners without pre-planning.
- The open design allows a root system to grow through SnapEdge, further reinforcing the installation.
- Engineered to provide a strong, easy-to-install edge restraint for concrete/ clay pavers.
- Nail hole bosses are full-length cylinders. Hammer blows will not fracture or force nail heads through edging.



#### Product Information:

6'8" (80") length pcs.  
Sidewall: 1 3/8"  
Pieces per Pallet: 672 (5,376 ln. ft.)  
Pieces per Bundle: 24 (192 ln. ft.)  
Bundles per Pallet: 28  
Pallet Weight: 1395 lbs.  
Pallet Size: 98" l x 48" w x 50" h

## Drainage, Separation & Reinforcement

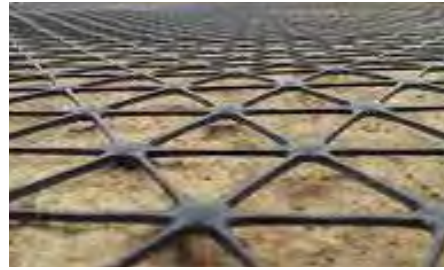

### UNILOCK DRIVEGRID™ SYSTEM

- 120' x 13' Roll,  
1,572 Sq.Ft./Roll  
56 lbs/Roll



### GATOR GRID 30-30

Gator Grid 30-30, a biaxial geotextile, provides strength, longevity, excellent stress transfer and prevents failure to the internal structure of landing areas, retaining walls and steep slopes. It has a high molecular weight as well as high-tenacity polyester yards which are woven in tension and finished with a PVC coating.

- Packaging:**
- 4' x 50' / 16 rolls per box
  - 6' x 50' / 20 rolls per pallet



### GATOR FABRIC NON-WOVEN 3.5

Gator Fabric Non-Woven 3.5 geotextile is ideal for drainage, filtration and will allow water flow in a paver or retaining wall application. It is designed for soil separation for added stability, has high strength and is dimensionally stable.

- Packaging:**
- 3' x 100' / 4 roll package
  - 6' x 100' / 12 roll package



### GATOR FABRIC WOVEN 5

Gator Fabric Woven 5 is a woven geotextile made from polypropylene yarns and can achieve higher tensile strength at low elongation. It is an excellent heavy-loading geotextile, ideal for driveways, alleyways, pathways and retaining walls.

- Packaging:**
- 4' x 100' / 4 roll package
  - 6.25' x 300' / 12 roll package



### GATOR FABRIC POLYSPUN 20 **SPECIAL ORDER**

Gator Fabric Polyspun 20 geotextile is specially formulated to resist deterioration in garden and landscape applications. It creates a barrier to reduce weed growth and allows water, fertilizer and air to pass through.

- Packaging:**
- 3' x 50' / 16 rolls per case / 64 rolls per skid
  - 3' x 100' / 9 rolls per case / 36 rolls per skid
  - 4' x 100' / 9 rolls per case / 36 rolls per skid
  - 6' x 100' / 30 rolls per case / 36 rolls per skid



## Tools & Accessories



Install up to 700 sq. ft. per hour!

- Access tight or narrow areas.
- Eliminate the need for a forklift on site.
- Reduce labor costs.
- Reduce shoulder, hand & knee pain and injury.
- Improve your bottom line.

Contact your local rep for details



MODEL MINI P



MODEL P



MODEL L



ALL TERRAIN PALLET MOVER



### PISA XL LIFTING TONG

- The Pisa XL tong makes it easier to lift and place units, especially on the base course.
- The action of lifting the handle secures the lifter and makes for easy, balanced lifting and placement.



### U-LEVEL™

- Easy to use.
- Accurate readings.
- Low maintenance.
- Works in difficult locations.
- Large working area.

A PRECISION TOOL NO HARDSCAPER SHOULD BE WITHOUT

## Base/Drainage Systems

### GATOR TILE SYSTEM

Contact Unilock for more information.



RS-ACC074-1



RS-ACC087



10oz - RS-ADH039  
28oz - RS-ADH040



RS-EDGE061



RS-ACC088



# Calculations

## AREA OF A CIRCLE

Radius (in.)	18	21	24	27	30	33	36	39	42	45	48	51	54	57
Radius (ft.)	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.235	4.50	4.75
Square Feet	7.07	9.62	12.56	15.90	19.63	23.75	28.26	33.17	38.47	44.16	50.24	56.72	63.59	70.85
Circumference (in.)	113.04	131.88	150.72	169.56	188.40	207.24	226.08	244.92	263.76	282.60	301.44	320.28	339.12	357.96
Circumference (Ft.)	9.42	10.99	12.56	14.13	15.70	17.27	18.84	20.41	21.98	23.55	25.12	26.69	28.26	29.83

Area of a circle = 3.14 x Radius x Radius

Circumference = 6.28 x Radius

## AREA CONVERSION CHART

Square Feet	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Square Meter	0.09	0.19	0.28	0.39	0.46	0.56	0.65	0.74	0.84	0.93	1.02	1.11	1.21	1.30
Square Meter	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Square Feet	10.76	21.53	32.29	43.06	53.82	64.58	75.35	86.11	96.88	107.64	118.40	129.17	139.93	150.69
Cubic Yard	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Cubic Feet	27	54	81	108	135	162	189	216	243	270	297	324	351	378

Area Square = Length x Width

Area Triangle = 1/2 Base x Height

## LINEAR DISTANCE CONVERSION CHART

Inches	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Centimeters	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	25.40	27.94	30.48	33.02	35.53
Centimeters	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Inches	0.39	0.79	1.18	1.57	1.97	2.36	2.76	3.15	3.54	3.94	4.33	4.72	5.12	5.51
Feet	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Meters	0.30	0.61	0.91	1.22	1.52	1.83	2.13	2.44	2.74	3.05	3.35	3.66	3.96	4.25
Meters	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Inches	39.37	78.74	118.11	157.48	196.85	236.22	275.59	314.96	354.33	393.70	433.07	472.44	511.81	551.18
Feet	3.28	6.56	9.84	13.12	16.40	19.69	22.97	26.25	29.53	32.81	36.09	39.37	42.65	45.93

## WEIGHT CONVERSION CHART

Pounds	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Kilograms	0.45	0.91	1.36	1.81	2.27	2.72	3.18	3.63	4.08	4.54	4.99	5.44	5.90	6.35
Kilograms	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Pounds	2.20	4.41	6.61	8.82	11.02	13.23	15.43	17.64	19.84	22.05	24.25	26.46	28.66	30.86

Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

## BEDDING MATERIALS CHART (APPROXIMATE IMPERIAL TONS)

Bedding Course												
Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0	2.3	2.5	2.8	3.0
100	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
150	0.8	1.5	2.3	3.0	3.8	4.5	5.3	6.0	6.8	7.5	8.3	9.0
200	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0
250	1.3	2.5	3.8	5.0	6.3	7.5	8.8	10.0	11.36	12.5	13.8	15.0
300	1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15.0	16.5	18.0
350	1.8	3.5	5.3	7.0	8.8	10.5	12.3	14.0	15.8	17.5	19.3	21.0
400	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.2	22.0	24.0
450	2.3	4.5	6.8	9.8	11.3	13.5	15.8	18.0	20.3	22.5	24.8	27.0
500	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0
550	2.8	5.5	8.3	11.0	13.8	16.5	19.3	22.0	24.8	27.5	30.3	33.0
600	3.0	6.0	9.0	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0
650	3.3	6.5	9.8	13.0	16.3	19.5	22.8	26.0	29.3	32.5	35.8	39.0
700	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0
750	3.8	7.5	11.36	15.0	18.8	22.5	26.3	30.0	33.8	37.5	41.3	45.0
800	4.0	8.0	12.0	16.0	20.0	24.0	28.0	32.0	36.0	40.0	44.0	48.0
850	4.3	8.5	12.8	17.0	21.3	25.5	29.8	34.0	38.3	42.5	46.8	51.0
900	4.5	9.0	13.5	18.0	22.5	27.0	31.5	36.0	40.5	45.0	49.5	54.0
950	4.8	9.5	14.3	19.0	23.8	28.5	33.3	38.0	42.8	47.5	52.3	57.0
1000	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0

## BASE DEPTH CHARTS (CUBIC YARDS)

Bedding Course												
Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.5	1.7	1.9
100	0.3	0.6	0.9	1.2	1.5	1.9	2.2	2.5	2.8	3.1	3.4	3.7
150	0.5	0.9	1.4	1.9	2.3	2.8	3.2	3.7	4.2	4.6	5.1	5.6
200	0.6	1.2	1.9	2.5	3.1	3.7	4.3	4.9	5.6	6.2	6.8	7.4
250	0.8	1.5	2.3	3.1	3.9	4.6	5.4	6.2	6.9	7.7	8.5	9.3
300	0.9	1.9	2.8	3.7	4.6	5.6	6.5	7.4	8.3	9.3	10.2	11.1
350	1.1	2.2	3.2	4.3	5.4	6.5	7.6	8.6	9.7	10.8	11.9	13.0
400	1.2	2.5	3.7	4.9	6.2	7.4	8.6	9.9	11.1	12.3	13.6	14.8
450	1.4	2.8	4.2	5.6	6.9	8.3	9.7	11.1	12.5	13.9	15.3	16.7
500	1.5	3.1	4.6	6.2	7.7	9.3	10.8	12.3	13.9	15.4	17.0	18.5
550	1.7	3.4	5.1	6.8	8.5	10.2	11.9	13.6	15.3	17.0	18.7	20.4
600	1.9	3.7	5.6	7.4	9.3	11.1	13.0	14.8	16.7	18.5	20.4	22.2
650	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.1	20.1	22.1	24.1
700	2.2	4.3	6.5	8.6	10.8	13.0	15.1	17.3	19.4	21.6	23.8	25.9
750	2.3	4.6	6.9	9.3	11.6	13.9	16.2	18.5	20.8	23.1	25.5	27.8
800	2.5	4.9	7.4	9.9	12.3	14.8	17.3	19.8	22.2	24.7	27.2	29.6
850	2.6	5.2	7.9	10.5	13.1	15.7	18.4	21.0	23.6	26.2	28.9	31.5
900	2.8	5.6	8.3	11.1	13.9	16.7	19.4	22.2	25.0	27.8	30.6	33.3
950	2.9	5.9	8.8	11.7	14.7	17.6	20.5	23.5	26.4	29.3	32.3	35.2
1000	3.1	6.2	9.3	12.3	15.4	18.5	21.6	24.7	27.8	30.9	34.0	37.0

Actual volume may vary due to type of materials, moisture content, and compaction. Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product coverage or shortage.

# FINISHES

---



**Umbriano®**  
Mottled Finish with  
ColorFusion™ and EasyClean




**Series™**  
Exposed Granite Finish



**Il Campo®**  
Brushed Finish



**Smooth**  
Premier Finish



**Flagstone**  
Premier Finish



**Antiqued**  
Timeworn Finish



**Classic**  
Thrumix Finish

## COLOR BLEND DESCRIPTIONS

COLOR NAME	DESCRIPTION
Avorio	Solid Beige/Tan
Basalt	Blueish-Black
Bavarian	Brown, Cream and Charcoal
Birch	Dark Brown, Light Brown and Cream
Black Granite	Black Granite and Charcoal
Burgundy Red	Plum with Red
Burnt Clay	Brown with Red
Cocoa Brown	Solid Dark Brown
Corvara	Light Grey/Beige
Dark Charcoal	Dark Charcoal
Dawn Mist	Grey and Tan
Desert Sand	Salmon, Buff and Charcoal
Fieldstone	Buff and Grey
Fossil	Light & Dark Grey, Chamois and White Accents
French Grey	Light Grey with White Flake
Granite	Natural and Charcoal
Limestone	Light Gray and Charcoal

COLOR NAME	DESCRIPTION
Midnight Sky	Charcoal and Black Flake
Modena	White Concrete with Black Flecks
Natural Blend	Light Grey and Medium Grey
Nevada	Chamois and Natural
Old Oak	Rust with Red
Opal Blend	Light Grey and White
Pebble Taupe	Tan with Light Brown
Rustic Red	Red and Charcoal
Sable Blend	Cream Tan Brown
Sandstone	Buff and Tan
Sierra	Charcoal, Russet and Buff
Steel Grey Blend	Dark Charcoal & Grey
Steel Mountain	Natural and Charcoal
Summer Wheat	Cream White with Pale Yellow & Beige Particles
Terra Cotta	Salmon and Charcoal
Vivanto	Dark Grey and Charcoal
Winter Marvel	White and Black Flake

# IMPORTANT NOTES

---

## UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

## TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee\* on the structural integrity of our paving stones, slabs and retaining wall units to the original purchaser of the product for residential use. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.

Excessive defective material (over the industry accepted normal of 2% for non-tumbled unit pavers) delivered to the purchaser will be replaced free of charge if a written claim is made within 5 days of delivery from the manufacturer. Such claims will not constitute reason for delaying payment. All goods shall be deemed accepted if completely installed. Inspect concrete products prior to opening bundle packaging to ensure that shape and color are as ordered. Unsatisfactory material must be available for inspection by Unilock to entitle the purchaser to any adjustment or credit. Inspect all concrete units during installation and set aside any which are chipped or cracked to use for any cut pieces required. The color of concrete products may vary significantly between production lots. Always install concrete units from several bundles simultaneously to ensure proper distribution of color. Prior to final compaction, inspect installed pavers for good color distribution. Relocate certain pavers, if necessary, to achieve desired color blend.

\*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at [unilock.com](http://unilock.com) and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

## PRODUCT HANDLING WARNING

**Bundle Straps Under Tension - Use extreme caution when removing or handling straps.** Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at [Unilock.com](http://Unilock.com).

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

## TRADEMARK & LEGAL INFORMATION

Umbriano® is a trademark of Metten Stein + Design GmbH & Co KG used under license by Unilock. Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area. Not all products shown are available at all Unilock locations. Log on to [www.unilock.com](http://www.unilock.com) for availability. Measurements throughout this portfolio are nominal.

©2024 Hengestone Holdings, Inc.



# QUALITY COMMITMENT

Unilock was the first concrete paver manufacturer in North America to offer a Lifetime Guarantee, and since then we have continued to stand behind it to ensure customers are completely satisfied with our products. With almost 2 billion stones in the ground, that's quite the commitment!

Our products are better and stronger than other brands. In fact, our internal standards of manufacturing in the USA and Canada far exceed industry standards set by ASTM (American Society for Testing and Materials) and CSA (Canadian Standards Association) and other European organizations.



## LIFETIME GUARANTEE - RESIDENTIAL

Our Transferable Lifetime Guarantee warranties the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. It covers any structural failure or deterioration of the concrete unit resulting from normal use or from the reasonable application of sodium chloride (common rock salt used for de-icing). StoneMark™ products have the same warranties as Unilock paving stones and retaining walls, but cannot be warranted against damage resulting from de-icing products.

Any materials installed and maintained

to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Proof of purchase is required. Customers are encouraged to submit receipts to us as soon as their project is complete, using the Unilock Warranty Registration Form on our website (Unilock.com).

Purchasers need to ensure that the product they purchase is appropriate for their intended application; for example, only certain thicknesses of products are appropriate for driveways. Color matching of the replacement product and/or lost time cannot be guaranteed and labor costs related to installing replacement product is not included. Unilock reserves the right to seek a professional diagnosis and opinion to determine the exact cause of the product failure. If the failure falls within our warranty parameters, Unilock will replace the defective product.

**EXCLUSIONS** - Unfortunately, some things are beyond the control of Unilock, and are therefore not covered by this warranty. These include: naturally occurring efflorescence, hazing from polymeric jointing sand, scratching and chipping resulting from snow removal or construction equipment, damage caused by natural or un-natural disasters, or negligence by anyone other than Unilock. While EasyClean helps to increase a paver's resistance to staining from various substances, it does not make our products stain-proof nor does it resist every kind of stain. The Unilock warranty also does not cover deterioration or damage as a result of poor design or poor installation practices that are contrary to specifications as laid out by ICPI (Interlocking Concrete

Pavement Institute) and the NCMA (National Concrete Masonry Association). For more information please visit [www.icpi.org](http://www.icpi.org) and [www.ncma.org](http://www.ncma.org). Additionally, please refer to the Maintenance, Color and Installation Advisories.

## MAINTENANCE ADVISORY

### 1. Cleaning and Sealing

As with anything that is outdoors, Unilock products are subject to harsh weather, dust, acid rain, leaf stains, water stains and general wear from foot or vehicular traffic. Therefore, periodic cleaning using environmentally safe detergents designed for cleaning concrete is recommended to maintain a bright, fresh appearance.

To make subsequent cleaning easier and more effective, a concrete sealer can be applied to new or cleaned products to help prevent the penetration of substances that can cause stains.

There are many types of concrete cleaners and sealers on the market. Always read the instructions carefully before using the product to make sure that it will function as expected. Testing first, in a small unobtrusive area, is always a good idea to ensure the results are acceptable. Consult your local hardscape dealer to find the products best suited for your paver or wall installation.



Visit [Unilock.com](http://Unilock.com) to register for your Transferable Lifetime Guarantee.



## 2. Winter Maintenance

Snow removal by way of metal blades on plows or shovels will scratch and chip the surface of pavers, causing permanent damage. To mitigate this risk, metal snow clearing blades must always have a polyurethane or rubber cutting edge attached when plowing pavers.

De-icing Salts - The use of de-icing products on paver surfaces is important for safety and to help mitigate snow accumulation. Most de-icing products will have some effect on concrete, even if the product label indicates that it is safe on concrete. If you must use a de-icing product, we recommend that you use Sodium Chloride (ordinary rock salt) or Calcium Chloride (for colder climates). Always apply sparingly. The use of de-icing products on StoneMark, wet-cast pavers, slabs or coping may damage the product and therefore is not recommended. Whenever possible use a coarse sand as an anti-slip measure instead of de-icing chemicals.

---

## COLOR ADVISORY

### 1. Selection

Due to the inherently variable nature of printed materials and digital monitors, Unilock cannot guarantee that products will match the color of printed or online images. Therefore, when making final product selections, decisions should be made based on actual stones which are readily available from Unilock, Authorized Contractors or Authorized Dealers. Most Unilock products are not comprised of a single color, but rather contain blended colors for a more natural appearance. This means that there will be significant color variance from stone to stone, so purchasers should view multiple units together to get a more accurate impression of the overall color.

*Note:* Unilock Natural Stone variations are outside the control of Unilock. Purchasers of natural stone must be willing to accept this inherent variability.

## 2. Pre-installation checking

Always check the label to ensure that the Unilock product delivered to your project is the product and color ordered. If there is a discrepancy, or if the product inside the packaging doesn't appear to be correct, contact your hardscape dealer before installing any pavers or wall units. If the product is installed, it indicates your acceptance of the products as delivered.

## 3. Blending

If the project requires more than one bundle of product it's always a good idea to draw product from several bundles when installing, as this ensures that any variation between bundles will be seamlessly integrated in the project. When bundles are from different production runs, random selection from multiple bundles is even more important.

## 4. Efflorescence

Efflorescence is a naturally occurring process that may appear as a white or light grey powder on the surface of concrete, clay or natural stone. It is temporary, and will disappear over time. However, if it is bothersome, an efflorescence cleaner can be used to remove it. There is no way to predict or prevent efflorescence. Because it does not compromise the structural integrity of the product, it is not covered by Unilock product warranties.

---

## INSTALLATION ADVISORY

### 1. Construction Residue

While a certain amount of dirt on pavers and walls is inevitable during the construction phase, installers are strongly encouraged to clean as they go as construction residue can embed in the surface and become difficult to remove. The slurry produced during wet-saw cutting is particularly stubborn to clean if allowed to dry on the surface of pavers. Unilock warranties do not cover stains caused by a failure to remove construction residue.

## 2. Polymeric Haze

Surface hazing caused by polymeric jointing sand is not the responsibility of Unilock. Polymeric jointing sand should only be installed by an experienced and knowledgeable contractor. Any sand that is left on the surface prior to activation will result in a haze that is very difficult and time-consuming to remove. Only the highest quality, brand name polymeric sand that is guaranteed by the manufacturer should be used.

## 3. Compaction Damage

Both smooth and textured paver surfaces can be scratched by compaction equipment used to 'flatten' a new paver installation. Therefore, metal plate compactors must be fitted with a polyethylene mat to protect the paver surface from becoming scratched, or a superior option is to use a rubber-roller compactor instead. Damage to product surfaces caused by failure to follow these instructions is not covered by Unilock product warranties.

---

## FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

# OHIO PRODUCT DIRECTORY

## UNIT PAVERS

Product	Page	Finish	Pedestrian	Residential Vehicular	Commercial Vehicular	Environmental	For Borders & Accents
Artline™	4	S	✓				✓
Beacon Hill™ Flagstone	5	F	✓				
Beacon Hill™ Smooth	6	SM	✓				
Boulevard™	7	F	✓	✓			✓
Bristol Valley*	8	S	✓				
Brussels Block*	9	W	✓	✓			✓
Camelot™	10	S	✓	✓	✓		✓
Copthorne°	11	T	✓	✓			✓
Courtstone°	12	C	✓	✓			✓
Eco-Line™	13	S	✓	✓	✓	✓	
Eco-Optiloc™	14	S	✓	✓	✓	✓	
Eco-Priora™	15	B	✓	✓	✓	✓	
Eco-Promenade™	16	S	✓	✓	✓	✓	
Granito™	17	SM	✓	✓			
Hex™	18	S	✓	✓			
Hollandstone™	19	S	✓	✓	✓		✓
Holland Premier °	20	S	✓	✓	✓		✓
Il Campo°	21	B	✓	✓	✓		✓
Mattoni™	22	T	✓	✓			✓
Natural Stone	23		✓				
Nordic Cobble™	27	WS	✓	✓	✓		✓
Optiloc™	28	S	✓	✓	✓		
Porcelain	29		✓				
Promenade™	31	S	✓	✓	✓		
Promenade EcoTerra™	33	SM	✓	✓	✓		
Richcliff°	34	F	✓	✓			✓
Series™	35	WS	✓	✓	✓		✓
Skyline™	36	S	✓				
Thornbury™	37	F	✓	✓	✓		
Town Hall*	38	T	✓	✓	✓	✓	✓
Treo° Premier	39	F	✓	✓			✓
Treo° Smooth	40	SM	✓	✓			✓
Tribeca Cobble	41	C	✓	✓			✓
Turfstone™	42	S		✓		✓	
Umbriano°	43	SZ	✓	✓	✓		✓
Westport™	46	F	✓	✓			✓

## RETAINING WALLS

Product	Page	Finish	Gardens	Retaining Walls	Steps	Seatwalls	Pillars
Brussels Dimensional System™	47	W	✓	✓	✓	✓	✓
Dimensional Smooth™	48	SM	✓	✓	✓	✓	✓
DuraHold°	49	S		✓			
DuraHold2°	51	S		✓			
Estate Wall™	52	SP/W	✓	✓	✓	✓	✓
Lineo™ Dimensional Stone	53	SZ	✓	✓	✓	✓	✓
Pisa2° & Pisa2 XL	54	SP	✓	✓	✓	✓	✓
Pisa Smooth™	55	SP	✓	✓	✓	✓	✓
Rivercrest® Wall	56	S	✓	✓	✓	✓	✓
RomanPisa™	57	SP/W	✓	✓	✓	✓	✓
RomanStack™	58	SP/W	✓				
SienaEdge°	59			✓	✓		
SienaStone°	60	SP		✓	✓		
Split'nStack™	61	SP	✓				
U-Cara°	62	Various	✓	✓	✓	✓	✓

Finishes: B=Brushed; C=Cobblestone; D=Dimpled; DW=Dimpled and Weathered; F=Flagstone; S=Standard; SM=Smooth; SZ=Smooth Zero Bevel; SP=Split; SP/W=Split and Weathered; T=Timeworn; W=Weathered; WS=Washed. This application chart should only be used as a guide. Site conditions, base materials, pattern and frequency of use may vary the performance of various types and styles of products.

# ADD 3D LANDSCAPE DESIGN TO YOUR TOOLBOX



## **U**VISION ALLOWS YOU TO VISUALLY COMMUNICATE YOUR DESIGN IDEAS TO YOUR CLIENT IN BOTH 2D PLAN VIEW AND 3D PERSPECTIVE VIEW

Whether you're coming from the hand-drawn world, or a 2D AutoCAD background, the biggest impact you'll see from adopting this new 3D design software is in how well the client will understand the project you are selling. **Uvision 3D Landscape Creator is an easy-to-use software tool that helps bring your designs ideas to life.**



**SCAN THE QR CODE FOR MORE INFORMATION OR TO DOWNLOAD A FREE 30-DAY TRIAL OF UVISION 3D LANDSCAPE CREATOR.**





TRANSFORMING HARDSCAPES

UNILOCK.COM | 1-800-UNILOCK

# Let's **BUILD YOUR BUSINESS TOGETHER.**

**CONTACT 1-800-UNILOCK OR VISIT UNILOCK.COM TO  
CONNECT WITH YOUR LOCAL TERRITORY MANAGER**

**BOSTON**  
(508) 278-4536

**CHICAGO**  
(630) 892-9191

**MILWAUKEE**  
(262) 742-3890

**KANSAS**  
(913) 417-7985

**MICHIGAN**  
(248) 437-7037

**NEW YORK**  
(845) 278-6700

**MID-ATLANTIC**  
(202) 798-2060

**ONTARIO**  
(416) 646-9000

**CINCINNATI/KY/TN**  
(513) 202-0219

**OHIO/WESTERN PA/  
WNY&CNY**  
(330) 927-4000

