2016 PRODUCT DATA

UNILOCK®
DESIGNED TO CONNECT™

THE UNILOCK® DIFFERENCE

WHEN HELD, TOUCHED AND VIEWED SIDE BY SIDE, UNILOCK PRODUCTS LOOK AND FEEL DIFFERENT, AND SET THE STANDARD FOR QUALITY.

For over 40 years we've been committed to investing in the future of landscape design. Today, we continue to lead the industry with the best selection of quality products and support. We've made this commitment because at Unilock, we believe that the outside of your home should be as beautiful, functional and welcoming as the inside of your home. So, it's no surprise more families are choosing to work with architects, designers and craftsmen who recommend our products.

If you're planning to landscape your home, we're confident that you'll be inspired by all that Unilock has to offer.

ENDURING COLOR

Concentrated color and special wear-resistant materials

UNITED WITH

STRENGTH

Coarser foundation that gives the stone its strength

ENDURACOLOR™

EnduraColor products deliver durability through a perfect union: **long-lasting color united with permanent strength.**

The top portion of each stone is engineered with concentrated color and special wear-resistant materials. This is permanently united with the stone's base - a sturdier, coarser foundation designed for remarkable strength.

ENDURACOLOR™ PLUS ARCHITECTURAL FINISHES

EnduraColor Plus Architectural Finishes promise long-lasting beauty through a proprietary blend of exclusive and superior ingredients.

WHAT IS THE 'PLUS' IN ENDURACOLOR PLUS?

A complex blend of granite and quartz, some of nature's highest performing minerals, are combined to create ultra-realistic surface textures and unique style options that are exceptionally durable.

A NEW STANDARD FOR EVERLASTING BEAUTY.

This symbol indicates that the product facilitates the flow of water from the surface into the joints and into the ground below. Unilock's exclusive line of permeable pavement products are recognized and awarded with internationally accepted Leadership in Energy and Environmental Design (LEED) credits required by the Green Building Rating System™ to certify green building construction.

LOOK FOR THESE ADDITIONAL TECHNOLOGIES IN ENDURACOLOR PLUS ARCHITECTURAL FINISHES:

Reala™ Surface Technology
Ultra-realistic textures cast from natural stone, brick and historic cobblestones.

ColorFusion™ Technology
A proprietary technology that disperses color randomly for a natural, granite-like appearance.

EasyClean™ Stain Resistance
An integral surface protection that allows for easier cleanup of spills when they happen, and before a stain can develop.

Ultima™ Concrete Technology
For heavy traffic loads, this proprietary manufacturing process creates pavers and walls with up to four times the strength of poured concrete.

TABLE OF CONTENTS

PAGE	UNIT PAVERS
2	Anchorlock®
2	Artline™
3	Beacon Hill Flagstone™
3	Bristol Valley™
4	Brussels Block®
4	Brussels Fullnose™
5	Copthorne®
5	Courtstone®
6	Dura-Mat™
6	Eco-Optiloc™
7	Eco-Priora™
7	Europaver® NOW ENDURACOLOR
8	Hollandstone™ / Double Holland™
9	Il Campo®
9	NighTec®
10	Olde Greenwich Cobble®
10	Optiloc®
11	Promenade™ Paver
11	Richcliff®
12	Rivenstone®
12	Senzo™ NEW!
13	Series 3000®
13	Stonehenge®
14	Thornbury™
14	Town Hall™
15	Umbriano®
16	Turfstone™
16	Uni Eco-Stone®
16	Unigranite®

EUROPAVER™

SENZO™

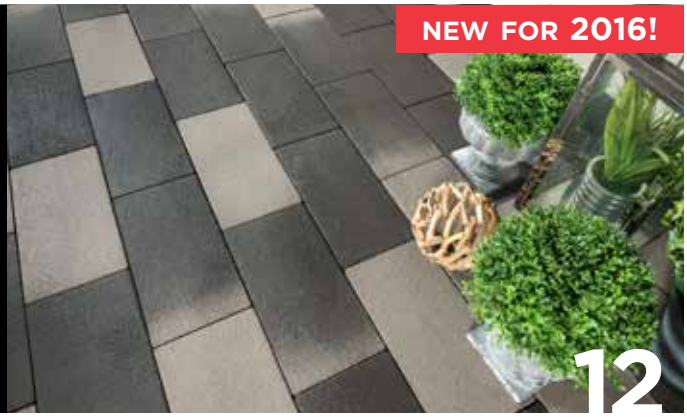

BELMURO™ WALL

PAGE	RETAINING WALLS
17	Belmuro™ Wall NEW!
18	Brussels Dimensional System™
19	DuraHold®
20	DuraHold2®
21	Estate Wall®
22	Ledgestone™ Pillar Caps and Coping
22	Lineo Dimensional Stone™
24	Pisa2®
25	Rivercrest® Wall
27	RomanPisa®
28	SienaStone®
29	Split'n Stack®

PAGE	PRODUCT & INSTALLATION
30	Laying Patterns
33	Unilock Elements
34	Fire Rock Fireplace
35	Lighting Systems
36	Unicare® Product Line & Accessories
39	Edge Restraints
40	Calculation Chart
41	Important Notes
42	Finishes & Color Blends
43	Product Directory

ANCHORLOCK®

STANDARD FINISH
CUSTOM FINISH AVAILABLE

ANCHORLOCK
8⅞" x 8⅞" x 3⅛"
22.5cm x 22.5cm x 8cm
SPECIAL ORDER

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Random Bundle:		78.80	11.26			7	-	-	-	-	-	-	-	-	-	-	412	-	2,883
1/3 Stone	3⅛" (8cm)	-	-	-	0.134	-	-	-		-	-		-	7.46		14	-	-	-
Std Stone	3⅛" (8cm)	-	-	-	0.418	-	-	-		-	-		-	2.39		182	-	-	-

Notes: Special Order from standard colors - Lead time required. This product is optimized for mechanical installation. Full bundles only. All measurements are nominal. Colors shown should be used only as a guide. Colors should always be chosen from actual samples.

Internal Use Only. ANC MI

ARTLINE™

ENDURACOLOR™

GRANITE

SIERRA

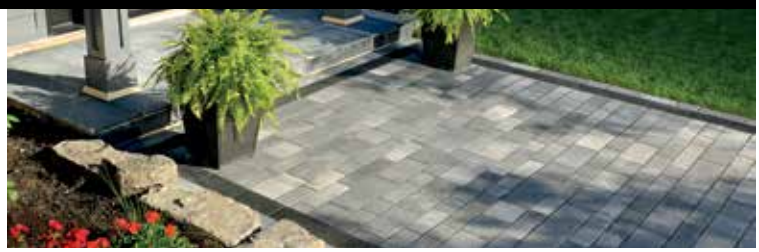

6¾" x 4⅞" x 2¾"
(16.9cm x 12.5cm x 7cm)

10⅜" x 4⅞" x 2¾"
(26.25cm x 12.5cm x 7cm)

13⅜" x 4⅞" x 2¾"
(33.75cm x 12.5cm x 7cm)

17¾" x 4⅞" x 2¾"
(45cm x 12.5cm x 7cm)

8⅞" x 7½" x 2¾"
(22.5cm x 18.75cm x 7cm)

13⅜" x 7½" x 2¾"
(33.75cm x 18.75cm x 7cm)

17¾" x 7½" x 2¾"
(45cm x 18.75cm x 7cm)

Random Bundle
Individual units cannot be sold separately

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Random Bundle:		93.25	11.66			8	-	-	-	-	0.483	-	192.9	-	-	-	373	-	2,986
A: 6¾" x 4⅞"	2¾" (7cm)	-	-	-	0.227	-	-	-		-	0.410		17.7	4.40		32	-	-	-
B: 10⅜" x 4⅞"	2¾" (7cm)	-	-	-	0.353	-	-	-		-	0.410		27.6	2.83		32	-	-	-
C: 13⅜" x 4⅞"	2¾" (7cm)	-	-	-	0.454	-	-	-		-	0.410		35.4	2.20		32	-	-	-
D: 17¾" x 4⅞"	2¾" (7cm)	-	-	-	0.605	-	-	-		-	0.410		47.2	1.65		32	-	-	-
E: 8⅞" x 7½"	2¾" (7cm)	-	-	-	0.454	-	-	-		-	0.615		23.6	2.20		32	-	-	-
F: 13⅜" x 7½"	2¾ (7cm)	-	-	-	0.681	-	-	-		-	0.615		17.7	1.47		16	-	-	-
G: 17¾" x 7½"	2¾" (7cm)	-	-	-	0.908	-	-	-		-	0.615		23.6	1.10		16	-	-	-

Notes: Product sold at factory in full bundle quantities. All measurements are nominal. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Read the Polymeric Sand advisory on page 37.

Internal Use Only. ART ON

To create a one-of-a-kind custom look, Artline is also available in these three finishes:

IL CAMPO® FINISH

GRANITE BLEND
SPECIAL ORDER
MINIMUM QUANTITIES APPLY

SERIES 3000® FINISH

BLACK GRANITE
SPECIAL ORDER
MINIMUM QUANTITIES APPLY

UMBRIANO® FINISH

MIDNIGHT SKY
SPECIAL ORDER
MINIMUM QUANTITIES APPLY

BEACON HILL FLAGSTONE™

ENDURACOLOR™

BAVARIAN

SIERRA

SYCAMORE



LARGE RECTANGLE
21¼" x 14⅛" x 2⅜"
54cm x 36cm x 6cm

SQUARE
14⅛" x 14⅛" x 2⅜"
36cm x 36cm x 6cm

SMALL RECTANGLE
7¹⁄₁₆" x 14⅛" x 2⅜"
18cm x 36cm x 6cm

Random Bundle

Individual units cannot be sold separately

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Random Bundle:		93.62	10.40			9	-	-	-	-	-	-	-	0.77	-	72	285	-	2,569
Large Rectangle	2⅜" (6cm)	-	-	-	2.093	-	-	-		-	-		-	0.48		18	-	-	-
Small Rectangle	2⅜" (6cm)	-	-	-	0.698	-	-	-		-	-		-	1.43		27	-	-	-
Square	2⅜" (6cm)	-	-	-	1.395	-	-	-		-	-		-	0.72		27	-	-	-

Notes: Product sold at factory in full bundle quantities. Product is shipped on skids. All measurements are nominal. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Product is not intended for vehicular applications. Read the Polymeric Sand advisory on page 37. Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing.

Internal Use Only.BHF MI

BRISTOL VALLEY™

ENDURACOLOR™

ALMOND GROVE

GRANITE

SIERRA



LARGE RECTANGLE
21¼" x 14⅛" x 2⅜"
54cm x 36cm x 6cm

SQUARE
14⅛" x 14⅛" x 2⅜"
36cm x 36cm x 6cm

SMALL RECTANGLE
7¹⁄₁₆" x 14⅛" x 2⅜"
18cm x 36cm x 6cm

Random Bundle

Individual units cannot be sold separately

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Random Bundle		93.62	10.40			9	-	-	-	-	-	-	-	0.77	-	72	285	-	2,569
Large Rectangle	2⅜" (6cm)	-	-	-	2.093	-	-	-		-	-		-	0.48		18	-	-	-
Small Rectangle	2⅜" (6cm)	-	-	-	0.698	-	-	-		-	-		-	1.43		27	-	-	-
Square	2⅜" (6cm)	-	-	-	1.395	-	-	-		-	-		-	0.72		27	-	-	-

Notes: Product sold at factory in full bundle quantities. All measurements are nominal. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Product is not intended for vehicular applications. Read the Polymeric Sand advisory on page 37.
Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing.

Internal Use Only. BRV ON

BRUSSELS BLOCK®

COFFEE CREEK

DESERT SAND

LIMESTONE

MAHOGANY ASH

SANDSTONE

XL STONE
8¼" x 13¼" x 2¾"
20.8cm x 34.8cm x 7cm

STANDARD STONE
6⅞" x 8¼" x 2¾"
17.3cm x 20.8cm x 7cm

HALF STONE
4⅛" x 6⅞" x 2¾"
10.4cm x 17.8cm x 7cm

	Unit	SqFt Per				Per Bundle		Soldier LnFt Per			Sailor LnFt per			Units Per			Lbs Per		
Stones & Bundling	Thickness	Bundle	Layer	Section	Stone	Layers	Sections	SqFt	Section	Bundle	SqFt	Section	Bundle	SqFt	Section	Bundle	Layer	Section	Bundle
Half	2¾" (7cm)	99.79	12.47	14.26	0.198	8	7	0.580	24.6	172.0	0.339	-	294.3	5.05	72	504	399	456	3,195
Standard	2¾" (7cm)	94.90	11.86	15.82	0.395	8	6	0.697	22.7	136.2	0.579	-	163.8	2.53	40	240	380	506	3,039
XL	2¾" (7cm)	95.66	9.57	31.89	0.797	10	3	1.168	27.3	81.9	0.698	-	137.0	1.25	40	120	306	1,021	3,063

Notes: Product sold at factory in full bundle quantities. Ask your Unilock dealer about purchasing lesser quantities as necessary. All measurements are nominal. Colors shown should be used only as a guide. Colors should always be chosen from actual samples.

Internal Use Only. BBK MI

BRUSSELS FULLNOSE™

COFFEE CREEK

DESERT SAND

LIMESTONE

MAHOGANY ASH

SANDSTONE

STANDARD
6" x 12" x 2¾"
15cm x 30cm x 7cm

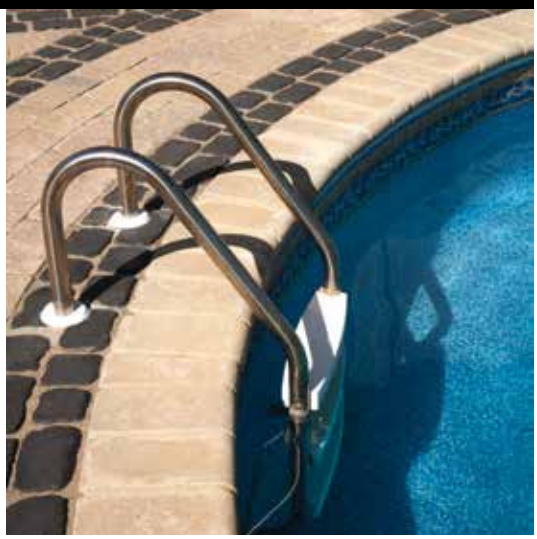

	Unit	SqFt Per				Per Bundle		Soldier LnFt Per			Sailor LnFt per			Units Per			Lbs Per		
Stones & Bundling	Thickness	Bundle	Layer	Section	Stone	Layers	Sections	SqFt	Section	Bundle	SqFt	Section	Bundle	SqFt	Section	Bundle	Layer	Section	Bundle
Standard	2¾" (7cm)	96.00	12.00	24.00	0.500	8	4	1.016	23.6	94.5	-	-	-	2.00	48	192	384	769	3,075

Notes: Can be used to create mantels for outdoor fireplaces and counter edging for outdoor counters. Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. All measurements are nominal. Colors shown should be used only as a guide. Colors should always be chosen from actual samples.

Internal Use Only. BFN MI

COPTHORNE®

ENDURACOLOR PLUS ARCHITECTURAL FINISHES

BURGUNDY RED

BURNT CLAY

OLD OAK

BASALT

3 COLOR BLEND
Sold Separately/Blended on Site

STANDARD
2½" x 7⅞" x 2⅜"
6.5cm x 20cm x 6cm

PRODUCT TECHNOLOGY

Reala™ Surface Technology

Ultra-realistic textures cast from natural stone, brick and historic cobblestones.

Ultima™ Concrete Technology

This proprietary manufacturing process creates pavers and walls with up to four times the strength of poured concrete.

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
2.5" x 8"	2⅜" (6cm)	89.20	11.15		0.149	8	-	0.708	-	126.0	0.227	-	393.7	6.73	-	600	294	-	2.349

Notes: Product sold at factory in full bundle quantities on a returnable skid. All measurements are nominal. Important: Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Read the Polymeric Sand advisory on page 37. Contact Unilock for information.

Internal Use Only. COP ON

COURTSTONE®

ENDURACOLOR PLUS ARCHITECTURAL FINISHES

BASALT

BELGIAN BLUE

DAWN MIST

PEBBLE TAUPE

BASALT/
BELGIAN BLUE
Sold Separately/
Blended on Site

DAWN MIST/
PEBBLE TAUPE
Sold Separately/
Blended on Site

PRODUCT TECHNOLOGY

Reala™ Surface Technology

Ultra-realistic textures cast from natural stone, brick and historic cobblestones.

Ultima™ Concrete Technology

This proprietary manufacturing process creates pavers and walls with up to four times the strength of poured concrete.

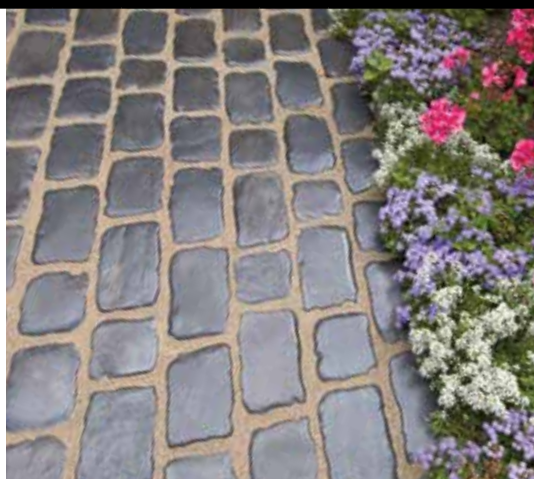

XL RECTANGLE
5⅛" x 8⅜" x 2⅜"
13cm x 21.5cm x 6cm

LARGE RECTANGLE
5⅛" x 7¼" x 2⅜"
13cm x 18.5cm x 6cm

RECTANGLE
5⅛" x 6½" x 2⅜"
13cm x 16.5cm x 6cm

SMALL RECTANGLE
5⅛" x 5¾" x 2⅜"
13cm x 14.5cm x 6cm

SQUARE
5⅛" x 5⅛" x 2⅜"
13cm x 13cm x 6cm

Random Bundle
Individual units cannot be sold separately

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Random Bundle		98.30	12.29			8	-	0.600	-	163.8	0.444	-	221.5	-	-	-	291	-	2,326
Large Rectangle	2⅜" (6cm)	-	-	-	0.259	-	-	0.607		27.3	0.427		38.8	3.86		64	-	-	-
Rectangle	2⅜" (6cm)	-	-	-	0.231	-	-	0.541		27.3	0.427		34.6	4.33		64	-	-	-
Small Rectangle	2⅜" (6cm)	-	-	-	0.203	-	-	0.476		27.3	0.427		30.4	4.93		64	-	-	-
Square	2⅜" (6cm)	-	-	-	0.182	-	-	0.427		27.3	0.427		27.3	5.50		64	-	-	-
XL Rectangle	2⅜" (6cm)	-	-	-	0.301	-	-	0.705		54.6	0.427		90.3	3.32		128	-	-	-

Notes: Product sold at factory in full bundle quantities on a returnable skid. All measurements are nominal. Important: Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Read the Polymeric Sand advisory on page 37. Contact Unilock for information. Colors shown should be used only as a guide. Colors should always be chosen from actual samples.

Internal Use Only. CRT ON

DURA-MAT™

NATURAL

STANDARD
19¾" x 19¾" x 4"
50cm x 50cm x 10cm
SPECIAL ORDER

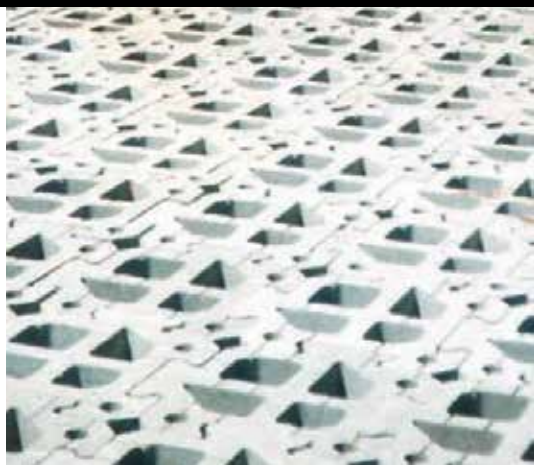

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Standard	4" (10cm)	78.40	11.20		2.800	7	-	-	-		-	-	-	0.36	-	28	320	-	2,242

Notes: Sold in full bundles only. Product is shipped on skids. All measurements are nominal. Colors shown should be used only as a guide. Colors should always be chosen from actual samples.

Internal Use Only. DMT ON

ECO-OPTILOC™

STANDARD FINISH

STANDARD
10¼" x 10¼" x 3⅛"
26cm x 26cm x 8cm
SPECIAL ORDER

CUSTOM COLORS & FINISHES AVAILABLE

STANDARD FINISH



WASHED FINISH



BRUSHED FINISH

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Standard	3⅛" (8cm)	64.33	9.19		0.511	7	-	-	-		-	-	-	1.96	-	126	336	-	2,353

Notes: Special Order from standard colors - lead time required. This product is optimized for mechanical installation. Product sold at factory in full bundle quantities. All measurements are nominal. Colors shown should be used only as a guide. Colors should always be chosen from actual samples.

Internal Use Only. EOP MI

ECO-PRIORA™ STANDARD & IL CAMPO® FINISH

ENDURACOLOR™

BEECHWOOD
STANDARD FINISH
(NOT ENDURACOLOR™)

HERITAGE BROWN
IL CAMPO 'BRUSHED' FINISH (ENDURACOLOR™)
SPECIAL ORDER

SANTA FE
IL CAMPO 'BRUSHED' FINISH (ENDURACOLOR™)
SPECIAL ORDER

CUSTOM COLORS & FINISHES AVAILABLE

STANDARD FINISH



WASHED FINISH



BRUSHED FINISH

STANDARD FINISH

RECTANGLE
5" x 10" x 3⅛"
12cm x 24cm x 8cm

IL CAMPO TEXTURE

RECTANGLE
5" x 10" x 3⅛"
12cm x 24cm x 8cm

	Unit	SqFt Per				Per Bundle		Soldier LnFt Per			Sailor LnFt per			Units Per			Lbs Per		
Stones & Bundling	Thickness	Bundle	Layer	Section	Stone	Layers	Sections	SqFt	Section	Bundle	SqFt	Section	Bundle	SqFt	Section	Bundle	Layer	Section	Bundle
10" x 10"	3⅛" (8cm)	86.60	12.37		0.619	7	-	0.786	-	110.2	0.786	-	110.2	1.62	-	140	443	-	3,098
5" x 10"	3⅛" (8cm)	74.60	10.66		0.304	7	-	0.773	-	96.5	0.387	-	192.9	3.28	-	245	360	-	2,518

Notes: *Special Order from standard colors- Lead time required. Product sold at factory in full bundle quantities. All measurements are nominal.
The color Beechwood is not Enduracolor. Colors shown should be used only as a guide. Colors should always be chosen from actual samples.
Important: Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Specially graded aggregates must be used for the joints. Contact Unilock for information.

Internal Use Only. EPA ON

EUROPAVER®

NOW IN ENDURACOLOR™

ALMOND GROVE
NEW FOR 2016

GRANITE BLEND
NEW FOR 2016

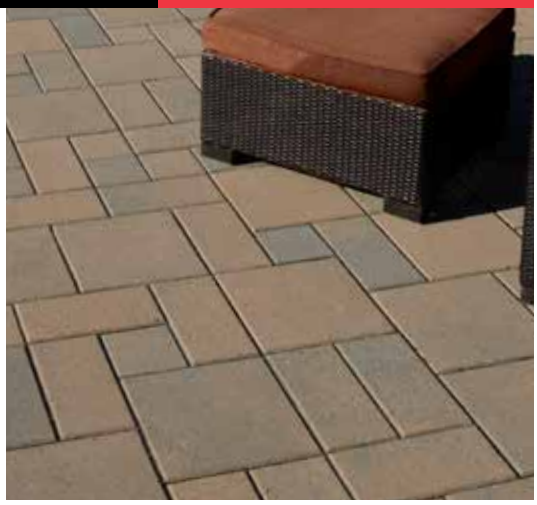



12" x 12" x 2¾"
30cm x 30cm x 7cm

6" x 12" x 2¾"
15cm x 30cm x 7cm

6" x 6" x 2¾"
15cm x 15cm x 7cm

Random Bundle
Individual units cannot be sold separately

	Unit	SqFt Per				Per Bundle		Soldier LnFt Per			Sailor LnFt per			Units Per			Lbs Per		
Stones & Bundling	Thickness	Bundle	Layer	Section	Stone	Layers	Sections	SqFt	Section	Bundle	SqFt	Section	Bundle	SqFt	Section	Bundle	Layer	Section	Bundle
Random Bundle:		93.04	11.63			8	-	-	-	-	-	-	-	1.81	-	168	380	-	3,041
12" x 12"	2¾" (7cm)	-	-	-	0.969	-	-	-		-	-		-	1.03		56	-	-	-
6" x 12"	2¾" (7cm)	-	-	-	0.484	-	-	-		-	-		-	2.06		48	-	-	-
6" x 6"	2¾" (7cm)	-	-	-	0.242	-	-	-		-	-		-	4.13		64	-	-	-

Notes: Product is sold at factory in full bundle quantities. Ask your Unilock dealer about purchasing lesser quantities as necessary. All measurements are nominal. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Read the Polymeric Sand advisory on page 37.
Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing.

Internal Use Only. EUP MI

HOLLANDSTONE™/ DOUBLE HOLLAND™

BEECHWOOD

CHARCOAL

GRANITE

MAHOGANY

RUSTIC RED**

SANDSTONE

ST. CLAIR

TERRA COTTA**

HOLLANDSTONE
4″ x 8″ x 2⅜″
10cm x 20cm x 6cm



DOUBLE HOLLAND
8″ x 8″ x 2⅜″
20cm x 20cm x 6cm

	Unit	SqFt Per				Per Bundle		Soldier LnFt Per			Sailor LnFt per			Units Per			Lbs Per		
Stones & Bundling	Thickness	Bundle	Layer	Section	Stone	Layers	Sections	SqFt	Section	Bundle	SqFt	Section	Bundle	SqFt	Section	Bundle	Layer	Section	Bundle
8” x 8”	2⅜” (6cm)	94.30	10.48	15.72	0.437	9	6	0.665	23.6	141.7	0.665	-	141.7	2.29	36	216	294	442	2,650
4” x 8”	2⅜” (6cm)	106.40	11.82	17.73	0.219	9	6	0.667	26.6	159.4	0.334	-	318.9	4.57	81	486	324	487	2,920
4” x 8”	3⅛” (8cm)	82.50	11.79	13.75	0.218	7	6	0.665	20.7	124.0	0.333	-	248.0	4.58	63	378	426	497	2,985

Hollandstone is available in all listed colors. Double Holland is available in marked colors (**). Colors shown should be used only as a guide. Colors should always be chosen from actual samples.
Notes: Hollandstone and Double Holland are all dimensionally compatible. 3⅛″ (8cm) product produced on a job lot basis. Minimum quantities apply. Contact your territory manager. See terms and conditions of sale. Product sold at factory in full bundle quantities. Ask your Unilock dealer about purchasing lesser quantities as necessary. All measurements are nominal.

Internal Use Only. HOL MI

IL CAMPO®

ENDURACOLOR™

COFFEE CREEK*

HERITAGE BROWN

SANTA FE*

DARK CHARCOAL**

Granite Blend is also available in Artline™ sizes.

SPECIAL ORDER - MINIMUM QUANTITIES APPLY.
See page 2 for more information.



12″ x 12″ x 2¾″
30cm x 30cm x 7cm

4″ x 12″ x 2¾″
10cm x 30cm x 7cm

6″ x 8″ x 2¾″
15cm x 20cm x 7cm

Random Bundle

Individual units cannot be sold separately

6″ x 8″ x 2¾″
15cm x 20cm x 7cm

6″ x 6″ x 2¾″
15cm x 15cm x 7cm

4″ x 6″ x 2¾″
10cm x 15cm x 7cm

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
12" x 12"	2¾" (7cm)	93.04	11.63	23.26	0.969	8	4	0.985	23.6	94.5	0.985	-	94.5	1.03	24	96	393	785	3,140
4" x 12"	2¾" (7cm)	93.04	11.63	23.26	0.323	8	4	0.985	23.6	94.5	0.328	-	283.5	3.10	72	288	393	785	3,140
6" x 8"	2¾" (7cm)	93.00	11.63	15.50	0.323	8	6	0.656	23.6	141.7	0.492	-	189.0	3.10	48	288	392	523	3,139
Random Bundle		89.12	11.14			8	-	0.574	-	155.2	0.464	-	192.1	3.78	-	337	376	-	3,008
4" x 6"	2¾" (7cm)	-	-	-	0.161	-	-	0.492		21.3	0.328		32.0	6.19		65	-	-	-
6" x 6"	2¾" (7cm)	-	-	-	0.242	-	-	0.492		55.1	0.492		55.1	4.13		112	-	-	-
6" x 8"	2¾" (7cm)	-	-	-	0.323	-	-	0.656		78.7	0.492		105.0	3.10		160	-	-	-

Notes: *Coffee Creek and Santa Fe require lead time and are sold at factory in full bundle quantities only. ** Dark Charcoal is only available in 6″ x 8″ rectangle. Lead time required. Random bundle is sold in full bundles only. Minimum quantities apply. Can be mechanically installed. All measurements are nominal. Colors shown should be used only as a guide. Colors should always be chosen from actual samples.
Important: Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Read the Polymeric Sand advisory on page 37. Contact Unilock for information.

Internal Use Only. ILC ON

NIGHTEC®

AQUA

NIGHTEC SQUARE
4″ x 4″ x 3⅛″
10cm x 10cm x 8cm

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
4" x 4"	3⅛" (8cm)	-	-	-	0.111	-	-	-	-	-	-	-	-	9	-	-	-	-	-

Notes: Product is sold by each unit. All measurements are nominal. Colors shown should be used only as a guide. Colors should always be chosen from actual samples.

Internal Use Only. NGT EU

OLDE GREENWICH COBBLE®

BEECHWOOD

GRANITE

RUSTIC RED

TERRA COTTA

SMALL RECTANGLE
2⅜" x 4¾" x 2⅜"
6cm x 12cm x 6cm

SQUARE
4¾" x 4¾" x 2⅜"
12cm x 12cm x 6cm

Square Bundle
Individual units cannot be sold separately

MEDIUM RECTANGLE
4¾" x 7" x 2⅜"
12cm x 18cm x 6cm

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Rectangle	2⅜" (6cm)	78.10	9.76		0.232	8	-	0.590	-	132.3	0.394	-	198.4	4.30	-	336	273	-	2,186
Random Bundle		77.90	9.74			8	-	0.393	-	198.4	0.344	-	226.8	-	-	-	273	-	2,183
Small Rectangle	2⅜" (6cm)	-	-	-	0.078	-	-	0.394		28.3	0.197		56.7	12.90		144	-	-	-
Square	2⅜" (6cm)	-	-	-	0.155	-	-	0.394		170.1	0.394		170.1	6.45		432	-	-	-

Notes: Product sold at factory in full bundle quantities. All measurements are nominal. Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Contact your Unilock representative for additional information.

Internal Use Only. OGC MI

OPTILOC®

CUSTOM COLORS & FINISHES AVAILABLE

STANDARD FINISH



WASHED FINISH



BRUSHED FINISH

STANDARD
10¼" x 10¼" x 3⅛"
26cm x 26cm x 8cm
SPECIAL ORDER

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Standard	3⅛" (8cm)	67.66	9.67		0.537	7	-	-	-		-	-	-	1.86	-	126	361	-	2,525

Notes: Special Order from standard colors - Lead time required. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. This product is optimized for mechanical installation. Full bundles only. Minimum quantities may apply. 126 units per bundle is made up of 119 whole units, 7⅓ units and 7⅔ units. All measurements are nominal.

Internal Use only. OPT MI

PROMENADE™ PAVER

ENDURACOLOR™ & ENDURACOLOR™ PLUS ARCHITECTURAL FINISHES



IL CAMPO® FINISH



SERIES 3000® FINISH

UMBRIANO® FINISH

ENDURACOLOR™ FINISH

8″ x 24″ x 4″
(20cm x 60cm x 10cm)
SPECIAL ORDER

4″ x 16″ x 4″
(10cm x 40cm x 10cm)
SPECIAL ORDER

4″ x 12″ x 4″
(10cm x 30cm x 10cm)
SPECIAL ORDER

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
4” x 12”	4” (10cm)	58.13	9.69		0.363	6	-	1.107	-	52.5	0.369	-	157.5	2.75	-	160	438	-	2,630
4” x 16”	4” (10cm)	51.67	10.33		0.431	5	-	1.312	-	39.4	0.328	-	157.5	2.32	-	120	468	-	2,338
8” x 24”	4” (10cm)	51.67	10.33		1.292	5	-	1.969	-	26.2	0.656	-	78.7	0.77	-	40	468	-	2,338

Notes: Special Order - Lead time required. Promenade Paver is not inventoried but is produced on demand for your project. See your Unilock Sales Representative for choices of colors and finishes to complement your design requirements. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Product sold at factory in full bundle quantities. All measurements are nominal.
Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing.

Internal Use Only. PMD_ON

RICHCLIFF®

ENDURACOLOR™ PLUS ARCHITECTURAL FINISHES

DAWN MIST

PEBBLE TAUPE

DAWN MIST/PEBBLE TAUPE
Sold Separately/
Blended on Site

PRODUCT TECHNOLOGY

Reala™ Surface Technology

Ultra-realistic textures cast from natural stone, brick and historic cobblestones.

Ultima™ Concrete Technology

This proprietary manufacturing process creates pavers and walls with up to four times the strength of poured concrete.



LARGE RECTANGLE
12″ x 9″ x 2⅜″
30cm x 22.6cm x 6cm



SQUARE
9″ x 9″ x 2⅜″
22.6cm x 22.6cm x 6cm



SMALL RECTANGLE
6″ x 9″ x 2⅜″
15cm x 22.6cm x 6cm

Random Bundle
Individual units cannot be sold separately

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Random Bundle		90.30	11.29		0.564	8	-	-	-	-	0.673	-	134.2	1.77	-	160	309	-	2,472
Large Rectangle	2⅜” (6cm)	-	-	-	0.730	-	-	-		-	0.741		63.0	1.37		64	-	-	-
Small Rectangle	2⅜” (6cm)	-	-	-	0.365	-	-	-		-	0.492		47.5	2.74		64	-	-	-
Square	2⅜” (6cm)	-	-	-	0.550	-	-	-		-	0.741		23.7	1.82		32	-	-	-

Notes: Product sold at factory in full bundle quantities on a returnable skid. All measurements are nominal. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Important: Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Read the Polymeric Sand advisory on page 37. Contact Unilock for information.

Internal Use Only. RIC ON

RIVENSTONE™

STONEMARK™

BLUESTONE

CANYON

PRODUCT TECHNOLOGY

Reala™ Surface Technology

Ultra-realistic textures cast from natural stone, brick and historic cobblestones.



24″ x 24″ x 1¾″
60cm x 60cm x
4.5cm



18″ x 24″ x 1¾″
45cm x 60cm x
4.5cm



18″ x 18″ x 1¾″
45cm x 45cm x
4.5cm

12″ x 24″ x 1¾″
30cm x 60cm x
4.5cm

12″ x 12″ x 1¾″
30cm x 30cm x
4.5cm

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
12"x12"	1¾" (4.5cm)	36.00	6.00		1.000	6	-	1.016	-	35.4	1.016	-	35.4	1.00	-	36	117	-	700
12"x24"	1¾" (4.5cm)	36.00	6.00		2.000	6	-	2.032	-	17.7	1.016	-	35.4	0.50	-	18	117	-	700
18"x18"	1¾" (4.5cm)	81.00	9.00		2.250	9	-	1.524	-	53.1	1.524	-	53.1	0.44	-	36	169	-	1,522
18"x24"	1¾" (4.5cm)	54.00	6.00		3.000	9	-	2.032	-	26.6	1.524	-	35.4	0.33	-	18	115	-	1,038
24"x24"	1¾" (4.5cm)	72.00	8.00		4.000	9	-	2.032	-	35.4	2.032	-	35.4	0.25	-	18	150	-	1,353

Notes: Flagstones are packaged on a specially designed refundable skid. Product sold at factory in full bundle quantities. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Do not use a vibratory plate compactor for the final surface compaction. Product is not intended for vehicular applications. All measurements are nominal.

Internal Use Only. RIV CH

SENZO™

New for 2016

ENDURACOLOR™ PLUS ARCHITECTURAL FINISHES

CASTANO
SPECIAL ORDER

CREMO
SPECIAL ORDER

NUVOLA
SPECIAL ORDER

PRODUCT TECHNOLOGY

EasyClean™ Stain Resistance

An integral surface protection that allows for easier cleanup of spills when they happen, and before a stain can develop.

LARGE SQUARE
SPECIAL ORDER
16″ x 16″ x 2¾″
41.6cm x 41.6cm x 7cm

RECTANGLE
SPECIAL ORDER
8″ x 16″ x 2¾″
20.8cm x 41.6cm x 7cm

SQUARE
SPECIAL ORDER
8″ x 8″ x 2¾″
20.8cm x 20.8cm x 7cm

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
16"x16"	2¾" (7cm)	82.67	10.33		1.722	8	-	-	-		-	-	-	0.58	-	48	331	-	2,647
8"x16"	2¾" (7cm)	82.67	10.33	13.78	0.861	8	6	1.262	10.9	65.5	0.656	-	126.0	1.16	16	96	339	452	2,710
8"x8"	2¾" (7cm)	82.67	10.33	13.78	0.431	8	6	0.631	21.8	131.0	0.631	-	131.0	2.32	32	192	339	452	2,710

Notes: Product sold at factory in full bundle quantities. Product is shipped on skids. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. All measurements are nominal. Important: Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Read the Polymeric Sand advisory on page 37.

Internal Use Only. SZO ON

SERIES 3000®

ENDURACOLOR PLUS ARCHITECTURAL FINISHES

BLACK GRANITE
Stock Color

CRYSTAL ROSE *

ICE GREY *

Black Granite is also available in Artline™ sizes.
SPECIAL ORDER - MINIMUM QUANTITIES APPLY.
See page 2 for more information.

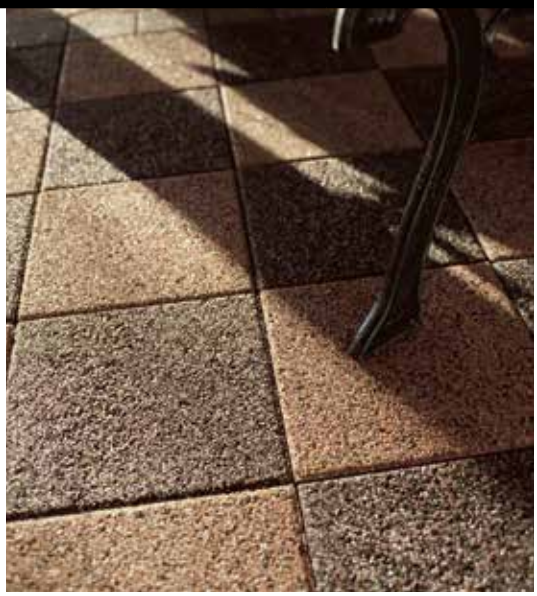



12″ x 12″ x 2¾″
30cm x 30cm x 7cm

6″ x 12″ x 2¾″
15cm x 30cm x 7cm

6″ x 6″ x 2¾″
15cm x 15cm x 7cm

4″ x 8″ x 2¾″
10cm x 20cm x 7cm & 8cm
AVAILABLE ONLY IN BLACK GRANITE

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
12” x 12”	2¾" (7cm)	93.04	11.63	23.26	0.969	8	4	0.985	23.6	94.5	0.985	-	94.5	1.03	24	96	393	785	3,140
4” x 8”	2¾" (7cm)	94.56	11.82	15.76	0.219	8	6	0.667	23.6	141.7	0.334	-	283.5	4.57	72	432	399	532	3,191
6” x 12”	2¾" (7cm)	93.04	11.63	23.26	0.485	8	4	0.985	23.6	94.5	0.492	-	189.0	2.06	48	192	393	785	3,140
6” x 6”	2¾" (7cm)	93.00	11.63	11.63	0.242	8	8	0.492	23.6	189.0	0.492	-	189.0	4.13	48	384	372	372	2,978

Notes: * Crystal Rose and Ice Grey require lead time and are sold at factory in full bundle quantities only. Custom colors and finishes available. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Minimum quantities apply. See terms and conditions of sale. All measurements are nominal. Important: Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Read the Polymeric Sand advisory on page 37. Contact Unilock for information.

Internal Use Only. S3K ON

STONEHENGE®

COFFEE CREEK



LARGE SQUARE
12″ x 12″ x 2¾″
30cm x 30cm x 7cm

RECTANGLE
6″ x 12″ x 2¾″
15cm x 30cm x 7cm

SMALL SQUARE
6″ x 6″ x 2¾″
15cm x 15cm x 7cm

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
12” x 12”	2¾" (7cm)	93.04	11.63	23.26	0.969	8	4	0.985	23.6	94.5	0.985	-	94.5	1.03	24	96	372	745	2,980
6” x 12”	2¾" (7cm)	93.04	11.63	23.26	0.485	8	4	0.985	23.6	94.5	0.492	-	189.0	2.06	48	192	372	745	2,980
6” x 6”	2¾" (7cm)	93.04	11.63	11.63	0.242	8	8	0.492	23.6	189.0	0.492	-	189.0	4.13	48	384	372	372	2,980

Notes: Custom colors available. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. The product can be installed dimpled side up or smooth side up. Product is sold at factory in full bundle quantities. Ask your Unilock dealer about purchasing lesser quantities as necessary. All measurements are nominal.

Internal Use Only. STH MI

THORNBURY™

ENDURACOLOR™

BAVARIAN

SYCAMORE

SIERRA



LARGE RECTANGLE
13¾" x 16½" x 2¾"
(35cm x 42cm x 7cm)



MEDIUM RECTANGLE
13¾" x 8¼" x 2¾"
(35cm x 21cm x 7cm)

SMALL RECTANGLE
6⅞" x 8¼" x 2¾"
(17.3cm x 21cm x 7cm)

Random Bundle
Individual units cannot be sold separately

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Random Bundle		88.61	11.08			8	-	-	-	-	-	-	-	1.08	-	96	355	-	2,837
Large Rectangle	2¾" (7cm)	-	-	-	1.582	-	-	-		-	-		-	0.63		32	-	-	-
Medium Rectangle	2¾" (7cm)	-	-	-	0.791	-	-	-		-	-		-	1.26		32	-	-	-
Small Rectangle	2¾" (7cm)	-	-	-	0.392	-	-	-		-	-		-	2.55		32	-	-	-

Notes: Product designed to be a permeable paver. Product sold at factory in full bundle quantities. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Contact Unilock for information. All measurements are nominal. Important: A urethane rubber paver mat must be used to prevent scuffing. Read the Polymeric Sand advisory on page 37.

Internal Use Only. THB ON

TOWN HALL™

ENDURACOLOR™ PLUS ARCHITECTURAL FINISHES

BURGUNDY RED

BURNT CLAY

OLD OAK

3 COLOR BLEND
Sold Separately/
Blended on Site

BASALT

PRODUCT TECHNOLOGY

Reala™ Surface Technology

Ultra-realistic textures cast from natural stone, brick and historic cobblestones.

Ultima™ Concrete Technology

This proprietary manufacturing process creates pavers and walls with up to four times the strength of poured concrete.

STANDARD
4" x 9¾" x 2¾"
10cm x 25cm x 7cm

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Rectangle	2¾" (7cm)	88.41	11.05		0.276	8	-	0.818	-	108.1	0.337	-	262.5	3.62	-	320	361	-	2,888

Notes: Product sold at factory in full bundle quantities. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. All measurements are nominal. Important: Textured surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Read the Polymeric Sand advisory on page 37. Contact Unilock for information.

Internal Use Only. TWH ON

UMBRIANO®

ENDURACOLOR PLUS ARCHITECTURAL FINISHES

AUTUMN SUNSET

MIDNIGHT SKY

WINTER MARVEL

SUMMER WHEAT

MIDNIGHT SKY

ARTLINE UMBRIANO® FINISH

PRODUCT TECHNOLOGY

EasyClean™ Stain Resistance

An integral surface protection that allows for easier cleanup of spills when they happen, and before a stain can develop.

ColorFusion™

A proprietary technology that disperses color randomly for a natural, granite-like appearance.

24″ x 24″ x 2¾″
60cm x 60cm x 7cm

12″ x 24″ x 2¾″
30cm x 60cm x 7cm

16″ x 16″ x 2¾″
40cm x 40cm x 7cm

8″ x 16″ x 2¾″
20cm x 40cm x 7cm

8″ x 8″ x 2¾″
20cm x 20cm x 7cm

LARGE RECTANGLE
21″ x 14″ x 2⅜″
30cm x 22.6cm x 6cm

SQUARE
14″ x 14″ x 2⅜″
22.6cm x 22.6cm x 6cm

SMALL RECTANGLE
7″ x 14″ x 2⅜″
15cm x 22.6cm x 6cm

Random Bundle

Individual units cannot be sold separately

RANDOM BUNDLE NEW FOR 2016!

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Random Bundle:		94.20	10.47			9	-	1.364	-	69.1	-	-	-	-	-	-	287	-	2,584
Large Rectangle	2⅜"(6cm)	-	-	-	2.089	-	-	1.768		21.3	-		-	0.48		18	-	-	-
Small Rectangle	2⅜"(6cm)	-	-	-	0.698	-	-	1.181		15.9	-		-	1.43		27	-	-	-
Square	2⅜"(6cm)	-	-	-	1.391	-	-	1.179		31.8	-		-	0.72		27	-	-	-
12" x 24"	2¾"(7cm)	93.00	11.63		1.938	8	-	1.969	-	47.2	0.984	-	94.5	0.52	-	48	393	-	3,142
16 x 16"	2¾"(7cm)	82.67	10.33		1.722	8	-	1.312	-	63.0	1.312	-	63.0	0.58	-	48	350	-	2,797
24" x 24"	2¾"(7cm)	62.00	7.75		3.875	8	-	1.969	-	31.5	1.969	-	31.5	0.26	-	16	258	-	2,062
8" x 16"	2¾"(7cm)	82.67	10.33		0.861	8	-	1.312	-	63.0	0.656	-	126.0	1.16	-	96	343	-	2,746
8" x 8"	2¾"(7cm)	82.67	10.33		0.431	8	-	0.656	-	126.0	0.656	-	126.0	2.32	-	192	331	-	2,647

Notes: 24″ x 24″ and 12″ x 24″ product are not intended for vehicular applications. All measurements are nominal. Product is not sectionable. Sold on a refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing.** Read the Polymeric Sand advisory on page 37. Contact Unilock for information.

Internal Use Only. UMB ON

TURFSTONE™

NATURAL
SPECIAL ORDER

STANDARD
16″ x 24″ x 3⅛″
40cm x 60cm x 8cm
SPECIAL ORDER

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
16” x 24”	3⅛” (8cm)	80.00	10.00		2.500	8	-	-	-		-	-	-	0.40	-	32	247	-	1,975

Notes: Product sold at factory in full bundle quantities. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. All measurements are nominal.

Internal Use Only. TFS MI

UNI ECO-STONE®

STANDARD FINISH

STANDARD FINISH



WASHED FINISH



BRUSHED FINISH

CUSTOM COLORS & FINISHES AVAILABLE

UNI ECO-STONE
4½” x 9” x 3⅛”
11.5cm x 23cm x 8cm
SPECIAL ORDER

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
Standard	3⅛” (8cm)	67.00	9.57		0.273	7	-	-	-		-	-	-	3.66	-	245	349	-	2,445

Colors: Special Order from standard colors - Lead time required. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Notes: This product is optimized for mechanical installation. Product sold at factory in full bundle quantities. All measurements are nominal.

Internal Use Only. UES MI

UNIGRANITE®



DARK CHARCOAL

SMALL SQUARE
4″ x 4″ x 2¾″
10cm x 10cm x 7cm

Stones & Bundling	Unit Thickness	SqFt Per Bundle	SqFt Per Layer	SqFt Per Section	SqFt Per Stone	Per Bundle Layers	Per Bundle Sections	Soldier LnFt Per SqFt	Soldier LnFt Per Section	Soldier LnFt Per Bundle	Sailor LnFt per SqFt	Sailor LnFt per Section	Sailor LnFt per Bundle	Units Per SqFt	Units Per Section	Units Per Bundle	Lbs Per Layer	Lbs Per Section	Lbs Per Bundle
4” x 4” *After Splitting	2¾” (7cm)	110.70	15.81	13.84	0.110	7	8	0.335	41.3	330.2	0.335	-	330.2	9.09	126	1,008	495	433	3,467

Notes: *After splitting. Dimensions may vary up to ¼″ due to the unique manufacturing method. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Read the Polymeric Sand advisory on page 37. All measurements are nominal.

Internal Use Only. UGT ON

BELMURO™ WALL

New for 2016

ENDURACOLOR™ PLUS ARCHITECTURAL FINISHES

AUTUMN SUNSET
SPECIAL ORDER

MIDNIGHT SKY
SPECIAL ORDER

SUMMER WHEAT
SPECIAL ORDER

WINTER MARVEL
SPECIAL ORDER

PRODUCT TECHNOLOGY

EasyClean™ Stain Resistance

An integral surface protection that allows for easier cleanup of spills when they happen, and before a stain can develop.

ColorFusion™

A proprietary technology that disperses color randomly for a natural, granite-like appearance.

FULL UNIT
20″ x 10″ x 6½"
50.5cm x 25.2m
x 16.5cm
SPECIAL ORDER

HALF UNIT
10″ x 10″ x 6½"
25.2cm x 25.2m
x 16.5cm
SPECIAL ORDER

CORNER UNIT
20″ x 10″ x 6½"
50.5cm x 25.2m
x 16.5cm
SPECIAL ORDER

HALF CORNER UNIT
10″ x 10″ x 6½"
25.2cm x 25.2m
x 16.5cm
SPECIAL ORDER

	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
Stones & Bundling	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Full Unit	21.31	0.888	-	-	24	1.13	-	-	63	1,503
Half Unit	10.65	0.444	-	-	24	2.25	-	-	31	747
Corner Unit	31.41	1.309	-	-	24	0.76	-	-	73	1,741
Half Corner Unit	21.07	0.878	-	-	24	1.14	-	-	41	985

Notes: ALL BELMURO WALL IS SPECIAL ORDER ONLY - Full Bundles Only. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. For coping options we recommend Ledgestone (page 22) or Natural Stone. All measurements are nominal.
The BelMuro blocks are factory-produced concrete elements featuring two chambers arranged in a row. Any wall over 39″ in height may be subject to permit requirements and engineering analysis. Always consult with your local authorities before beginning your project. As a rule of thumb, walls 2′ high or less require a shallow excavation; otherwise you will require a deep excavation or the implementation of concrete piers (Sono tubes). This system should only be installed by trained, professional contractors to ensure a safe, consistent, reliable system that will be long-lasting. Contact your local representative for details. Retaining wall engineering software is also available free of charge at www.unilock.com.

Internal Use Only. BLM ON

FOR WALLS UNDER 28 INCHES IN HEIGHT

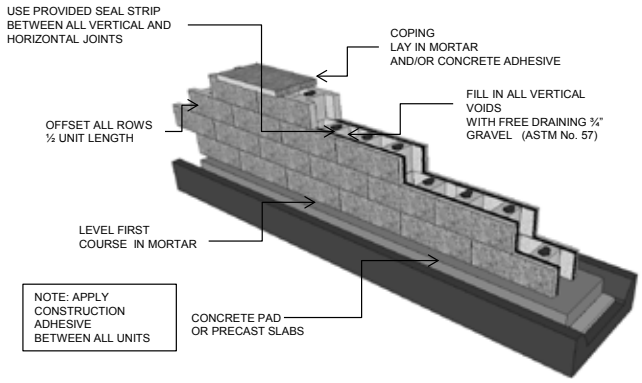

FOR WALLS 28 TO 39 INCHES IN HEIGHT

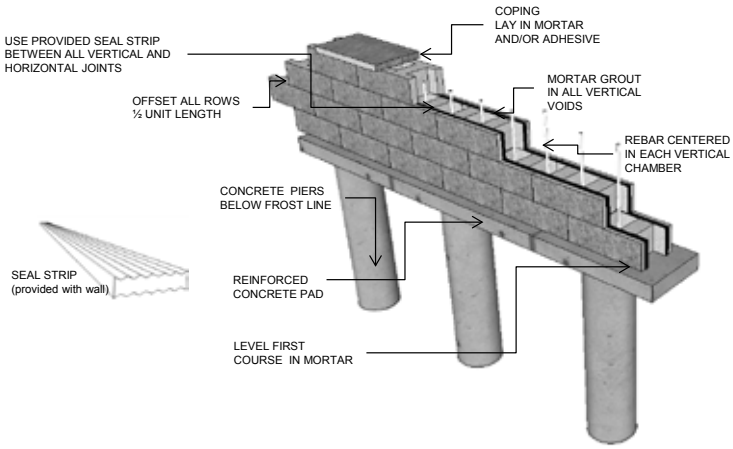

BRUSSELS DIMENSIONAL SYSTEM™

COFFEE CREEK

DESERT SAND

LIMESTONE

MAHOGANY ASH

SANDSTONE

STANDARD/CORNER
4″ x 8″ x 12″
30cm x 10cm x 20cm

COPING
12″ (9″) x 3″ x 12″
30.5cm (22.9cm) x 7.6cm x 30.5cm

9″ UNIT
9″ (6″) x 4″ x 8″
22.9cm(15.2cm) x 10cm x 20cm

12″ UNIT
12″ (9″) x 4″ x 8″
30cm(22.5cm) x 10cm x 20cm

15″ UNIT
15″ (12″) x 4″ x 8″
37.5cm(30cm) x 10cm x 20cm

Wall Bundle
Individual units cannot be sold separately

Stones & Bundling	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Coping (32 End Caps/Bdl-not sold separately**)	24.00	0.250	81.00	0.844	96	4.00	8	4	30	2,902
Standard/Corner	32.00	0.710	96.00	1.000	96	3.48	6	4	30	3,020
Wall Tapered Bundle:	30.00	1.000	-	-	30	1.00	5		-	2,462
12" Unit	7.50	0.250	22.53	0.751	30	4.00			20	
15" Unit	9.90	0.330	29.52	0.984	30	3.03			27	
9" Unit	12.60	0.420	36.90	1.230	30	2.38			33	

Notes: Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Maximum height 27”-31.5” including the unit in the ground (depending on site conditions). To construct higher walls, contact a Unilock representative. Product is installed using Unilock Adhesive to secure corners and top row units. *20.9 sq. ft. face per bundle based on random pattern creating 12” solid wall. 32 sq. ft. face per bundle based on running bond creating 8” deep wall. **Coping End Caps are tapered on one side and straight on the other. Pins not available in Michigan market. Unilock adhesive should be used to secure units. Maximum height for planter wall is 16” under optimal conditions. Wall units and Standard/Corner units sold at factory in full bundle quantities. Ask your Unilock dealer about purchasing lesser quantities as necessary. All measurements are nominal.

Internal Use Only. BDS MI

TYPICAL CORNER INSTALLATION







BRUSSELS DIMENSIONAL SYSTEM™ RADIUS CHART

Radius achieved using only the tapered units from a random bundle”							
Outside Radius (inches)	35”	27”	35”	47”	32”	37”	42”
Unit sequence	9”, 12”, 15”	only 9” units	only 12” units	only 15” units	9”, 12” etc.	9”, 15” etc.	12”, 15” etc.
uses all units in bundle		Note: These sequences will have left over units. Plan to use the left over units in other parts of the project.					

DURAHOLD®

NATURAL

STANDARD
72″ x 12″ x 24″
183cm x 30cm x 60cm
SPECIAL ORDER

CORNER 90˚
60″ x 12″ x 24″
152cm x 30cm x 60cm
SPECIAL ORDER

COPING
72″ x 12″ x 24″
183cm x 30cm x 60cm
SPECIAL ORDER

CLOSED-END COPING
72″ x 12″ x 24″
183cm x 30cm x 60cm
SPECIAL ORDER



TIE-BACK
72″ x 12″ x 24″
183cm x 30cm x 60cm
SPECIAL ORDER

½ COPING
36″ x 12″ x 24″
91.5cm x 30cm x 60cm
SPECIAL ORDER

CORNER 45˚
60″ x 12″ x 24″
152cm x 30cm x 60cm
(Right Corner Shown)
SPECIAL ORDER

½ STANDARD
36″ x 12″ x 24″
91.5cm x 30cm x 60cm
SPECIAL ORDER

	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
Stones & Bundling	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Coping Closed End 72"		6.024	6.02	6.024	1	0.17			1,560	1,560
Half Coping		3.003	3.00	3.003	1	0.33			780	780
Corner 45° Left		7.042	-	-	1	0.14			1,480	1,480
Corner 90° Left		7.042	-	-	1	0.14			1,320	1,320
Coping 72"		6.024	6.02	6.024	1	0.17			1,560	1,560
Wall Half		3.003	3.00	3.003	1	0.33			800	800
Wall Standard		6.024	6.02	6.024	1	0.17			1,680	1,680
Wall Tieback		2.000	-	2.000		0.50			1,660	

Notes: ALL DURAHOLD IS SPECIAL ORDER ONLY - Full Bundles Only. Colors shown should be used only as a guide. Colors should always be chosen from actual samples.

*Closed–end coping units are available and are closed on both ends so that they may be used as left or right. Tie–back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms conditions for placement rates.
Unilock, through Risi Stone Systems International, can provide you with preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide you with this engineering. Contact your local representative for details. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal.

Internal Use Only. DH1 ON

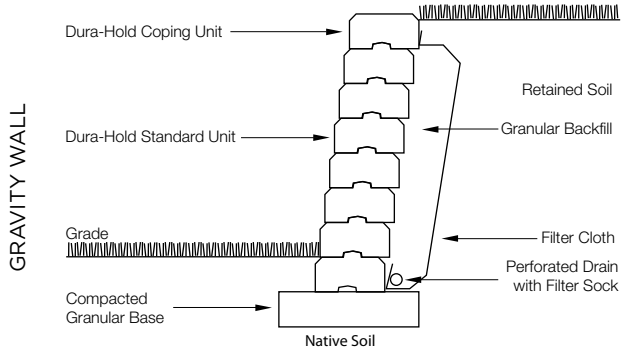

Cross sections are examples, and must not be used for construction.

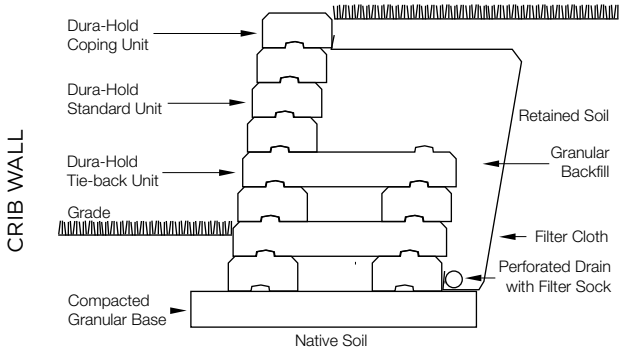

Cross sections are examples, and must not be used for construction.

DURAHOLD2®

NATURAL

STANDARD
72″ x 12″ x 14″
183cm x 30cm x 36cm
SPECIAL ORDER

COPING
72″ x 12″ x 14″
183cm x 30cm x 36cm
SPECIAL ORDER

CLOSED-END COPING
72″ x 12″ x 14″
183cm x 30cm x 36cm
SPECIAL ORDER

TiE-BACK
72″ x 12″ x 14″
183cm x 30cm x 36cm
SPECIAL ORDER

CORNER 90˚
36″ x 12″ x 14″
90cm x 30cm x 36cm
(Right Corner Shown)
SPECIAL ORDER

Stones & Bundling	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Coping Closed End 72"	24.10	6.024	24.10	6.024	4	0.17	2		884	3,536
Coping 72"	24.10	6.024	24.10	6.024	4	0.17	2		884	3,536
Corner 90°	20.00	5.000	-	-	4	0.20	2		460	1,840
Wall Standard	24.10	6.024	24.10	6.024	4	0.17	2		940	3,760
Wall Tieback	4.71	1.176	4.00	1.000	4	0.85	2		938	3,752

Notes: ALL DURAHOLD2 IS SPECIAL ORDER ONLY - Full bundles only. Colors shown should be used only as a guide. Colors should always be chosen from actual samples.
*Closed–end coping units are available and are closed on both ends so that they may be used as lefts or rights. Tie–back units are reinforced with steel. Refer to terms and conditions for placement rates.
For DuraHold® and DuraHold2, Unilock, through Risi Stone Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide you with this preliminary site engineering. Contact your local Unilock representative for details. Retaining wall engineering software is also available free of charge at www.unilock.com.

Internal Use Only. DH2 ON

GRAVITY WALL

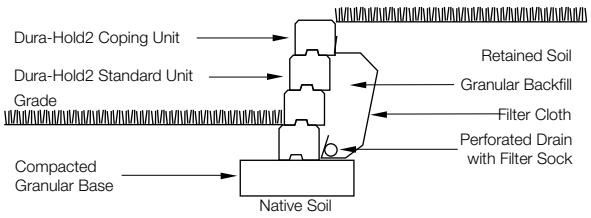

Cross sections are examples, and must not be used for construction.

GEOGRID REINFORCED

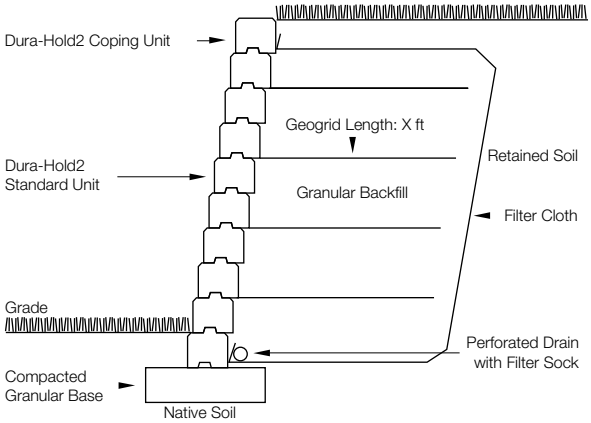

Cross sections are examples, and must not be used for construction.

ESTATE WALL®

SIERRA

CORNER
12½" x 6" x 9"
31.75cm x 15cm x 22.9cm

COPING
12" x 3" x 12"
30cm x 7.5cm x 22.9cm

LARGE WEDGE
16" x 6" x 9"
40cm x 15cm x 22.9cm

MEDIUM WEDGE
12" x 6" x 9"
30cm x 15cm x 22.9cm

SMALL WEDGE
8" x 6" x 9"
20cm x 15cm x 22.9cm

Random Bundle
Individual units cannot be sold separately

Stones & Bundling	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Standard Wall Bundle:	21.29		43.26	-	48	-	-	4	-	2,226
Large Wedge		.56 / .66	-	1.15 / 1.33	16	3 / 4.35	-	-	63.53	-
Medium Wedge		.39 / .49	-	.80 / 1.00	16	2 / 2.56	-	-	46.38	-
Small Wedge		.23 / .33	-	.47 / .57	16	1.5 / 1.78	-	-	29.23	-
Corner Unit (double unit)	28.20	1.76	-	-	16	2.28	-	4	107.18	1,715
Coping 12"	18.00	0.250	62.64	0.870	72	4.00		3	31	2,248

Notes: Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Maximum height for vertical installation - 24" including the unit in the ground (under optimum conditions). Maximum height for setback installation - 31.5" including the unit in the ground (under optimum conditions). Wall bundle has 5 end units in each bundle. End caps not sold separately. Brussels XL, Fullnose™, Stonehenge® 12x12, or Ledgestone™ complement as a possible coping. All measurements are nominal.

Internal Use Only. EWL ON

TYPICAL RETAINING WALL CROSS SECTION

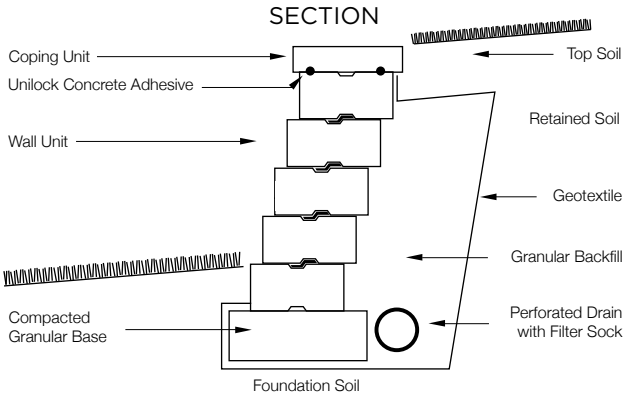

TYPICAL SEAT WALL CROSS SECTION

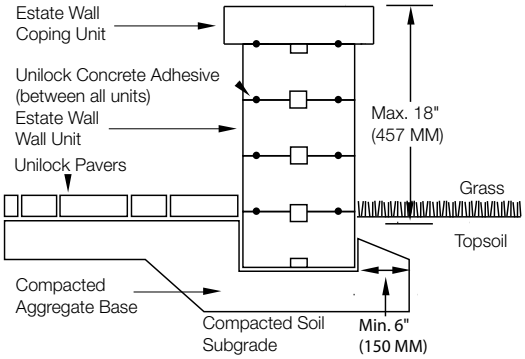

Radius achieved using only the tapered units from a "random bundle"			
Radius (inches)	31"	38"	48"
Unit sequence	ALL SMALL UNITS	SMALL & MEDIUM UNITS	ALL THREE UNITS
S= Straight Wall Standard Unit	uses all units in bundle	Note: These sequences will have left over units. Plan to use the left over units in other parts of the project.	

Curved walls or steps can be constructed from a 31" outside radius when using all small units, 38" radius when using medium and small units, and a 48" radius can be constructed using all three wall units.

LEDGESTONE™ PILLAR CAP, STEPS & COPING

BUFF

GREY

PRODUCT TECHNOLOGY

Reala™ Surface Technology

Ultra-realistic textures cast from natural stone, brick and historic cobblestones.

PILLAR CAP
24″ x 24″ x 3½″
61cm x 61cm x 10cm

COPING UNIT
12″ x 24″ x 2¾″
30.5cm x 61cm x 7cm

CLOSED-END COPING
12″ x 24″ x 2¾″
30.5cm x 61cm x 7cm



FULLNOSE UNIT
12″ x 23¹³⁄₁₆″ x 1¾″
30.5cm x 60.5cm x 4.5cm

48″ STEP
48″ x 24″ x 6″
122cm x 61cm x 15.2cm

Stones & Bundling	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Fullnose Coping 24"			32.00	2.000	16		5		42	667
Coping/Closed End Coping 12"			24.00	2.000	12				64	772
48"x24" Step			12.00	4.000	3		3		574	1,721
Pillar Cap					5				159	795

Notes: Colors shown should be used only as a guide. Colors should always be chosen from actual samples. 4 Ledgestone end coping units can be used to cap pillars larger than 20″. This would leave a small opening for lighting. Coping is rock-faced on the front and the back; Closed-End Coping is rock-faced on 3 sides. All measurements are nominal.

Internal Use Only. LDG CH

LINEO DIMENSIONAL STONE™

MAHOGANY ASH

LIMESTONE

SANDSTONE

PILLAR UNIT
16″ X 4″ X 8″
40CM X 10CM X 20CM

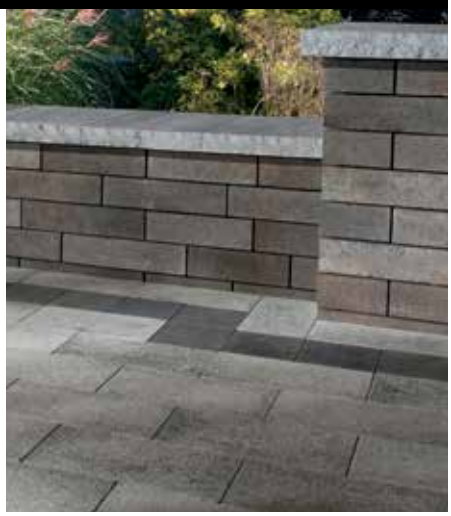

XL RECTANGLE
24″ x 4″ x 8″
60cm x 10cm x 20cm

LARGE RECTANGLE
20″ x 4″ x 8″
50cm x 10cm x 20cm

RECTANGLE
16″ x 4″ x 8″
40cm x 10cm x 20cm

SMALL RECTANGLE
12″ x 4″ x 8″
30cm x 10m x 20cm

Individual units cannot be sold separately

Random Bundle

Stones & Bundling	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Pillar Unit	47.81	0.664	95.10	1.321	72	1.51	3		39	2,821
Wall Random Bundle:	29.90	-	89.10	-	60	-	3		-	2,643
Large Rectangle	1.00	0.067	29.52	1.968	15	15.00			59	
Rectangle	8.31	0.554	24.60	1.640	15	1.81			49	
Small Rectangle	6.66	0.444	19.68	1.312	15	2.25			39	
XL Rectangle	5.00	0.333	15.00	1.000	15	3.00			29	

Notes: Product sold at factory in full bundle quantities. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. All measurements are nominal. Spacing strips are shipped with random wall bundles to create even spacing between units. Ask your Unilock representative for installation tips.

Internal Use Only. LDS MI

Lineo Dimensional Stone

Max Wall Height = 16”
Max Pillar Height = 48”

Assembly Notes:

1. Assemble only on frost free gravel base minimum 6” thick.
2. Use only non-shrinking concrete adhesive.
3. Space plastic shadow strips and T-inserts as per diagram to prevent soil wash-through or to prevent visible light on seating walls.
4. Do not glue strips or T’s. The glue will not adhere to the plastic.
5. Always mound glue high enough that both layers of concrete will make contact with the glue.
6. Note: There is no specified pattern. Place units for most pleasing appearance. Avoid double stacked joints.
7. Use 16” Pillar units to construct pillars and/or walls.
8. Shadow spacers are <u>not recommended</u> for use between coping and wall units.
9. Shadow Spacers <u>are not required</u> for units embedded below grade.

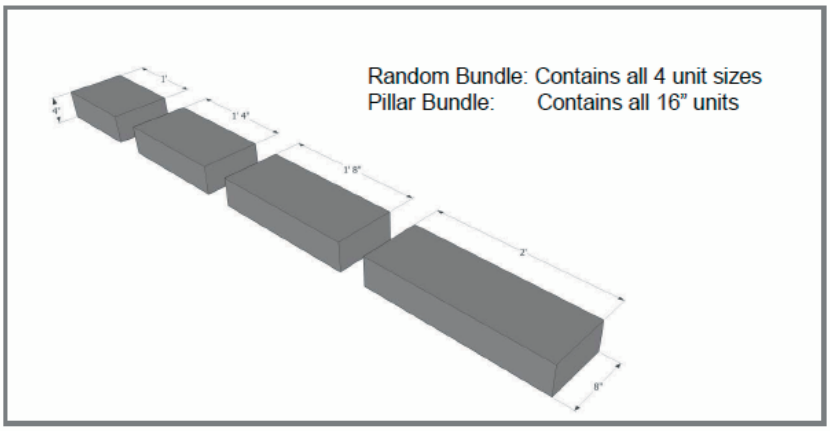

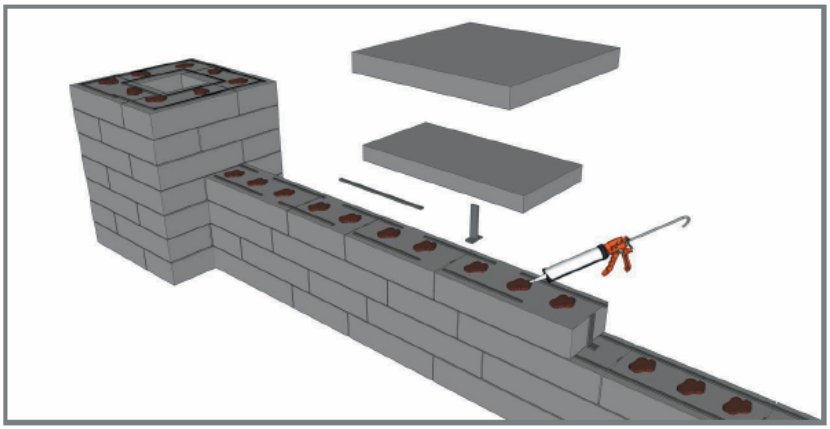

Lineo Dimensional Stone

Lineo Dimensional Stone is a decorative wall stone intended for low seat walls and garden walls. (It is not an engineered wall system.) The stability of this wall will be affected by the amount and quality of adhesive used. Use concrete adhesives liberally in large dapples. *Use adhesives with a minimal shrinkage factor.*

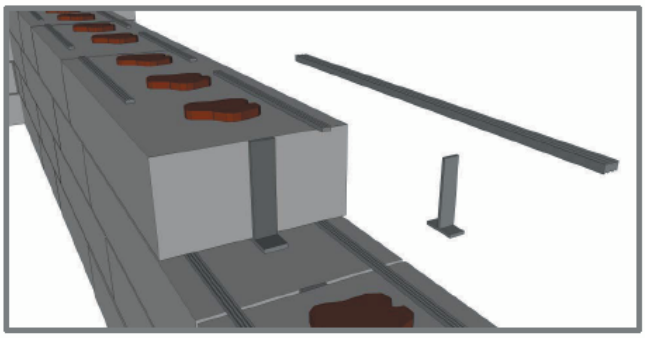

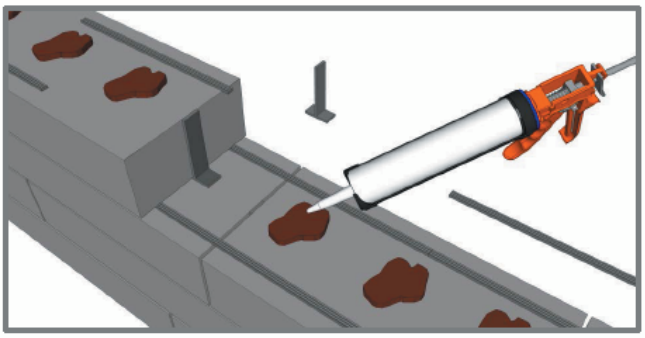

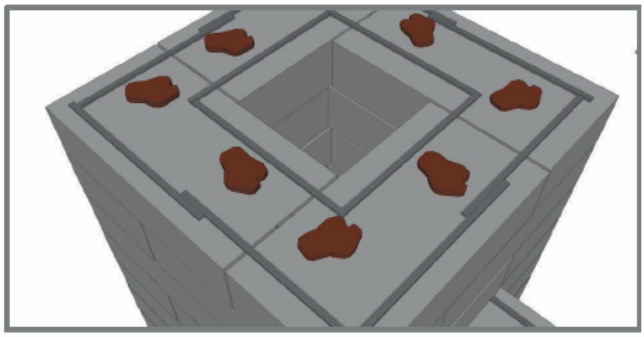

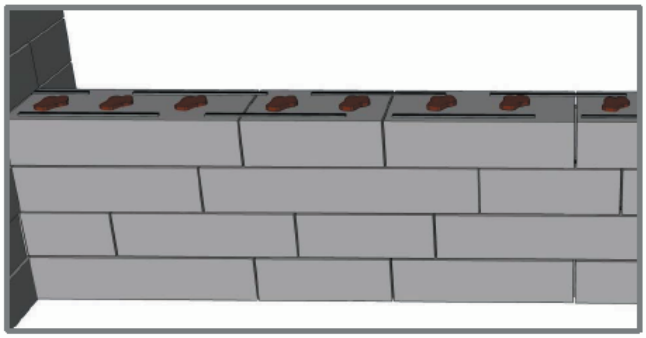

PISA2®

BEECHWOOD

CHARCOAL

NEVADA

GRANITE

RUSTIC RED

SANDSTONE

ST. CLAIR

TAPERED
8″ x 6″ x 12″
20cm x 15cm x 30cm

CORNER
12″ x 6″ x 8″
30cm x 15cm x 20cm



12″ COPING
12″ x 3″ x 12″
30cm x 7.5cm x 30cm

Stones & Bundling	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Coping 12" (double unit)	21.00	0.500	84.00	2.000	42	2.00	7	2	65	2,750
Corner Unit (double unit)	20.17	1.681	-	-	12	0.60	3	4	110	1,320
Wall Xtra Tapered (double unit)	20.00	0.667	40.00	1.333	30	1.50	3	2	86	2,580

Notes: Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Tapered units will allow for a minimum 5ft. outside radius. To achieve this radius, you must use stones of the same taper on one layer, and stones of the opposite taper on the next layer. Higher walls can be achieved using geogrid reinforcement. **See Pisa2 calculations on page 27.** 12" Coping bundle has 14 units of Closed-end coping (7 left and 7 right). Closed-end 12" coping not sold separately. Product sold at factory in full bundle quantities. Ask your dealer about purchasing lesser quantities as necessary. Unilock through Risi Stone Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide you with this preliminary site engineering. Contact your local Unilock representative for details. Retaining wall engineering software is also available free of charge at www.unilock.com.

Internal Use Only. PS2 MI

GRAVITY WALL

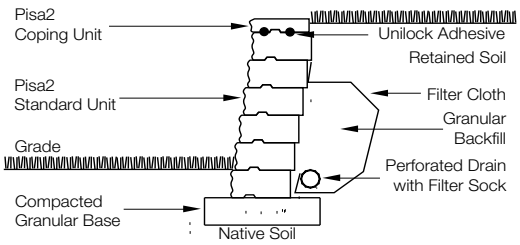

Cross sections are examples, and must not be used for construction.

GEOGRID REINFORCED

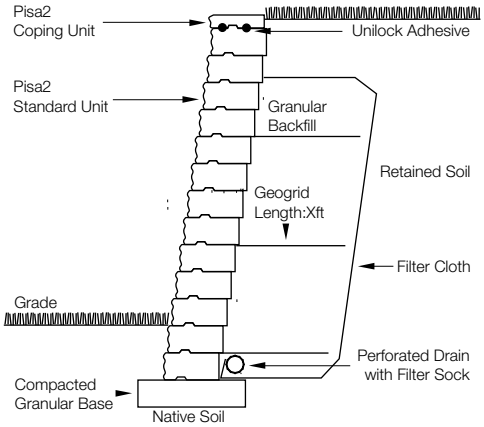

Cross sections are examples, and must not be used for construction.

RIVERCREST® WALL

COASTAL SLATE

BUFF

PRODUCT TECHNOLOGY

Reala™ Surface Technology

Ultra-realistic textures cast from natural stone, brick and historic cobblestones.



LONG COPING
22″ x 11″ x 2½″
56cm x 28cm x 5.7cm

LONG CORNER UNIT
12″ x 9-10″ x 2¼″
31cm x 23-25cm x 5.7cm

SHORT CORNER UNIT
10″ x 9-10″ x 2¼″
25cm x 23-25cm x 5.7cm

Corner Bundle
Individual units cannot be sold separately

STANDARD UNIT 1
8″ x 9-10″ x 2¼″
20cm x 23-25cm x 5.7cm

STANDARD UNIT 2
12″ x 9-10″ x 2¼″
31cm x 23-25cm x 5.7cm

STANDARD UNIT 3
12″ x 9-10″ x 2¼″
31cm x 23-25cm x 5.7cm

STANDARD UNIT 4
17″ x 9-10″ x 2¼″
42.5cm x 23-25cm x 5.7cm

Random Bundle
Individual units cannot be sold separately

JUMPER UNIT 1
8″ x 9-10″ x 4½″
20cm x 23-25cm x 11.4cm

JUMPER UNIT 2
12″ x 9-10″ x 4½″
31cm x 23-25cm x 11.4cm

JUMPER UNIT 3
12″ x 9-10″ x 4½″
31cm x 23-25cm x 11.4cm

JUMPER UNIT 4
17″ x 9-10″ x 4½″
42.5cm x 23-25cm x 11.4cm

Jumper Bundle
Individual units cannot be sold separately

Note All jumper units are only available in Buff.

Stones & Bundling	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Coping	16.70	0.348	89.10	1.86	48	2.87	8	-	43	2,090
Corner Unit Bundle:	20.92	-	-	-	64	-	4	-	-	1,232
Long Corner Unit	16.10	0.335	85.92	1.79	48	2.99	-	-	20.4	-
Short Corner Unit	4.80	0.300	25.44	1.59	16	3.33	-	-	16.7	-
Wall Jumper Bundle:	24.30	-	-	-	64	-	4	-	-	2,720
Jumper Unit 1	3.9	0.24	10.49	0.658	16	4.17	-	-	30	-
Jumper Unit 2	6.1	0.38	16.27	1.01	16	2.63	-	-	40	-
Jumper Unit 3	6.1	0.38	16.27	1.01	16	2.63	-	-	40	-
Jumper Unit 4	8.2	0.5	22.00	1.375	16	2.00	-	-	60	-
Wall Standard Bundle:	24.30	-	130.2	-	128	-	8	-	-	1,990
Standard Unit 1	3.9	0.12	20.99	0.656	32	8.33	-	-	9.4	-
Standard Unit 2	6.1	0.19	32.54	1.017	32	5.26	-	-	14.7	-
Standard Unit 3	6.1	0.19	32.54	1.017	32	5.26	-	-	14.7	-
Standard Unit 4	8.2	0.25	44.61	1.394	32	4.00	-	-	14.7	-

Notes: Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Random wall units sold at factory in full bundle quantities only. Rivercrest™ is recommended for walls under 2ft. Ideal for straight or curved walls, seat walls, pillars, tree rings, planters, firepits and grill islands. Integrated connectors require no pins or clips. Minimum radius using equal amounts of each unit is 1.25m / 4.1ft. Using only units 1 & 3, a 1.055m / 3.5ft radius can be achieved. Long coping is rock faced on all four sides.
Unilock, through Risi Stone Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Contact your local Unilock representative for details. Retaining wall engineering software is also available free of charge at www.unilock.com.

Internal Use Only. RVC ON

For more information please consult the Rivercrest installation booklet.

RIVERCREST® WALL

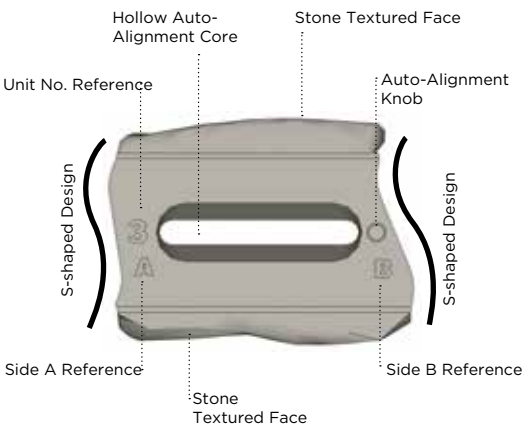

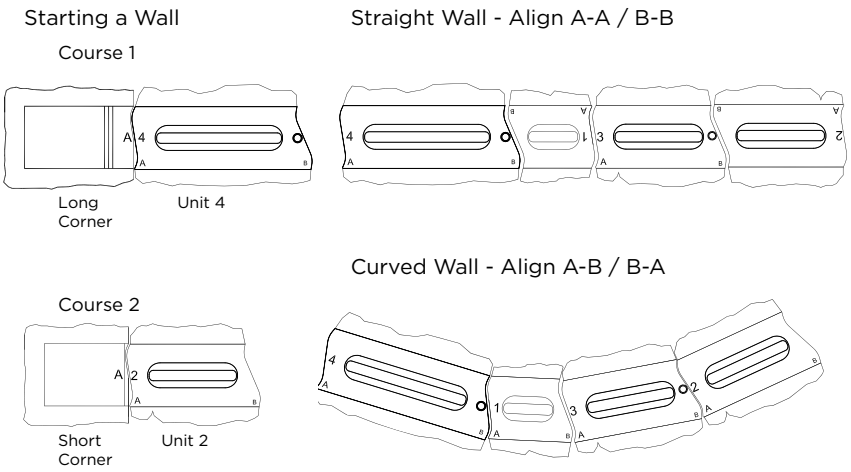

CONSTRUCTING CURVED WALLS

With Rivercrest Wall you can create almost any size curve, circle or serpentine with no cutting required.

Using only the No. 1 Block, you can build a perfect curve with a minimum outside radius of 2.9′ (88cm), and larger curves can be made by the addition of No. 2, 3 & 4 Blocks. Just remember to match Sides A to B.

Tip: For even larger curves, simply incorporate more No. 4 Block int the design.

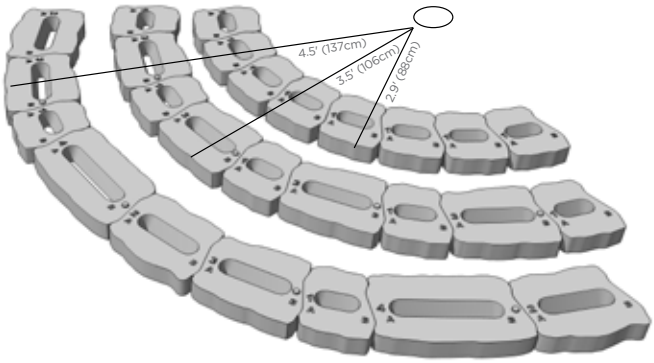

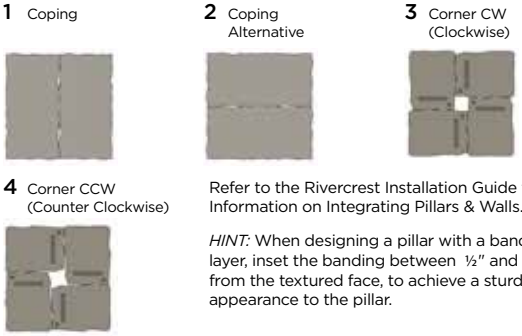

Refer to the Rivercrest Installation Guide for Information on Integrating Pillars & Walls.

HINT: When designing a pillar with a banding layer, inset the banding between ½″ and ¾″ from the textured face, to achieve a sturdy appearance to the pillar.

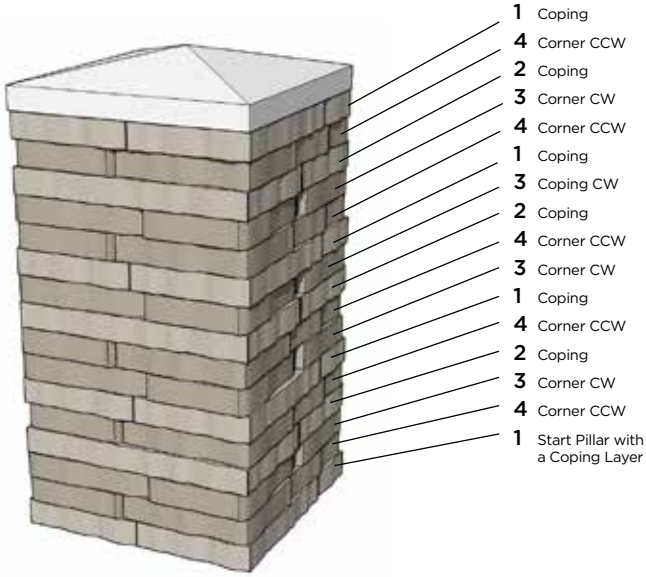

INTEGRATED STEPS

The Rivercrest wall system has been designed to have a comfortable step tread depth of 11″ (280mm) and a riser height of 7″ (180mm). Use the height of the exposed wall and the chart or formula to calculate the number of steps and the Total Run you will require.

When building Rivercrest retaining walls higher than 2′ (0.6m) in height, the use of an approved Polyester Geogrid reinforcement is required.

Refer to Geogrid Installation for more information.

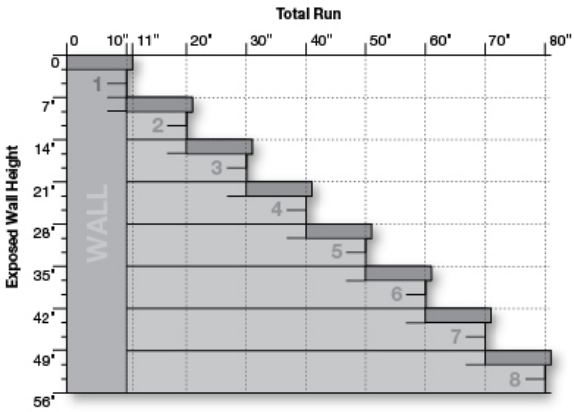

For more information please consult the Rivercrest® installation booklet.

ROMANPISA®

BEECHWOOD

GRANITE

NEVADA

ROMAN COPING
12" x 3" x 12"
30cm x 7.5cm x 30cm

TAPERED
8" x 6" x 12"
20cm x 15cm x 30cm

CORNER
12" x 6" x 8"
30cm x 15cm x 20cm

Stones & Bundling	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Coping 12"	21.00	0.250	84.00	1.000	84	4.00	7	4	33	2,750
Corner Unit (double unit)	40.13	1.672	-	-	24	0.60	3	4	110	2,640
Wall Xtra Tapered (double unit)	20.00	0.667	40.00	1.333	30	1.50	3	4	86	2,580

Notes: Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Tapered units will allow for a minimum 5ft. outside radius. Higher walls can be achieved using geogrid reinforcement. **Tumbled 12" coping bundles include closed-end tumbled coping not sold separately. Product sold at factory in full bundle quantities. Ask your dealer about purchasing lesser quantities as necessary.
Unilock, through Risi Stone Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Contact your local Unilock representative for details. Retaining wall engineering software is also available free of charge at www.unilock.com.

Internal Use Only. RPA MI

Pisa 2®/Roman Pisa® Calculations

Pisa2 Wall

Step 1: Height of wall (includes buried course) x Length of wall = Square Face Feet
Step 2: Square Face Feet x 1.55 (units per face feet) = Number of Double Units
Step 3: Number of Double Units x Cost per Double Unit = Cost of Material

Pisa2 Corner

Step 1: Height of wall in inches x Number of 90 degree corners in wall = Total Combined Inches
Step 2: Total Combined Inches / 6 (height of unit) = Single Corner Units Required
Step 3: Single Corner Units / 2 (sold by dbl. unit) = Double Units Purchased
Step 4: Double Units x Cost per Double Unit = Cost of Material

Note: Unilock provides these calculation formulas as a service for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

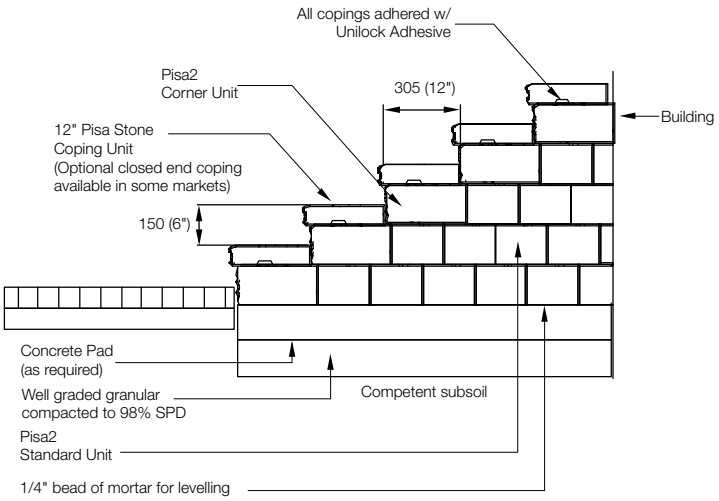

Note: Poor site conditions can affect the stability of the structure. Consult a qualified professional engineer to determine site specific construction details.

SIENASTONE®

NATURAL

BROWN **

NATURAL **



STANDARD 925
48" x 7¼" x 36½"
120cm x 18.5cm x 92.5cm
SPECIAL ORDER



STANDARD 500
48" x 7¼" x 20"
120cm x 18.5cm x 50cm
SPECIAL ORDER

CORNER 90° (left & right)
43⅓" x 7¼" x 20"
110cm x 18.5cm x 50cm
SPECIAL ORDER

CORNER 45° (left & right)
43⅓" x 7¼" x 20"
110cm x 18.5cm x 50cm
SPECIAL ORDER

COPING
48" x 7¼" x 20"
120cm x 18.5cm x 50cm
SPECIAL ORDER

CLOSED-END COPING **
48" x 7¼" x 20"
120cm x 18.5cm x 50cm

	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
Stones & Bundling	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Coping Closed End 48"	14.42	2.404	24.00	4.000	6	0.42	3		570	3,420
Coping 48"	14.42	2.404	24.00	4.000	6	0.42	3		570	3,420
Corner 90° (double unit)	19.11	6.369	-	-	3	0.16	3		1,050	3,420
Wall 500 - 48"	14.42	2.404	24.00	4.000	6	0.42	3		570	3,420
Wall 925 - 48"	7.21	2.404	12.00	4.000	3	0.42	3		1,140	3,420

Notes: *Special Order – Lead Time Required. **48" Closed-End Coping is available as a Stock Item in Brown and Natural Only. Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Closed-End Coping units can be used to construct steps. Closed-End Coping Corner units available (special order, lead time required). Wall, Corner and Coping units are available in Natural color only (special order, lead time required). Custom Colors available (minimums apply). All measurements are nominal.
Unilock, through Risi Stone Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide you with preliminary site engineering. Contact your local Unilock representative for details. Retaining wall engineering software is also available free of charge from www.unilock.com.

Internal Use Only. SST ON

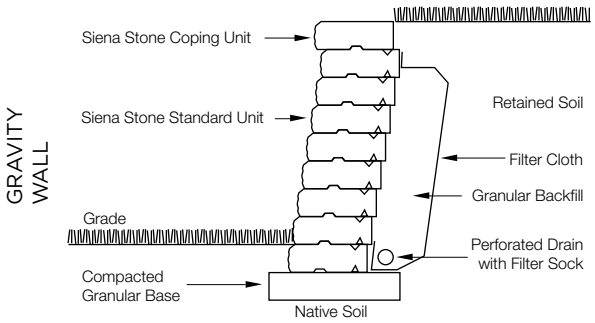

Cross sections are examples, and must not be used for construction.

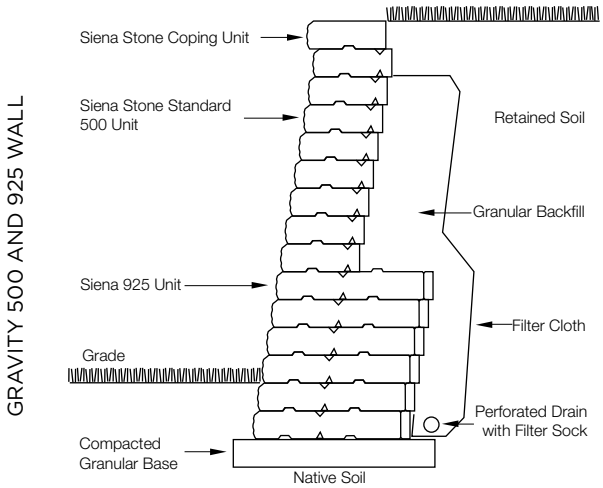

Cross sections are examples, and must not be used for construction.

SPLIT'N STACK®

BEECHWOOD

RUSTIC RED

SANDSTONE

ST. CLAIR



WEDGE UNIT
8″ x 4″ x 8″ x 6″
20cm x 10cm x 20cm x 15cm

Stones & Bundling	Face Feet Per		Linear Feet Per		Units Per		Per Bundle		Lbs Per	
	Bundle	Unit	Bundle	Unit	Bundle	Face Feet	Layers	Sections	Unit	Bundle
Coping	30.00	0.200	87.50	0.583	150	5.00	5		19	2,850

Notes: Colors shown should be used only as a guide. Colors should always be chosen from actual samples. Maximum height – 24" (under optimum conditions) including material below grade. Radius - minimum outside radius 29". All measurements are nominal.

Internal Use Only. STK MI

DETAILS FOR SPLIT'N STACK

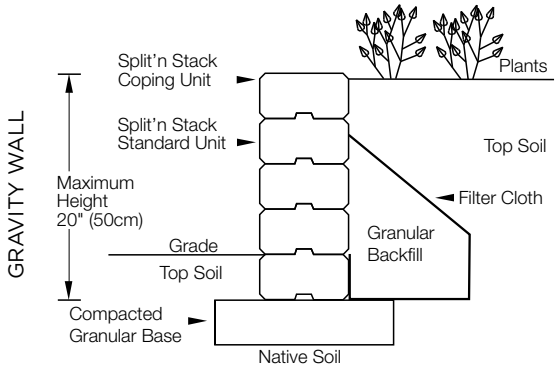

Cross sections are examples, and must not be used for construction.

TYPICAL CORNER

First Course



Second Course



Height	Courses	Length of Wall Measured in Feet					
		5'	10'	15'	20'	25'	30'
4″	1	9	18	27	36	45	54
8″	2	18	36	54	72	90	108
12″	3	27	54	81	108	135	162
16″	4	36	72	108	144	180	216
20″	5	45	90	135	180	225	270

CIRCLE CHART

	FT	Full Circle # of Units	Half Circle # of Units	Quarter Circle # of Units
	2.5	23	12	7
	3	28	15	8
	4	38	20	10
OUTSIDE	5	47	24	13
RADIUS	6	56	29	15
	7	66	34	17
	8	75	38	20
	9	84	43	22
	10	94	48	24

TYPICAL RADIUS

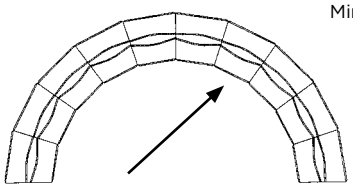

Minimum outside radius 29″

Minimum inside radius 21″

LAYING PATTERNS

ARTLINE™



Artline A

BEACON HILL FLAGSTONE™ / BRISTOL VALLEY™



BHF/BRV A - 40% Large Rectangle, 40% Square, 20% Small Rectangle



BHF/BRV B - 40% Large Rectangle, 40% Square, 20% Small Rectangle

BRUSSELS BLOCK®



Brussels AF - 40% XL, 40% Standard, 20% Half

BRUSSELS BLOCK®



Brussels O - 33% Half Stone, 67% Standard



Brussels P - 67% Standard, 33% Half



Brussels X - 57% XL, 29% Standard, 14% Half



Brussels Y - 57% XL, 29% Standard, 14% Half

BRUSSELS BLOCK®



Brussels Z - 67% XL, 20% Standard, 13% Half



Copthorne A - 100% Standard

COPTHORNE®



Copthorne B - 100% Standard



Copthorne C - 100% Standard

COPTHORNE®



Copthorne C - 100% Standard

COURTSTONE®



CRT A - 16% Square, 18% Sm.Rec., 19% Rec., 22% Lg.Rec., 25% XLRec.

EUROPAVER®



Europaver B - 50% 12″x12″, 50% 6″x12″



Europaver F - 67% 12″x12″, 22% 6″x12″, 11% 6″x6″

IL CAMPO®



Il Campo F - 75% 12″x12″, 25% 4″x12″



Il Campo H - 60% 6″x8″, 30% 6″x6″, 10% 4″x6″



Il Campo I - 33% 12″x12″, 11% 4″x12″, 33% 6″x8″, 17% 6″x6″, 6% 4″x6″



Il Campo J - 33% 12″x12″, 11% 4″x12″, 33% 6″x8″, 17% 6″x6″, 6% 4″x6″

Patterns may not reflect bundle configurations. More patterns available at unilock.com.

IL CAMPO®



Il Campo L - 43% 12″x12″, 28.5% 4″x12″, 28.5% 6″x8″



Il Campo O - 50% 12″x12″, 17% 4″x12″, 33% 6″x8″

OLDE GREENWICH COBBLE®



Greenwich C - 30% Medium Rectangle, 60% Square, 10% Small Rectangle



OGC H - 53% Med Rec. 39% Square, 8% Sm Rec.

OLDE GREENWICH COBBLE® RICHCLIFF®



Greenwich I - 100% Medium Rectangle



Richcliff A - 100% Random



Richcliff B - 100% Random



Richcliff C - 100% Random

RIVENSTONE™



A - 45% 24″x24″, 33% 18″x24″, 22% 12″x24″



D - 43%18″x18″, 38% 12″x24″, 19% 12″x12″



E - 37% 18″x24″, 27% 18″x18″, 24% 12″x24″, 12% 12″x12″”



H - 26% 24″x24″, 19% 18″x24,″ 29% 18″x18″, 13% 12″x24″, 13% 12″x12″

SENZO™



Senzo A - 67% Rectangle, 33% Square



Senzo D - 89% Rectangle, 11% Square



Senzo A - 100% Rectangle

SERIES 3000®



Series 3000 F - 57% 12″x12″, 14% 6″x6″, 29% 6″x12″

SERIES 3000®



Series 3000 G - 67% 12″x12″, 11% 6″x6″, 22% 6″x12″

STONEHENGE®



Stonehenge B - 50% Large Square, 50% Rectangle



Stonehenge D - 54% Large Square, 37% Rectangle, 9% Small Square

THORNBURY™



Thornbury A - 49% Large Rec., 34% Medium Rec., 17% Small Rec.

THORNBURY™



Thornbury B - 49% Large Rec., 34% Medium Rec., 17% Small Rec.



Thornbury C - 49% Large Rec., 34% Medium Rec., 17% Small Rec

TOWN HALL™



Town Hall B - 100% Standard



Town Hall D - 100% Standard

UMBRIANO®



Umbriano A - 57% 16"x16", 29% 16"x8," 14% 8"x8"



Umbriano B - 67% 16"x16", 22% 16"x8", 11% 8"x8"



Umbriano C - 54% 16"x16", 37% 8"x16", 9% 8"x8"



Umbriano E - 33% 24"x24", 33% 12"x 24", 15% 16"x16", 15% 16"x8," 4% 8"x8"

UMBRIANO®



Random Bundle A - 40% Large Rectangle, 40% Square, 20% Small Rectangle

BASE THICKNESS CHART (GENERAL)

APPLICATION	GRAVEL BASE	BEDDING COURSE	BACKFILL WIDTH (WALLS ONLY)
PATIOS, WALKWAYS, POOL DECKS	4"- 6" (10cm – 15cm)	1" (2.5cm)	
DRIVEWAYS	8" - 12" (20cm – 30cm)	1" (2.5cm)	
STEPS, PLANTERS, RAISED PATIOS	6" (15cm)	0 – 1/8" (0cm-.3cm)	8"- 12" (20cm - 30cm)
RETAINING WALLS UNDER 18" (45cm)	6" (15cm)	0 – 1/8" (0cm-.3cm)	12" (30cm)
RETAINING WALLS OVER 18" (45cm)	6" (15cm)	0 – 1/8" (0cm -.3cm)	16" (50cm)

Soil condition - In areas with poor soil conditions, (e.g., heavy clay, disturbed soils) increase the depth of the base to provide more stability. Where poor soil conditions exist, it may be advisable to contract an engineer when constructing a retaining wall in excess of 24" in height.

Area = (Length) x (Width)
Area of a Circle = 3.14 x (Radius) x (Radius)
Area of a Half Circle = 1.57 x (Radius) x (Radius)
Area of a Quarter Circle = .78 x (Radius) x (Radius)
Area of a Triangle = (1/2 Base) x (Height)
Perimeter of a Circle = 6.28 x (Radius)
Perimeter of a Half Circle = 3.14 x (Radius)
Perimeter of a Quarter Circle = 1.57 x (Radius)

Metric Equivalents
1 inch = 2.5400 centimeters
1 foot = 0.3048 meter
1 yard = 0.9144 meter
1 sq. foot = 929.030 sq.centimeters
1 sq. meter = 1.196 sq. yards
27 cu feet = 1 cu. yard

1 centimeter = 0.3937 inch
1 meter = 39.3701 inches

Patterns may not reflect bundle configurations. More patterns available at unilock.com.

UNILOCK ELEMENTS

PRE-BUILT FIREPLACES FROM UNILOCK

FEATURES:

- Installs in less time
- Built to exacting standards
- Coordinates beautifully with new or existing Unilock paving stones
- Built with UL-approved fireboxes and grills (gas units available)

TUSCANY FIREPLACE

Sierra with Copthorne® accent.

CUSTOM SOLUTIONS

Custom designed solutions allow you to embellish with pavers, making it easy to match your patio borders and banding for that cohesive look and feel.

All Element fireplaces are pre-built in the factory and can be installed in any location accessible by forklift.

ADDITIONAL ELEMENTS

BRICK OVEN

GRILL ISLAND

BRUSSELS DIMENSIONAL SYSTEM™

SUNSET FIRE PITS

Sandstone

Desert Sand

Mahogany Ash

Round
(shown in Mahogany Ash)

Square
(shown in Mahogany Ash)

Stones & Bundling	Stones per Course	Stones per Pallet	Outside Diameter of Stone	Inside Diameter of Stone	Diameter of Pit Insert	Lbs / Pallet	Kits / Bundle
Round Fire Pit	18	54	52"	36"	34"	1125	1
Large Square	16	48	56"	40"	38"	1525	1

Units and colors may not be exactly as shown.

UNILOCK ELEMENTS

Tuscany Fireplace

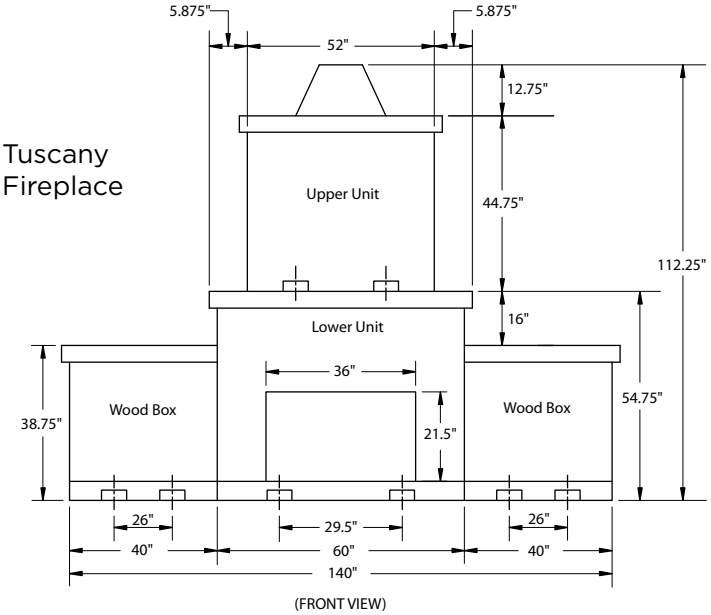

(FRONT VIEW)

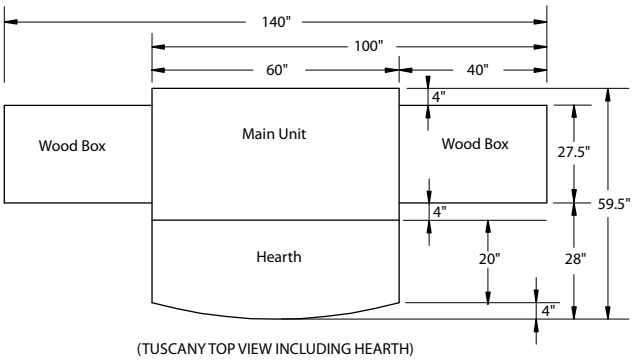

(TUSCANY TOP VIEW INCLUDING HEARTH)

Weights:

Fireplace Top	2815 lbs
Fireplace Bottom	3995 lbs
Wood Box (set of 2)	3785 lbs
Arched Hearth	1070 lbs

Typical Cross Section for Concrete Pad Installation

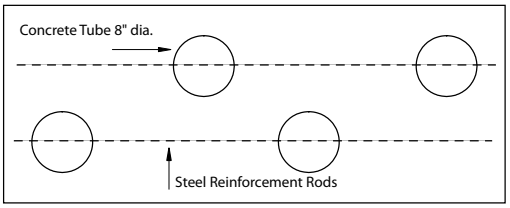

(TOP VIEW)

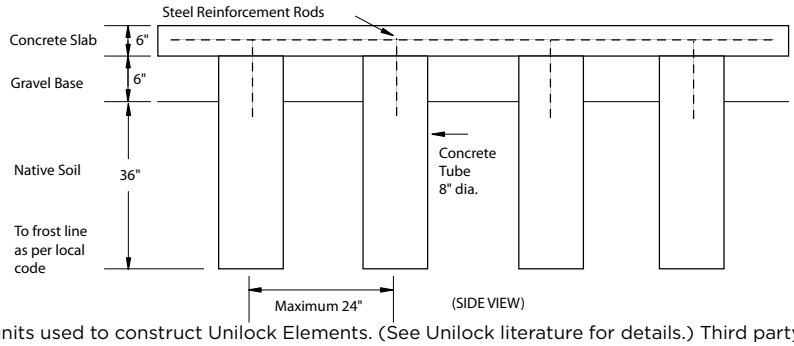

(SIDE VIEW)

Guarantee: The standard Unilock guarantee applies to the units used to construct Unilock Elements. (See Unilock literature for details.) Third party grills and fireboxes carry their respective manufacturer's warranty and may change without notice.
Note: Unilock reserves the right to change model designs, accessories and colors without notice. Unilock will not be responsible for improper use or handling that results in property damage. Some models may not be exactly as shown. Fireplaces come complete with UL- approved stainless steel fireboxes. Check local building codes and regulations prior to ordering and installing Unilock Elements.

FIRE ROCK FIREPLACE

Pre-Engineered Masonry Fireplace and Chimney System

The Fire Rock Masonry Fireplace and Chimney System is a pre-engineered refractory components kit system. Fire Rock products represent the latest technology in safe, high-performance, all-masonry fireplaces and chimneys. In recent years, many architects and landscape firms have utilized Fire Rock for outdoor rooms and patios. Contact your local Unilock representative for availability of additional components (wood boxes, grill surrounds, etc.).

Firebox		30"	36"	42"
Overall Width	A	38	44	50
Overall Depth	B	28.5	28.5	28.5
Firebox Height	C	38	38	38
Smoke Ch. Ht.	D	22.75	22.75	32.125
Opening Width	E	32.5	38.5	44.5
Opening Height	F	32.125	32.125	32.125
Firebox Depth	G	22.75	22.75	22.75
Width at Top		26	26	32
Width at Rear		21.875	27.875	33.875

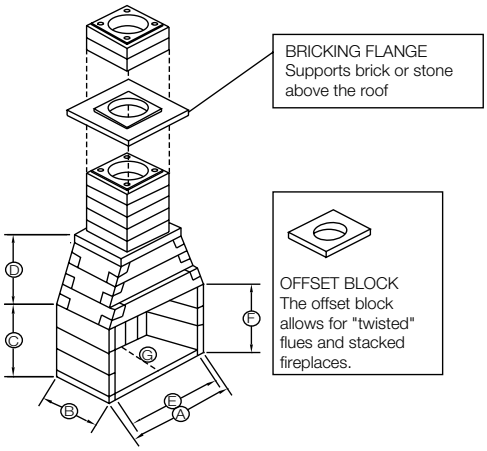

NOTE: 30" units are special order. Also available: Refractory Mortar and Firebrick Installation Kits.

LIGHTING SYSTEMS

NighTec® paver during daytime.

NighTec® paver during night time.

NIGHTEC®

Night-lighting concrete blocks easily illuminate dark, hazardous areas or add an attractive accent to any landscape. The effect of noctilucent lighting is that of "phosphorescence". With phosphorescence, the luminescent materials charge themselves in UV- or black light and then illuminate in the dark. This effect is often called "glow in the dark". NighTec luminescent materials do not contain any phosphorous.

- Uses no electricity
- No special tools for installation required
- Charged by natural light
- Lighting period of up to 10 hours
- Night-lighting crystals inseparably fused to stone
- Non-poisonous
- Non-radioactive
- Safe for use with polymeric sand, sealers and cleaners.

Color: Aqua
Size: 10cm x 10cm x 8cm

Skyfuel unit



Skyfuel™ unit (solar charged) placed into a paving stone.

SOLARCAP LIGHTS BY SKYFUEL™

Colors: white and blue
Size: 2” (5cm) Diameter x 1.25” (3cm) High

SolarCap lights can be installed anywhere. Installation itself is very easy. Different from 12V low voltage and 110V or 120V lighting which requires wiring, conduit, breakers, switches, timers and a monthly electricity charge. SolarCap lights can be placed anywhere you want without the range and economic constraints of wire. When it is installed in a sidewalk, patio, fountain, stairway, boardwalk, pool deck, building exterior, driveway, or garden path, it not only beautifies the landscape but also safely acts as a guide for pedestrian or vehicular traffic.

- Semi-permanent life
- 100,000 charge/discharge cycles
- No degradation of energy storage on performance
- Easy installation anywhere
- Horizontal or vertical placement
- Withstands vehicle loads as large as semi trucks and trailers
- 40C to +75C (-40F to +158F) operating temperature range
- Automatic on/off
- No electric leakage
- Water-proof structure
- Non-contaminating materials
- Charging time 5 hours (sunny) to 8-15 hours (cloudy or rainy)

UNICARE®

UNICARE OIL & GREASE REMOVER

Description: Unicare Paver Cleaner is the most effective product available for removing oil spots from paving stones and concrete. Unicare Oil & Grease Remover dissolves, dislodges, and encapsulates oil, to ensure thorough cleaning without leaving any oily film after rinsing.
Packaging 1 quart container
Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

UNICARE EFFLORESCENCE REMOVER

Description: Unicare Paver Cleaner is specially formulated to dissolve efflorescence (whitish salt deposit) and remove ground-in dirt on paving stones and concrete, without discoloring or damaging surfaces. It cleans evenly, and enables the sealant to better penetrate the material to be treated.
Packaging 1 gallon • Box of 4 x 1 US gallon
Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

UNICARE RUST REMOVER

Description: Unicare Paver Cleaner cleans rust from paving stones and concrete without discoloring the surface.
Packaging 1 quart container
Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

UNICARE PAINT, TAR, & RUBBER REMOVER

Description: Unicare Paver Cleaner thoroughly dissolves paint, tar or bitumen, rubber and chewing gum, from paving stones, concrete and masonry.
Packaging 1 quart container
Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

SANDS

UNICARE SWEEPING JOINTING SAND

Kiln dried and angular shaped in order to flow easily and stay in place.
50 lb/ bag 56 Bags/Skid

POLYMERIC PLUS (RG+) SAND For Standard Joints

A special mix of graded sand and binder specifically formulated for achieving optimum lock-up of pavers or slabs by filling the joints between them. Unlike regular sweeping jointing sand, Polymeric Sand resists insect penetration, weed growth, and erosion. New formulation with half hour setting time.
50 lb/bag, 56 Bags/Skid (2860lbs/skid)
Available Colors: Tan, Gray and Urban Grey
Coverage: Approx. 75 sq. ft. /bag Coverage will vary depending on the type/size of stone used.
Note: Extra care must be exercised when using on Copthorne®, Courtstone®, Richcliff®, Town Hall™ and Umbriano® products. Umbriano must have the surface cleaned with a foam squeegee post installation. This product is not suitable for use with Il Campo®, Series 3000®, and Unigranite®.

POLYMERIC MAX (HP²) SAND For Large Joints

This high-performance mix made of the latest generation of polymers are specially formulated for the filling of paver or slab joints in heavy-traffic areas such as pool decks, sloped driveways, public ways, etc. It is recommended for the replacement of existing joints because of its unrivaled effectiveness and durability.
For use where:
Max width: 2.5 cm (1”); a larger joint width is acceptable where the pavers intersect. Min depth: 3 cm (1.25”).
50 lb/bag, 56 Bags/Skid (2860lbs/skid)
Available Colors: Tan, Gray and Urban Grey
Coverage: Approx. Courtstone - 1 bag covers approximately 25 sq. feet.
Note: Extra care must be exercised when using on Courtstone®, Copthorne®, Richcliff® and Town Hall™. This product is not recommended for Umbriano®.

EASY-PRO™

Ultimate Paving Stone Joint Compound
Designed for installation in light rain or sun with a surface temperature above 32˚F, this pre-mixed epoxy resin product is ideal for residential driveways, patios, pool decks and walkways.
Features: Vacuum packed, pre-mixed and ready to use, eco-friendly (60% renewable products), no haze formulation, for joint widths starting from 1/8" wide 1 1/4" deep.
Colors: Tan, Gray & Black
50 lb container - premixed
Coverage: Approximately 80 sq ft /container. Coverage will vary depending on the type/size of stone used. Courtstone® coverage approximately 20 sq ft/container.
STORAGE: Open product good for 30 day when covered with water.

Note: This product is not suitable for use with Il Campo®, Senzo™, Series 3000®, Umbriano® and Unigranite®.

Sands	SAND RECOMMENDATIONS BY PRODUCT			
	Unicare® Standard Jointing Sand	Unicare® Plus Polymeric Sand	Unicare® MAX Polymeric Sand	Unicare® Easy-Pro
PAVERS \ FEATURES	For joints up to 1/8" May be sealed. Tan color Non-binding sand	For joints up to 1". May be sealed. Available in Tan, Gray or Karbon Binding sand	For joints up to 4". May be sealed. Available in Tan, Gray or Karbon Binding sand	For joints up to 1". May be sealed. Available in Tan, Gray or Karbon Binding sand
Copthorne®	✓	✓+	✓*	✓
Courtstone®	✓	✓+	✓	✓
Il Campo®	✓	N/R	N/R	N/R
Richcliff®	✓	✓+	✓*	✓
Rivenstone™	N/R	✓	✓	✓
Series 3000®	✓	N/R	N/R	N/R
Town Hall™	✓	✓+	✓	✓
Trevia™	N/R	✓	✓	✓
Umbriano®	✓	✓+	N/R	N/R
Unigranite®	✓	N/R	N/R	N/R
Tumbled Pavers	✓	✓	✓	N/R
Standard Pavers	✓	✓	✓	✓

N/R - Not Recommended ✓ - Recommended ✓+ - Recommended with Extra Care (contact your Territory Manager for more information)

✓* - These pavers have a very narrow or slightly angled edge (chamfer) limiting sand penetration in the joint and causing possible weak bonding areas. The life cycle performance could be affected.

IMPORTANT NOTICE

1. **DO NOT USE** Polymeric Jointing Sand on the following products:

Series 3000® Il Campo® Unigranite®

If joint stabilization is required, use ordinary jointing sand and apply a stabilizing sealer. **Contact your local Unilock office for recommended sealants and application specifics.**

2. **EXTRA CARE** must be exercised when using Polymeric Sand on the following products:

Courtstone® Copthorne® Richcliff® Town Hall™ Umbriano®
Artline™ Beacon Hill Flagstone™ Bristol Valley™ Europaver® Senzo™ Thornbury™

Unilock's Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Unilock Polymeric Jointing Sand have a natural tendency to adhere to the surface and therefore extra diligence must be taken to pre-clean the surface prior to "wetting the sand in". Then during the final wetting process, **clean surface by removing excess water** with a leaf blower or a squeegee depending on the paver surface texture. Failure to do so will result in a "whitish haze" on the surface that is difficult to remove. Contact your Unilock representative with any questions.

3. **IMPORTANT COMPACTION NOTICE**: Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric sand can then be swept into the joints. *Always use a compactor with a protective membrane attached to the bottom of the plate.*

Unilock Polymeric Jointing Sand, cleaners and sealers, must always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.

NOTICE: Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of Unilock polymeric sand, sealers or cleaners. Unilock will not accept responsibility for alternate suppliers of polymeric sand, jointing sand, cleaners and sealers.

UNICARE® SEALERS

UNICARE SOLVENT-BASED PROTECTIVE SEALER WLWR

Seals & protects pavers, slabs, & other concrete surfaces
Description: Unicare Wet Look Protective Sealant is a solvent-based thermoplastic acrylic protective sealant for paving stones. It is the best protection you can buy for your pavers; it enhances the original color of the units and gives them a "wet" look.
Packaging:
• 1 and 5 gallon available • 55 gallon drum available on special order
Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS. For outdoor use only.

UNICARE CLEAR LOOK WATER-BASED SEALER - MATTE FINISH

Description: Unicare WB Paver Sealant for paving stones, is a thermoplastic acrylic emulsion. Whitish in color in liquid state, it becomes clear when dry. Since it contains very little solvent, it does not emit unpleasant odors and, therefore, is ideal for interior applications. It gives a satin finish which does not affect the original color of the concrete surface. Sealers facilitate maintenance by reducing oil and dirt penetration. Neither Unicare™ sealer will peel, discolor, or make the pavement slippery. They resist calcium and sea-salt, and wear evenly.
Packaging:
• 1 and 5 gallon available • 55 gallon drum available on special order
Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

UNICARE JOINT SAND STABILIZER & PAVER SEALER - MATTE FINISH

Unicare Joint Sand Stabilizer & Paver Sealer is a one-step sealer and joint sand stabilizer recommended for residential, commercial, and industrial projects. It will protect the colors and revitalize the pavers by enhancing the colors without darkening the pavement. It will waterproof the surface to inhibit absorption of food, beverages, salt, and acid staining, thereby reducing the cost of maintenance. This bond will resist joint sand erosion and weed growth.
Packaging
• 1 and 5 gallon pail available
Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

UNICARE NATURAL LOOK (INV) INVISIBLE SEALER - MATTE FINISH

Unicare Invisible Paver Sealer will protect the colors and revitalize the pavers with an invisible matte finish. This protective driveway sealer allows for easier cleaning by slowing down the penetration of oil, grease and dirt (i.e. in barbecue areas). As a water-based product, it contains very little solvent, emits no odour and is an environmentally-friendly option. Approximate coverage 120 sq. ft. per gallon.
Packaging: • 1 and 5 gallon pail available
Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

ADHESIVES

UNILOCK CONCRETE ADHESIVE

• 10.2-oz. Caulk Tube: 40' at 1/4" Bead (Case of 12) • 29-oz. Caulk Tube: 100' at 1/4" Bead (Case of 12)
Ideal for step veneering and retaining wall cap securement
SPECIFICATIONS – (Conforms to UN-STD. 1804, ASTM 2339-70 & FHA UM-60)
Color: Natural Sand Color
Weight: Over 8 lbs. Per Gallon (12 Cartridges at 13 lbs.) Over 8 lbs. Per Gallon (12 Cartridges at 32 lbs.)
Packaging: 1/10th Gallon Cartridges (10.2 Fl. Oz.) Packaged 12 Per Case. 1-Qt. Cartridges (29 Fl. Oz.)
Packaged: 12 Per Case.
CLEANUP: Use mineral spirits or chlorinated solvents - read solvent suppliers' caution notes for use of this product.
STORAGE: Store in cool place, rotate stock. Keep at 70°F for 24 hours before use in cold weather. Store cartridges upright .

EDGE RESTRAINTS

SnapEdge - One-Piece Edging That Does It All!

- Only one part required for straight runs or curved installations.
- Built-in connector fastens one piece to the next – convenient 96" size, makes them easy to transport.
- Unique 'Snip and Flex' feature speeds installations of curves and corners without pre-planning.
- The open design allows a root system to grow through SnapEdge, further reinforcing the installation.
- Engineered to provide a strong, easy-to-install edge restraint for concrete/clay pavers.
- Nail hole bosses are full-length cylinders. Hammer blows will not fracture or force nail heads through edging.

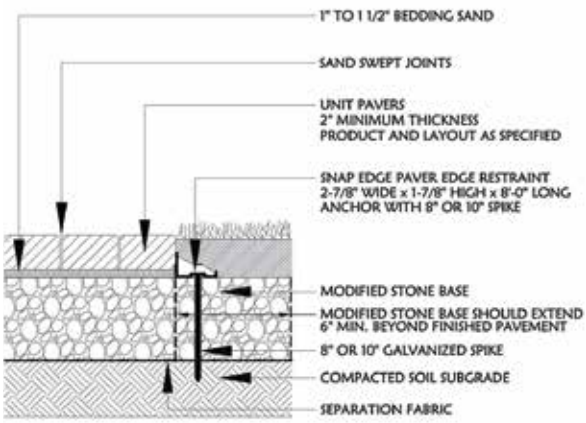

NATURAL STONE CAPS

Dimensions: 24" x 24" x 3" (60cm x 60cm x 8cm)
28" x 28" x 3" (71cm x 71cm x 8cm)
32" X 32" X 3" (80cm x 80cm x 8cm)
Colors: Natural Limestone with natural color variations.
Weight: 100lbs each
Non Drilled
Excellent when drilled for pillars and lightposts with Brussels Dimensional System™, Lineo™ Dimensional Stone, Pisa2® and Roman Pisa®.

DRAINAGE, SEPARATION AND REINFORCEMENT

STRATAGRID

Stratagrid is a geogrid reinforcement for soil and aggregate reinforcement. These high-performance geogrids are constructed of high molecular weight and high-tenacity polyester yarns, utilizing a complex knitting process and low-temperature coating technology to provide superior engineering properties. Yarns are precision-knitted into a dimensionally stable, uniform network of apertures providing significant tensile reinforcement capacity. Stratagrid is engineered to be mechanically and chemically durable in both the harsh construction installation phase and in aggressive soil environments (pH range from 2-10). A proprietary UV-stabilized coating provides further chemical and mechanical benefits.

DESIGN PROPERTIES OF STRATAGRID

Ultimate & Creep-Limited Tensile Strength (lbs/ft)	SG150	SG200
Ultimate Strength	1875	3000
Creep-Limited Strength	1165	1863
Reduction Factors for Installation Damage and Durability		
RF Inst. Damage (Sand, Silt & Clay)	1.05	1.05
RF Inst. Damage (3/4" minus angular aggregate)	1.10	1.10
RF Inst. Damage (1.5" minus angular aggregate)	1.20	1.20
RF Durability	1.10	1.10
Long-term Design Strength (LTDS or Tal)[3]		
For Sand, Silt, & Clay	1008	1613
For 3/4" minus angular aggregate	9621	540
For 1		
PHYSICAL PROPERTIES		
Roll Dimensions (width x length) (feet)	6 x 300	6 x 300
Area (square yards)	200	200
Weight per Roll (lbs)	85	85
Last Number	GB-3022	

FX-40HS GEOTEXTILE FABRIC

FX-40HS, a non-woven multipurpose geotextile fabric composed of 100% polyester continuous filament yarns and heatbonded so the filaments retain their relative position.

SPECIFICATIONS

Physical Properties	Test Method	English	Metric
Weight	ASTM D-3776	4.0 oz/sy	135 gm/sm
Tensile Strength	ASTM D-4632	115 lbs	510 N
Elongation @ Break	ASTM D-4632	50%	50%
Mullen Burst	ASTM D-3786	210 psi	1445 kPa
Puncture Strength	ASTM D-4833	65 lbs	285 N
Trapezoidal Tear	ASTM D-4533	50 lbs	220 N
Apparent Opening Size	ASTM D-4751	70 US Std Sieve	0.210 mm
Permittivity	ASTM D-4491	2.0 sec-1	2.0 sec-1
UV Resistance	ASTM D-4355	70%	70%

Roll Sizes Available 12.5'x 360' & 6.25' x 360'

CALCULATIONS

BEDDING MATERIALS CHART (APPROXIMATE IMPERIAL TONS)

	Bedding Course											
Square Feet	1”	2”	3”	4”	5”	6”	7”	8”	9”	10”	11”	12”
50	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0	2.3	2.5	2..8	3.0
100	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
150	0.8	1.5	2.3	3.0	3.8	4.5	5.3	6.0	6.8	7.5	8.3	9.0
200	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0
250	1.3	2.5	3.8	5.0	6.3	7.5	8.8	10.0	11.36	12.5	13.8	15.0
300	1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15.0	16.5	18.0
350	1.8	3.5	5.3	7.0	8.8	10.5	12.3	14.0	15.8	17.5	19.3	21.0
400	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.2	22.0	24.0
450	2.3	4.5	6.8	9.8	11.3	13.5	15.8	18.0	20.3	22.5	24.8	27.0
500	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0
550	2..8	5.5	8.3	11.0	13.8	16.5	19.3	22.0	24.8	27.5	30.3	33.0
600	3.0	6.0	9.0	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0
650	3.3	6.5	9.8	13.0	16.3	19.5	22.8	26.0	29.3	32.5	35.8	39.0
700	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0
750	3.8	7.5	11.36	15.0	18.8	22.5	26.3	30.0	33.8	37.5	41.3	45.0
800	4.0	8.0	12.0	16.0	20.0	24.0	28.0	32.0	36.0	40.0	44.0	48.0
850	4.3	8.5	12.8	17.0	21.3	25.5	29.8	34.0	38.3	42.5	46.8	51.0
900	4.5	9.0	13.5	18.0	22.5	27.0	31.5	36.0	40.5	45.0	49.5	54.0
950	4.8	9.5	14.3	19.0	23.8	28.5	33.3	38.0	42.8	47.5	52.3	57.0
1000	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0

Actual volume may vary due to type of materials, moisture content, and compaction. Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

BASE DEPTH CHARTS (CUBIC YARDS)

	Bedding Course											
Square Feet	1”	2”	3”	4”	5”	6”	7”	8”	9”	10”	11”	12”
50	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.5	1.7	1.9
100	0.3	0.6	0.9	1.2	1.5	1.9	2.2	2.5	2.8	3.1	3.4	3.7
150	0.5	0.9	1.4	1.9	2.3	2.8	3.2	3.7	4.2	4.6	5.1	5.6
200	0.6	1.2	1.9	2.5	3.1	3.7	4.3	4.9	5.6	6.2	6.8	7.4
250	0.8	1.5	2.3	3.1	3.9	4.6	5.4	6.2	6.9	7.7	8.5	9.3
300	0.9	1.9	2.8	3.7	4.6	5.6	6.5	7.4	8.3	9.3	10.2	11.1
350	1.1	2.2	3.2	4.3	5.4	6.5	7.6	8.6	9.7	10.8	11.9	13.0
400	1.2	2.5	3.7	4.9	6.2	7..4	8.6	9.9	11.1	12.3	13.6	14.8
450	1.4	2.8	4.2	5.6	6.9	8.3	9.7	11.1	12.5	13.9	15.3	16.7
500	1.5	3.1	4.6	6.2	7.7	9.3	10.8	12.3	13.9	15.4	17.0	18.5
550	1.7	3.4	5.1	6.8	8.5	10.2	11.9	13.6	15.3	17.0	18.7	20.4
600	1.9	3.7	5.6	7.4	9.3	11.1	13.0	14.8	16.7	18.5	20.4	22.2
650	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.1	20.1	22.1	24.1
700	2.2	4.3	6.5	8.6	10.8	13.0	15.1	17.3	19.4	21.6	23.8	25.9
750	2.3	4.6	6.9	9.3	11.6	13.9	16.2	18.5	20.8	23.1	25.5	27.8
800	2.5	4.9	7.4	9.9	12.3	14.8	17.3	19.8	22.2	24.7	27.2	29.6
850	2.6	5.2	7.9	10.5	13.1	15.7	18.4	21.0	23.6	26.2	28.9	31.5
900	2.8	5.6	8.3	11.1	13.9	16.7	19.4	22.2	25.0	27.8	30.6	33.3
950	2.9	5.9	8.8	11.7	14.7	17.6	20.5	23.5	26.4	29.3	32.3	35.2
1000	3.1	6.2	9.3	12.3	15.4	18.5	21.6	24.7	27.8	30.9	34.0	37.0

Actual volume may vary due to type of materials, moisture content, and compaction. Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

IMPORTANT NOTES

UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee* on the structural integrity of our paving stones, slabs and retaining wall units to the original purchaser of the product for residential use. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.

Excessive defective material (over the industry accepted normal of 2% for non-tumbled unit pavers) delivered to the purchaser will be replaced free of charge if a written claim is made within 5 days of delivery from the manufacturer. Such claims will not constitute reason for delaying payment. All goods shall be deemed accepted if completely installed. Inspect concrete products prior to opening bundle packaging to ensure that shape and color are as ordered. Unsatisfactory material must be available for inspection by Unilock to entitle the purchaser to any adjustment or credit. Inspect all concrete units during installation and set aside any which are chipped or cracked to use for any cut pieces required. The color of concrete products may vary significantly between production lots. Always install concrete units from several bundles simultaneously to ensure proper distribution of color. Prior to final compaction, inspect installed pavers for good color distribution. Relocate certain pavers, if necessary, to achieve desired color blend.

*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at unilock.com and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.
Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.
Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at www.unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

TRADEMARK AND LEGAL INFORMATION

Belmuro™ Wall and Umbriano® are trademarks of Metten Stein + Design GmbH & Co KG used under license by Unilock.

Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Measurements throughout this portfolio are nominal.

*Colors shown in this catalog should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area.

Not all products shown are available at all Unilock locations. Log on to www.unilock.com for availability.

©2016 Hengestone Holdings, Inc. 1-800-UNILOCK www.unilock.com

FINISHES


BRUSHED

COBBLESTONE


WEATHERED

DIMPLED AND WEATHERED

FLAGSTONE

SMOOTH


WASHED


SMOOTH - ZERO BEVEL


SPLIT

TIMEWORN

SPLIT AND WEATHERED


STANDARD

Color Blend Descriptions

COLOR NAME	DESCRIPTION
Almond Grove	Tan, Buff and Charcoal
Autumn Sunset	Salmon with Brown Flake
Basalt	Blueish-Black
Bavarian	Brown, Cream and Charcoal
Beechwood	Tan and Charcoal
Belgian Blue	Blueish-Gray
Black Granite	Black Granite and Charcoal
Blue Ridge	Blue & Brown with Black Veining
Bluestone (Rivenstone)	Blue with Black and Brown Veining
Canyon	Plum with Yellow-Brown
Castano	Dark Brown and Burnt Brown Blend
Coastal Slate	Grey and Tan
Coffee Creek	Sandstone, Brown and Charcoal
Cremo	Cream and Buff
Crystal Rose	Light Charcoal, Fine Rose Quartz, Black Granite, and Black Metallic
Dawn Mist	Grey and Tan
Desert Sand	Salmon, Buff and Charcoal
Granite	Natural and Charcoal

COLOR NAME	DESCRIPTION
Heritage Brown	Dark Brown and Salmon
Ice Grey	Gray and White
Limestone	Light Gray and Charcoal
Mahogany	Brown and Charcoal
Mahogany Ash	Mid Brown and Light Charcoal
Midnight Sky	Charcoal and Black Flake
Nevada	Chamois and Natural
Pebble Taupe	Tan with Light Brown
Rose (Unigranite)	Brown and Charcoal with Rose Granite
Rustic Red	Red and Charcoal
Sandstone	Buff and Tan
Santa Fe	Buff, Natural and Charcoal
Sierra	Charcoal, Russet and Buff
Slate (Unigranite)	Slate with Black Granite
St. Clair	Salmon and Brown
Summer Wheat	Cream White with Pale Yellow & Beige Particles
Sycamore	Brown, Buff and Charcoal
Terra Cotta	Salmon and Charcoal
Winter Marvel	White and Black Flake

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples.

UNIT PAVERS

Product	Page	Finish	Pedestrian	Residential Vehicular	Commercial Vehicular	Environmental	For Borders & Accents
Anchorlock®	2	S			✔		
Artline™	2	S	✔				
Beacon Hill Flagstone™	3	F	✔				
Bristol Valley™	3	S	✔				
Brussels Block®	4	W	✔	✔			✔
Brussels Fullnose™	4	W	✔				
Copthorne®	5	T	✔	✔			✔
Courtstone®	5	C	✔	✔			✔
Double Holland™	8	S	✔	✔	✔		✔
Dura-Mat™	6	S		✔		✔	
Eco-Optiloc™	6	S	✔	✔	✔	✔	
Eco-Priora™	7	B	✔	✔	✔	✔	
Europaver®	7	S	✔	✔			✔
Hollandstone™	8	S	✔	✔	✔		✔
Il Campo®	9	B	✔	✔	✔		✔
Olde Greenwich Cobble®	10	S	✔	✔	✔		✔
Optiloc®	10	S	✔	✔	✔		
Promenade™ Paver	11	S	✔	✔	✔		✔
Richcliff®	11	F	✔	✔			✔
Rivenstone™	12	F	✔				
Senzo™	12	SM	✔				✔
Series 3000®	13	WS	✔	✔	✔		✔
Stonehenge®	13	DW	✔	✔			✔
Thornbury™	14	F	✔	✔		✔	
Town Hall®	14	T	✔	✔	✔	✔	✔
Turfstone™	15	S		✔		✔	
Umbriano®	15	SZ	✔	✔	✔		✔
Uni Eco-Stone®	16	S				✔	
Unigranite®	16	SP	✔	✔			✔

RETAINING WALLS

Product	Page	Finish	Gardens	Retaining Walls	Steps	Seatwalls	Pillars
Belmuro™ Wall	17	SM	✔	✔			
Brussels Dimensional System™	18	W	✔	✔	✔	✔	✔
DuraHold®	19	S		✔			
DuraHold2®	20	S		✔			
Estate Wall®	21	SP/W	✔	✔	✔	✔	✔
Lineo™	22	SZ	✔	✔			
Pisa2®	23	SP	✔	✔	✔	✔	✔
Rivercrest™ Wall	24	F	✔		✔	✔	✔
RomanPisa®	25	SP/W	✔	✔	✔	✔	✔
SienaStone®	26	SP		✔	✔		
SplitN'STACK®	27	SP	✔				

Finishes:
B=Brushed; C=Cobblestone; D=Dimpled; DW=Dimpled and Weathered; F=Flagstone; S=Standard; SM=Smooth; SZ=Smooth Zero Bevel; SP=Split; SP/W=Split and Weathered; T=Timeworn; W=Weathered; WS=Washed

This application chart should only be used as a guide. Site conditions, base materials, pattern and frequency of use may vary the performance of various types and styles of products.

NOTES

UNILOCK®
DESIGNED TO CONNECT™

UNILOCK.COM | 1-800-UNILOCK

BOSTON
(508) 278-4536

BUFFALO
(716) 822-6074

CHICAGO
(630) 892-9191

CLEVELAND
(330) 927-4000

DETROIT
(248) 437-7037

MILWAUKEE
(262) 742-3890

NEW YORK
(845) 278-6700

TORONTO
(416) 646-9000

©2016 Hengestone Holdings, Inc.